

# J-PARC Hadron Facility

Megumi Naruki for the Hadron Facility Team

J-PARC 50GeV Main Ring





## Introduction

J-PARC (Japan Proton Accelerator Research Complex) is a new accelerator facility to produce MW-class high power proton beams at both 3 GeV and 50 GeV. The Main Ring (MR) of J-PARC can extract beams to the neutrino beam line and the slow-extraction beam line for Hadron Experimental Facility (Hadron Hall). Civil construction of Hadron Hall was completed in June, 2007.

## Slow-extraction beam line

The slow-extraction beam line handles the beams of  $3 \times 10^{14}$  protons extracted "slowly" in about 2 second duration per 6 second accelerator cycle. The extracted beams are transported to Hadron Hall and irradiated on the production target (T1) to produce secondary particles (kaons and pions). The secondary beams are transported to experimental area for nuclear and particle physics experiments. The beam "Switch Yard" has capabilities to separate a small portion (2% loss) of the primary beam and place a production target (0.2% loss) that can provide test beams for future extensions.

Hadron Hall

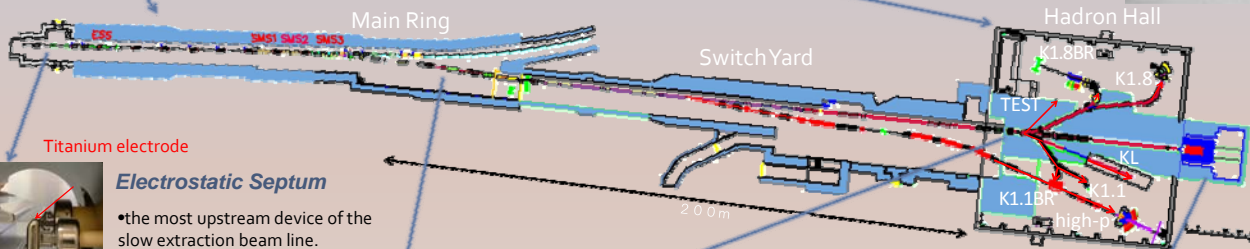

Titanium electrode



## Electrostatic Septum

- the most upstream device of the slow extraction beam line.
- "shave" the proton beam under a high electric field (170kV/25mm) between the titanium electrode and tungsten ribbon


## Radiation Hardness

- To handle the high intensity proton beam, beam line components are designed to have enough radiation hardness.
- Design of working spaces, remote maintenance system and quick connection system have been developed.

## Radiation-hard Magnet

- Made of fully inorganic materials.
- Lifting tackle which automatically locks
- "Knife switch" – electrical connection system; up to 3000A
- Quick coupler

## Lifting



## Water Connection



- no bolt
- 2 inch. diameter
- operation with 2 MPa

## Vacuum Connection



- all metal
- remote handling
- leak rate:  $10^{-11}$  Pa·m<sup>3</sup>/s
- large diameter: 500mm

## Electrical Connection



Max. 3000A


## Production Target & Central Vacuum Chamber

The production target (T1) :

- nickel disks
- diameter is 36cm
- thickness is 54mm (corresponds to 30% loss)
- rotating in a water tank to remove the heat deposition of the primary beam. (85rpm)



Vacuum Chamber:

- storage for magnets
- no beam duct
- water pipes and power cables are drawn out to the maintenance space.

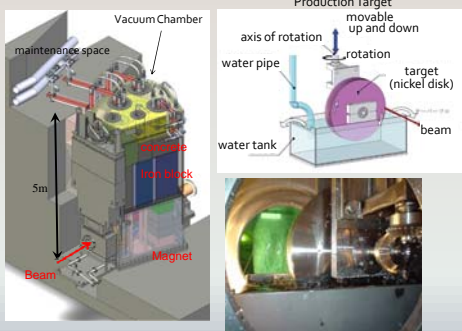


## Beam Dump

- Located at the end of the primary beam line.
- Absorb beam power of 750kW safely.
- Core part consists of 40 oxygen free copper blocks (1000 tons).
- The copper core is cooled by water to reduce the temperature rise up to 200 Celsius.
- Surrounding materials are concrete and iron blocks.
- Movable on rails – keep up with an extension of the hall at Phase II

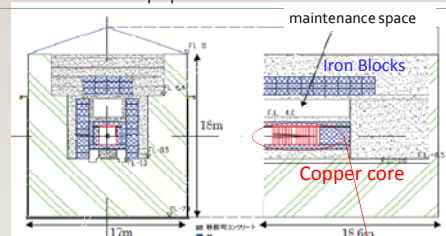


## Beam Monitor

- Measure profile and intensity of the primary proton beam
- OTR (Optical Transition Radiation monitor) measures 2-dimensional profile images by detecting transition radiation generated on the surface of a thin metallic foil.
- Residual Gas Ionization Profile Monitor measures X/Y profile by detecting ionization electrons of residual gas in the beam pipe with no beam loss.




## RGIPM



# Resent Results


## First Beam Profiles measured with Screen Monitors

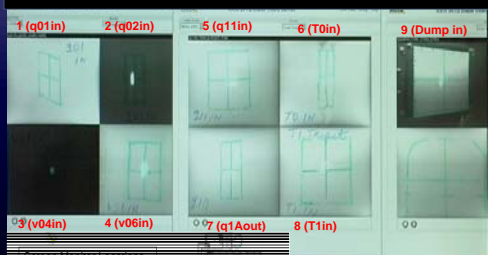


Jan. 27th 2009



## TYPICAL BEAM PROFILES



OTR Profile (Oct. 2009)

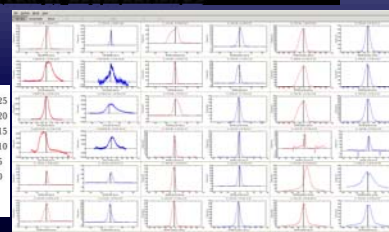

RGIPM Profile

The first beam from the Main Ring was successfully extracted on 27th. January 2009. The beam profiles are measured with the OTR and RGIPM.