

# Observing GW from space : The LISA mission

Hubert Halloin,  
Université Paris cité / CNRS / APC





- LISA Science Objectives
- From LISA Pathfinder to LISA
- Mission description
- Conclusion





## **LISA Science Objectives**

 From LISA Pathfinder to LISA

 Mission description

 Conclusion

# GW = space-time deformation

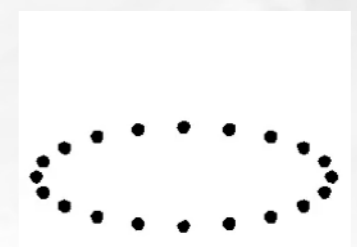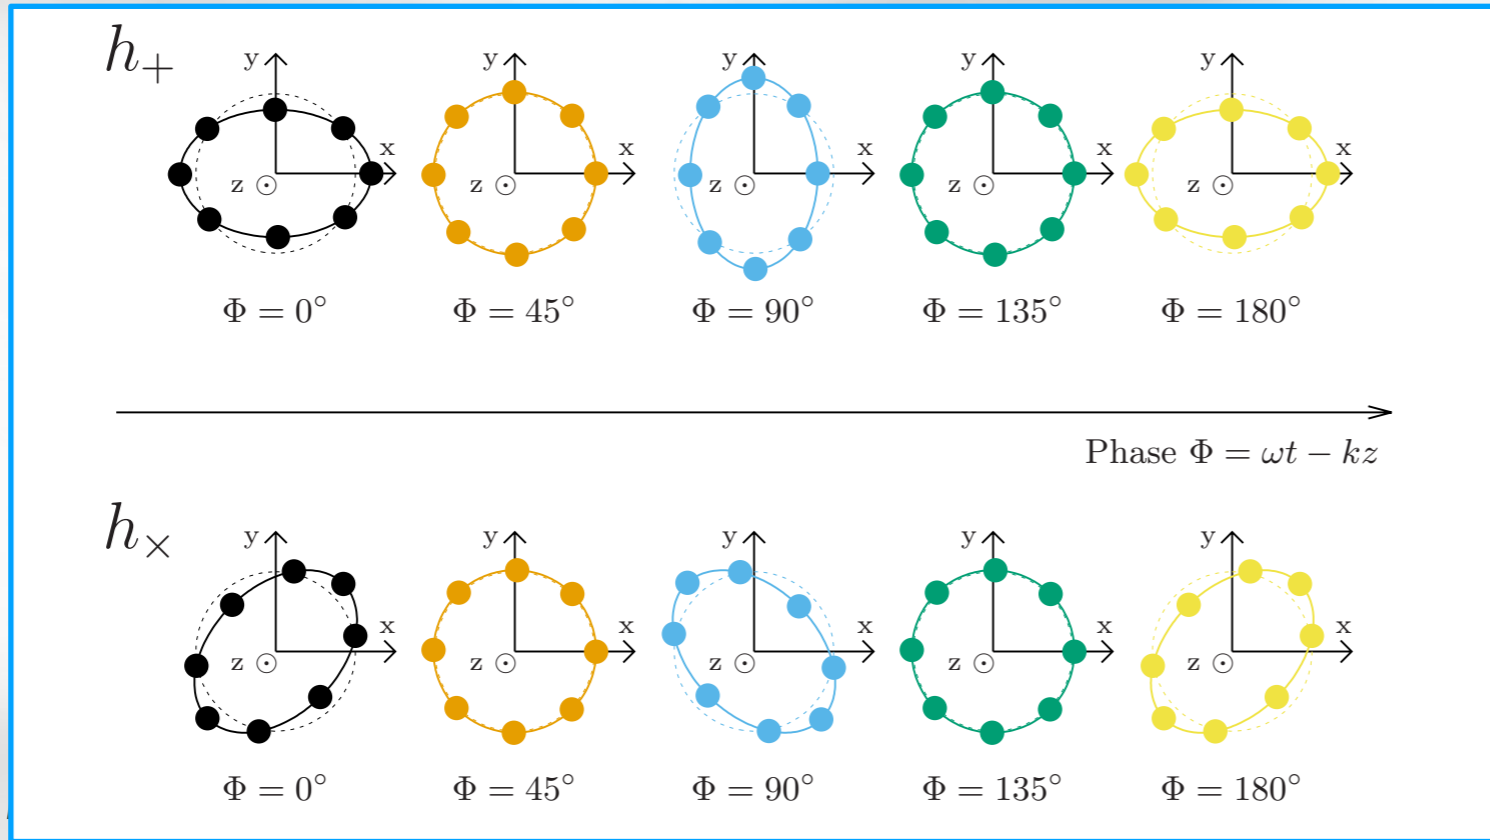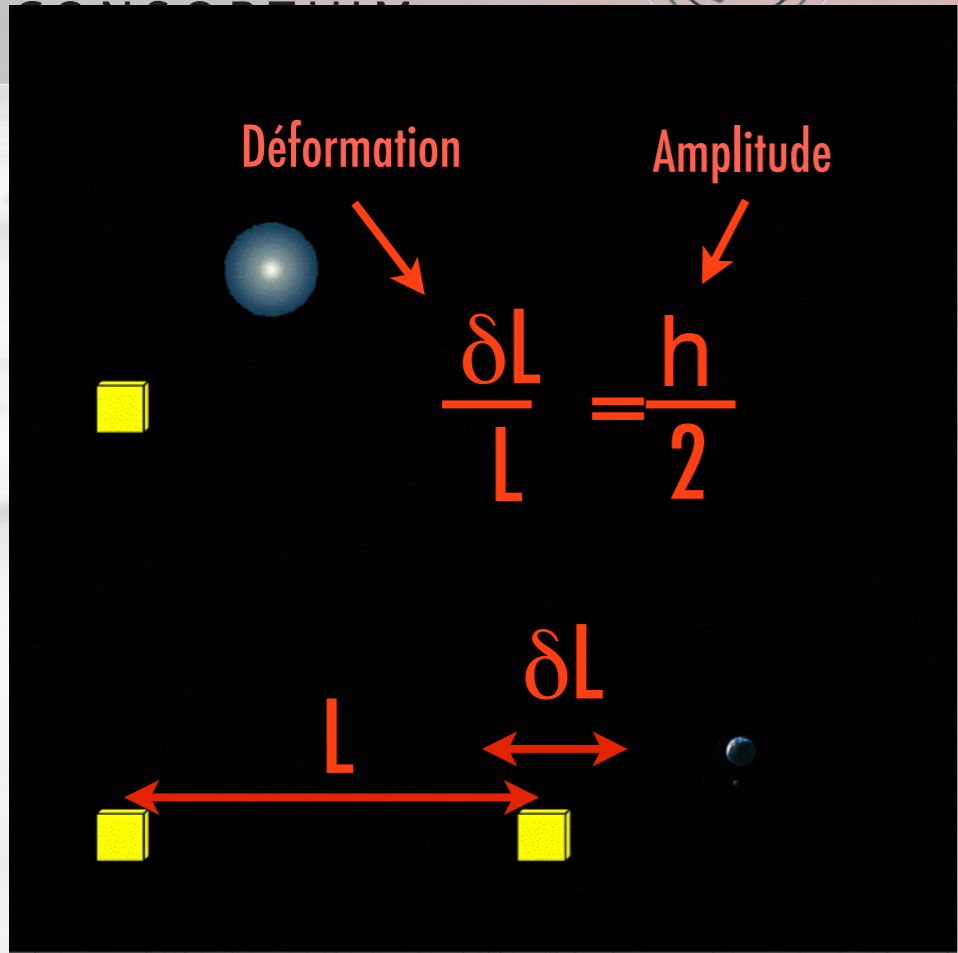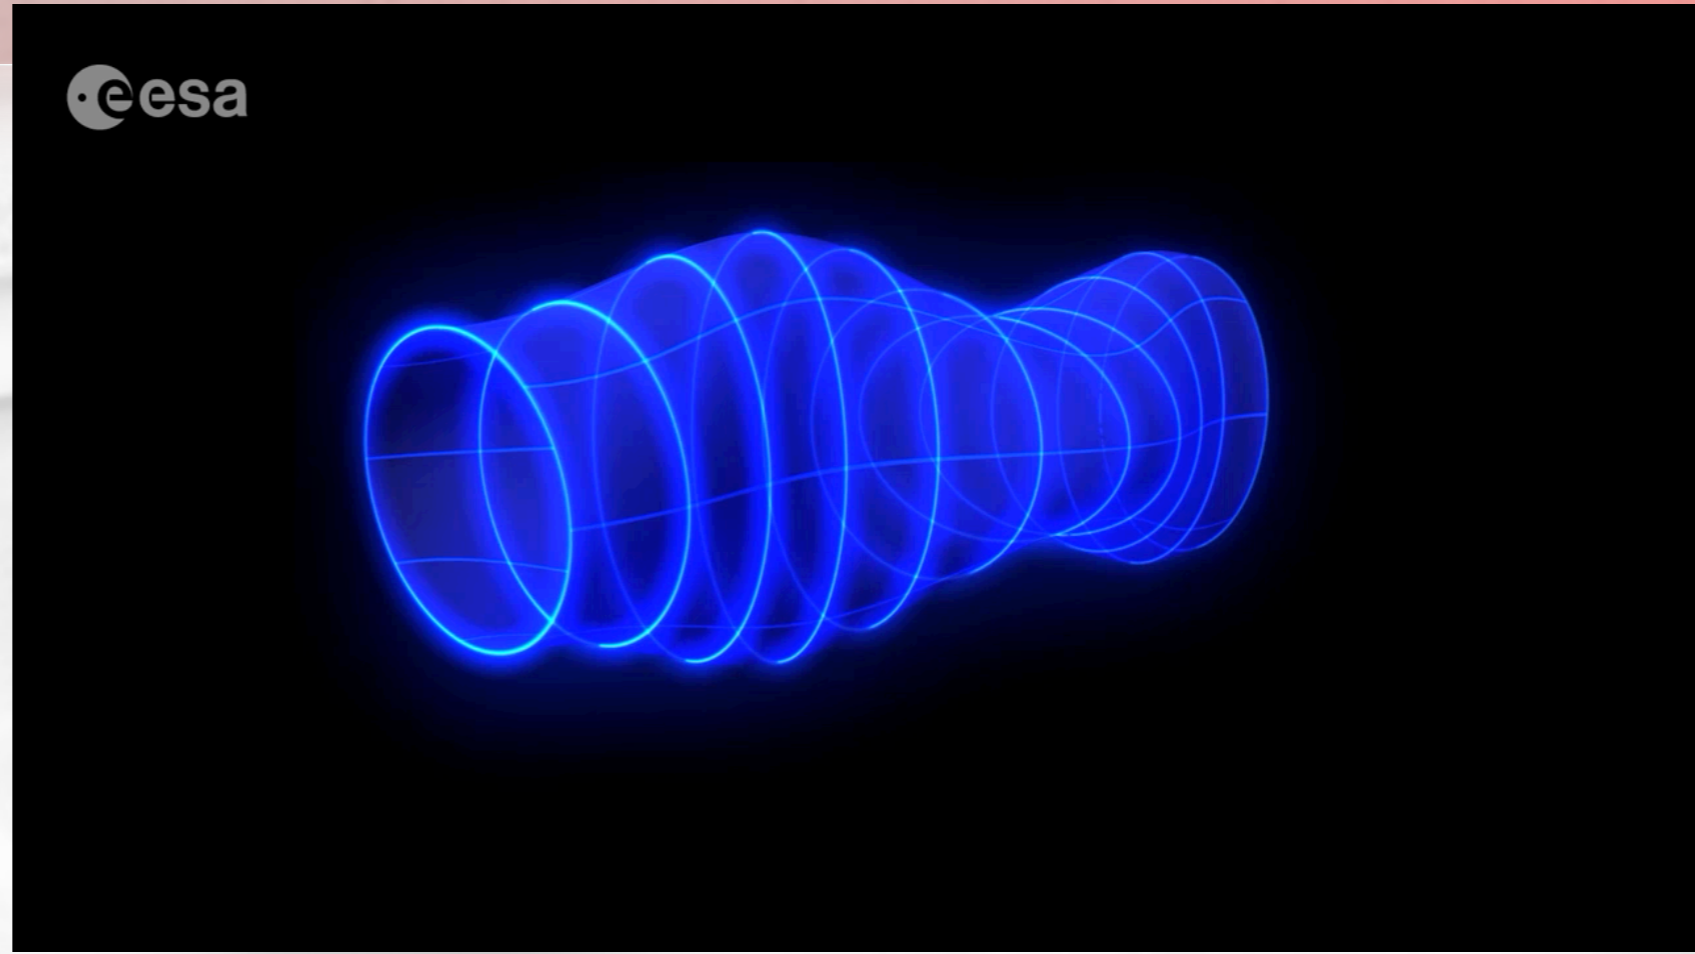



## Orders of magnitude

### Compacity of a gravitational system


$$\frac{v^2}{c^2} \approx \frac{GM}{Rc^2} = \Xi < 1$$

### Wave amplitude

$$h = 2 \frac{\Delta L}{L} \lesssim \frac{\Xi}{10^{-1}} \cdot \frac{M}{10^6 M_\odot} \cdot \frac{10 \text{ Gpc}}{D_1} \text{ nm/Mkm}$$

### Wave frequency



$$f \approx 14 \times \left( \frac{\Xi}{10^{-1}} \right)^{3/2} \cdot \frac{10^6 M_\odot}{M} \text{ mHz}$$

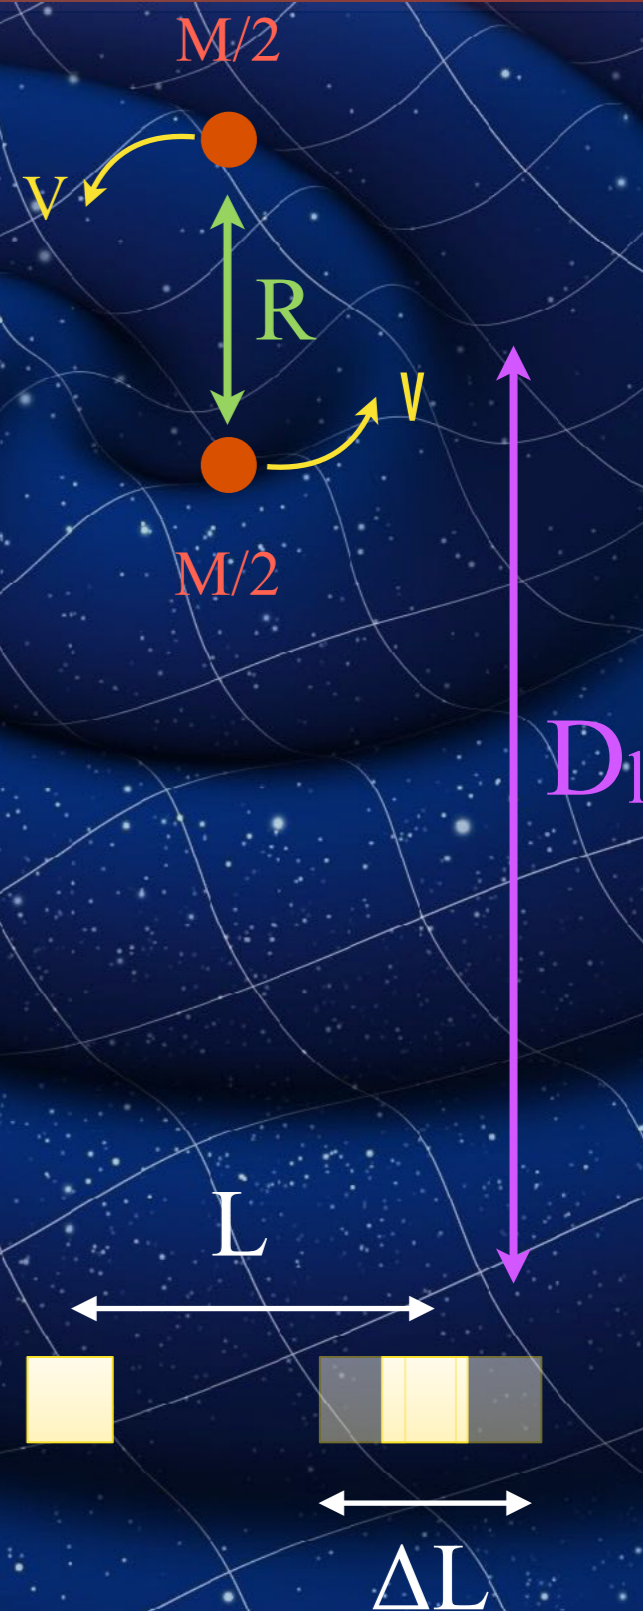




The geometry and sensitivity of the Michelson interferometer particularly well suited for detecting Gas

- Require mirrors 'free falling' along the line of sight
- First concepts in the 60's in USSR [Gertsenshtein et Pustovoit, 1963] an in the USA [Moss et al, 1971]
- R. Weiss, 1972 : identification and computation of the most important sources of noise

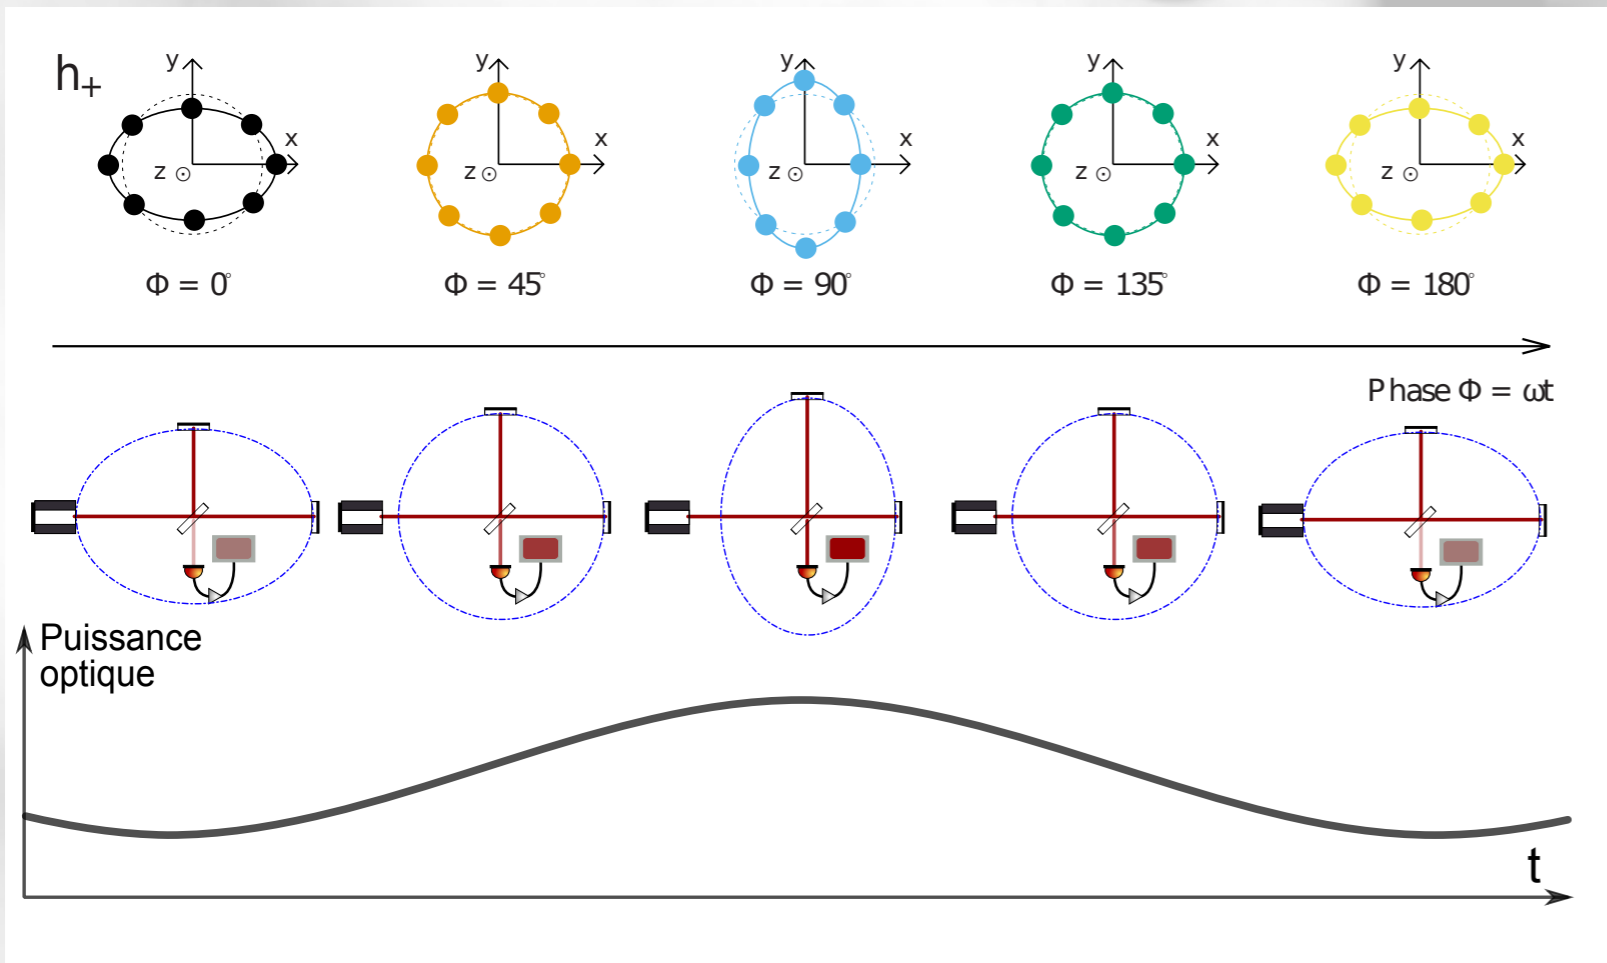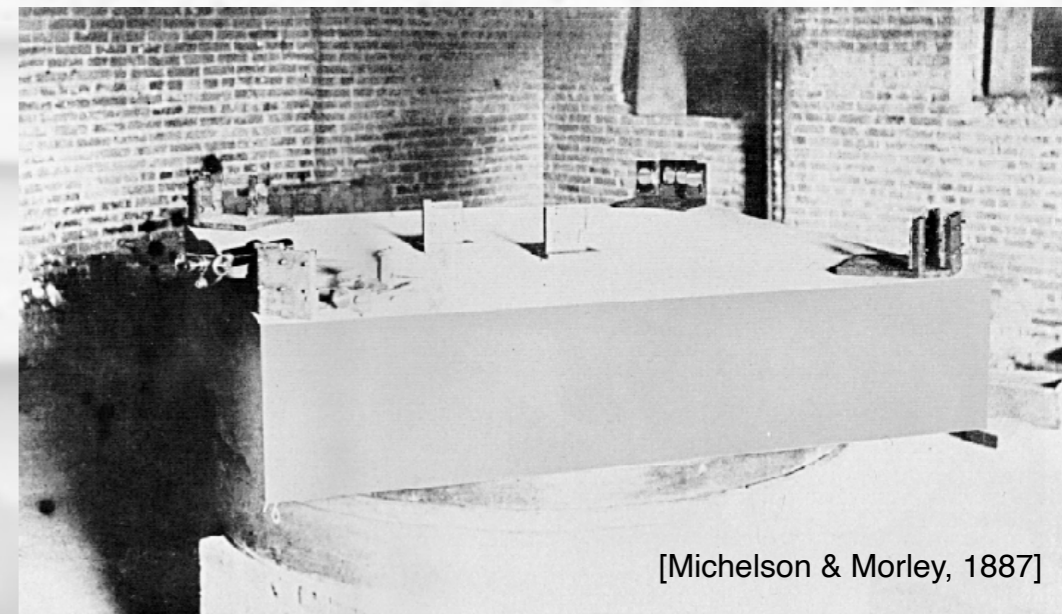

[Weiss et al, 1972]

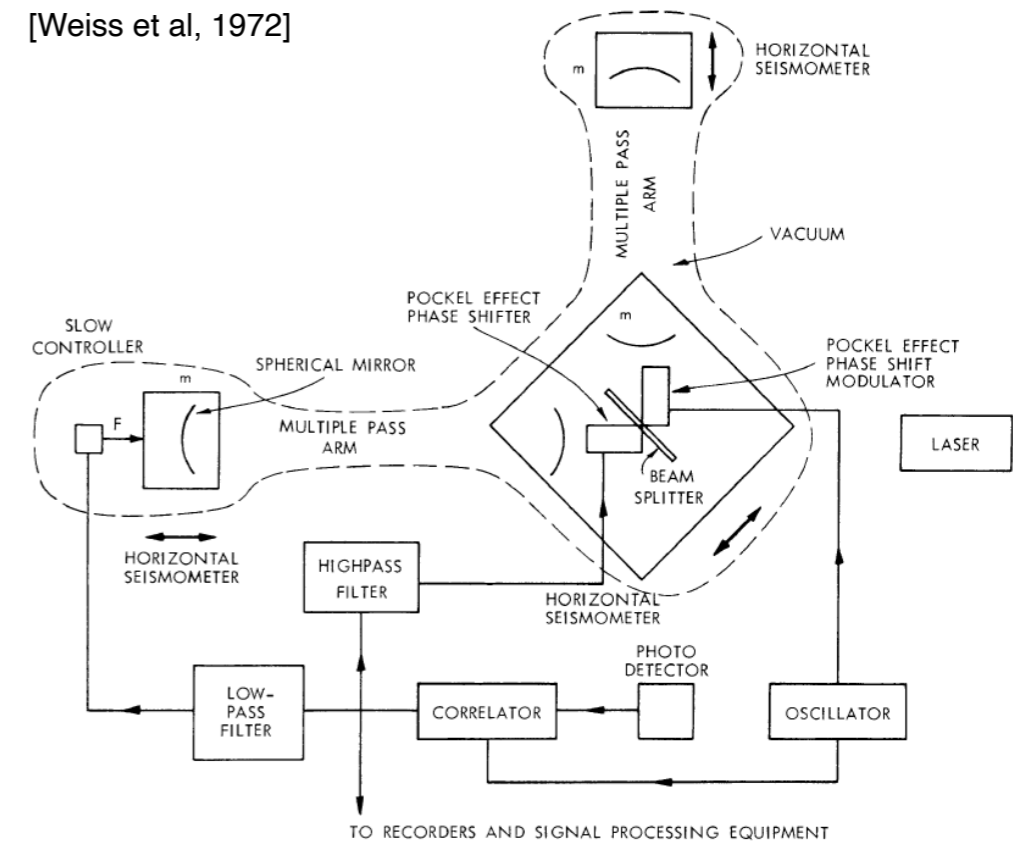



# Ground based interferometers

Hanford, Washington



LIGO Livingston, Louisiana




LIGO  
4 km  
armlength

VIRGO  
3 km  
armlength






## Sources



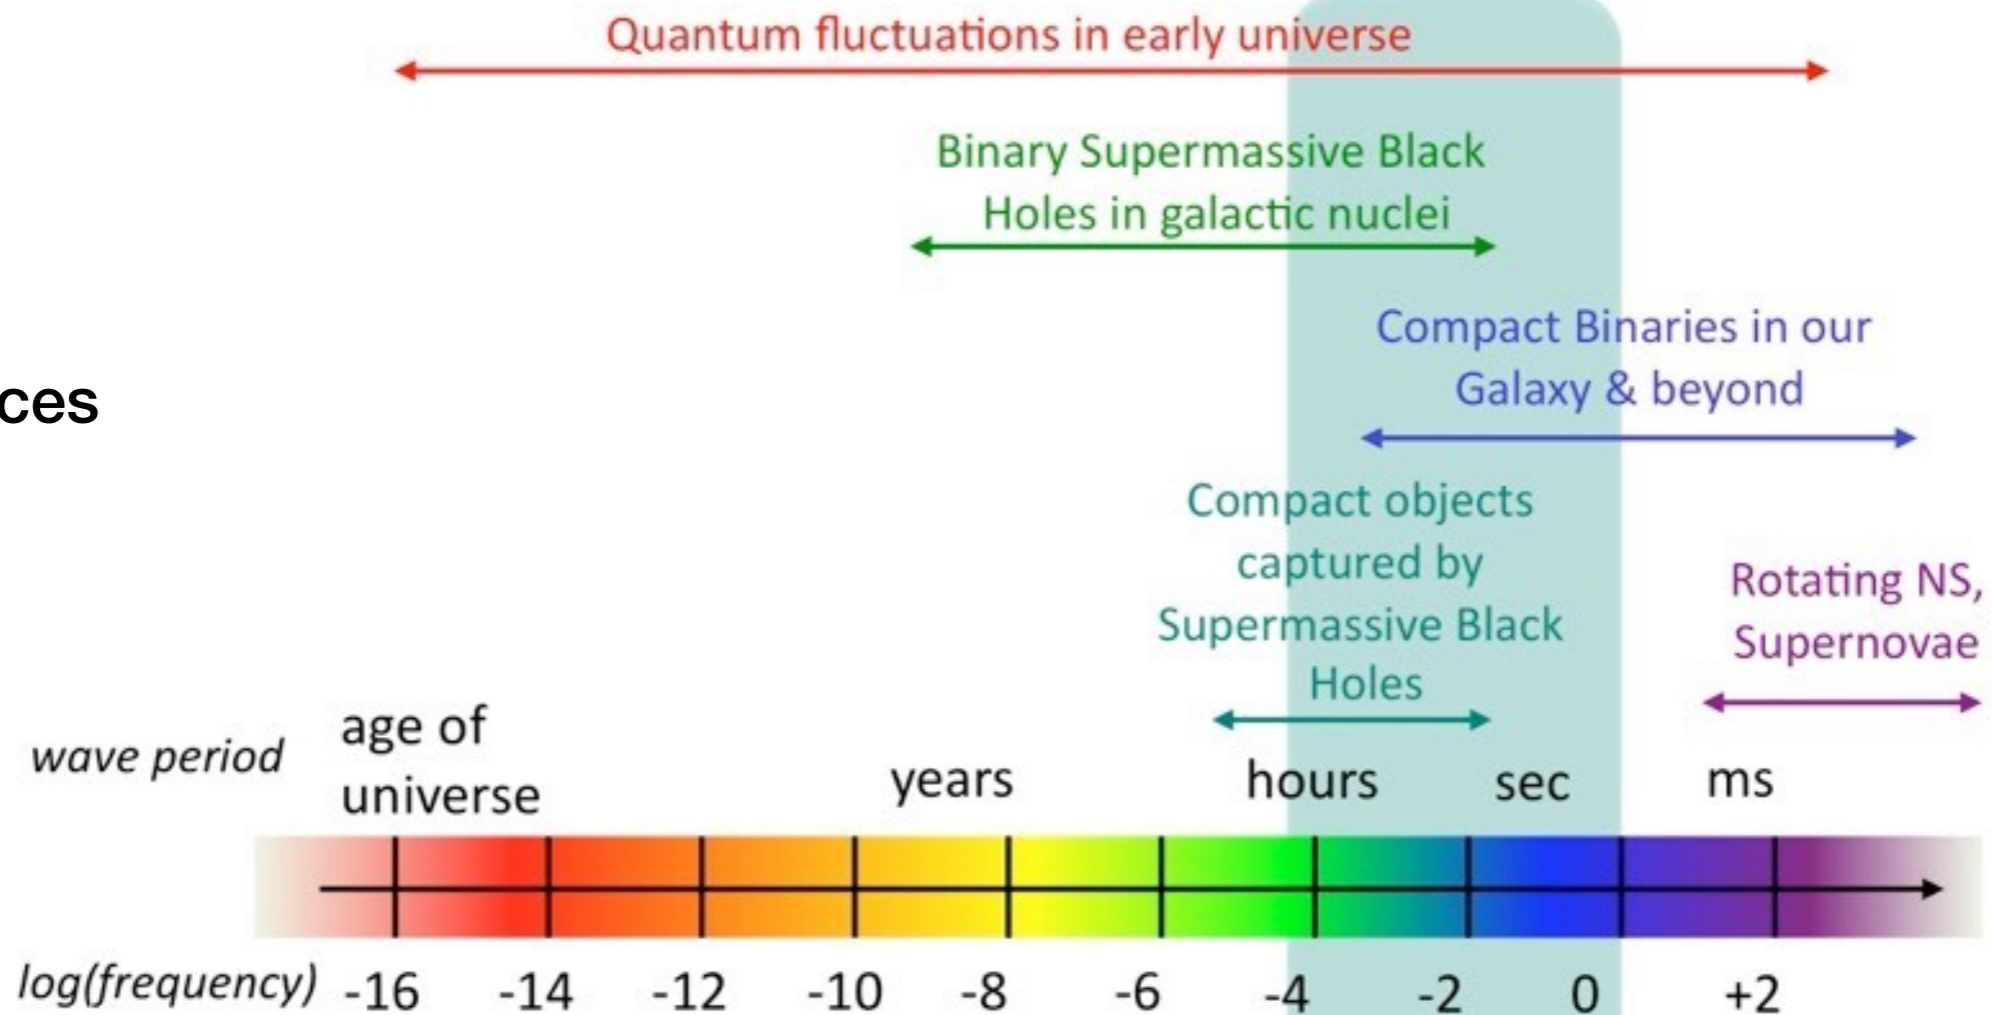


## Detectors

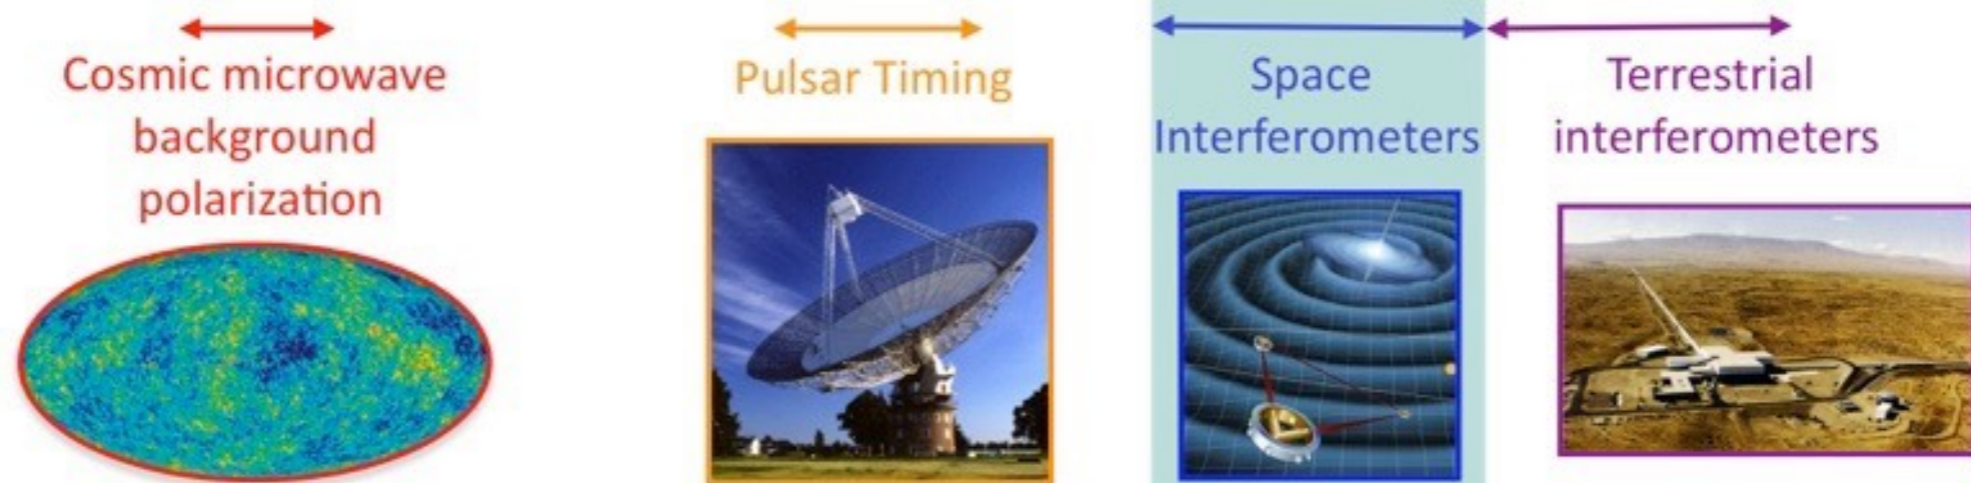



LISA will observe GWs from 0.1 mHz to 1 Hz

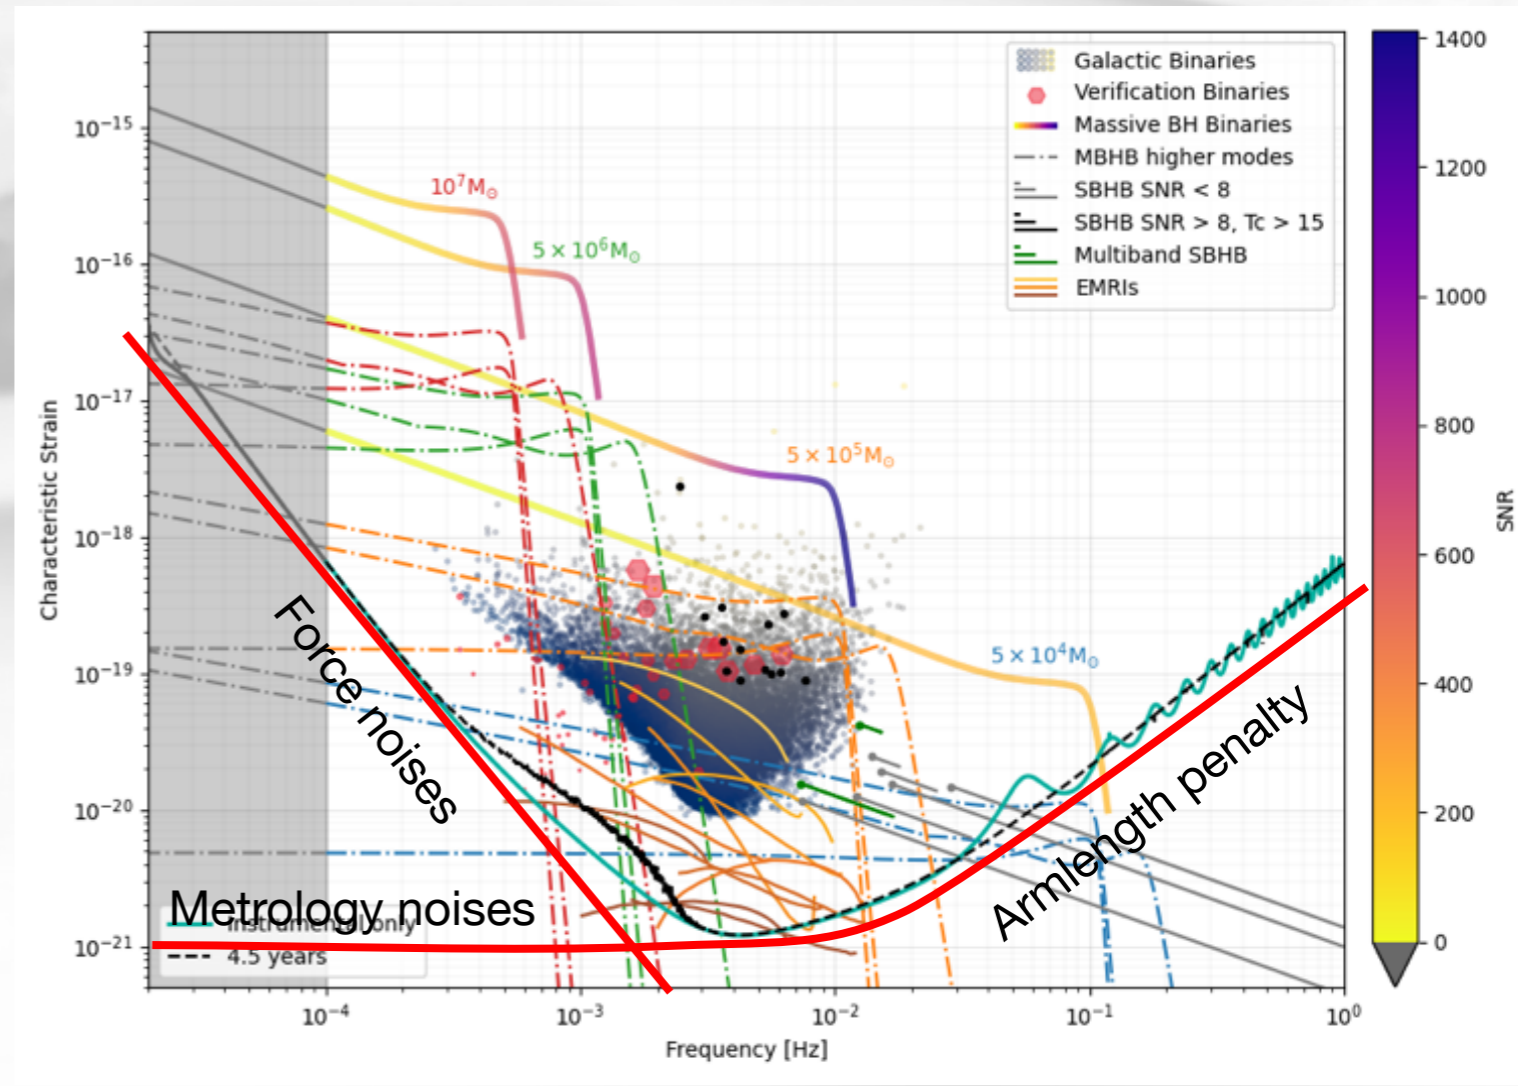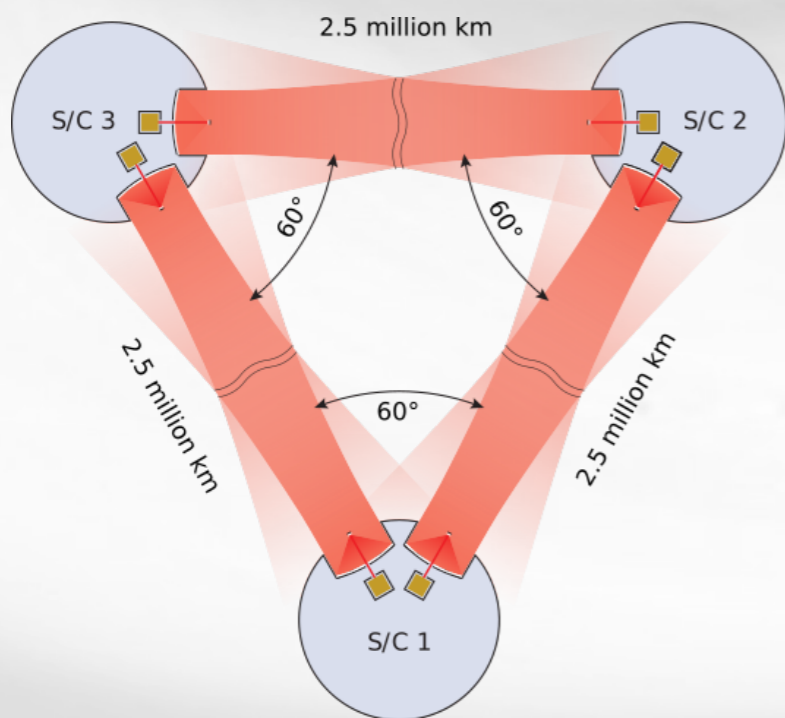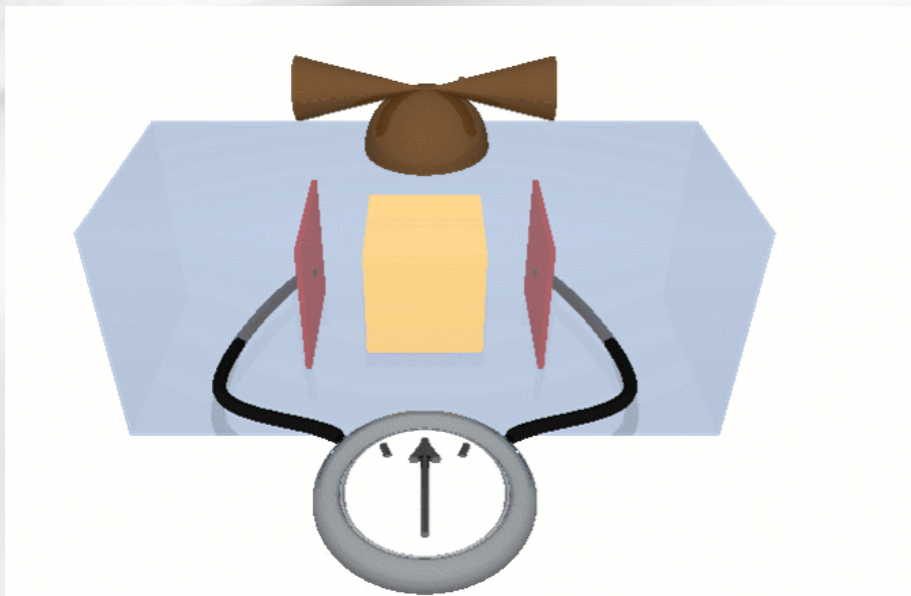



# Massive BH binaries

- Massive BHs in the nucleus of every Galaxy

- $4 \times 10^6 M_{\text{sun}}$  at the center of the Milky Way

- MBHs accumulate mass

- gas accretion


- merging with other BHs

- Galaxies merge


- observed...

- may result in a MBH binary which could merge in a reasonable time

- Stars and/or gas required to dissipate orbital momentum and bring it in GW driven regime



[credits: EHT]

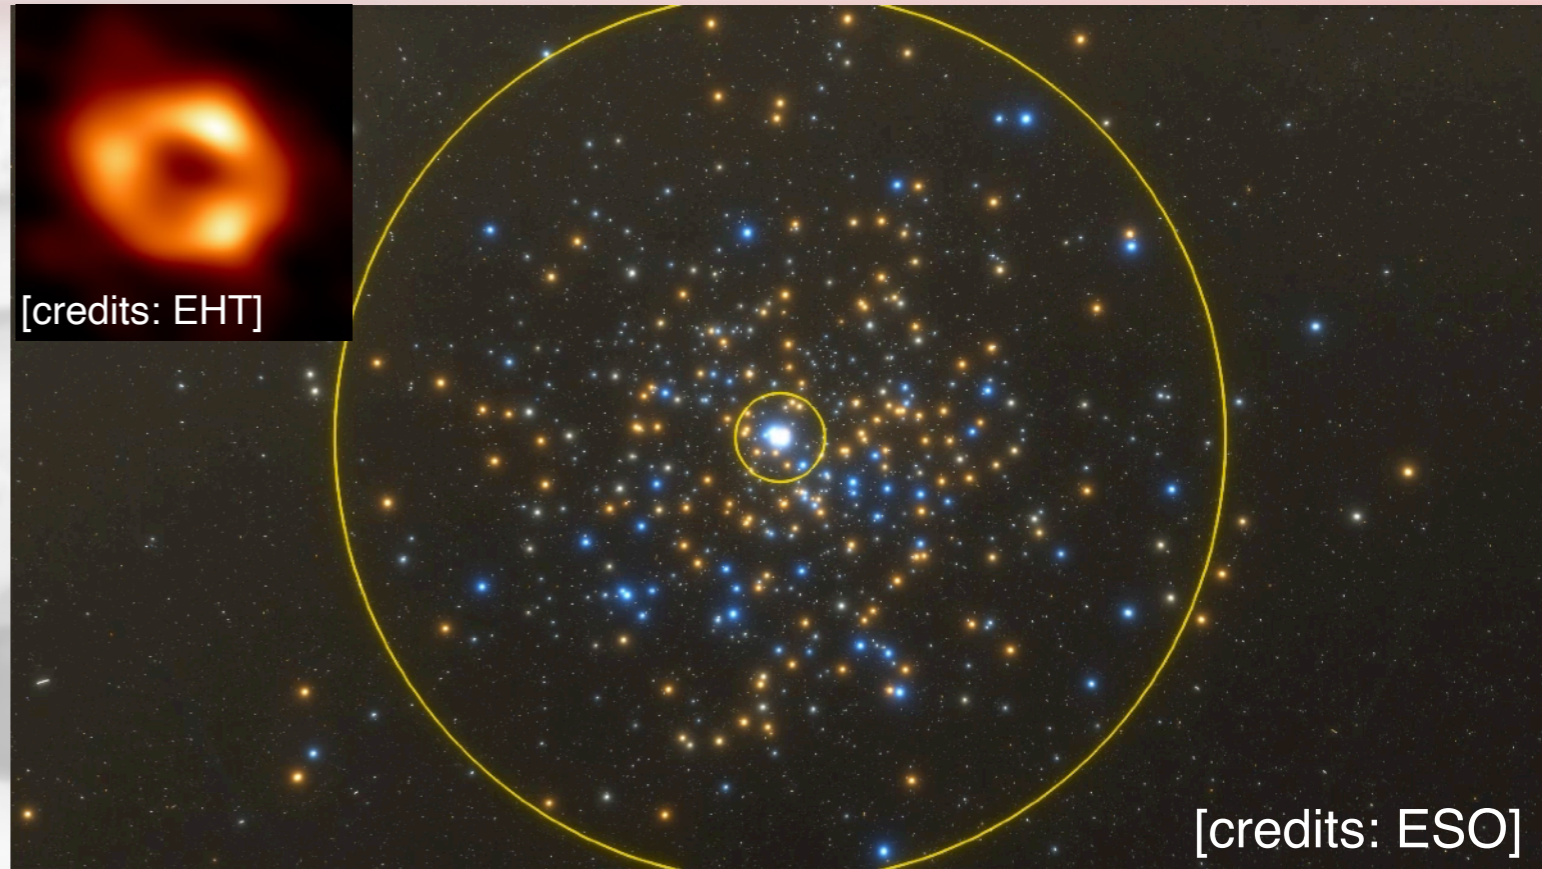

[credits: ESO]





[credits: HST]



## Super massive black holes binaries ( $10^4 - 10^7 M_{\text{sun}}$ ) - SMBHB

- ~ few to few hundreds / year
- Up to  $z \sim 20 \rightarrow$  origin and evolution
- Post merger ringdown to test GR
- Cosmology with standard sirens

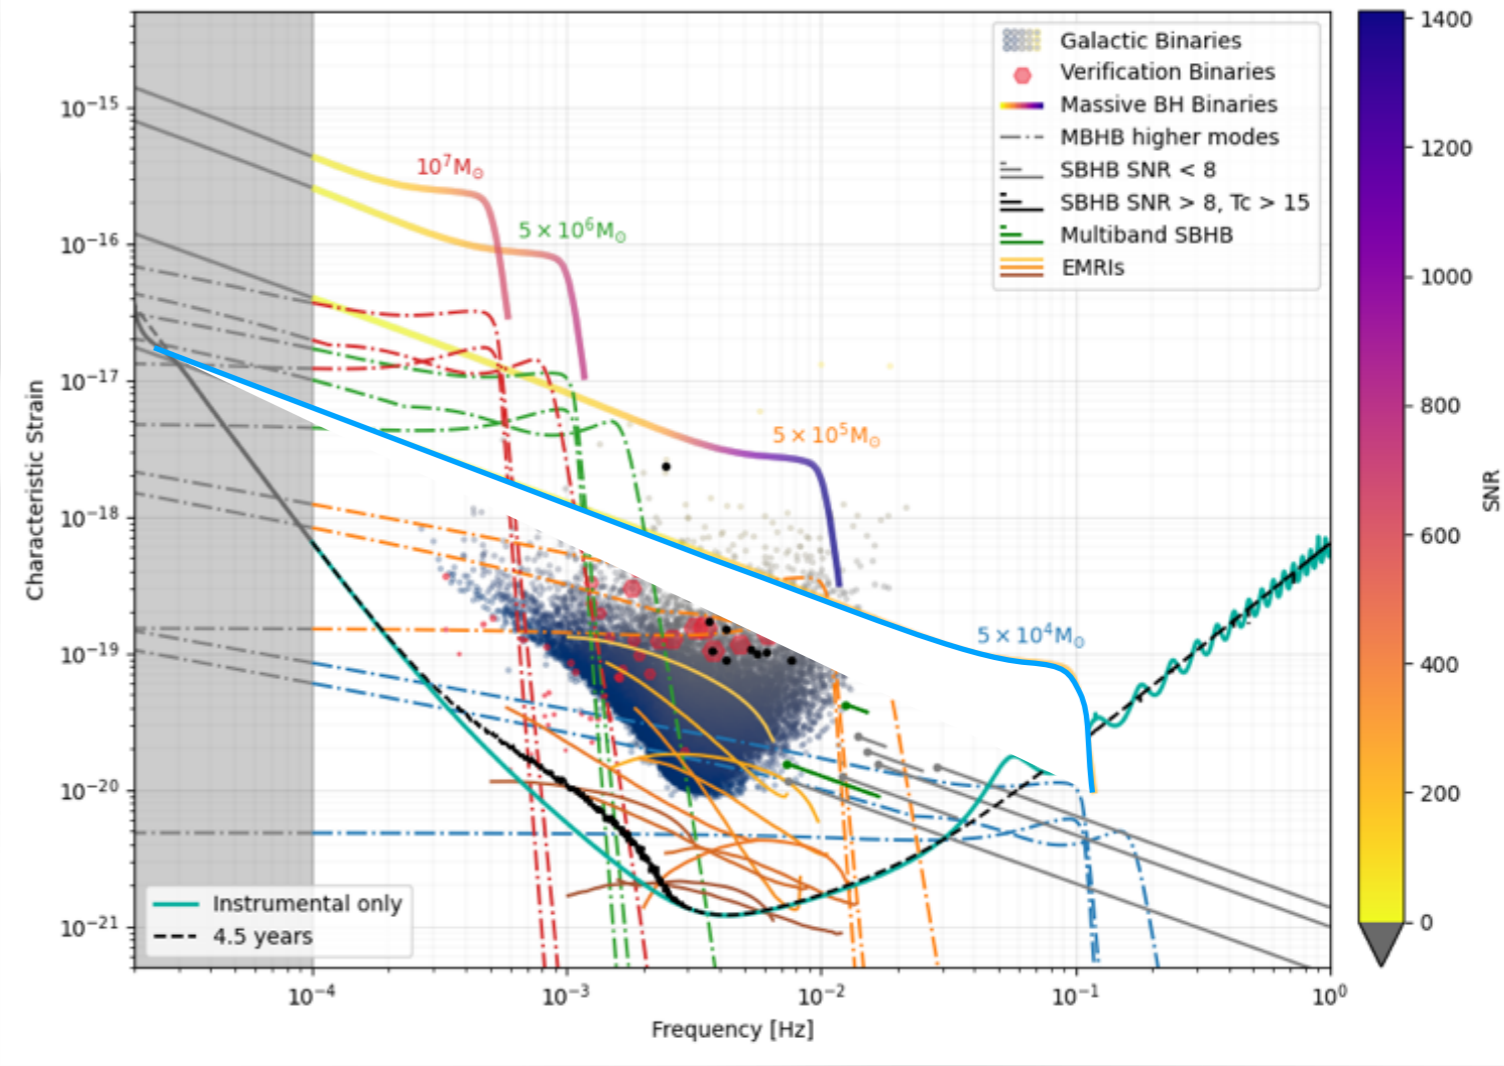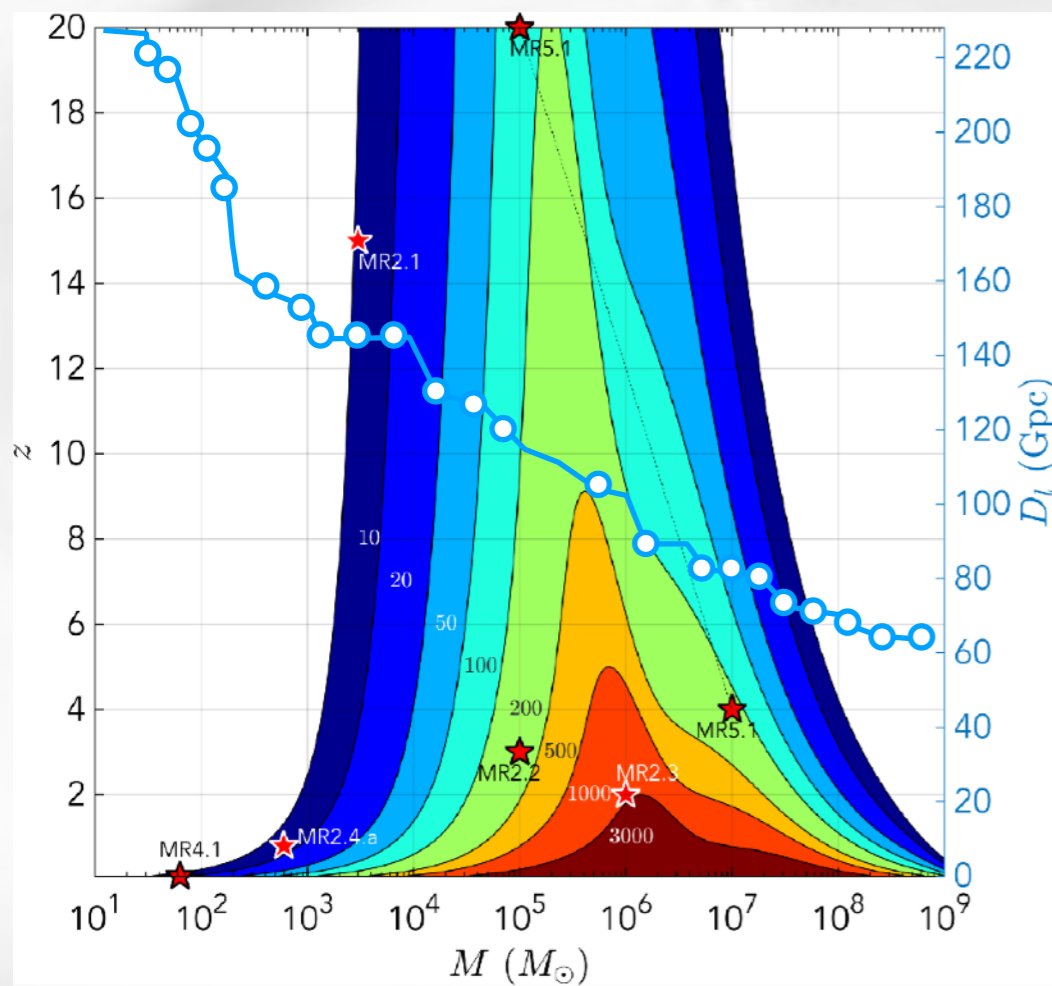



## Galactic white dwarf binaries ( $\sim 10\,000$ resolved) - GB

### Three categories

- Joint EM - GW sources (Gaia, LSST)

- Known verification binaries in the LISA band



- Individually detected :  $\sim 10^4$

- Stochastic GW signal

- foreground 'noise'

- Binary populations, evolution, merger rate



- Milky way mass distribution

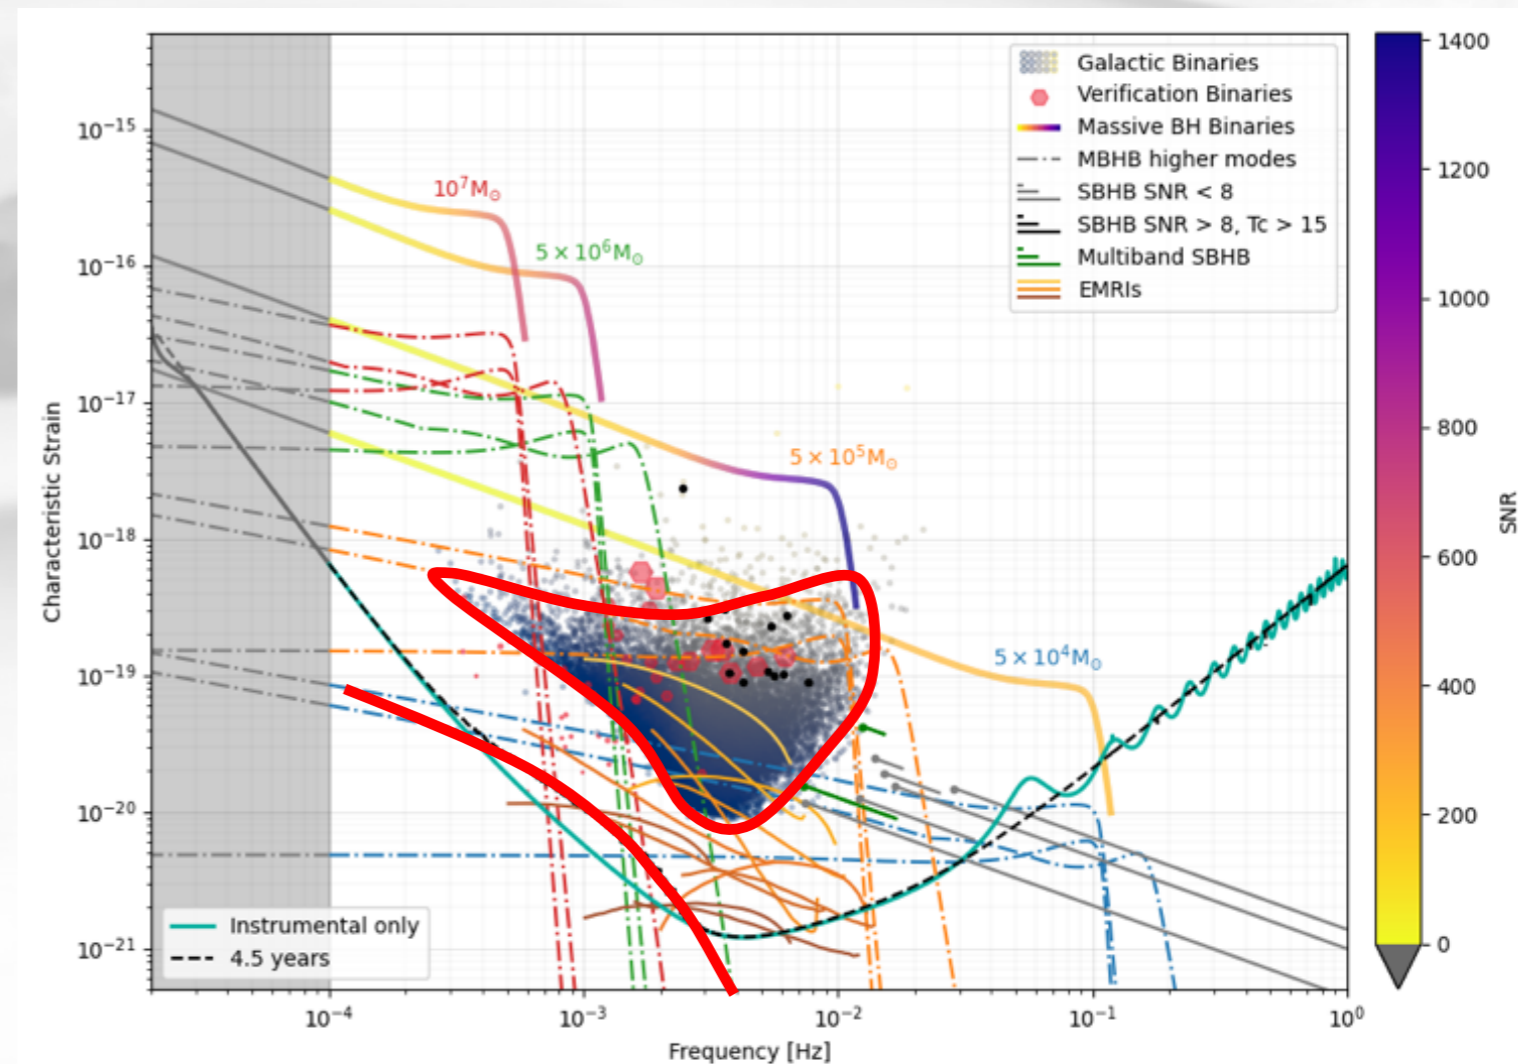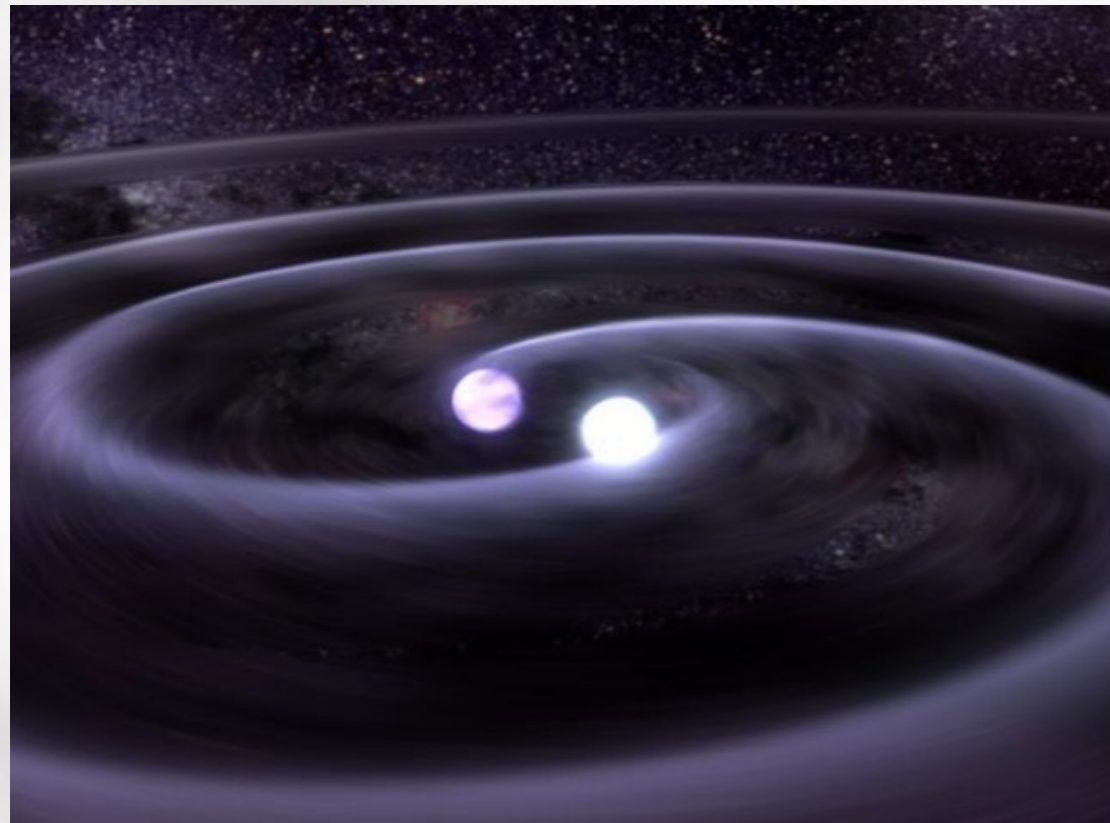



## Stellar mass black holes binaries - SBHB

- ~ a few and a couple multibands
- Inspiral phase of LVK like events → formation channel and environmental effects, EM counterpart
- Observed for ~years in LISA until ~days before merger

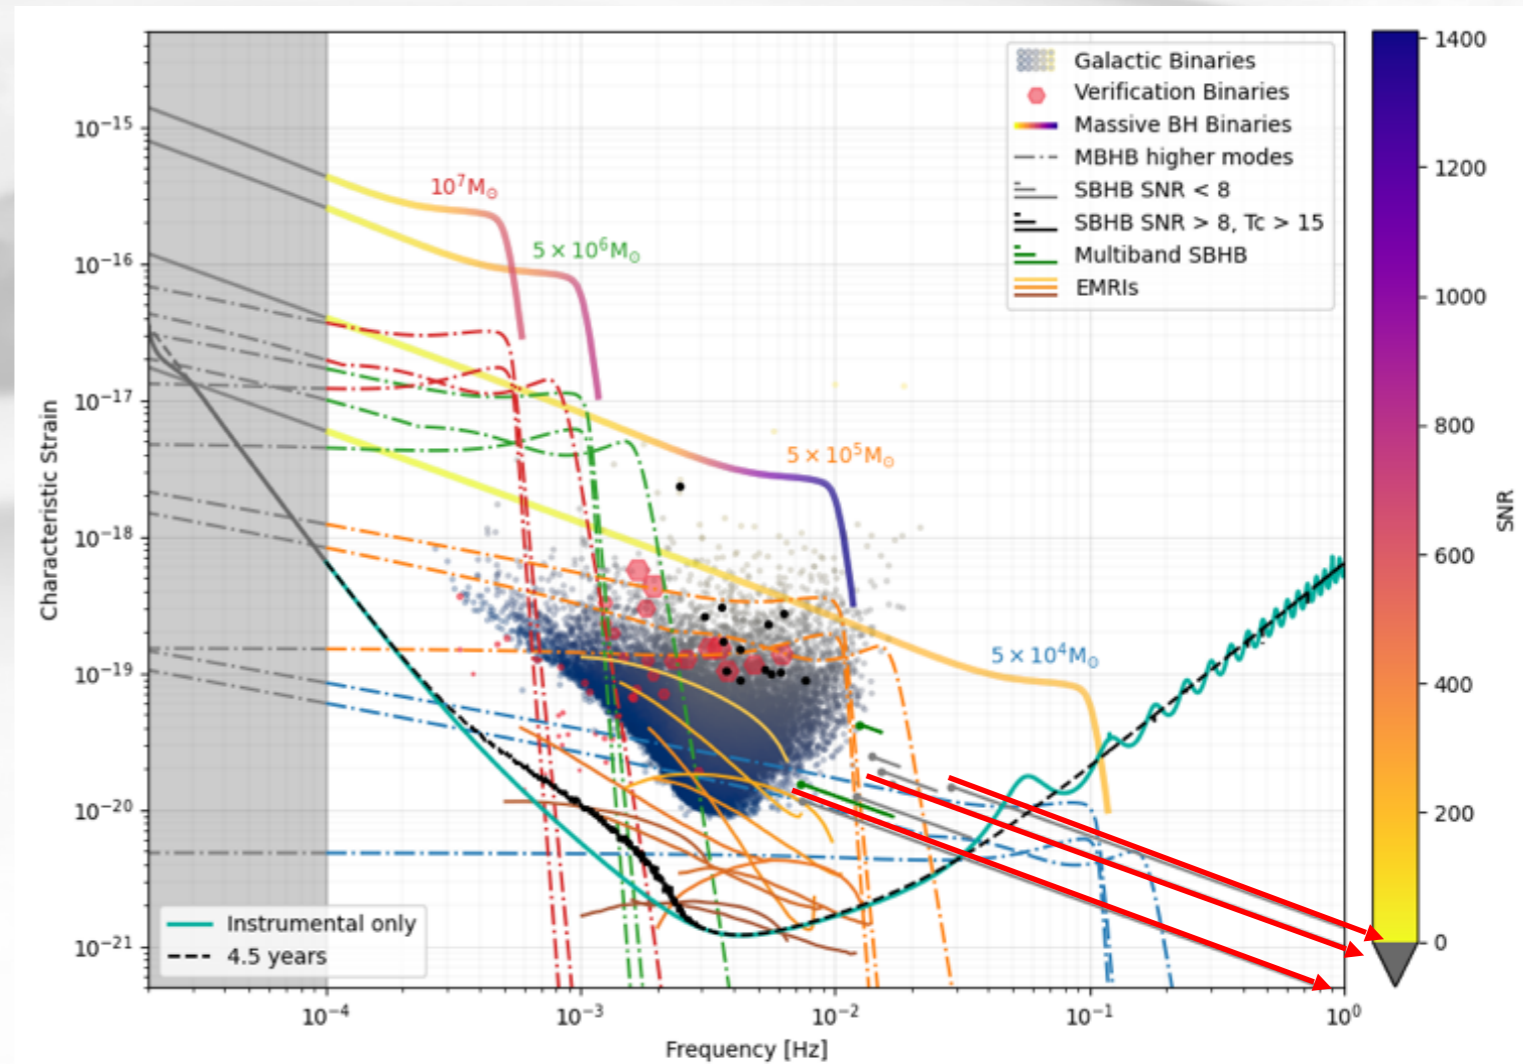
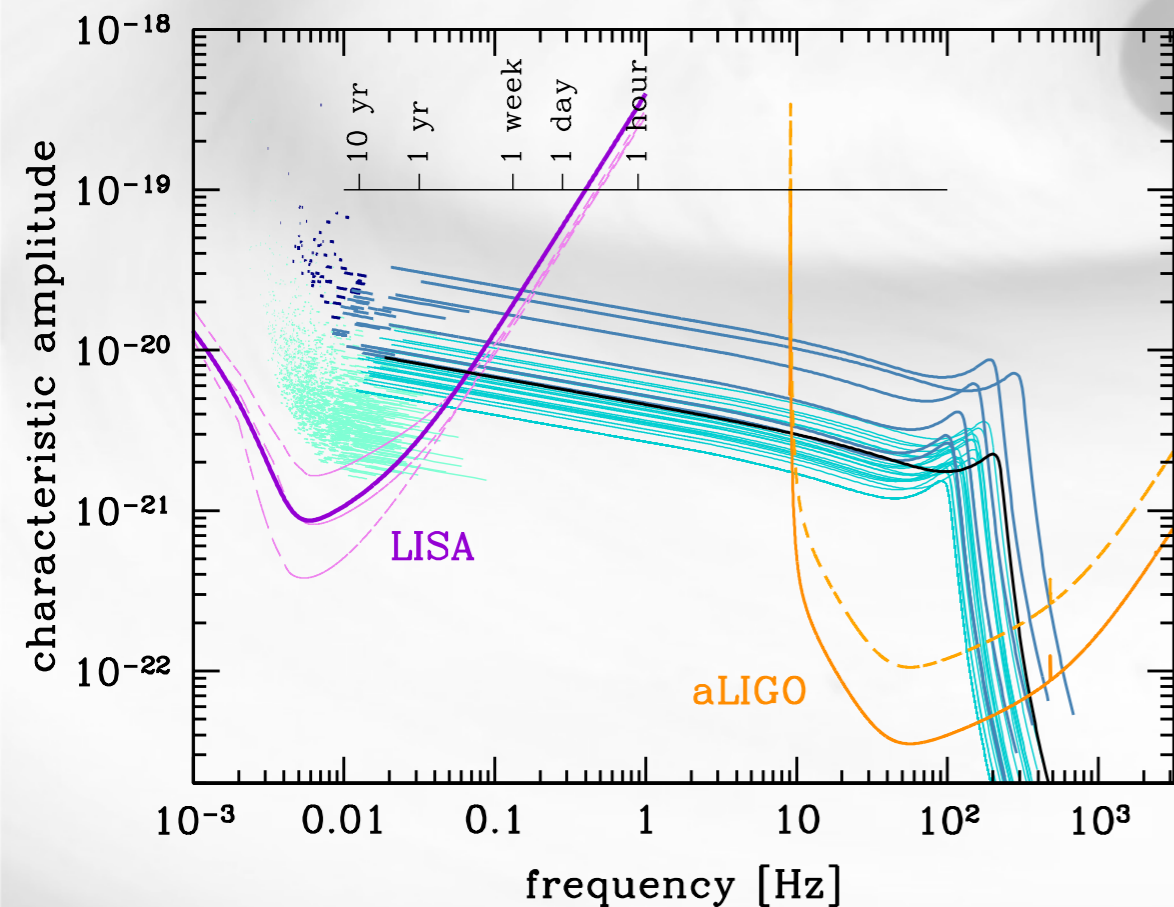


[credits: A. Sesana, 2017]




## Extrem Mass Ratio Inspirals (EMRI)

- ~ 1 to 1000 / year
- Origin and local environment of MBH
- GR in the strong field regime

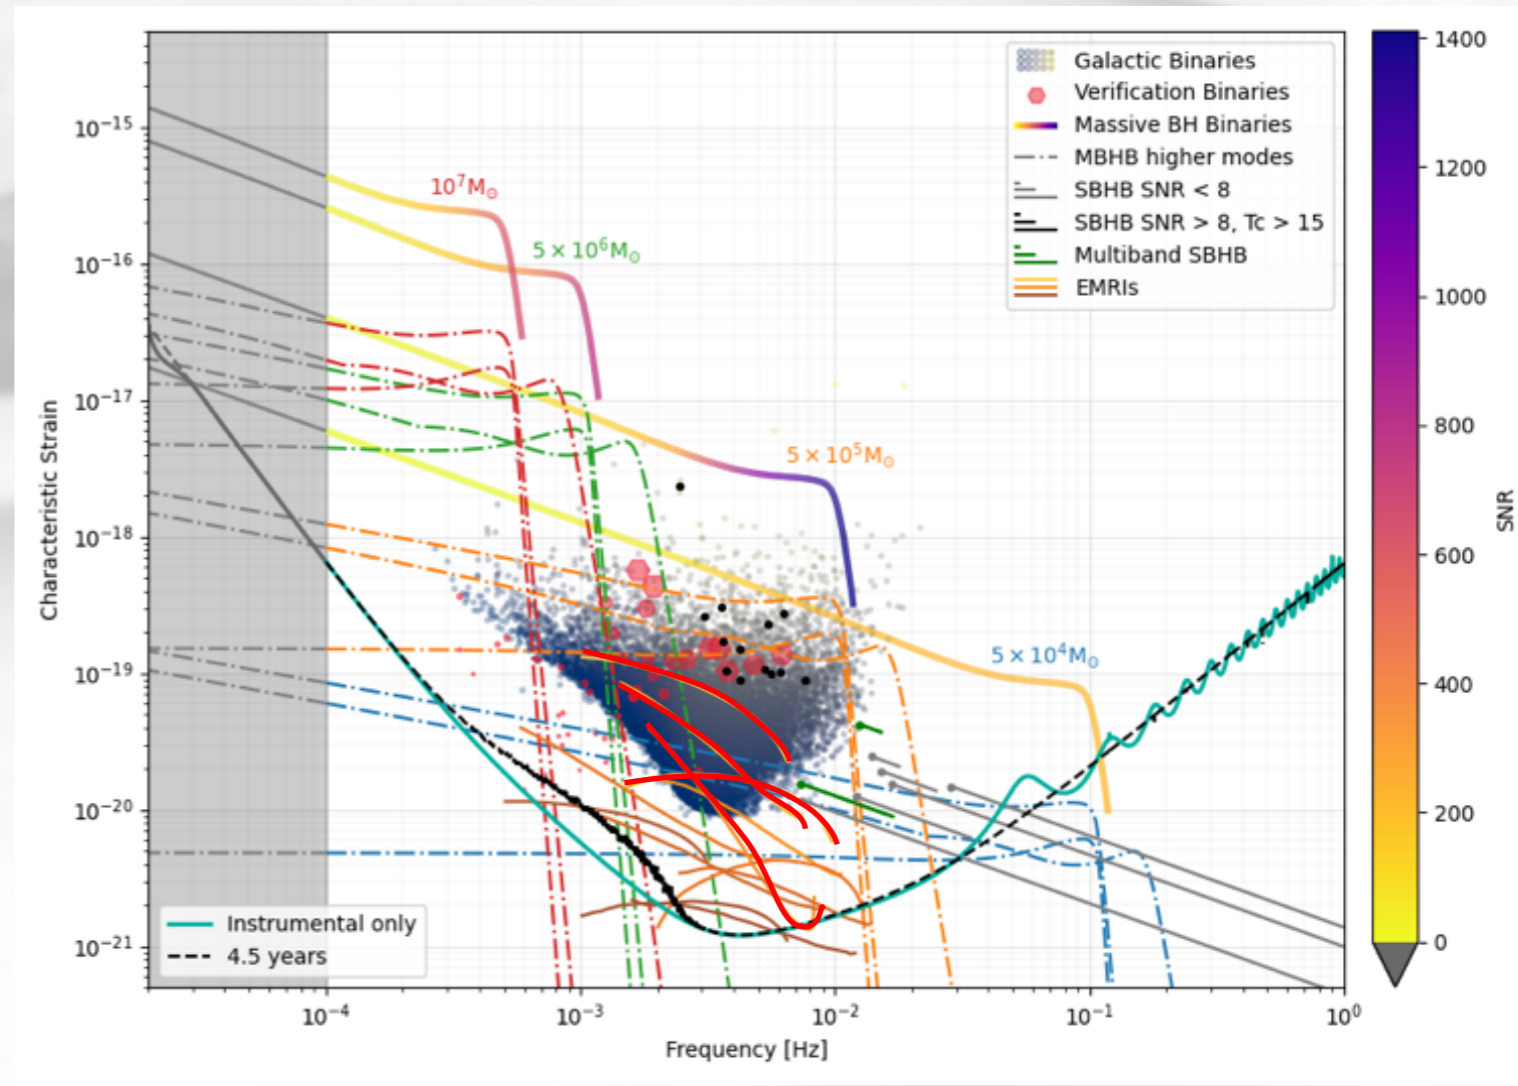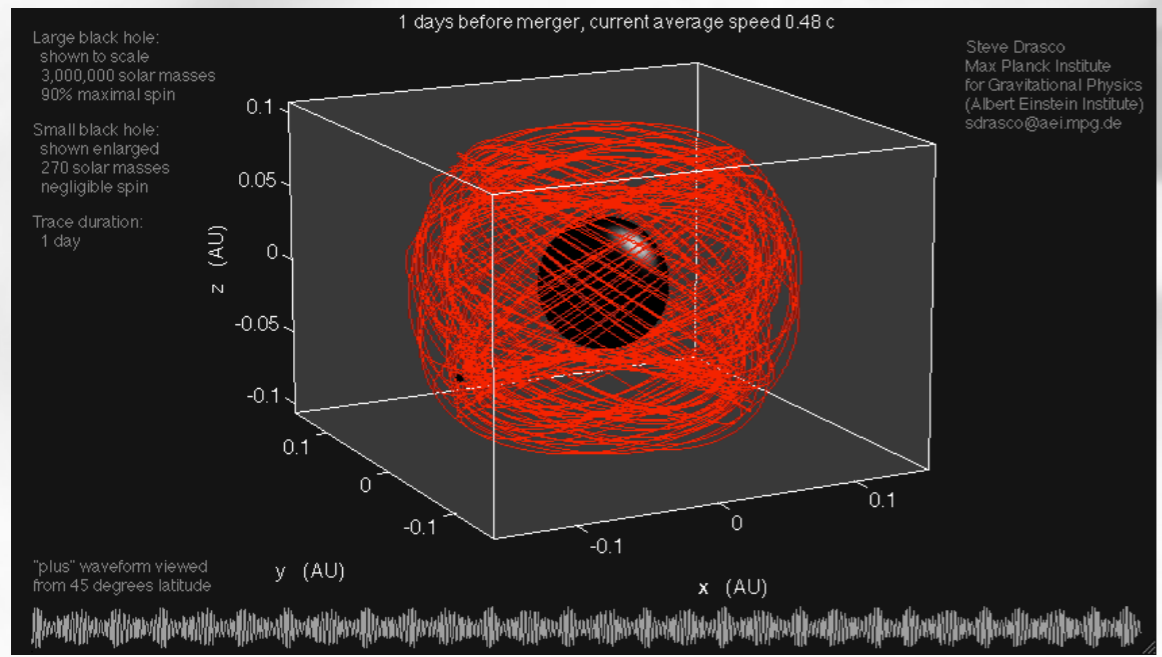




- 🚀 Using emitted GW to map the spacetime structure
- 🚀 Tests of GR
  - 🚀 Fundamental principles and symmetries of GR
  - 🚀 Testing GR with compact objects
- 🚀 Tests of the Nature of Black Holes
- 🚀 Dark matter and Primordial Black Holes
- 🚀 Model-independent tests
  - 🚀 Consistency of GR vs constraining Modified Gravity
  - 🚀 Parametrized tests
  - 🚀 Other tests including: Polarisation, GW propagation, Stochastic GW Background
- 🚀 Astrophysical and Waveform systematics

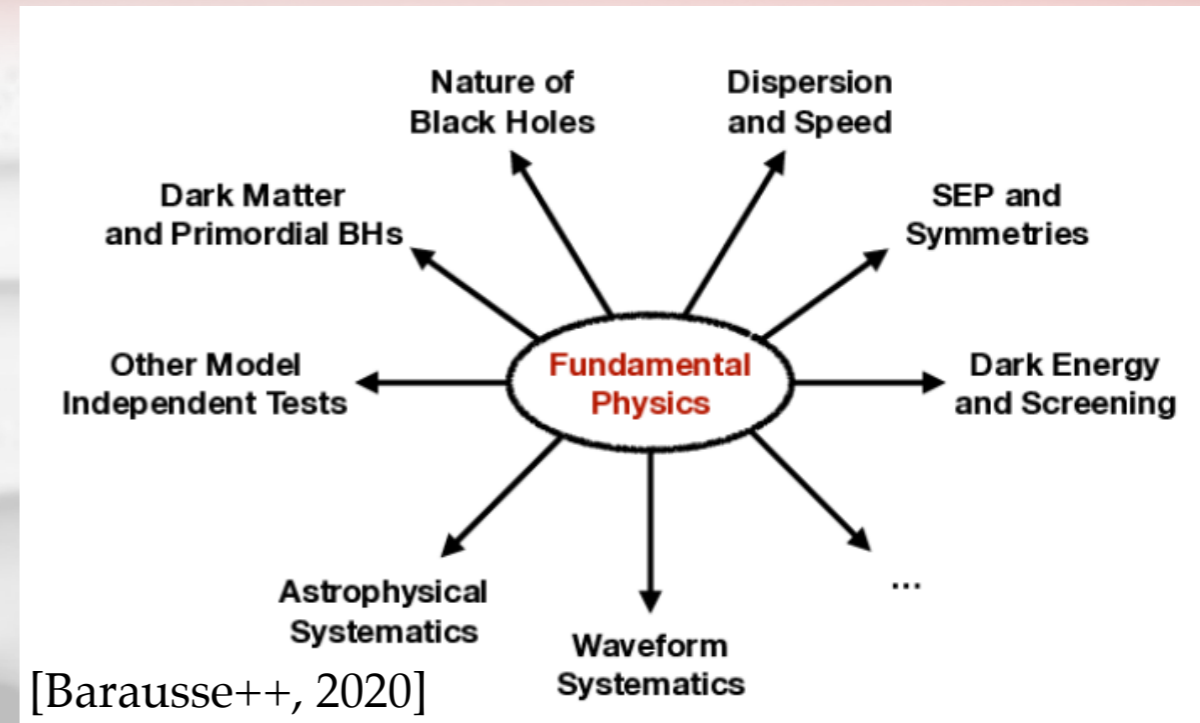

Deviation in quadrupole moment from Kerr value (no hair theorem):

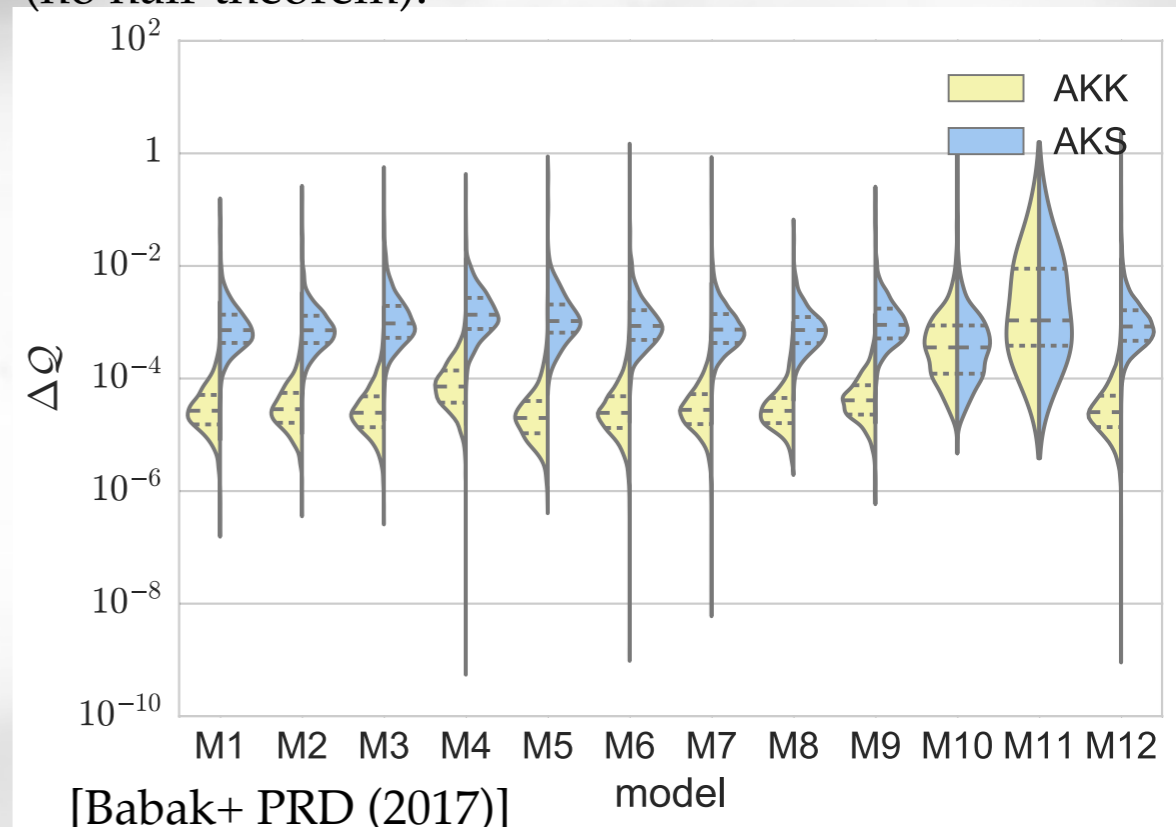



❖ Possible X-ray emission during the late stages of the SMBH inspiral (days to hours before final merger) comes from:

❖ **Circumbinary disc:**

❖ X-ray emission in soft x-rays ( $\leq 1\text{keV}$ )

❖ **Mini-discs around black holes**


❖ Hard x-ray emission ( $\geq 10\text{keV}$ ) from accretion of minidisks individually onto each black hole

❖ **Interaction of circumbinary and mini discs:**

❖ Accretion of circumbinary disc onto mini-discs via optically thick streams

❖ Thermal radiation dominated by the inner edge of the circumbinary disc, producing soft x-rays ( $\sim 2\text{keV}$ )

❖ X-ray emission shows clear modulation on timescales as short as a few hours

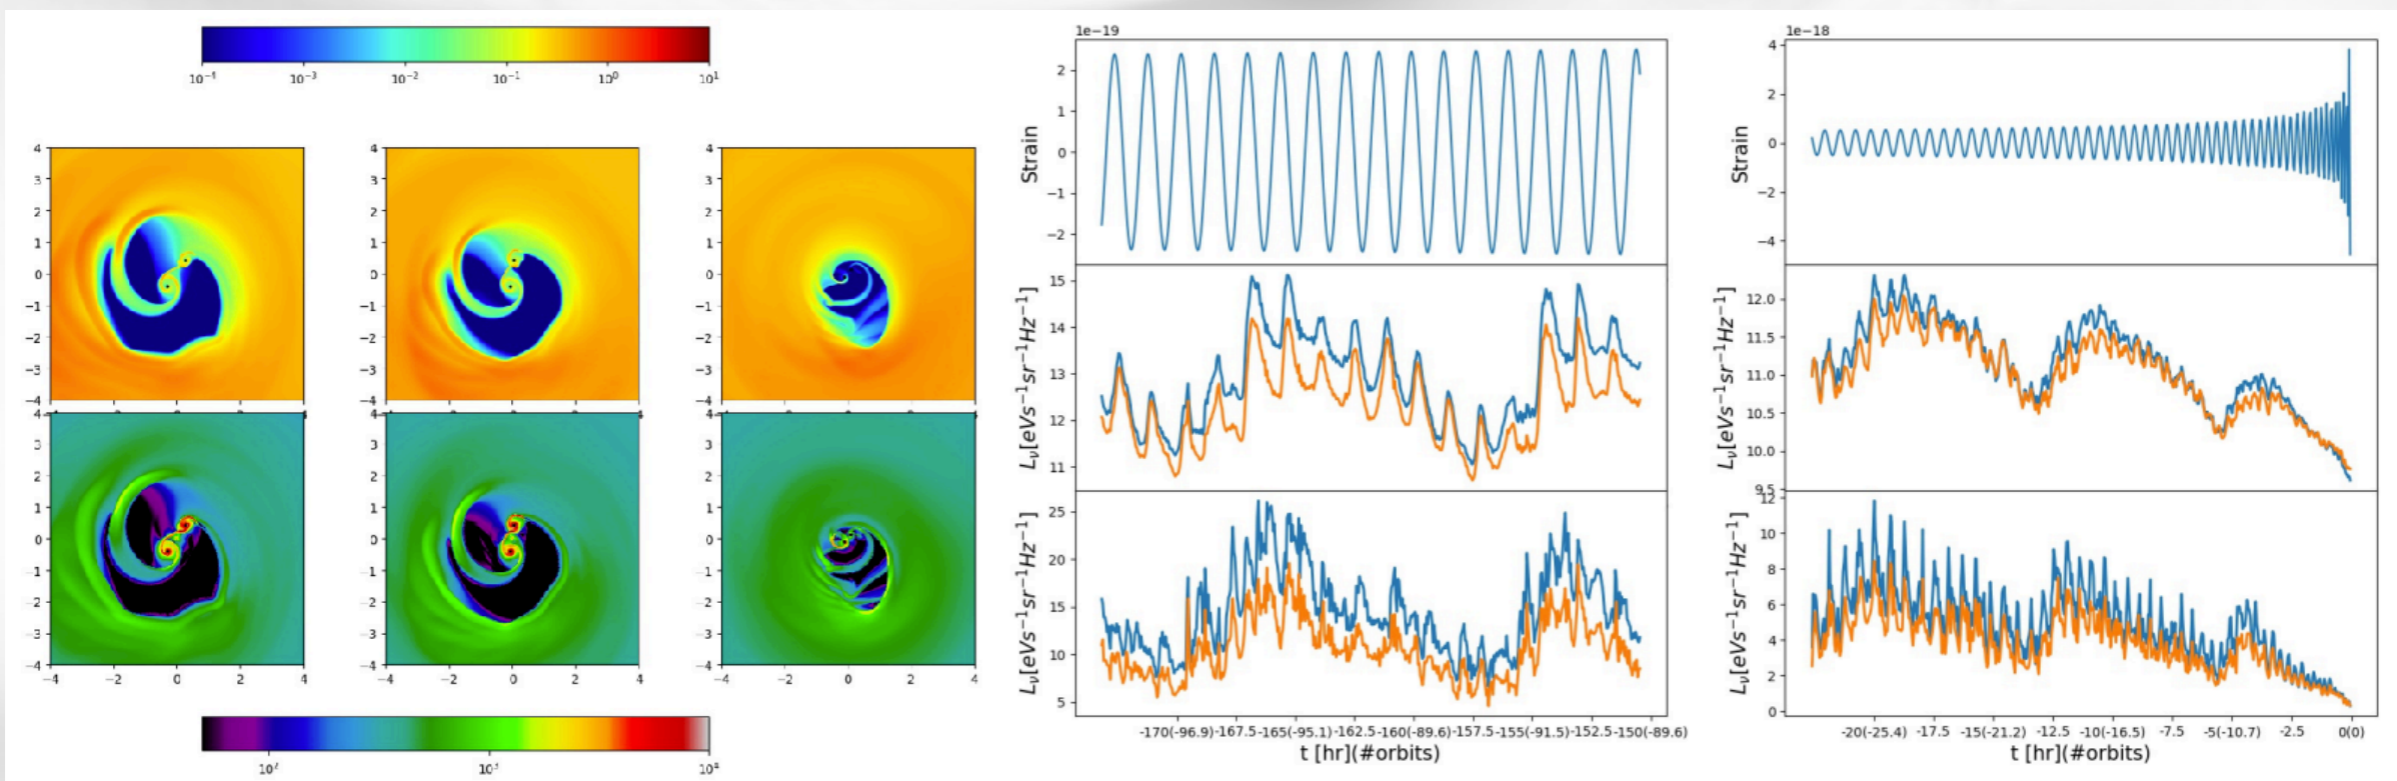



LISA may help on many cosmological problems

Expansion rate of the Universe : late acceleration ?

CMB :  $H_0 = 66.93 \pm 0.62 \text{ km.s}^{-1}.\text{Mpc}^{-1}$

SN Ia :  $H_0 = 73.5 \pm 1.4 \text{ km.s}^{-1}.\text{Mpc}^{-1}$

Dark energy

Cosmological constant ?

Early dark energy: DE evolves with redshift and contributes to rate of expansion at  $z > 1$

Modification of GR on large scale

LISA can probe the Universe at different scales


Use BHBs merger events as standard sirens

Requires the knowledge of the redshift

from e/m counterpart of the host galaxy


or from statistical inference

Universe expansion rate from GW events :

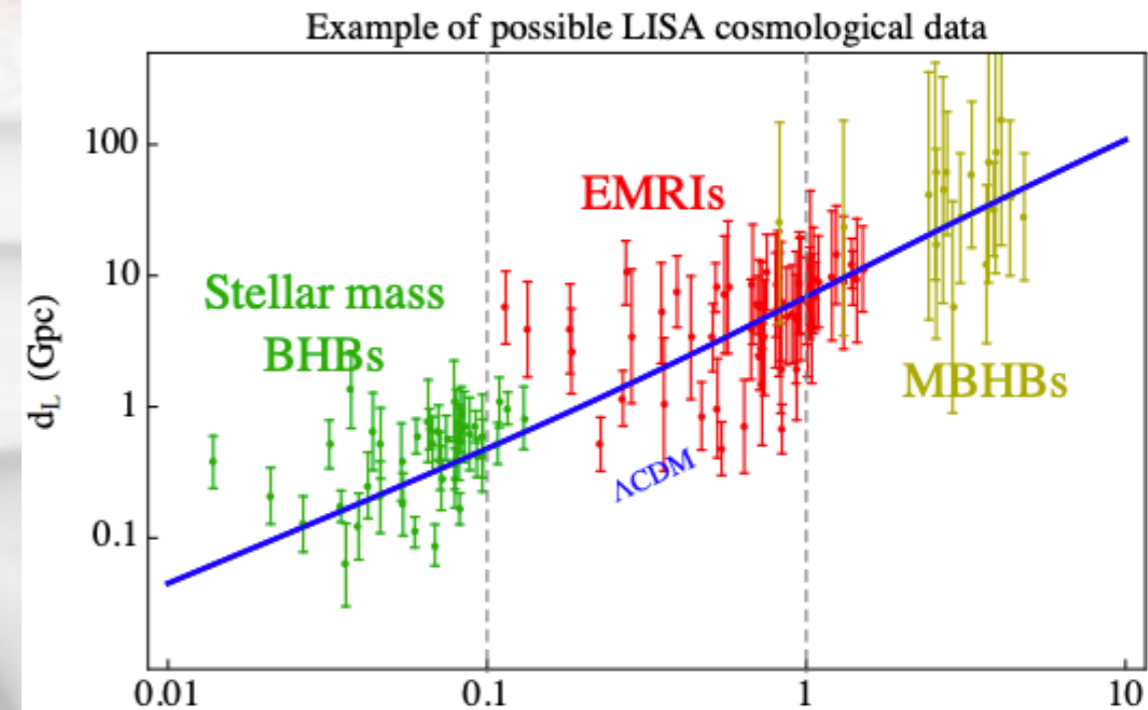

N. Tamanini J. Phys. CF 2016




Universe DE content:

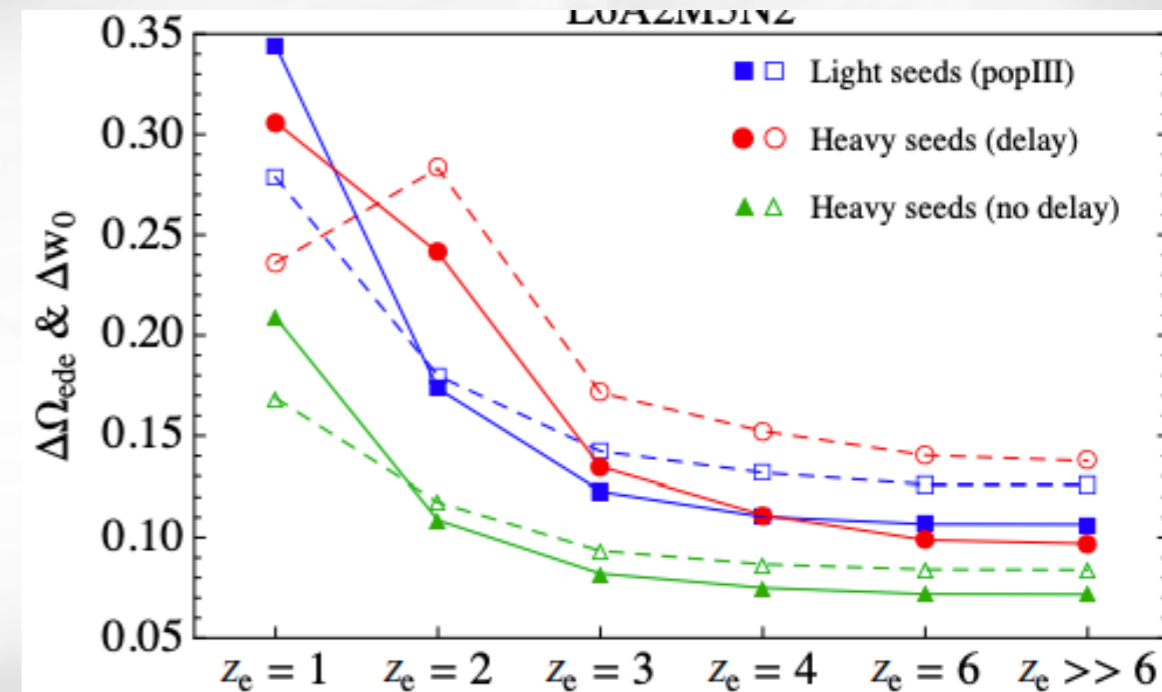

Ch. Caprini, N. Tamanini JCAP 2016



- Violent processes in the early Universe may produce stochastic GW background (SGWB)
- First order phase transition
  - Collision of true vacuum bubbles and conversion to the symmetry-broken phase accompanied with anisotropic stresses.
  - The LISA band ( $10^{-4}$  - 0.1 Hz) corresponds to the energy scale of the EW (electroweak) phase transition (up to  $10^4$  TeV).
  - Formation of sound wave, shocks and turbulence in the plasma
- Cosmic strings:
  - A network of strings formed in the early Universe generates SGWB (as superposition of many uncorrelated sources) and (possibly) individual bursts

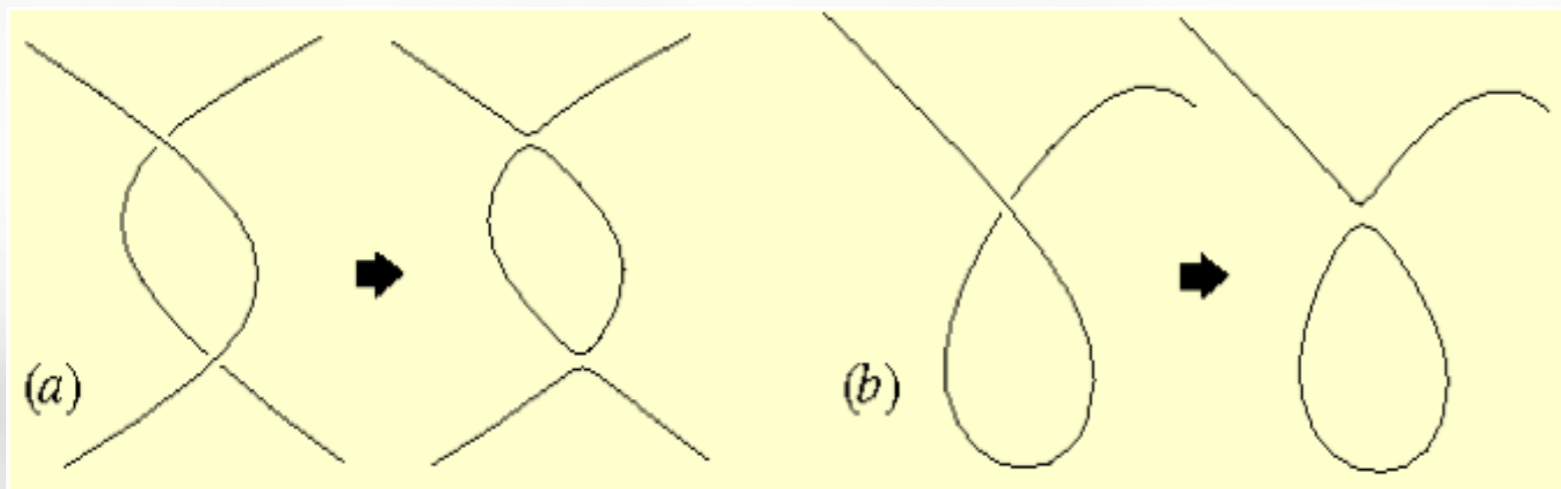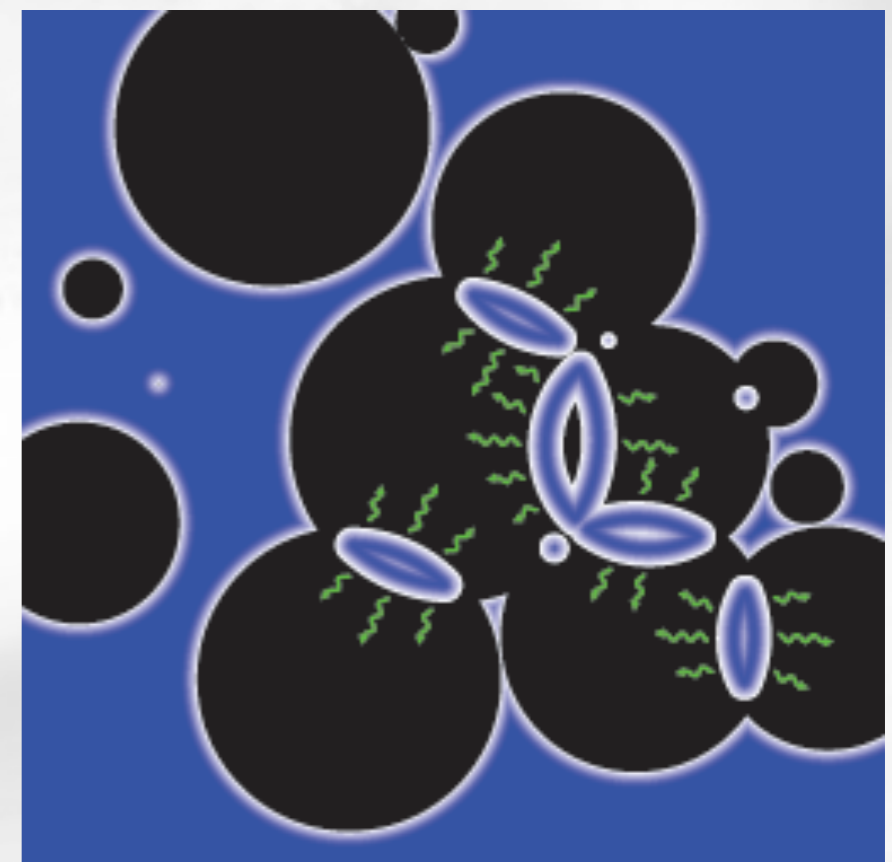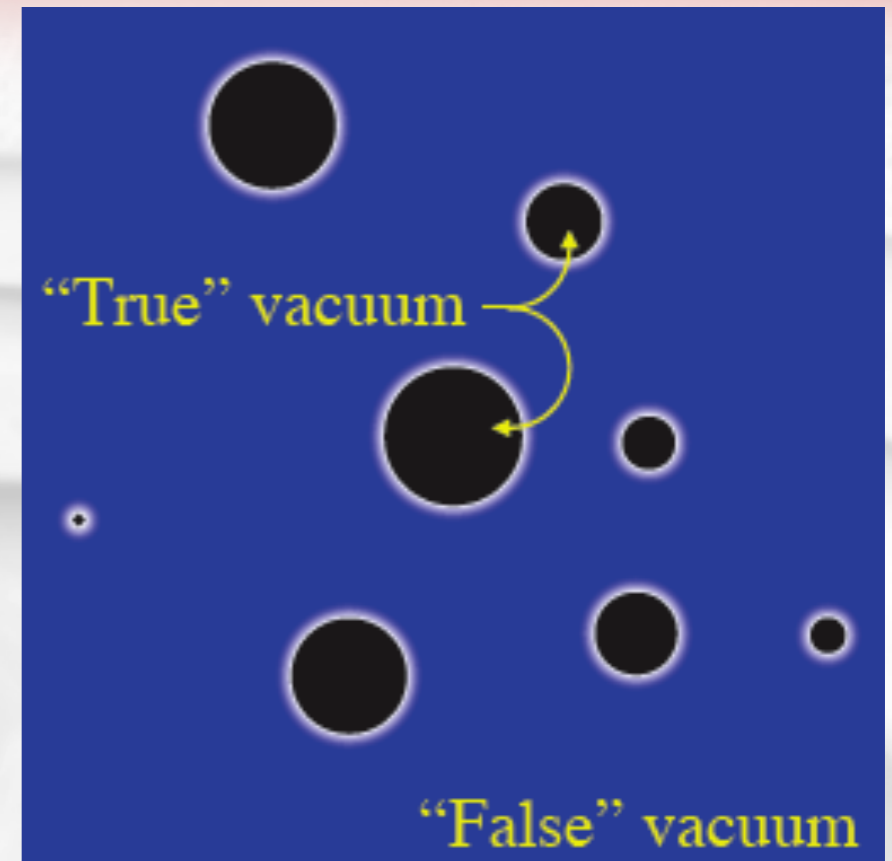



Many sources ...


- Compact galactic binaries
- Coalescence of SMBH
- Extrem mass inspirals
- Stochastic background from the early Universe
- ....

... to answer important scientific questions

- Formation and evolution of compact binaries
- Origin and evolution of BH since the early ages
- Strong field tests of GR
- Estimation of cosmological parameters
- ....

1 nm/Mkm →

1 pm/Mkm →

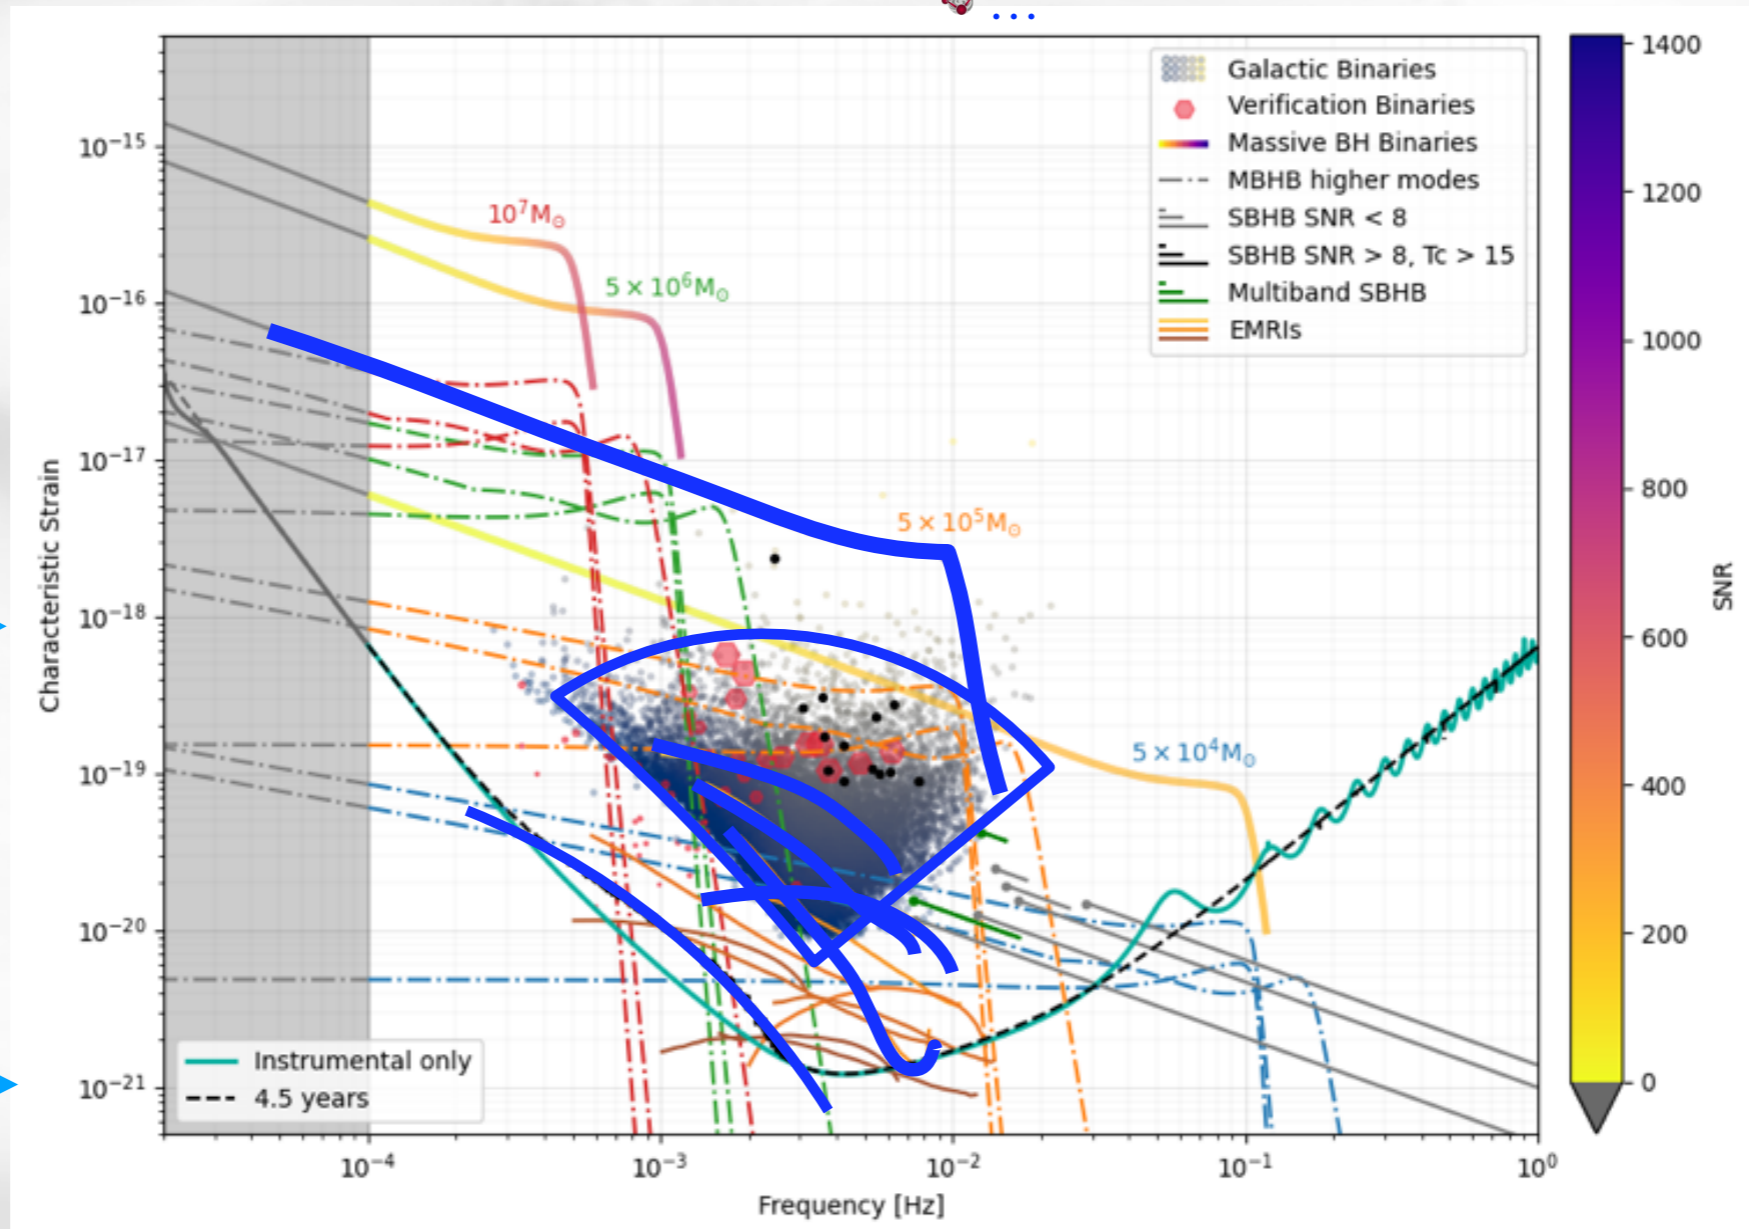



 *LISA Science Objectives*

 **From LISA Pathfinder to LISA**

 Mission description

 Conclusion



# Why going to space ?

Ground-based interferometers are limited by seismic and Newtonian noises




Detection bandwidth  $\approx 10$ 's Hz

(very) long armlength are possible

On ground :  
a few km max (eq. to  
100's km using cavities  
and folding mirrors)

$\rightarrow$  mHz GW observations only possible from space

VIRGO superattenuator

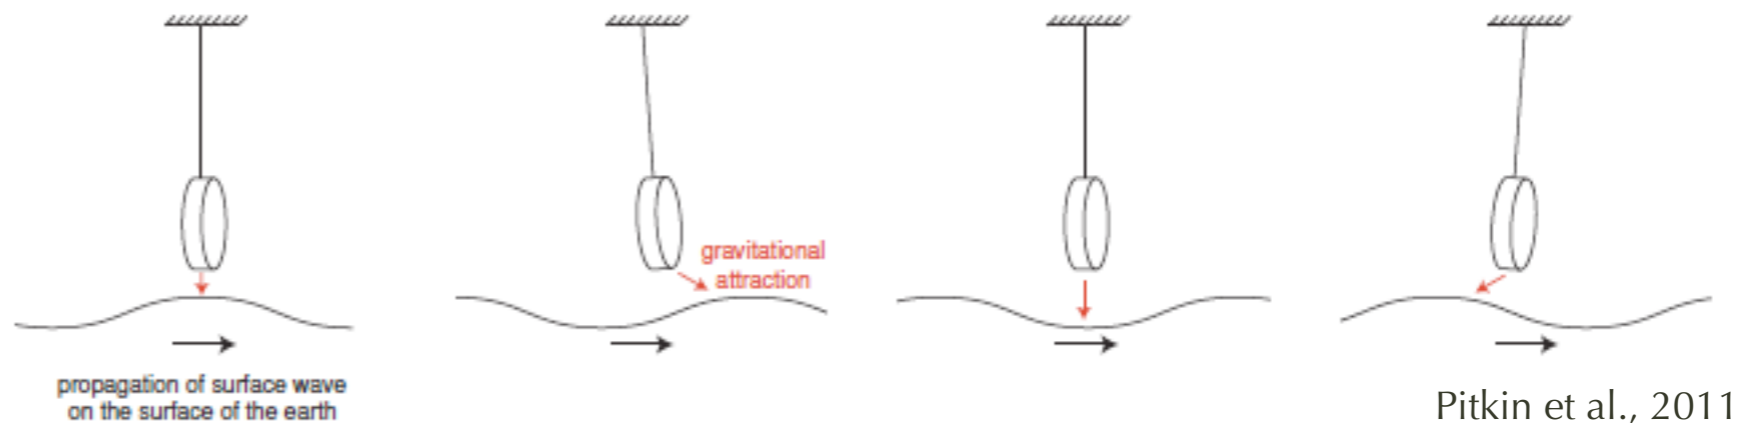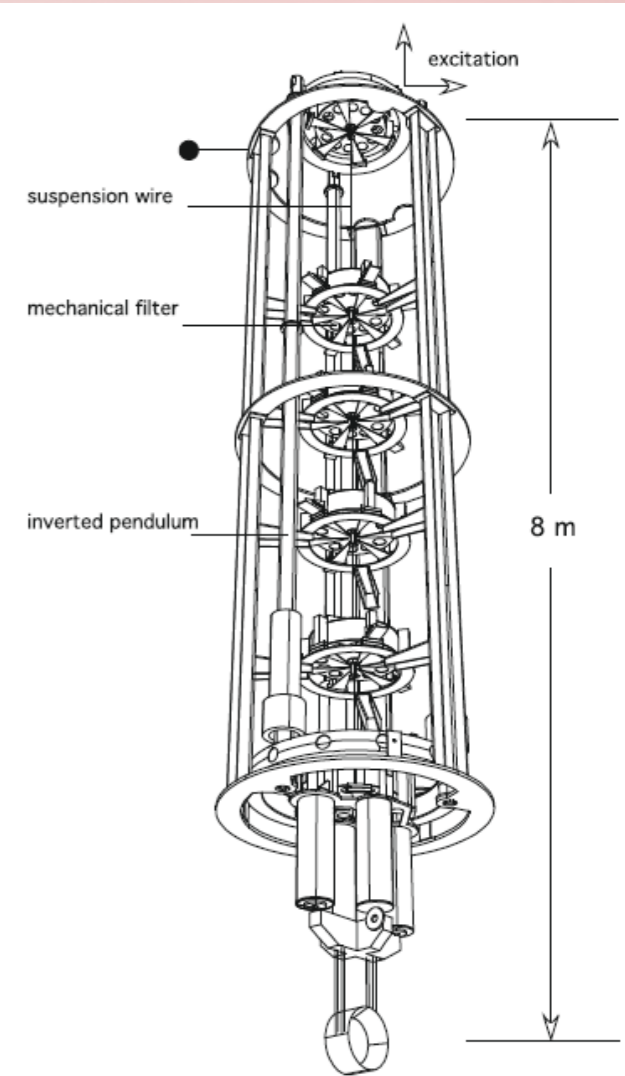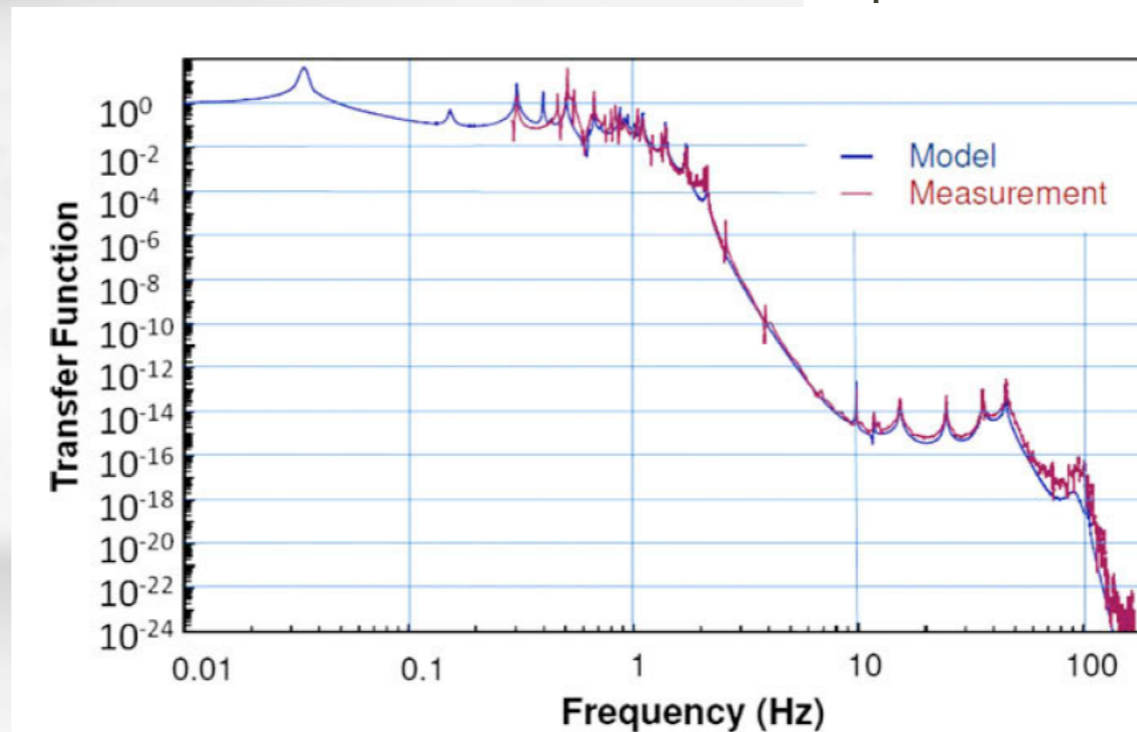

Pitkin et al., 2011





🚀 LISA = Laser Interferometer  
Space Antenna


- 🚀 Space-borne, million-km arms,  
interferometer between free-floating test  
masses
- 🚀 Response bandwidth :  $\sim 0.1$  mHz - 1 Hz
- 🚀 'Large' ESA mission (Phase B), launch expected  
in  $\sim 2035$

🚀 LISA Pathfinder = technology demonstrator  
for LISA

- 🚀 Launched in December 2015
- 🚀 End of mission in July 2017



- Test masses must be protected from external perturbations (mainly solar wind)
- Technology demonstrator : LISA Pathfinder

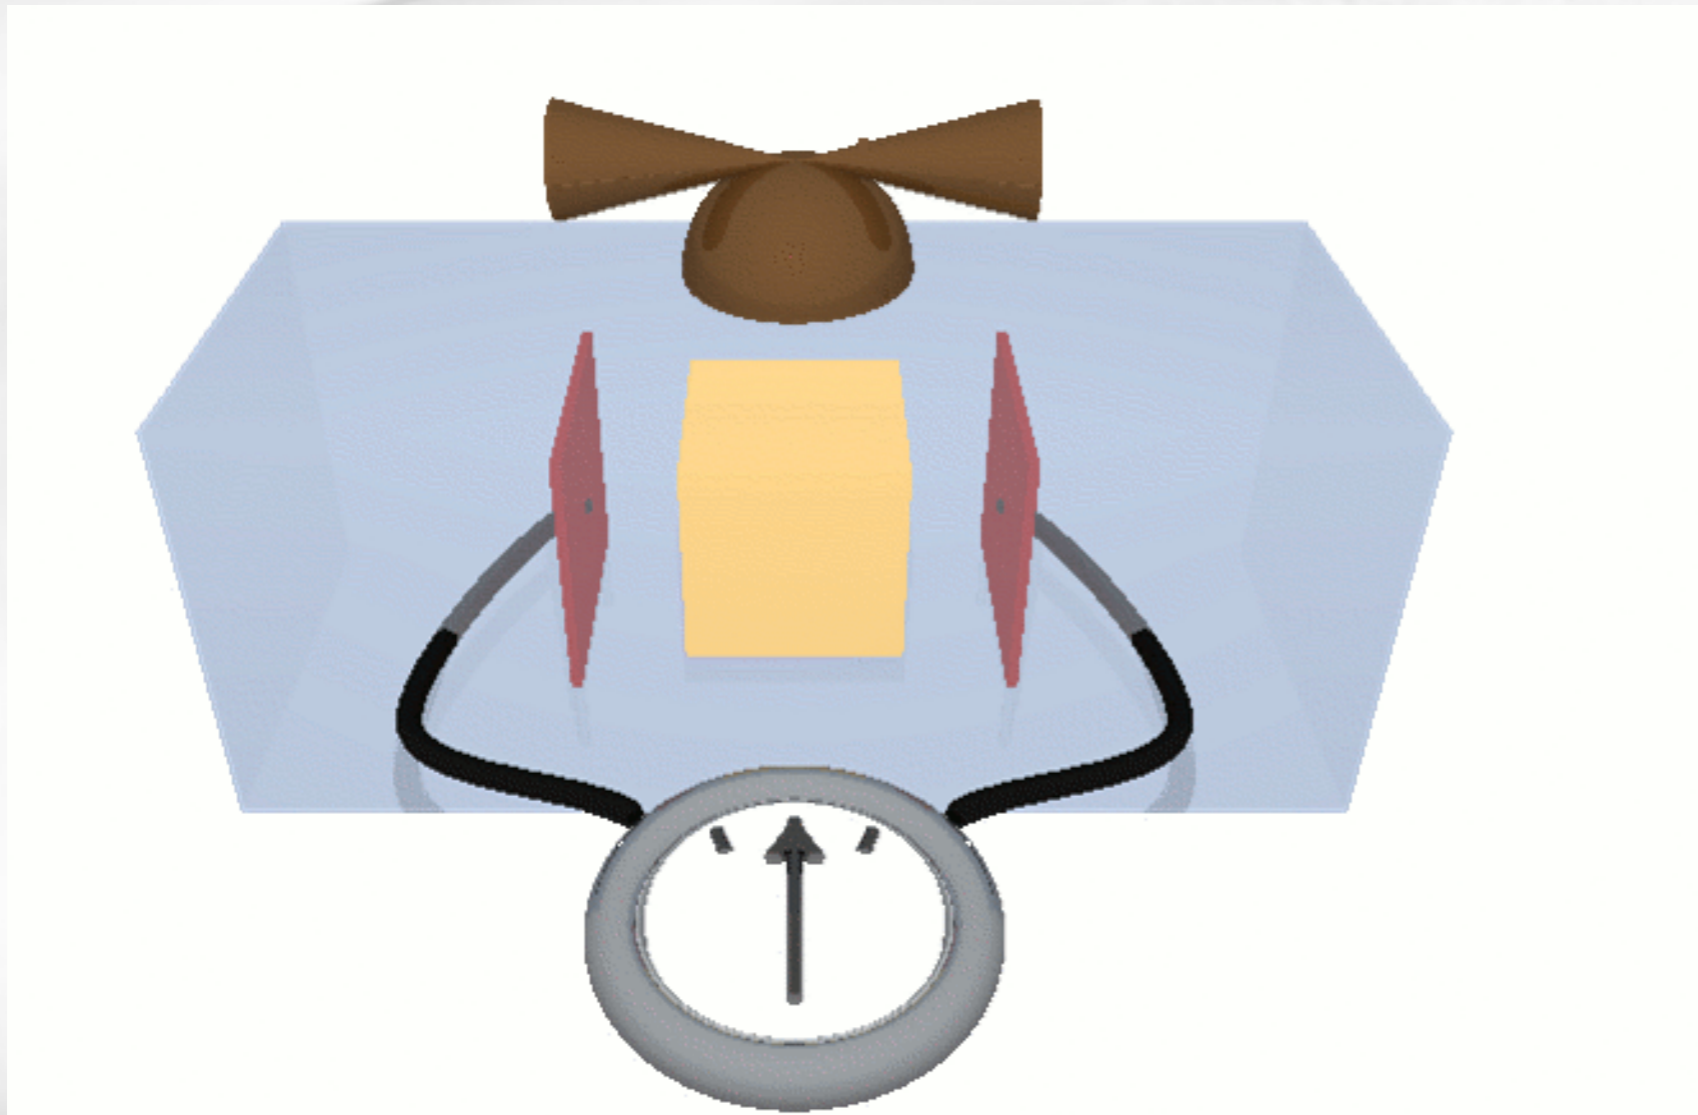





- Main goal: demonstrate the possibility of "Free Fall" in space at the level of  $\approx 10^{-14} \text{ m.s}^{-2}/\sqrt{\text{Hz}}$ , around 1 mHz
- A number of effects had to be minimized:
  - The static gravitational potential between the TMs and the SC,
  - Residual links of the TMs w.r.t the SC via the residual vacuum,
  - Cross talk between various electrostatic actuators,
  - TM charging by cosmic rays that is eliminated by UV illumination,
  - Temperature fluctuations,
  - Magnetic field fluctuations,
  - ...



# Lisa Pathfinder : A technology demonstrator

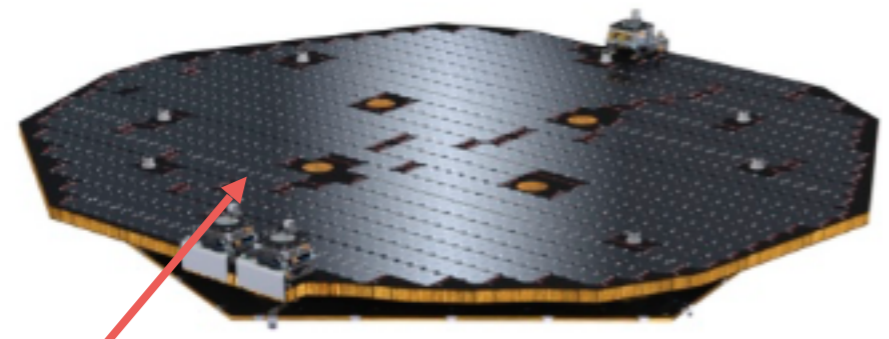


Solar panels

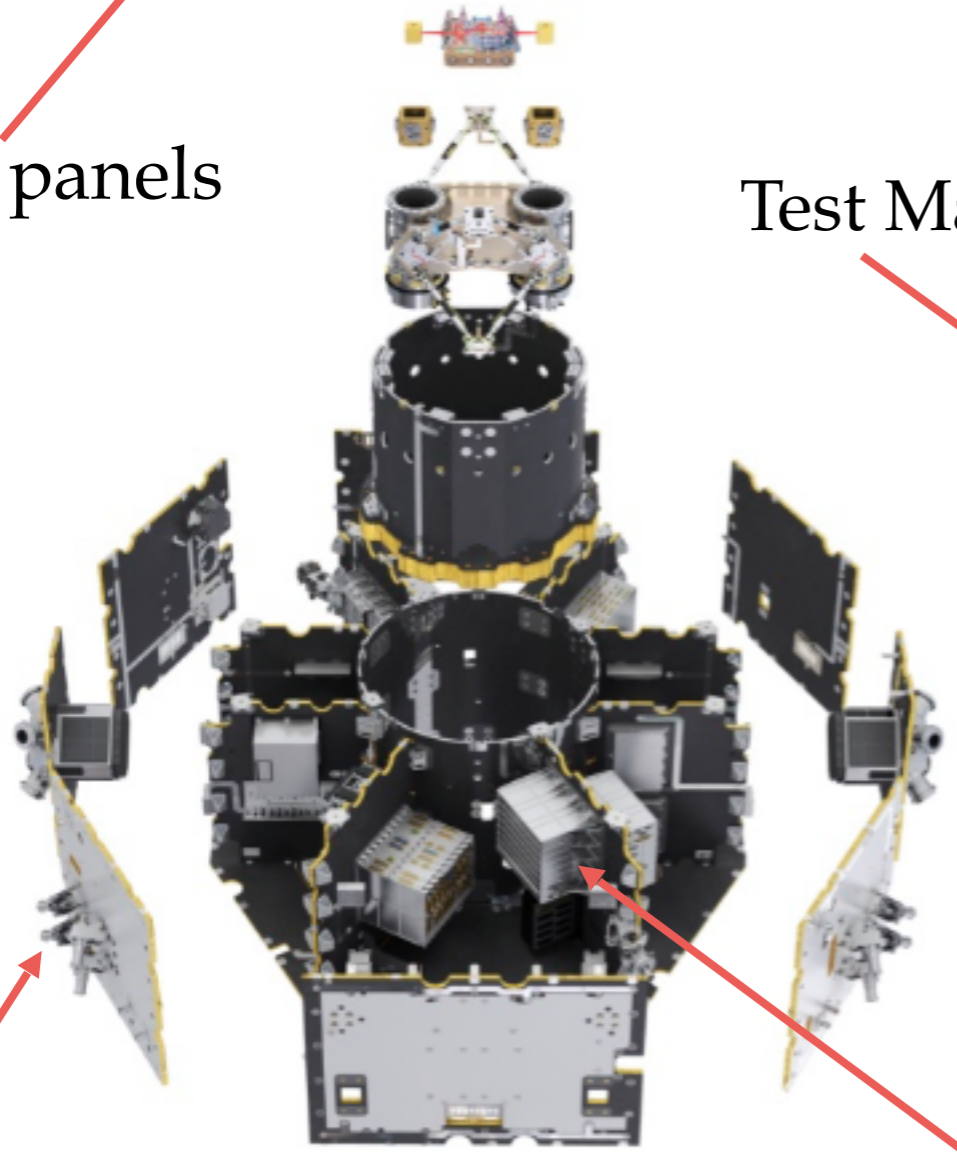

The micro-thrusters  
 Cold Gas ( $\mu$ -Newton)

Test Mass

Electronics + computers




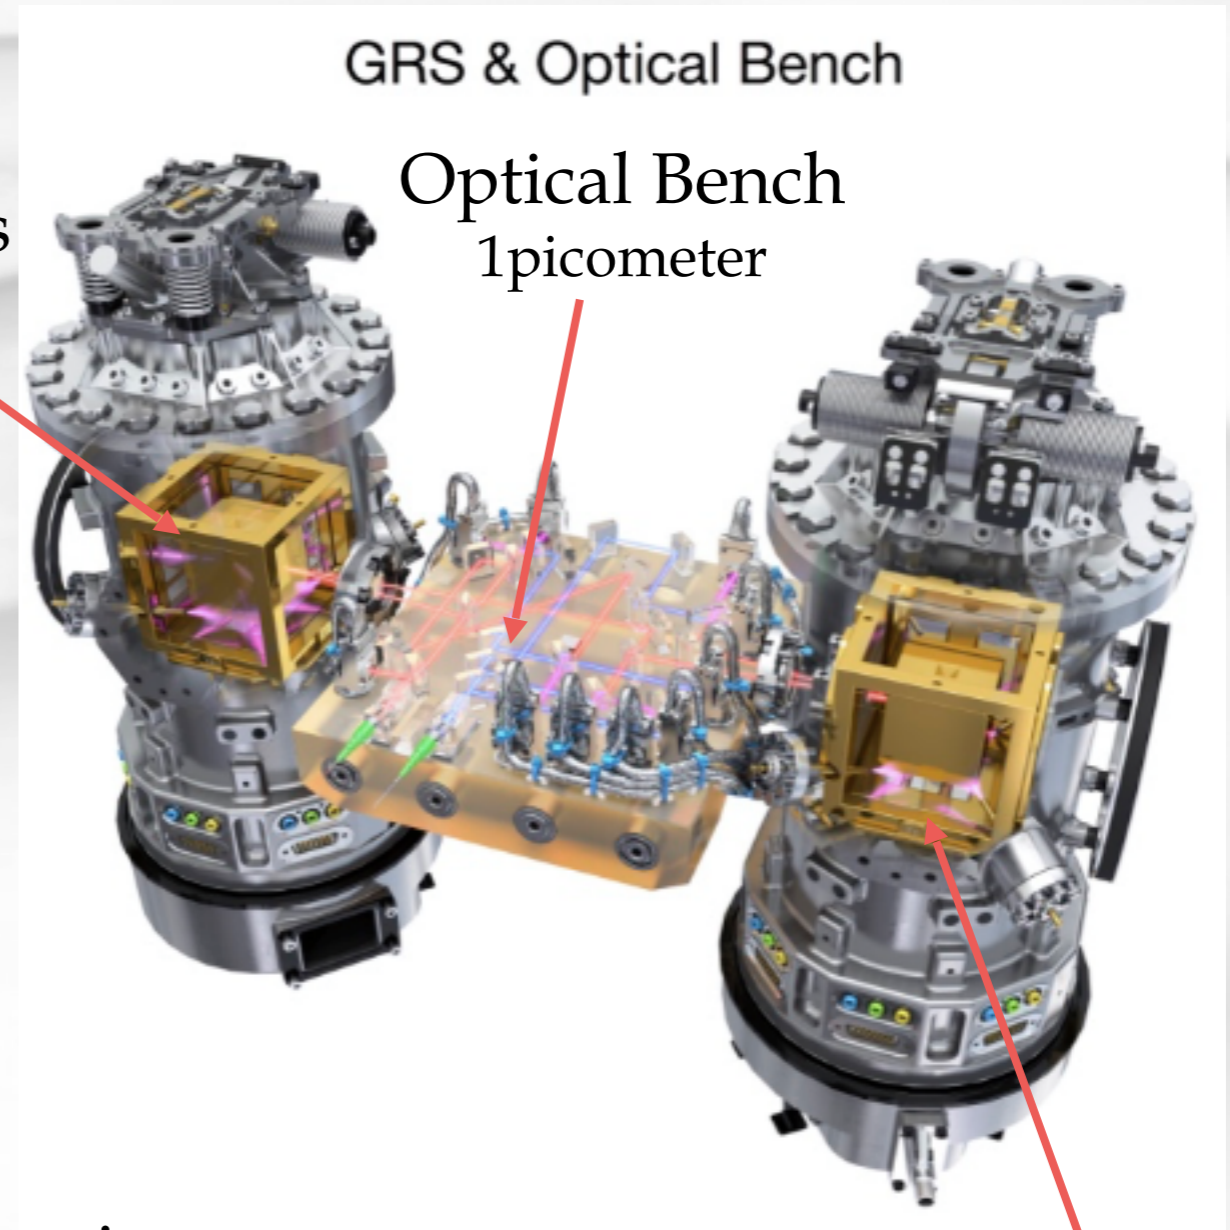


GRS & Optical Bench

Optical Bench  
1picometer

UV illumination



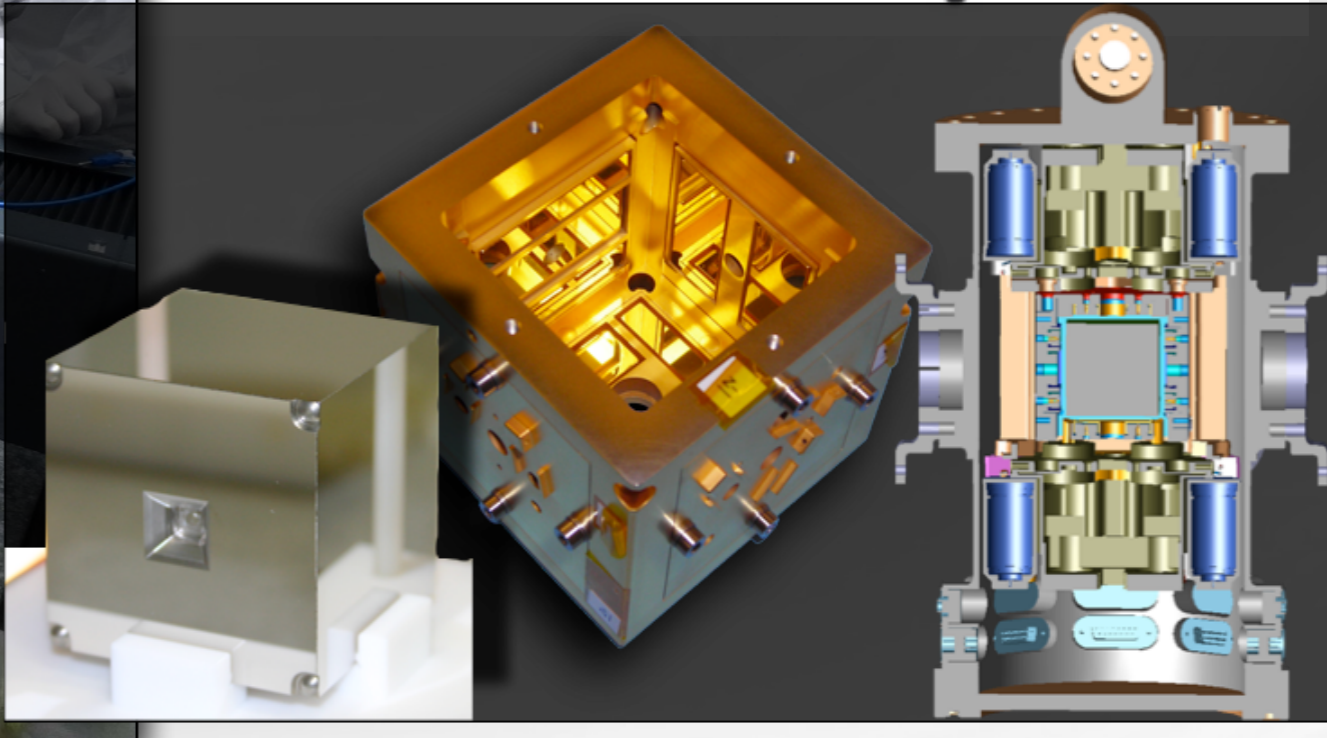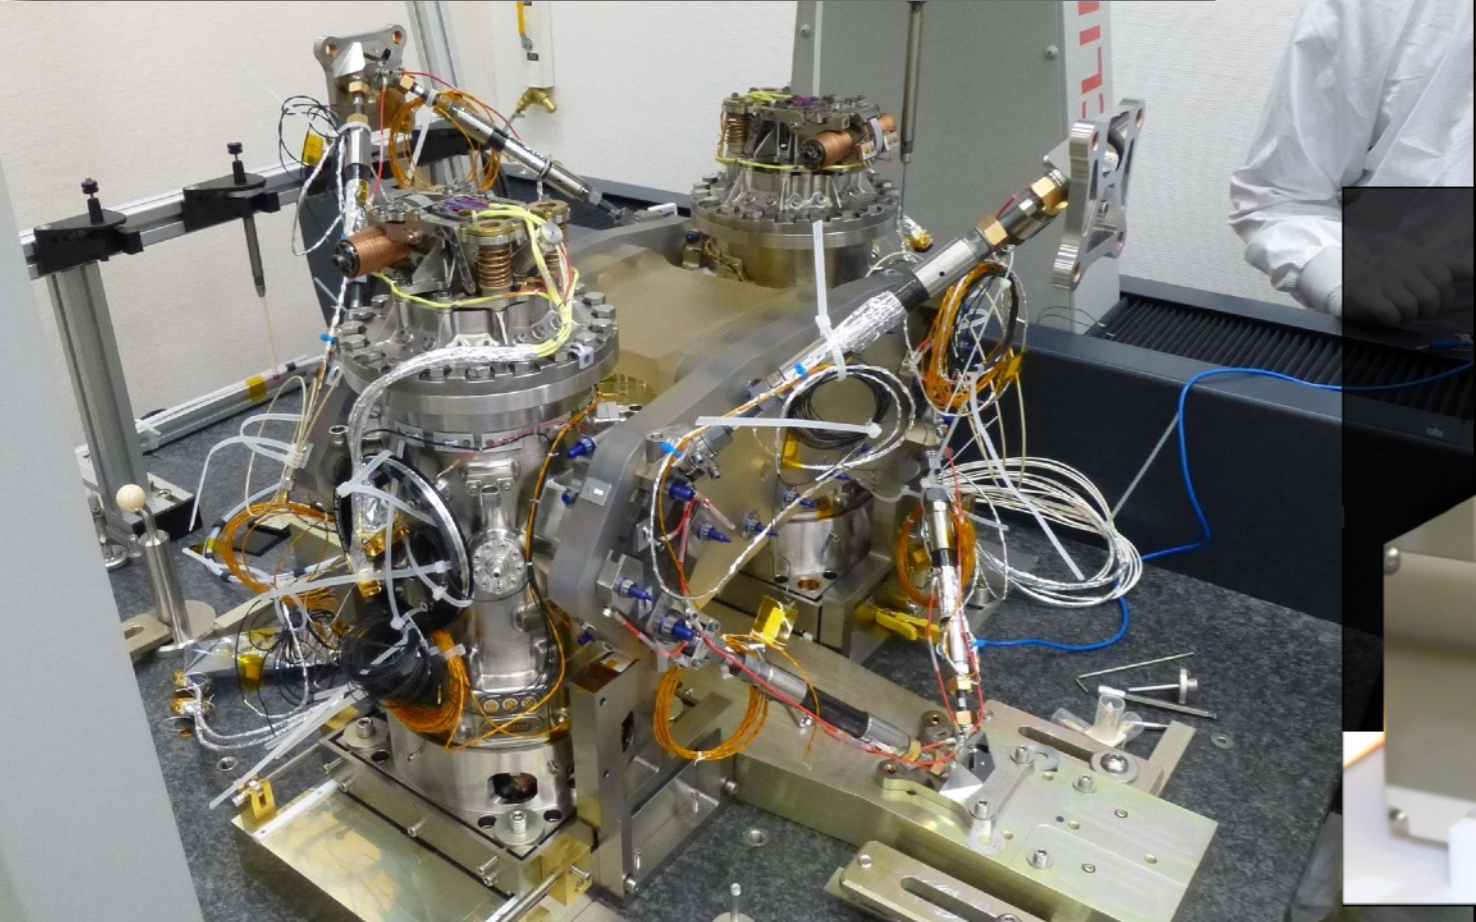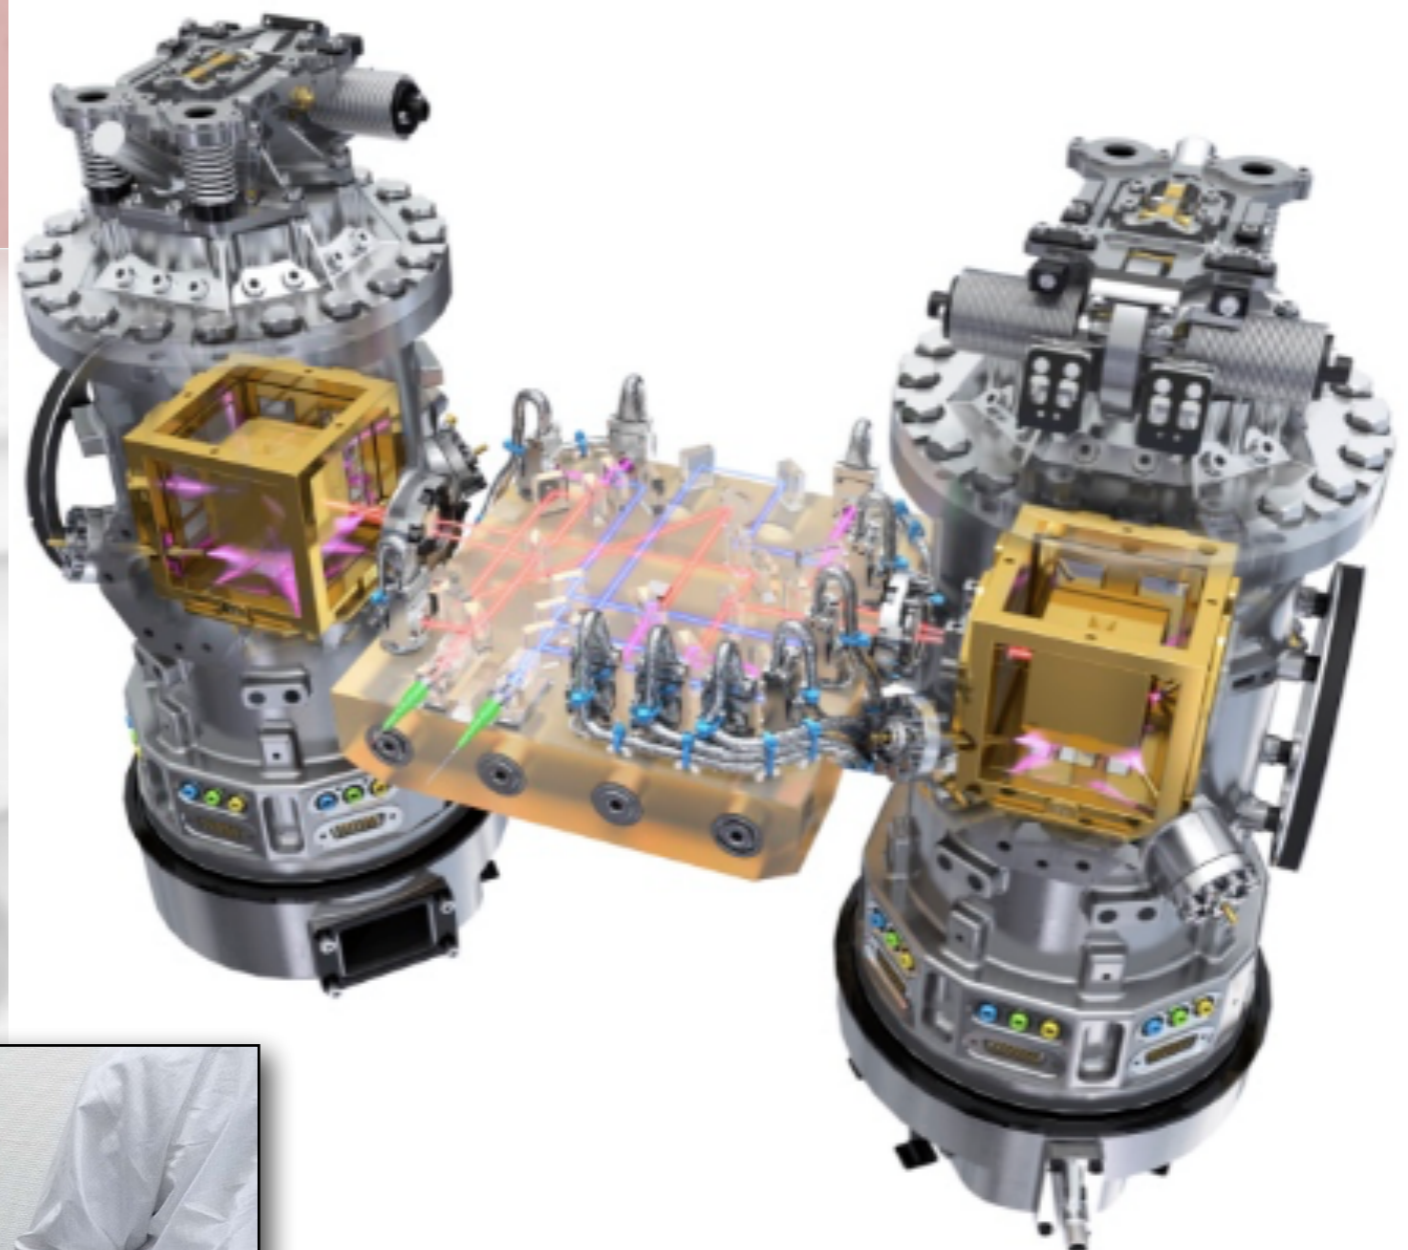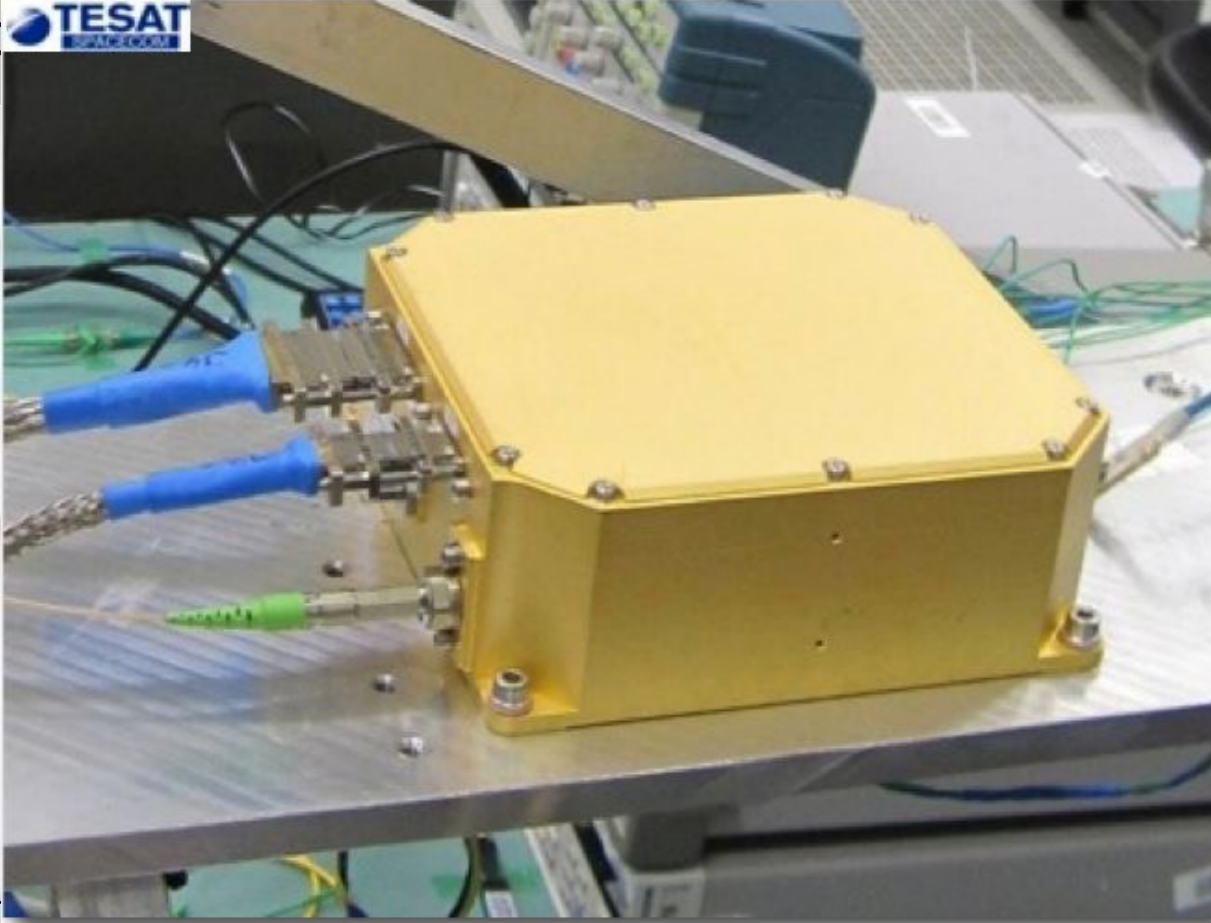





# Testing inertial flight with LISA Pathfinder










00:28





# In-flight performance evolution

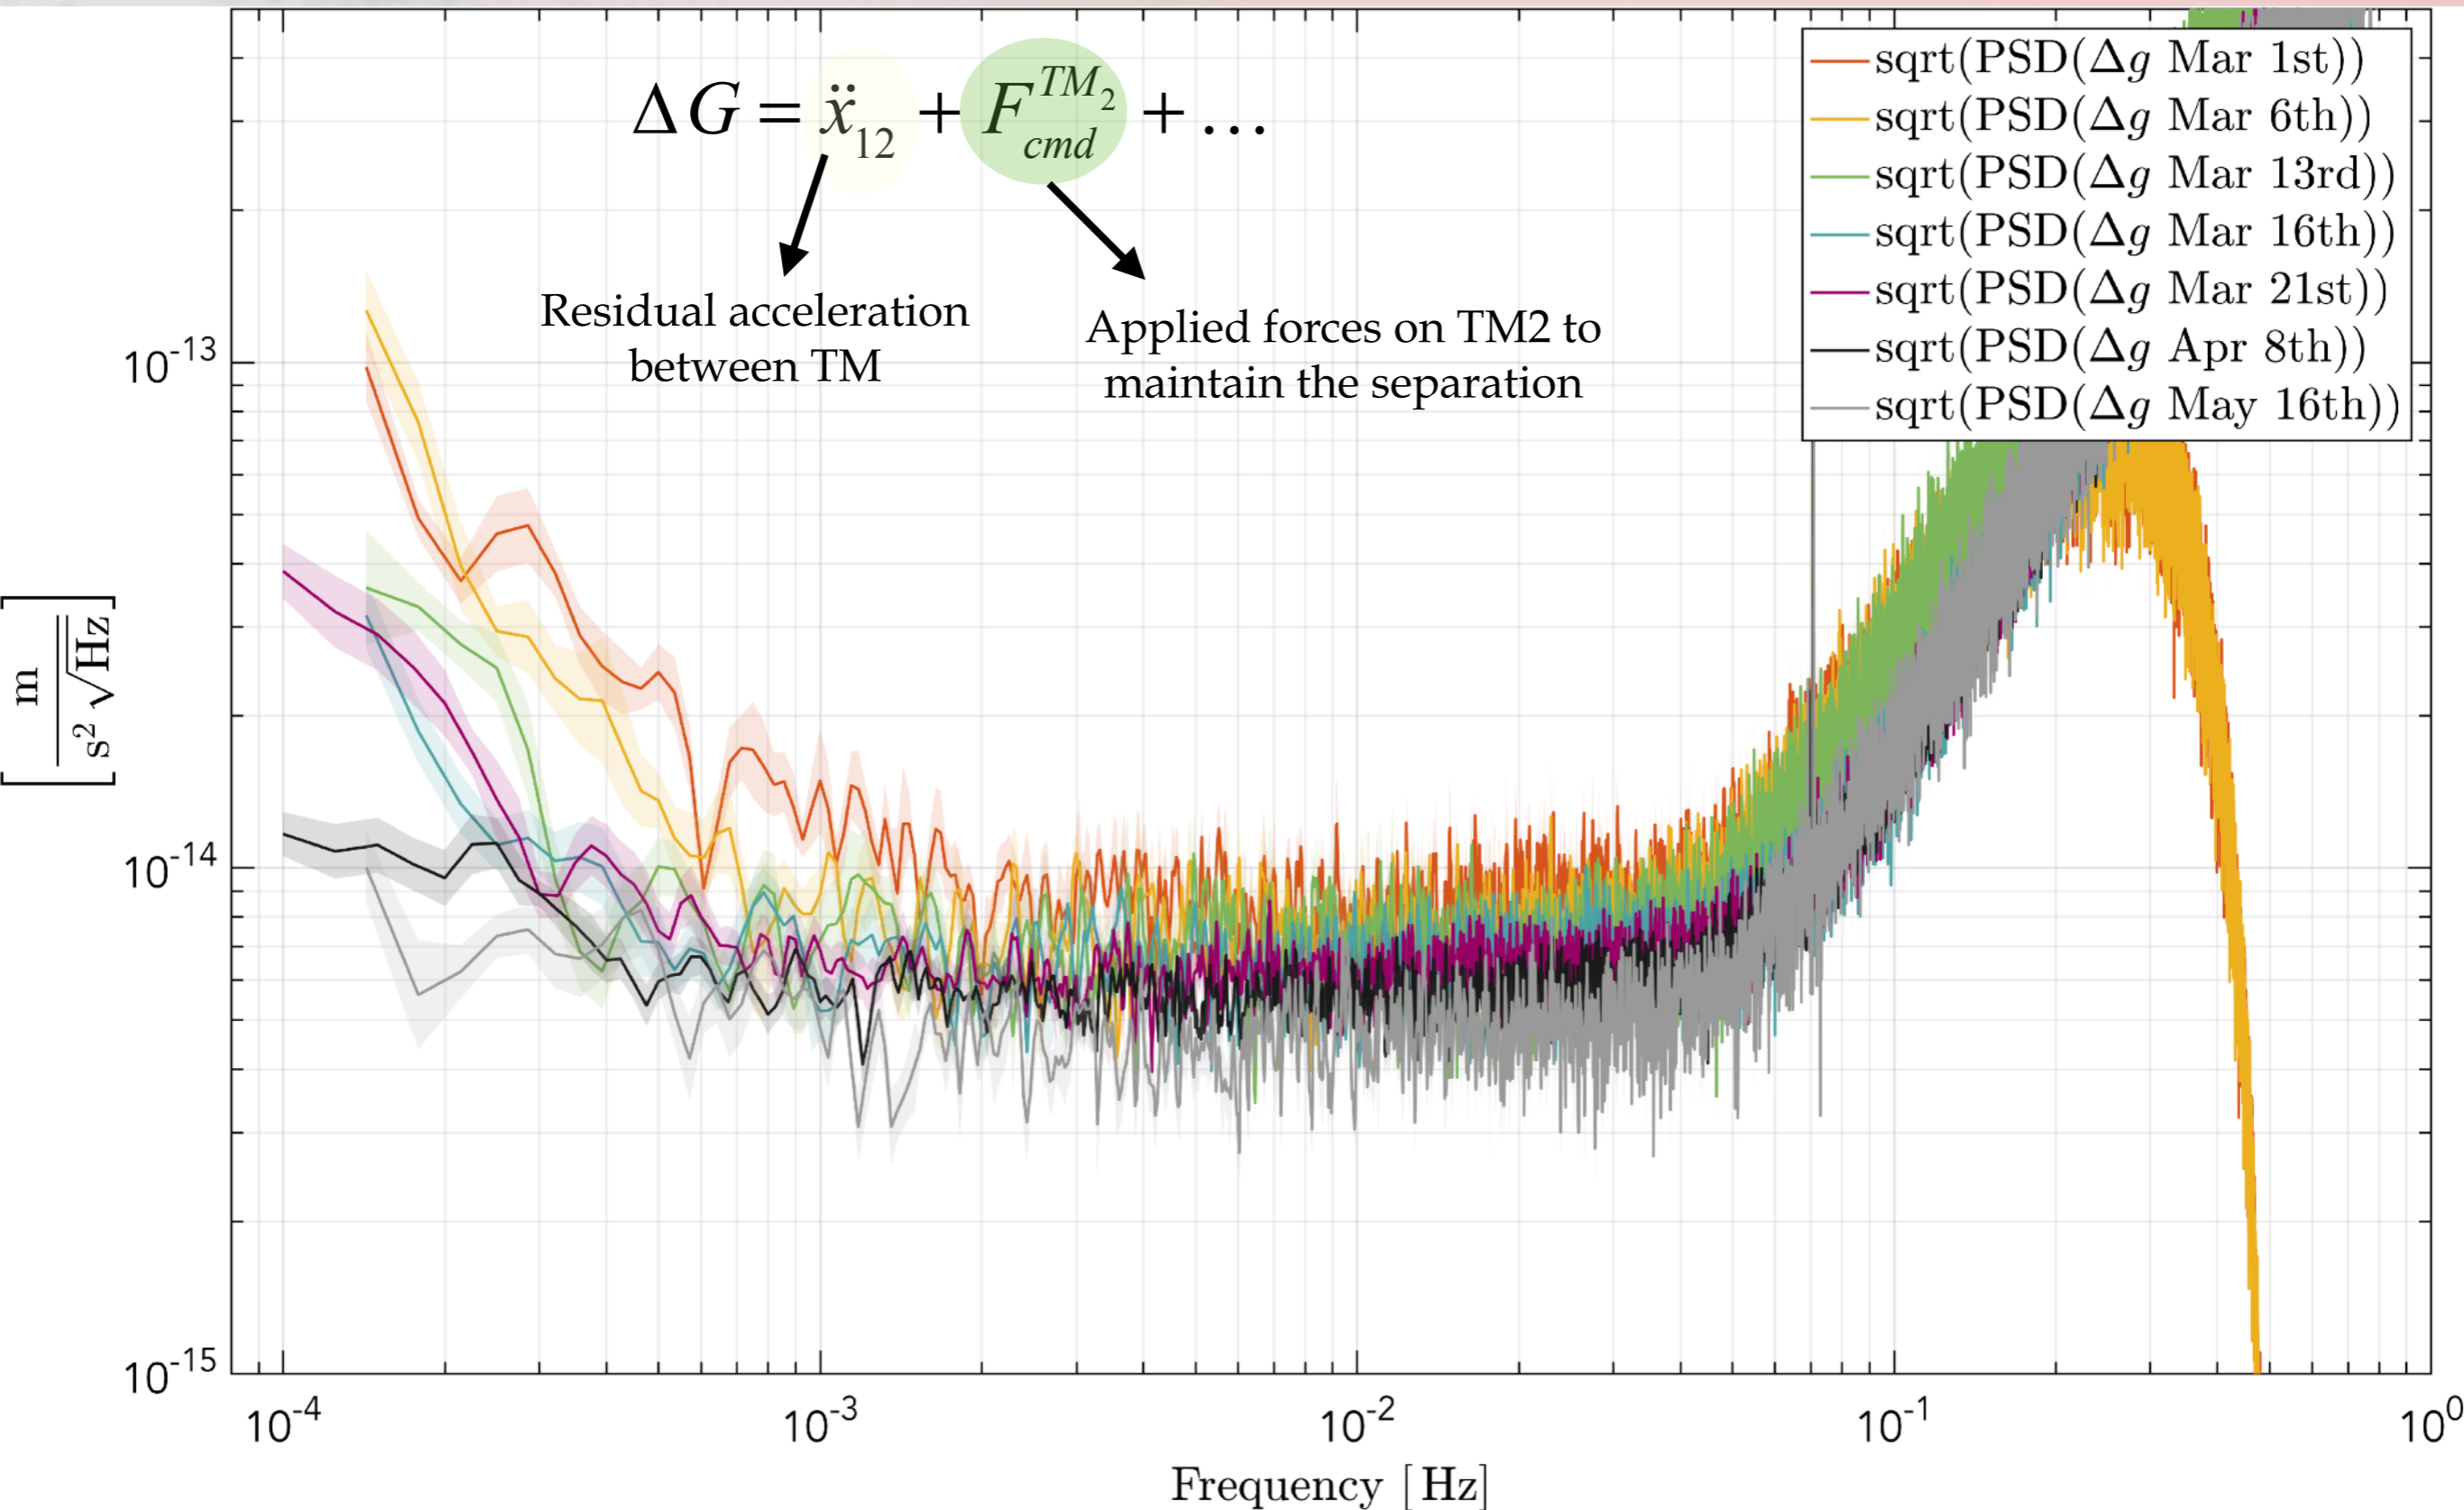




# The Different Frequency Ranges

$$\Delta G = \ddot{x}_{12} + F_{cmd}^{TM_2} + \dots$$



$\ddot{x}_{12}$  is measured by the optical bench      Obtained by "on board" telemetry and precisely calibrated.

**Decomposition of LPF Residual  $\Delta G$**

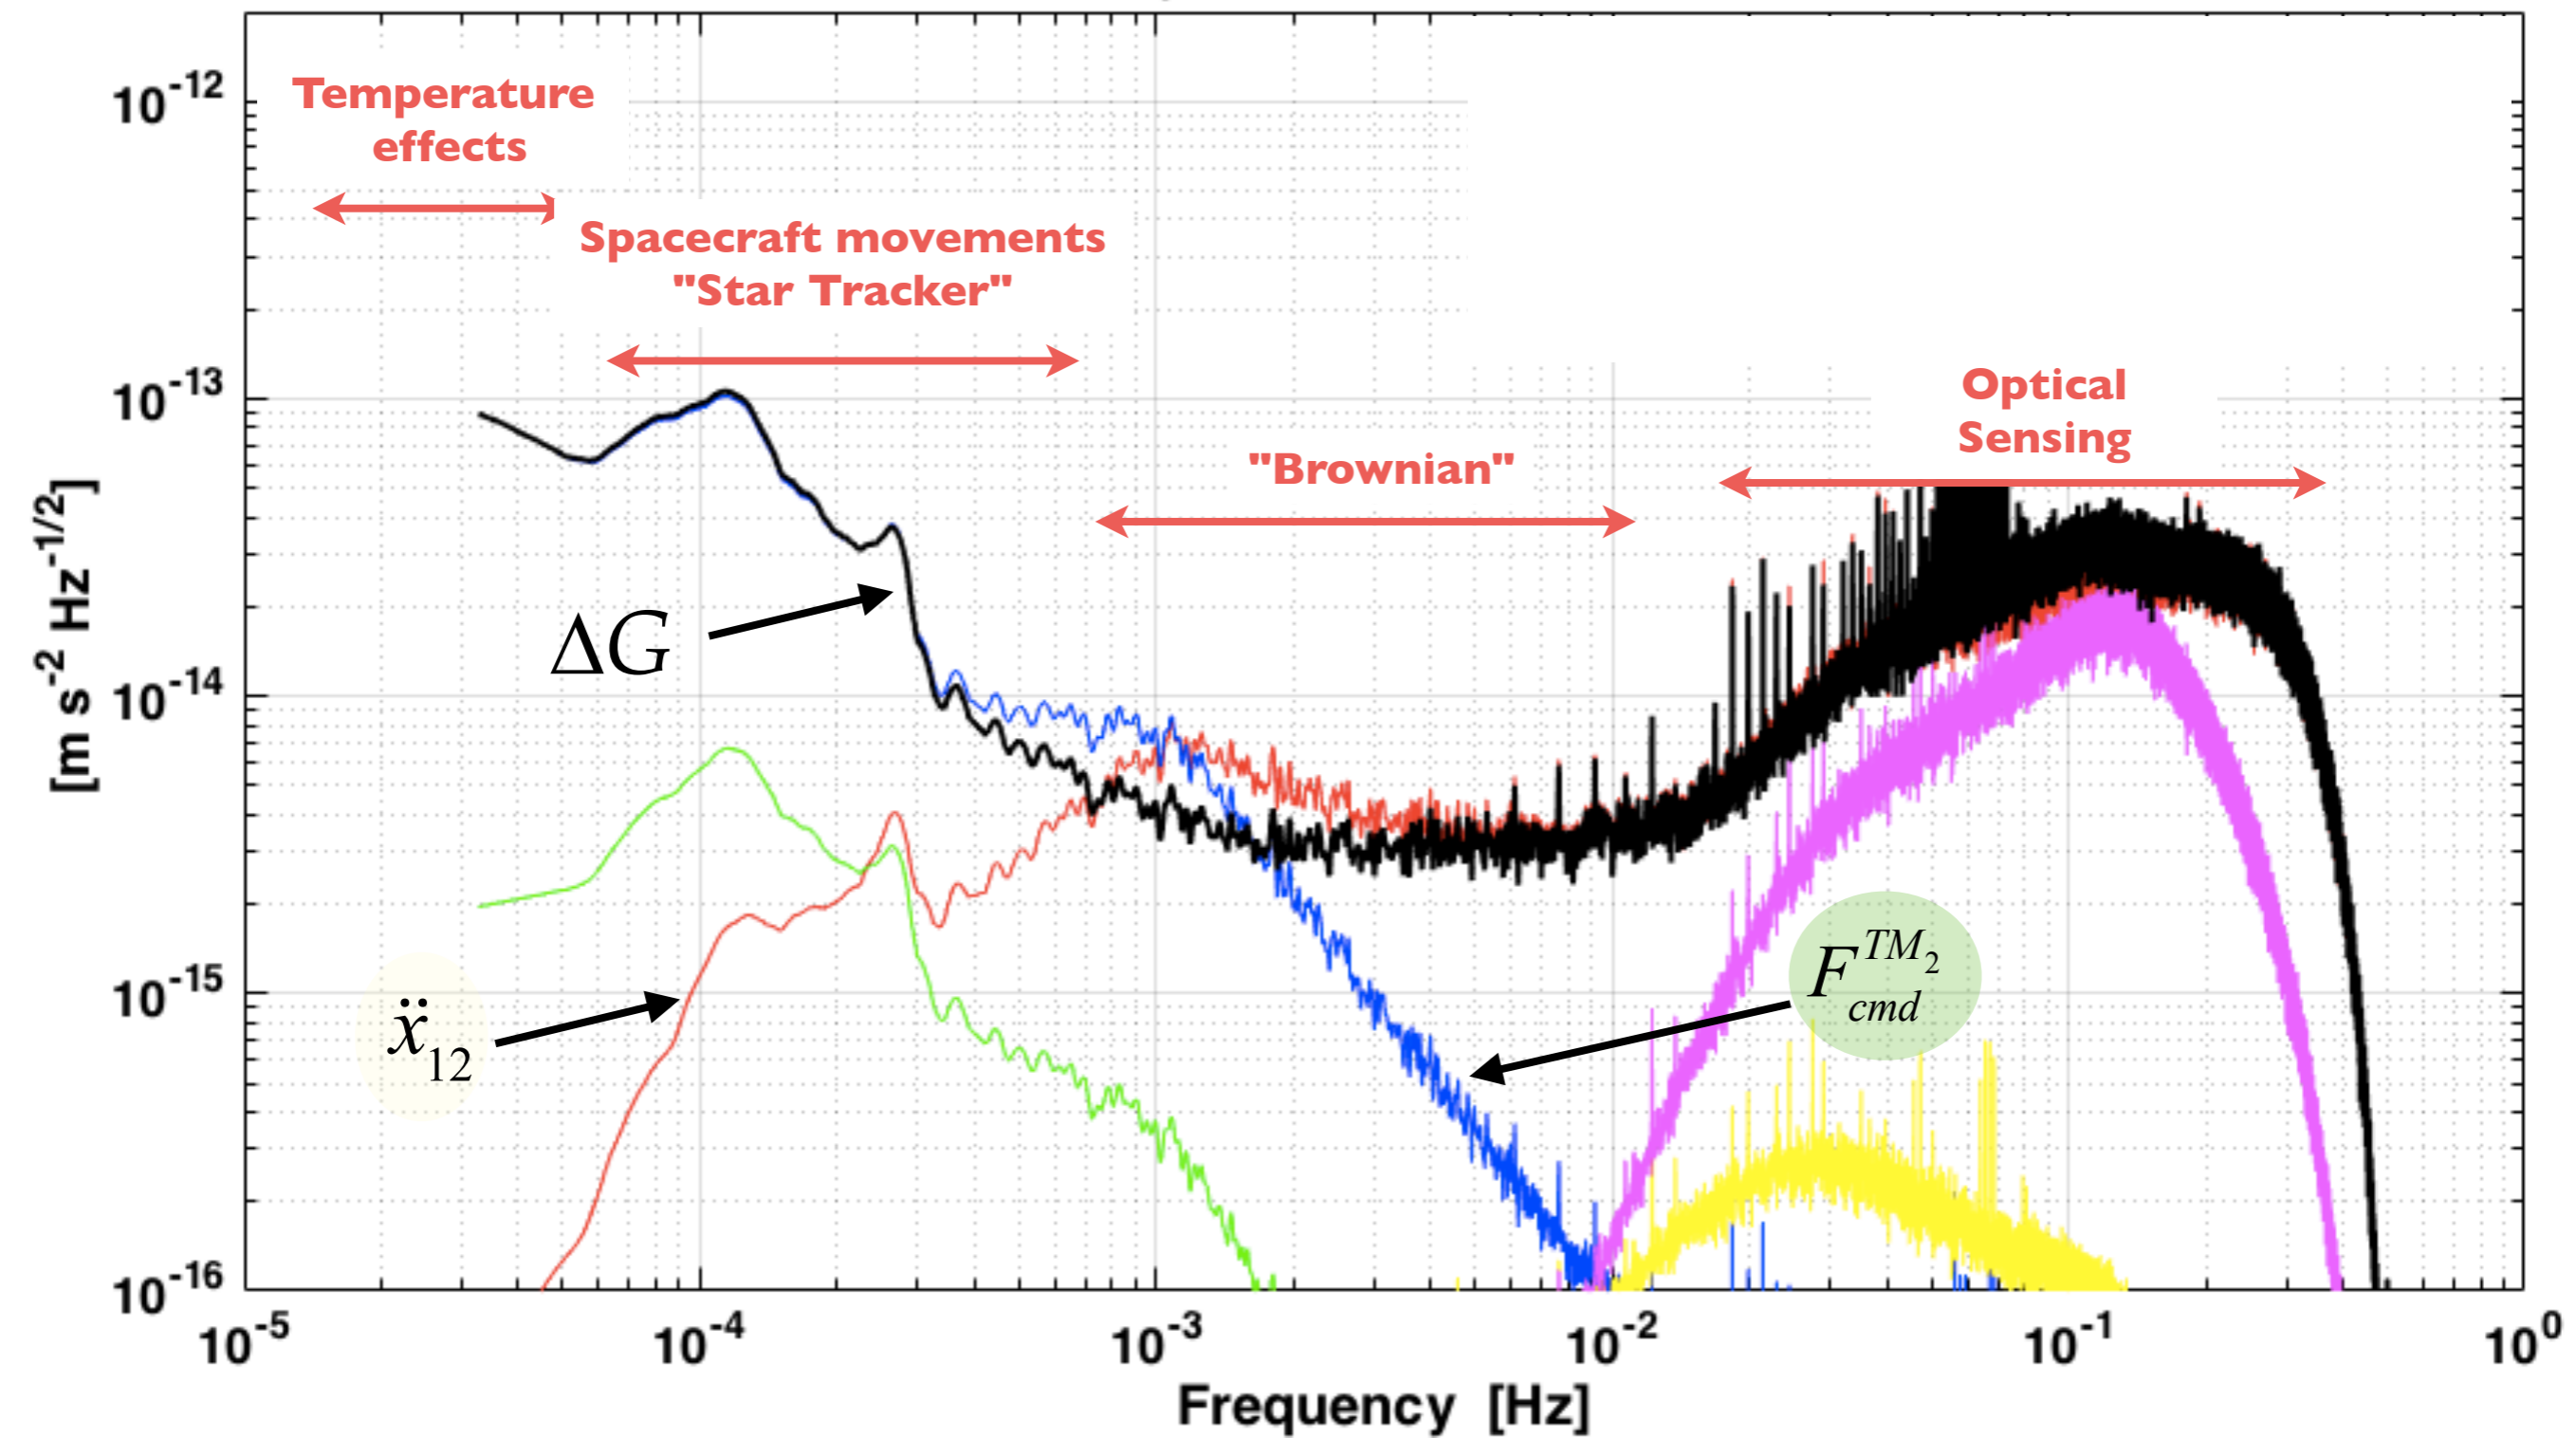



# Looking in depth: Optical Sensing Noise

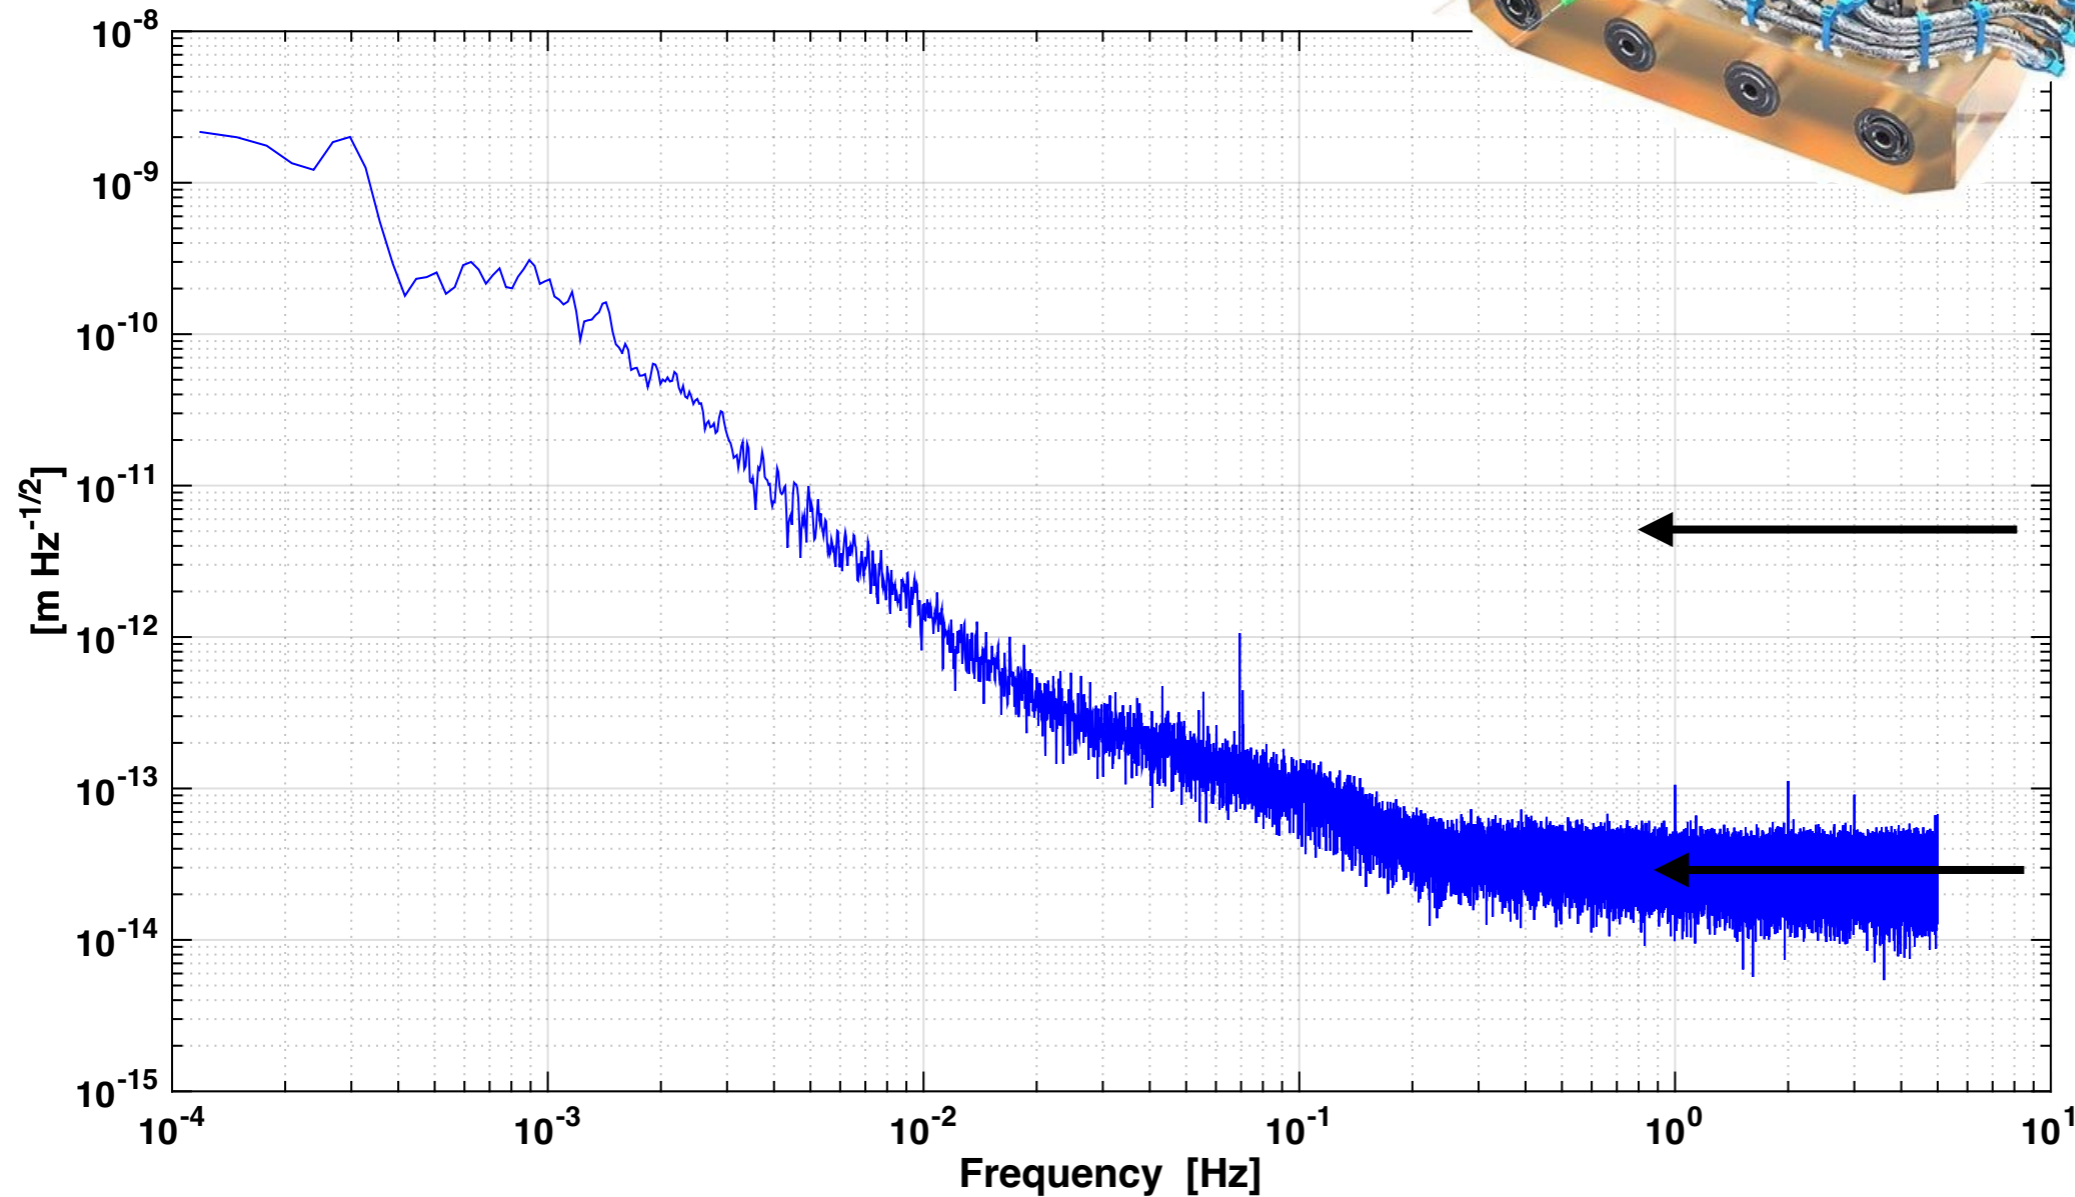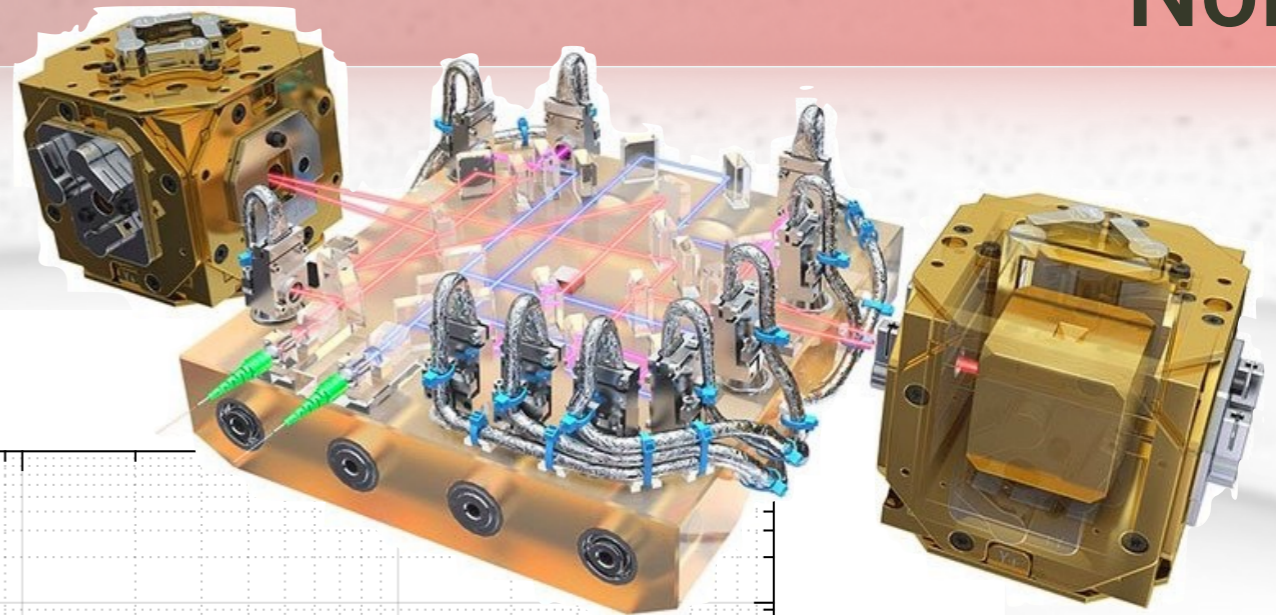


in the lab  
6 pm/√Hz

in space  
30 fm/√Hz




- Occurred every  $\sim 1.5$  days
- Caused by micro-meteorites and other unknown causes
- Modeled and subtracted from the data

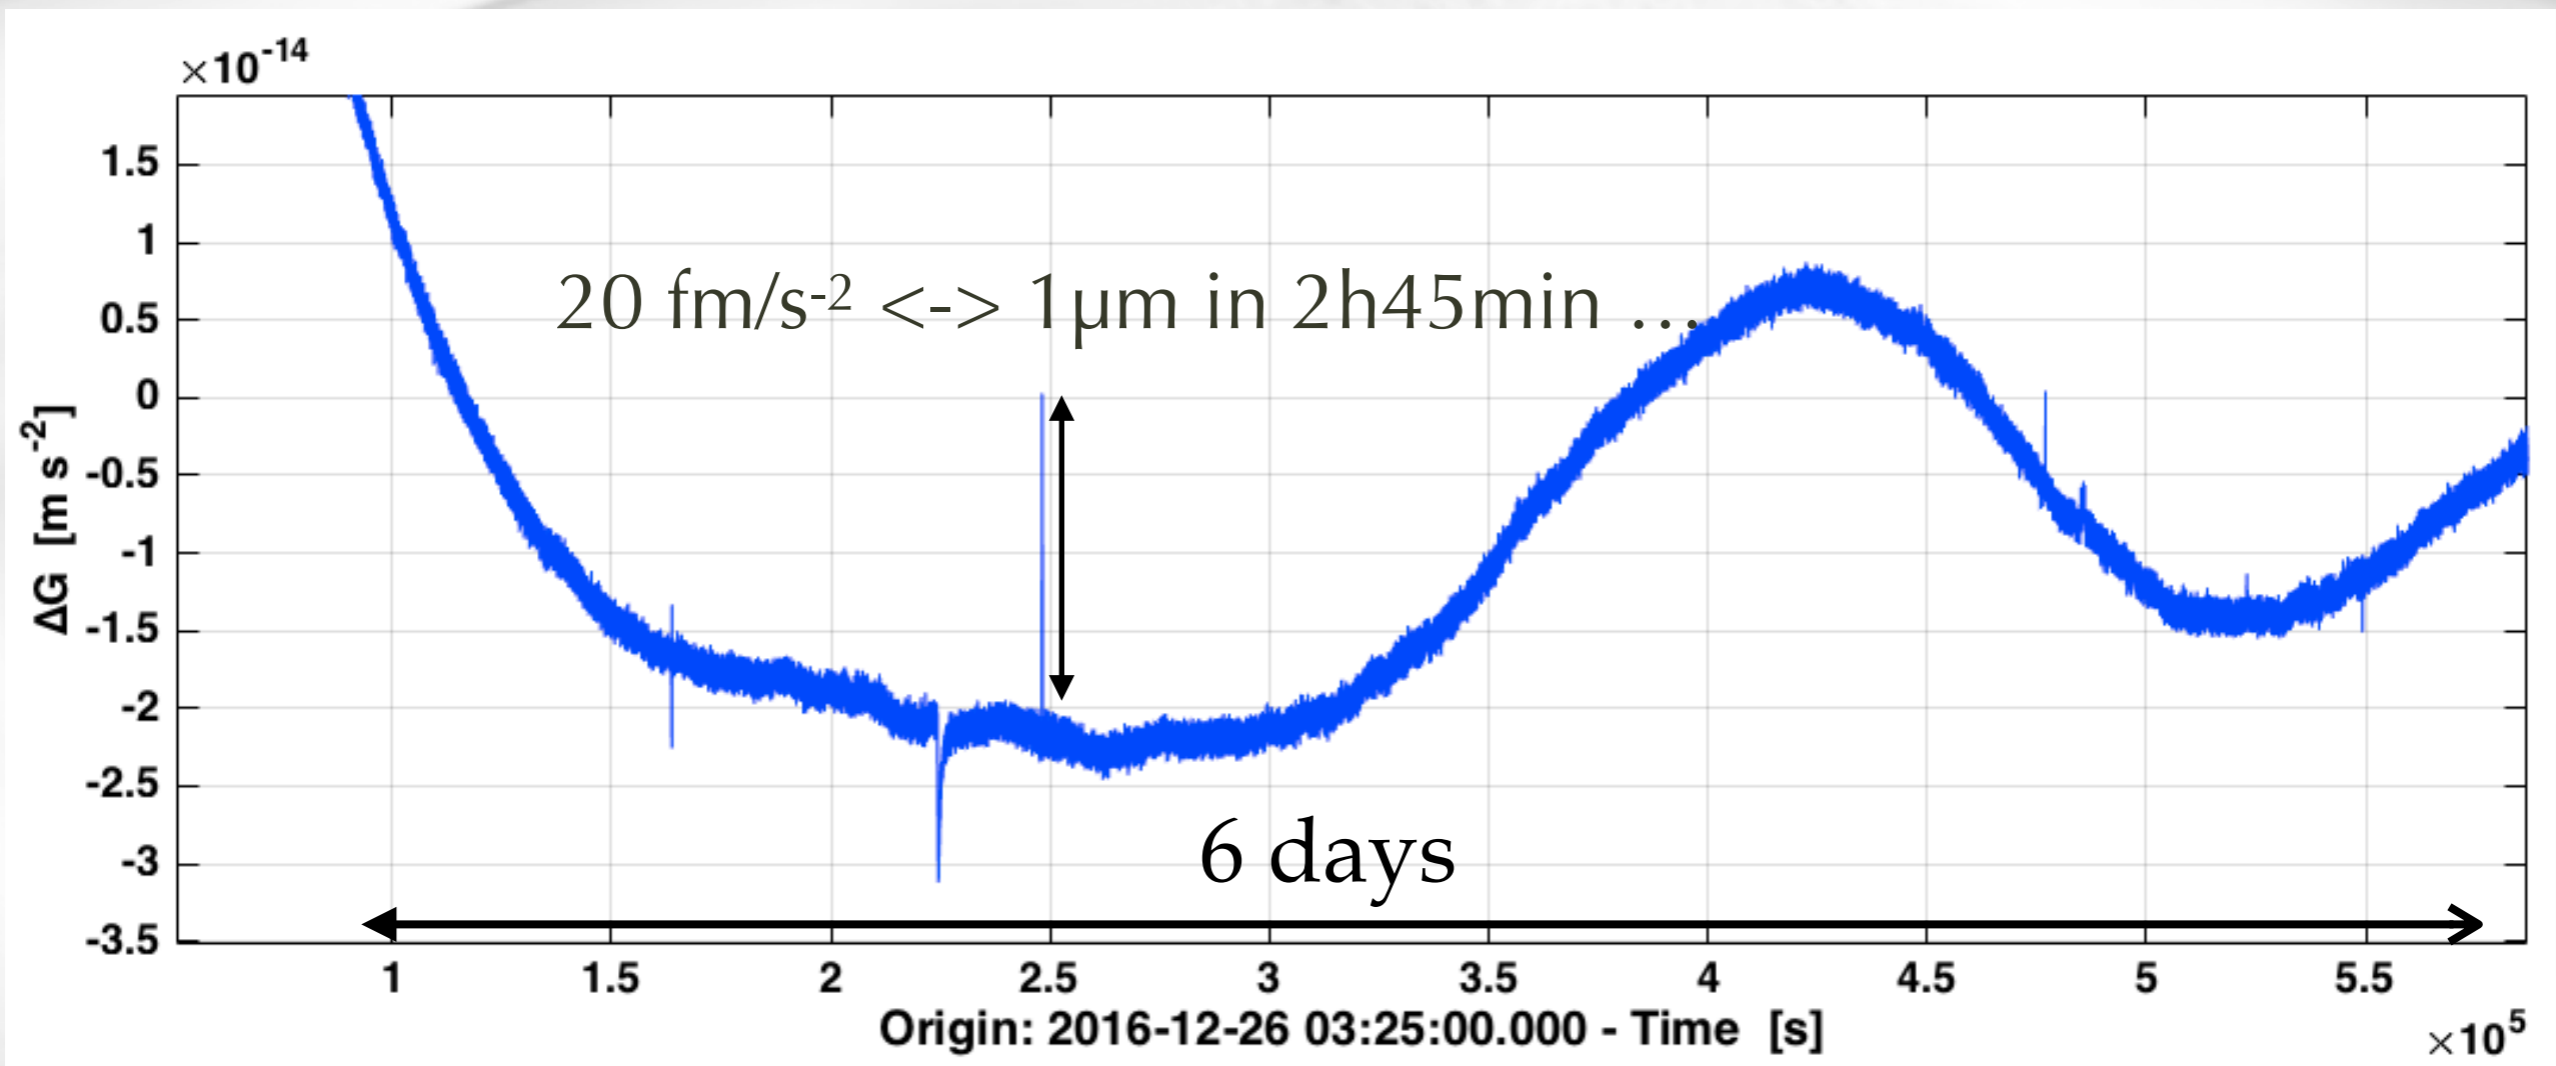






## Sub-Femto-g Free Fall for Space-Based Gravitational Wave Observatories: LISA Pathfinder Results

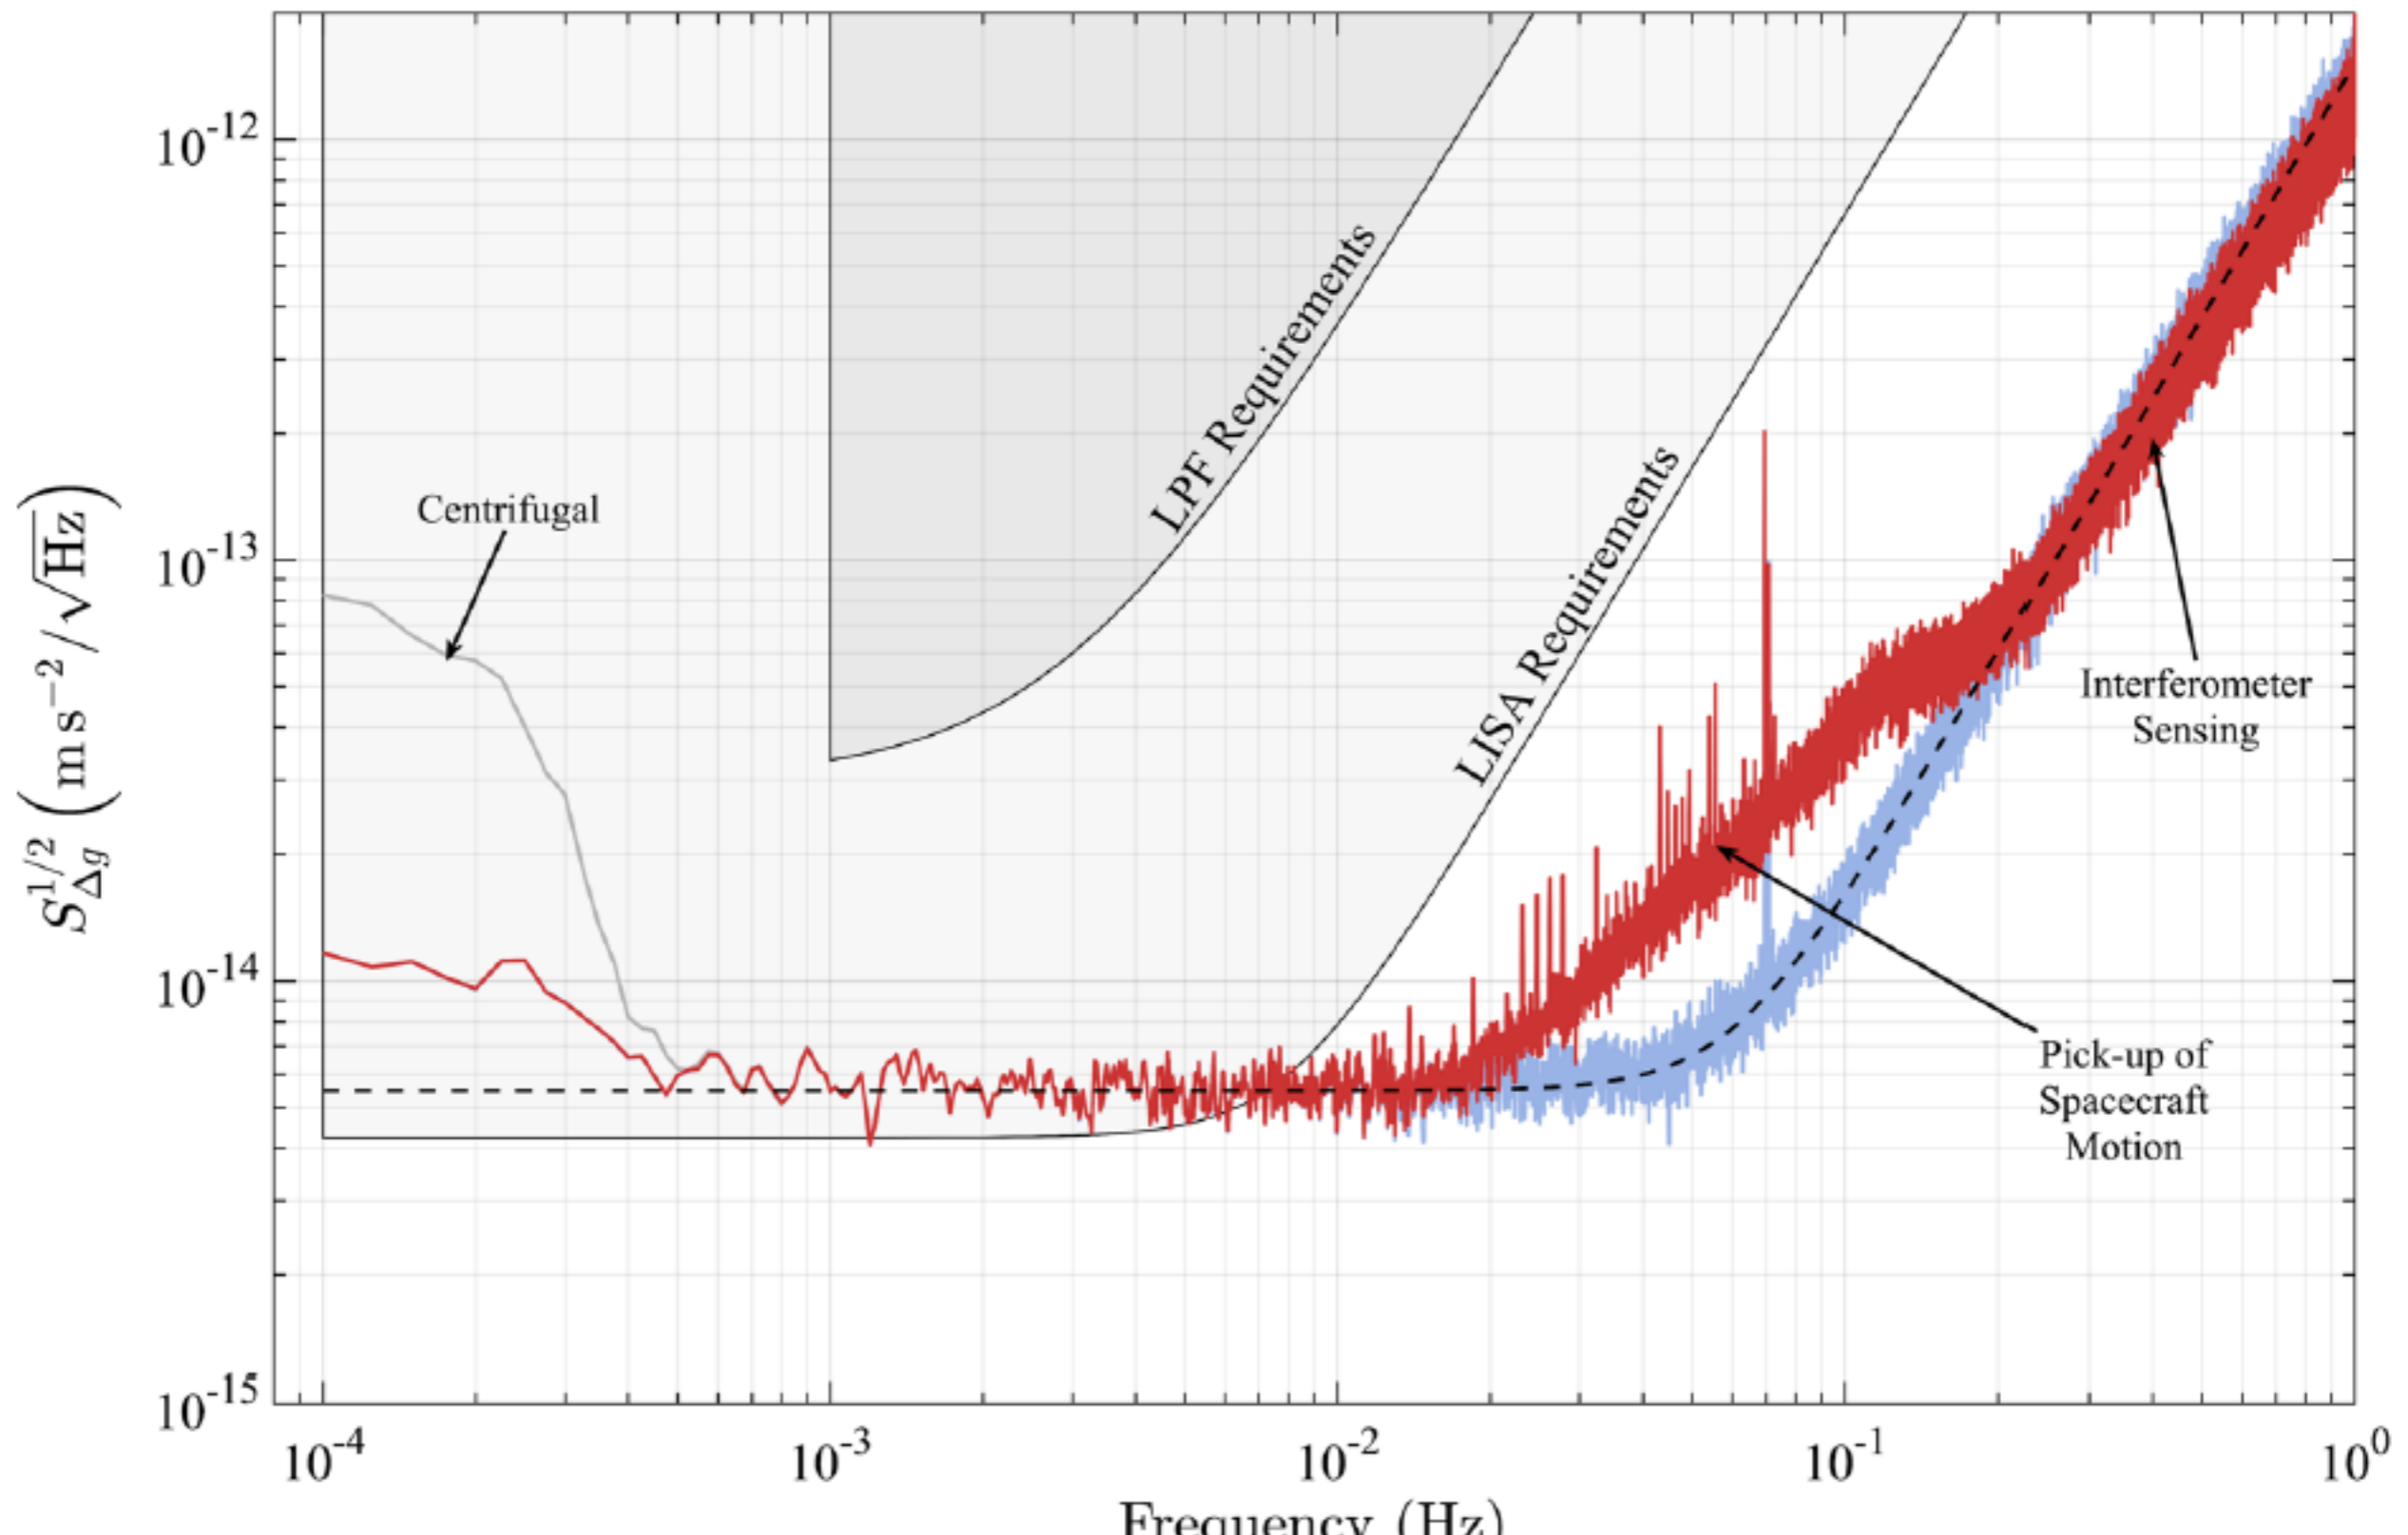



### Beyond the Required LISA Free-Fall Performance: New LISA Pathfinder Results down to $20 \mu\text{Hz}$

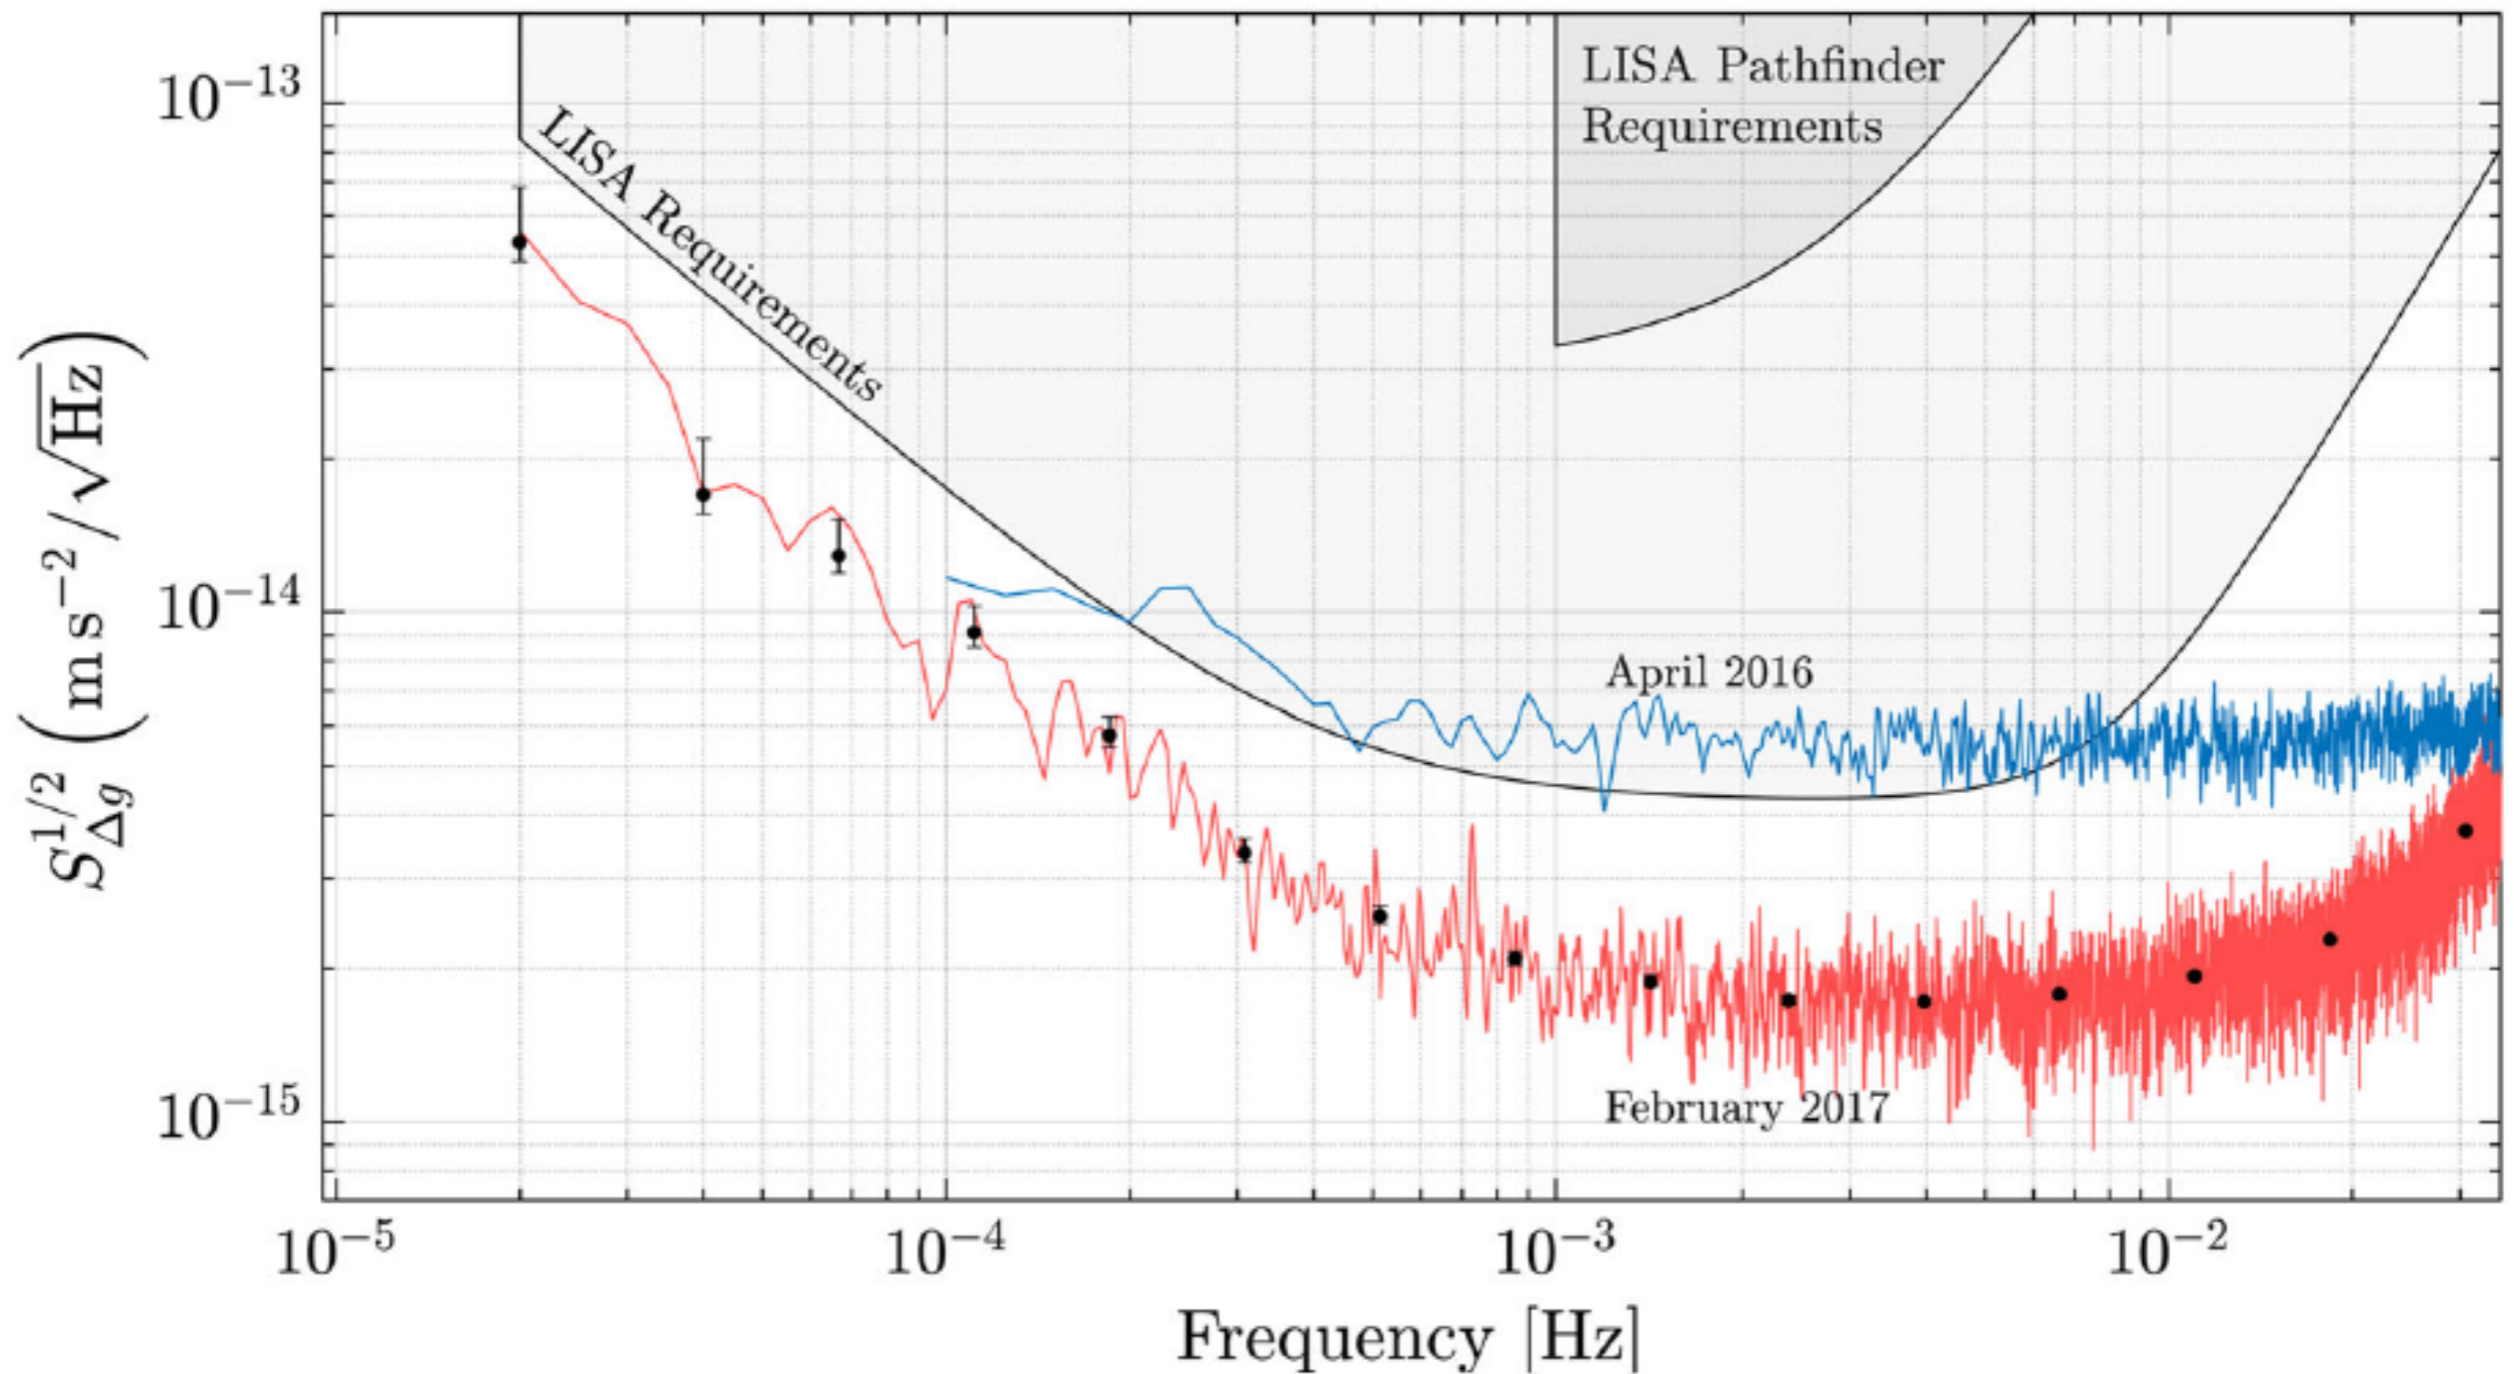




- *LISA Science Objectives*
- *From LISA Pathfinder to LISA*
- **Mission description**
- Conclusion



# A long awaited mission


- First NASA studies in 1978
- Deployable rigid structure 1x1 km

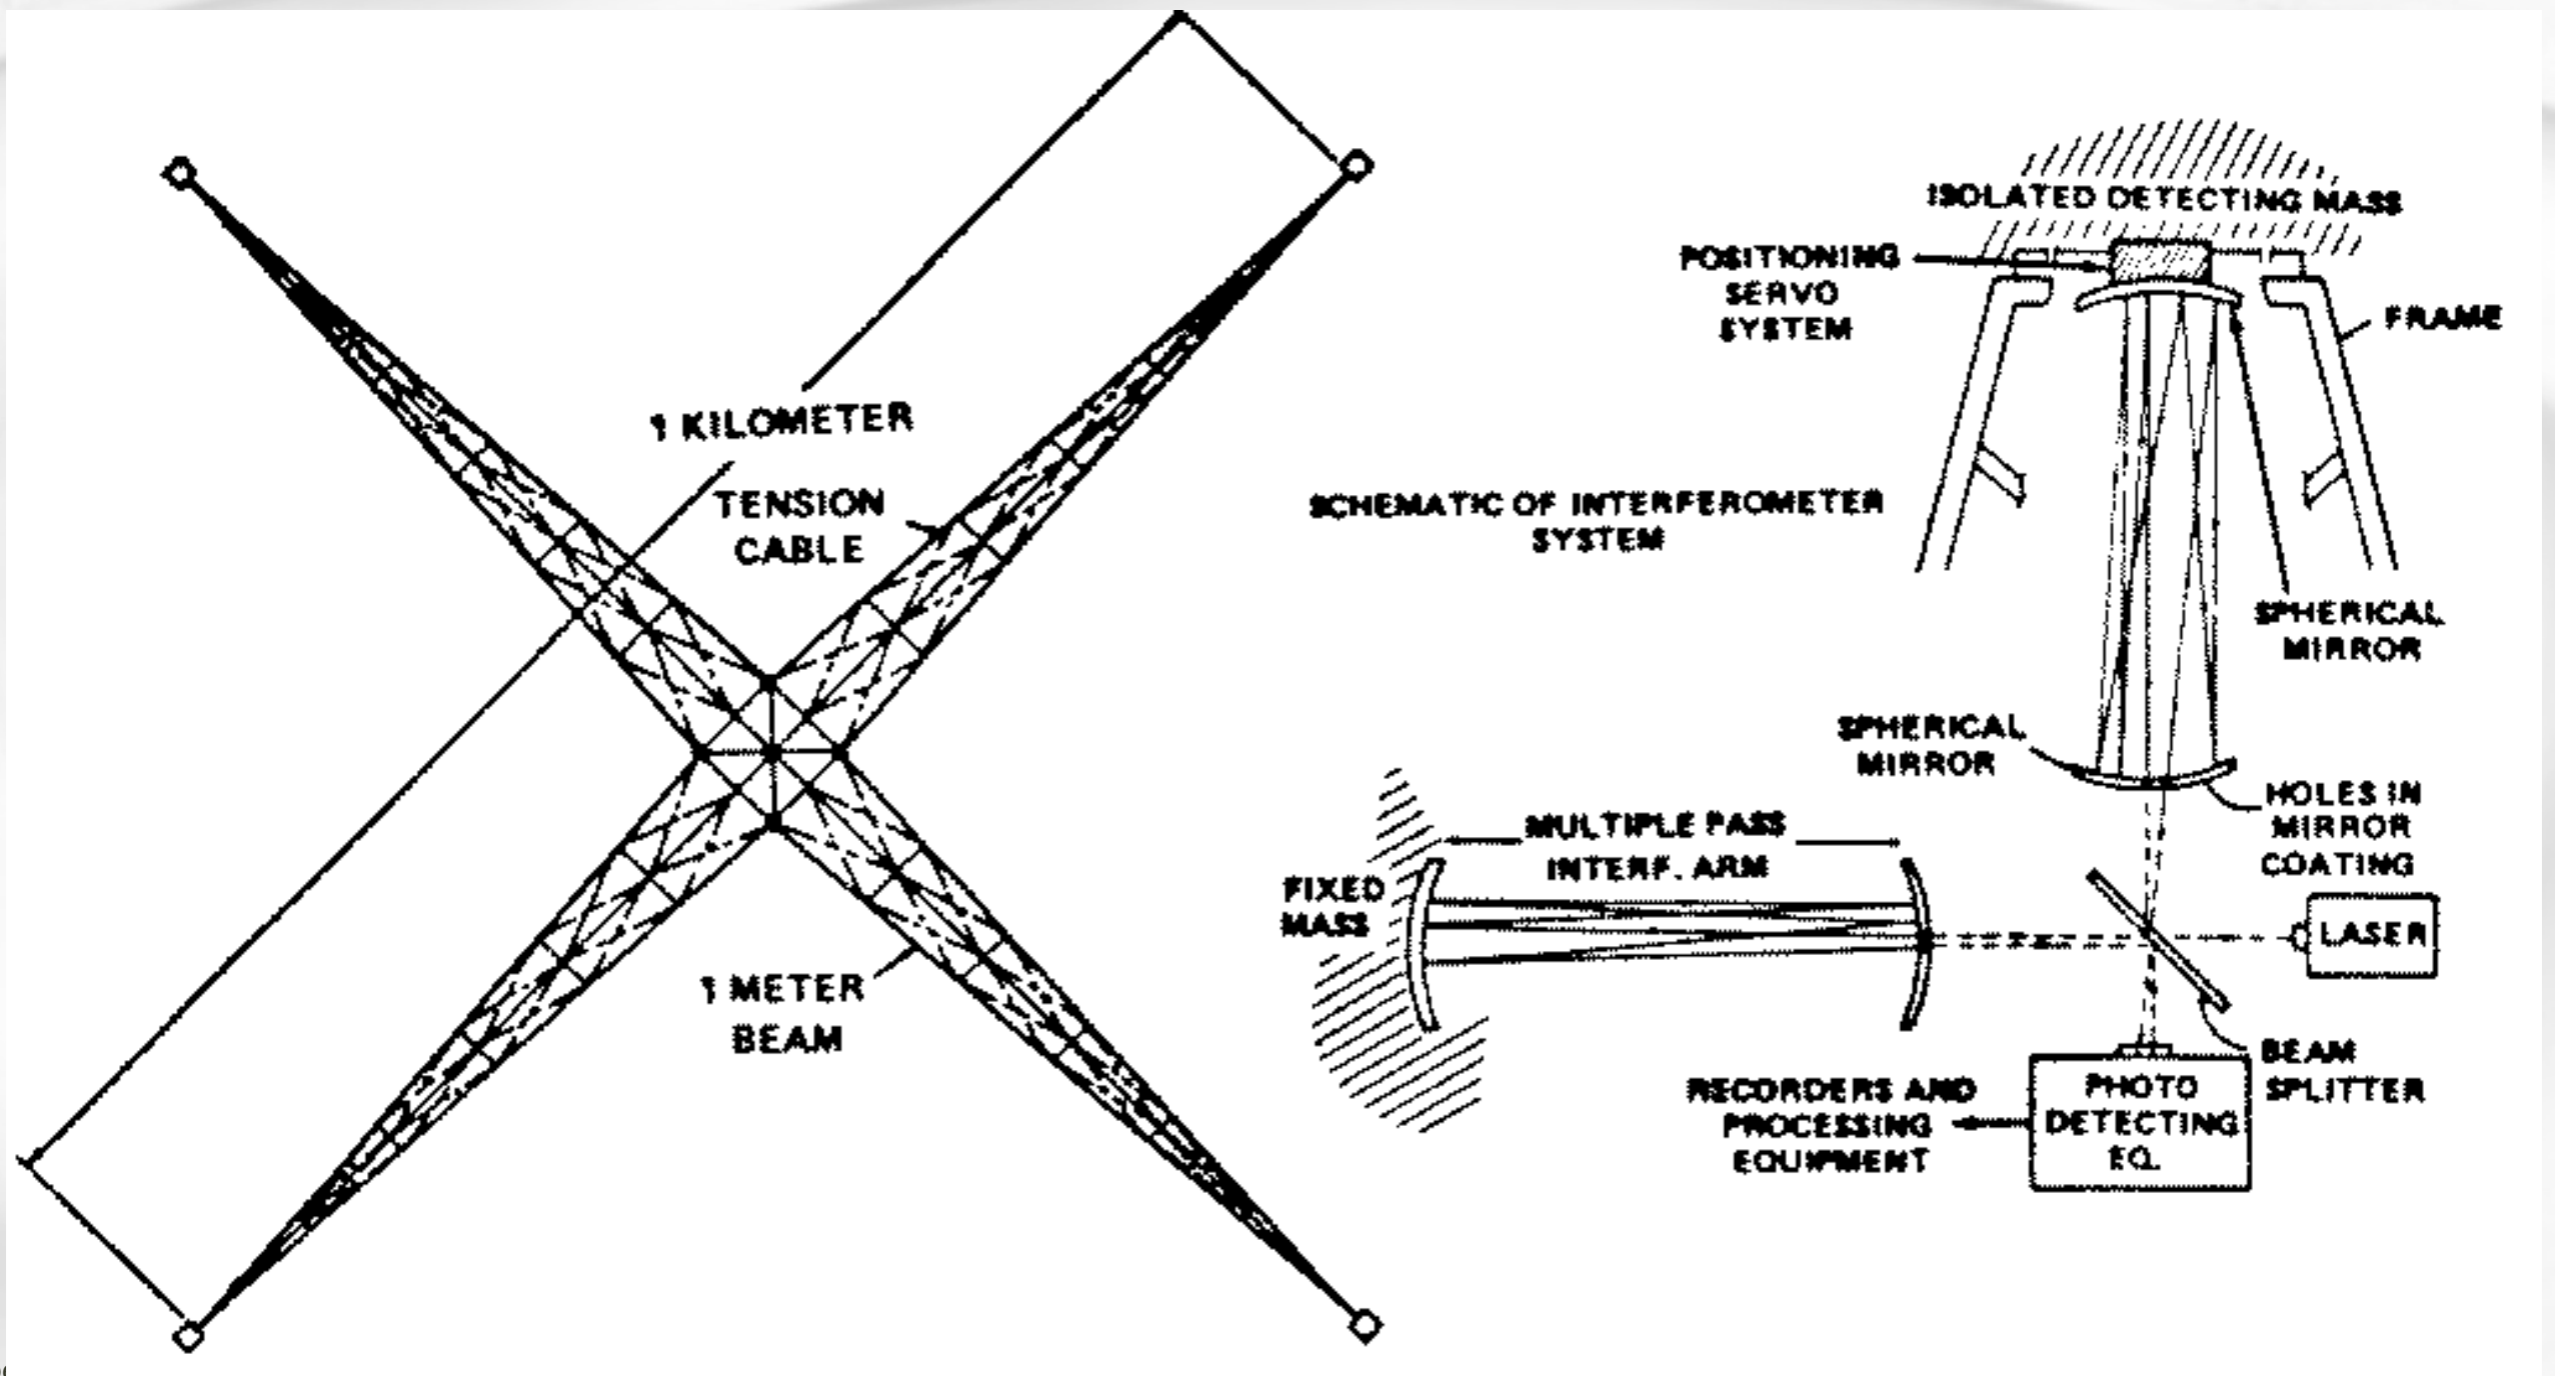





-  J.E. Faller, P.L. Bender, J.L. Hall, D. Hills and M.A. Vincent, *Proc. Colloquium «Kilometric Optical Arrays in Space»*, Cargèse (Corsica), **23-25 October 1984**

We are investigating possible designs for a laser gravitational wave antenna in space using free test masses and heterodyne (interferometric) detection. One possibility is to use baselines about  $10^6$  km long between three spacecraft in nearly circular one-year orbits about the sun. If the orbit elements are chosen properly, the distances between the spacecraft can be kept constant to roughly 1 part in  $10^3$  without orbit corrections. With milliwatt-transmitted laser power levels and 50 cm diameter optics, a strain sensitivity of  $10^{-19}/\sqrt{\text{Hz}}$  over at least the period range from 10 to  $10^4$  seconds appears feasible. The primary goal of the measurements is to observe gravitational radiation associated with present or past interactions of super-massive objects. A number of binary sources can, however, also be studied. For periods shorter than 10 seconds, the sensitivity for a baseline length of  $10^6$  km would degrade as a result of multiple gravitational wavelengths being contained in the arm lengths. For longer periods, the main limitation is likely to come from spurious accelerations due to forces other than the gravitational attraction of the sun and planetary bodies.

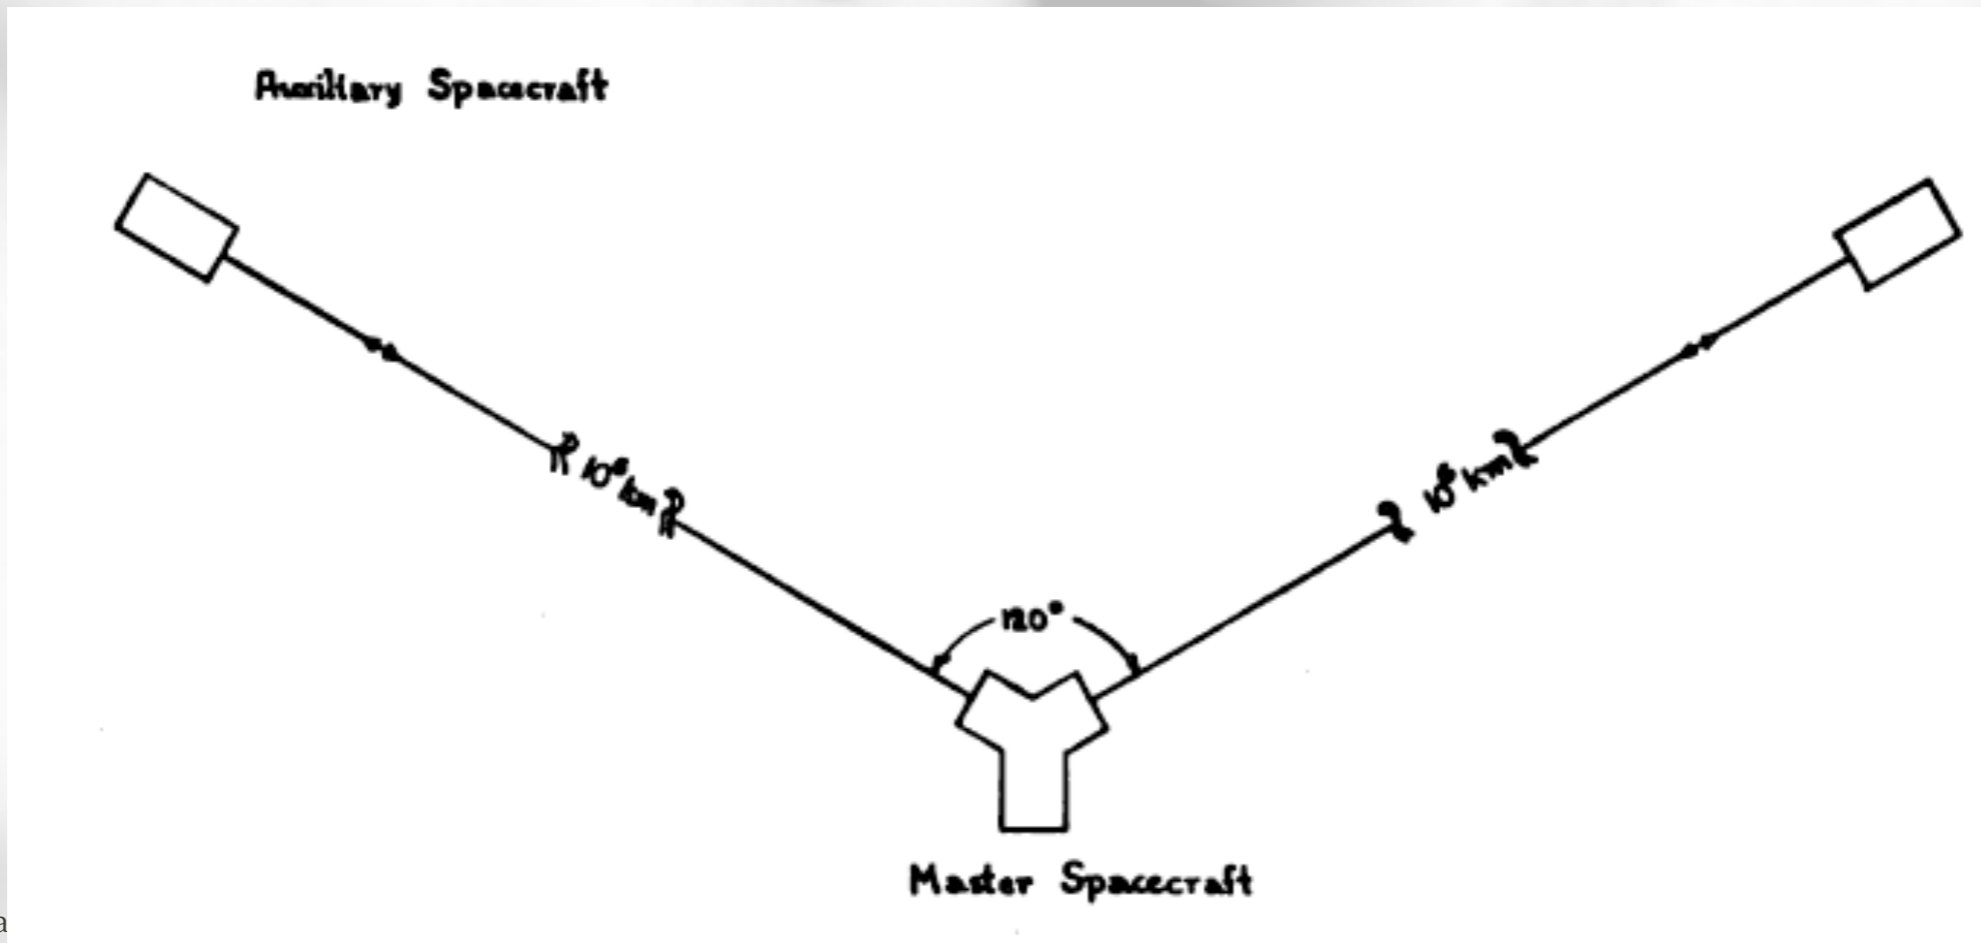



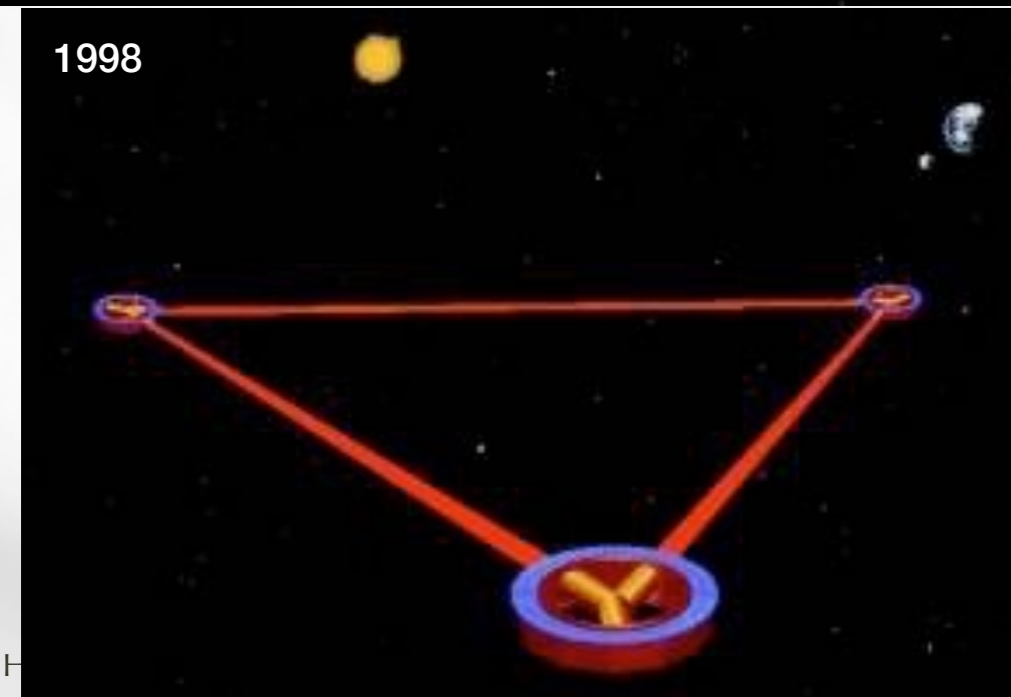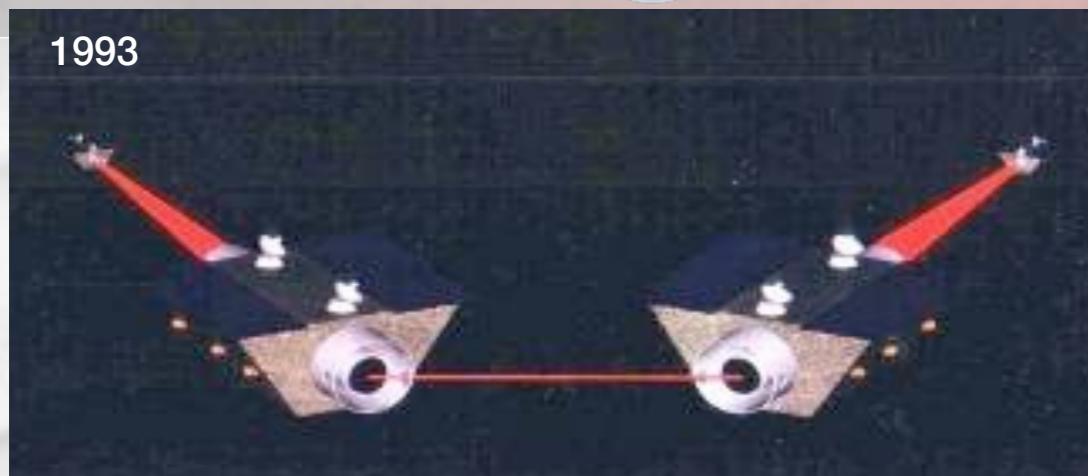


- ✈️ Joint ESA-NASA mission in 1993
  - ✈️ 4 (1993) → 6 (1994) → 3 (1997) satellites
  - ✈️ LISA name appeared (Laser Interferometer Space Antenna) in 1993
  - ✈️ ESA 'Cornerstone' mission, launch before 2010
  
- ✈️ 2011: NASA out of the project
  - ✈️ Recommendation : « NASA cannot participate to any large mission for the next decade because of the JWST cost »
  - ✈️ ESA decide to go alone, on a 'optimized' (cheaper) design : the eLISA mission concept (only 2, shorter, arms)



## THE GRAVITATIONAL UNIVERSE

A science theme addressed by the *eLISA* mission observing the entire Universe

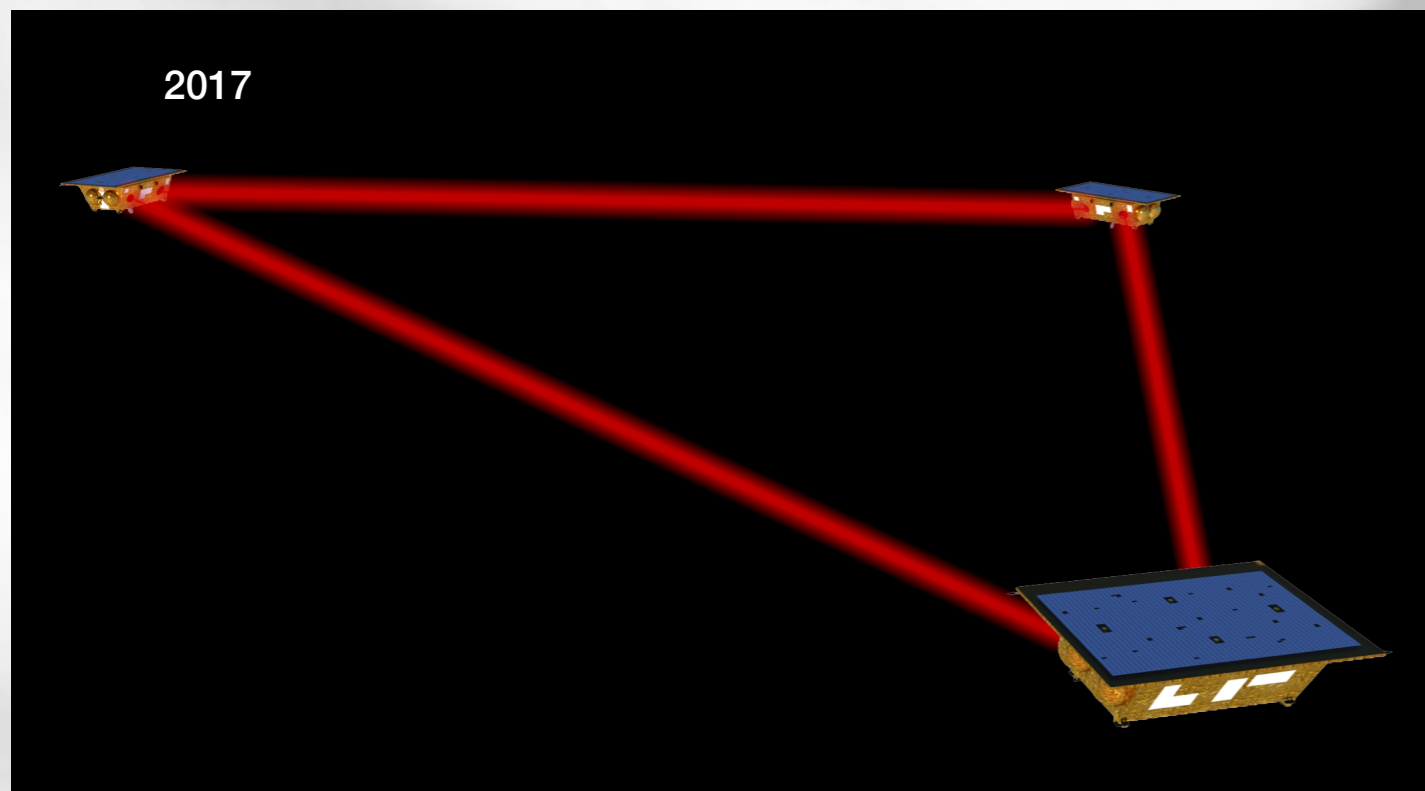

- ✈ 2013 : selection of the 'Gravitational Universe' as the science theme of the 'L3' mission
  - ✈ eLISA as strawman mission concept
  - ✈ Launch in 2034
- ✈ Déc. 2015 - July 2017 : LISA Pathfinder flight
  - ✈ Achieved performance far beyond expectations...
- ✈ 2017 : selection of LISA as the 'L3' mission candidate
  - ✈ NASA back into LISA as 'Junior' partner
  - ✈ 3 interferometric arms, 2.5 Mkm long
- ✈ Since then LISA follows mission development phases
  - ✈ Phase A (feasibility studies) : 2017 - 2021
  - ✈ Phase B (preliminary design) : 2022 - 2027
  - ✈ Adoption : Nov 2023 - Jan. 2024
  - ✈ Phase C (detailed design) : 2027 - 2031
  - ✈ Phase D (construction) : 2031 - 2035
  - ✈ Launch : ~2035
  - ✈ Transfer + commissioning : 2 years
  - ✈ Operations : 4.5 (+3) years
  - ✈ End of consumables : ~10 years in operations




- Equilateral configuration
  - 3 arms / 6 links ; 2.5 Mkm

- Test masses

- Direct heritage from LPF
- 2 TM / satellite
- 2 steerable optical benches / satellite


- Typical metrology requirement :

**$\sim 10 \text{ pm}/\sqrt{\text{Hz}}$  @ 1 mHz**

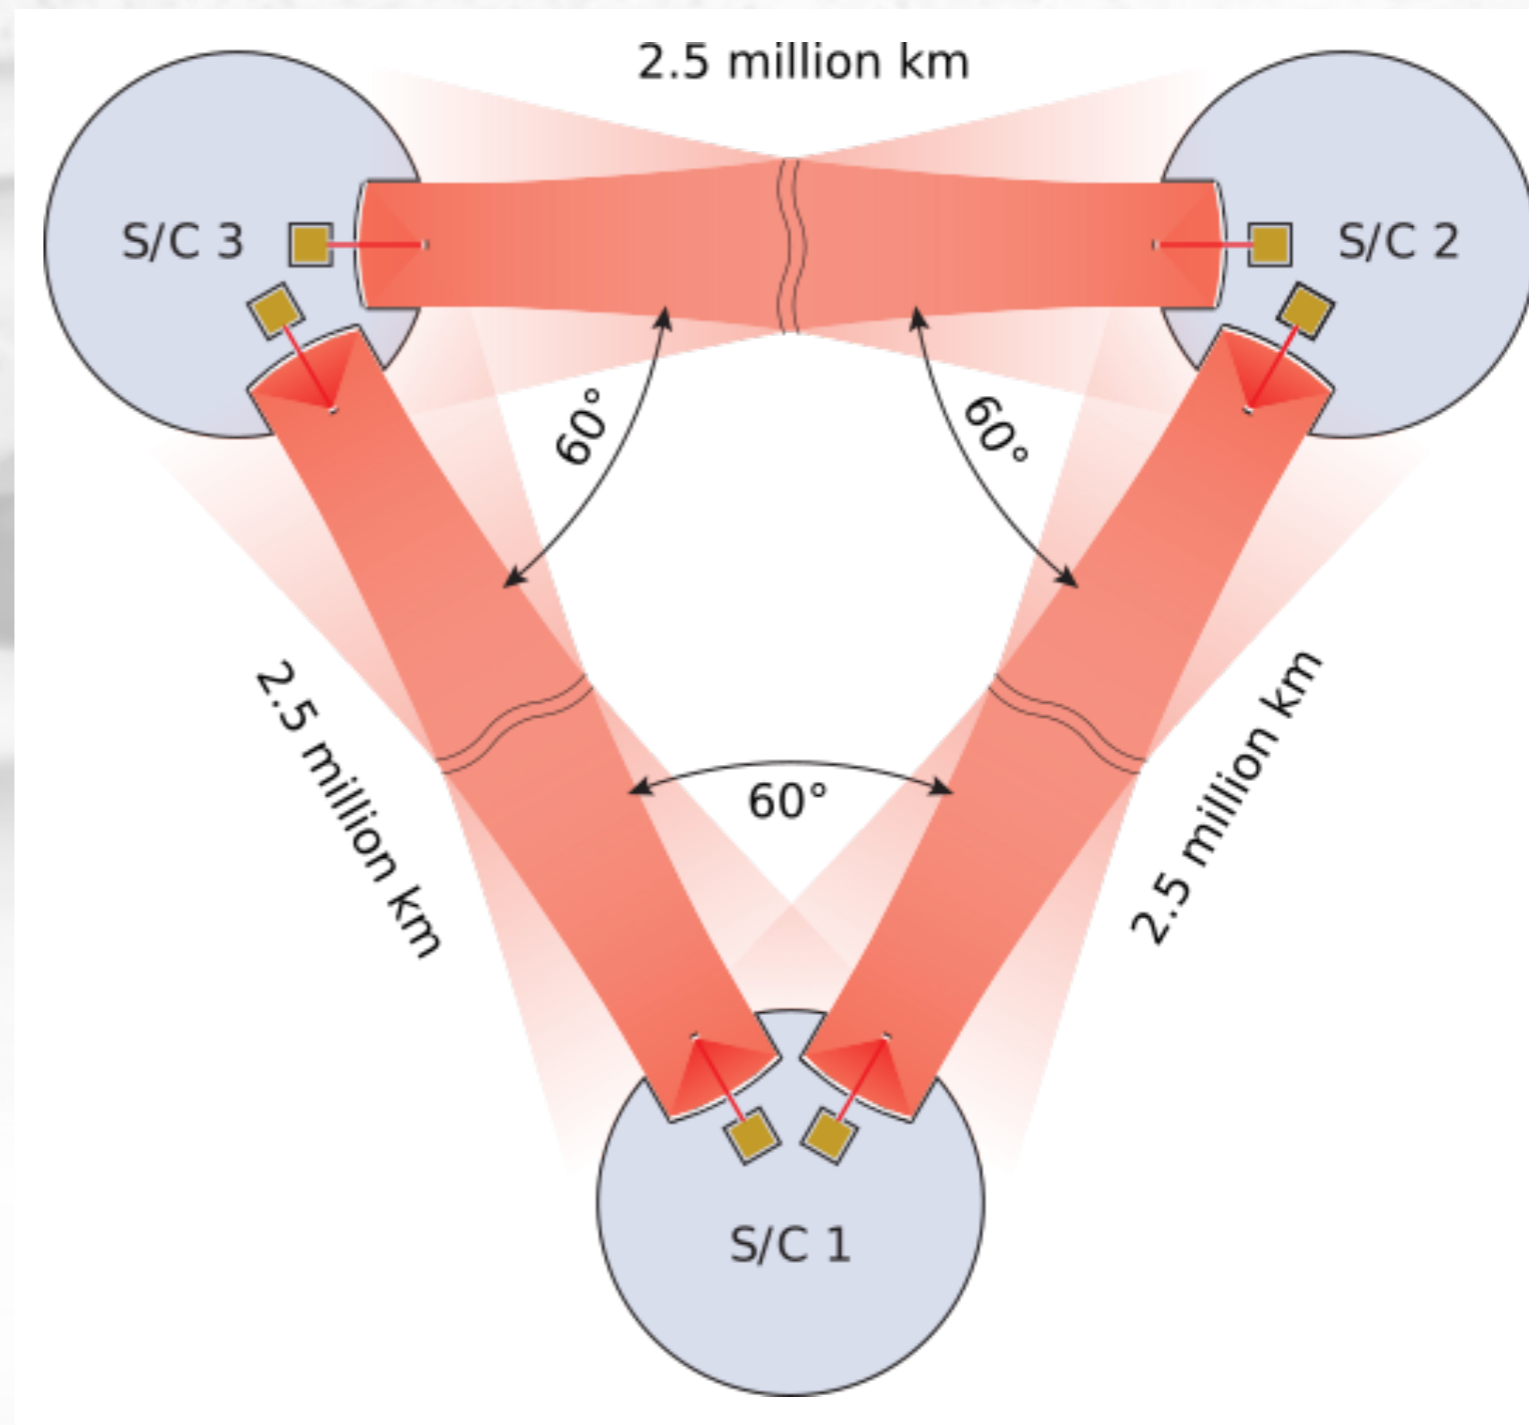




# Measurement principle

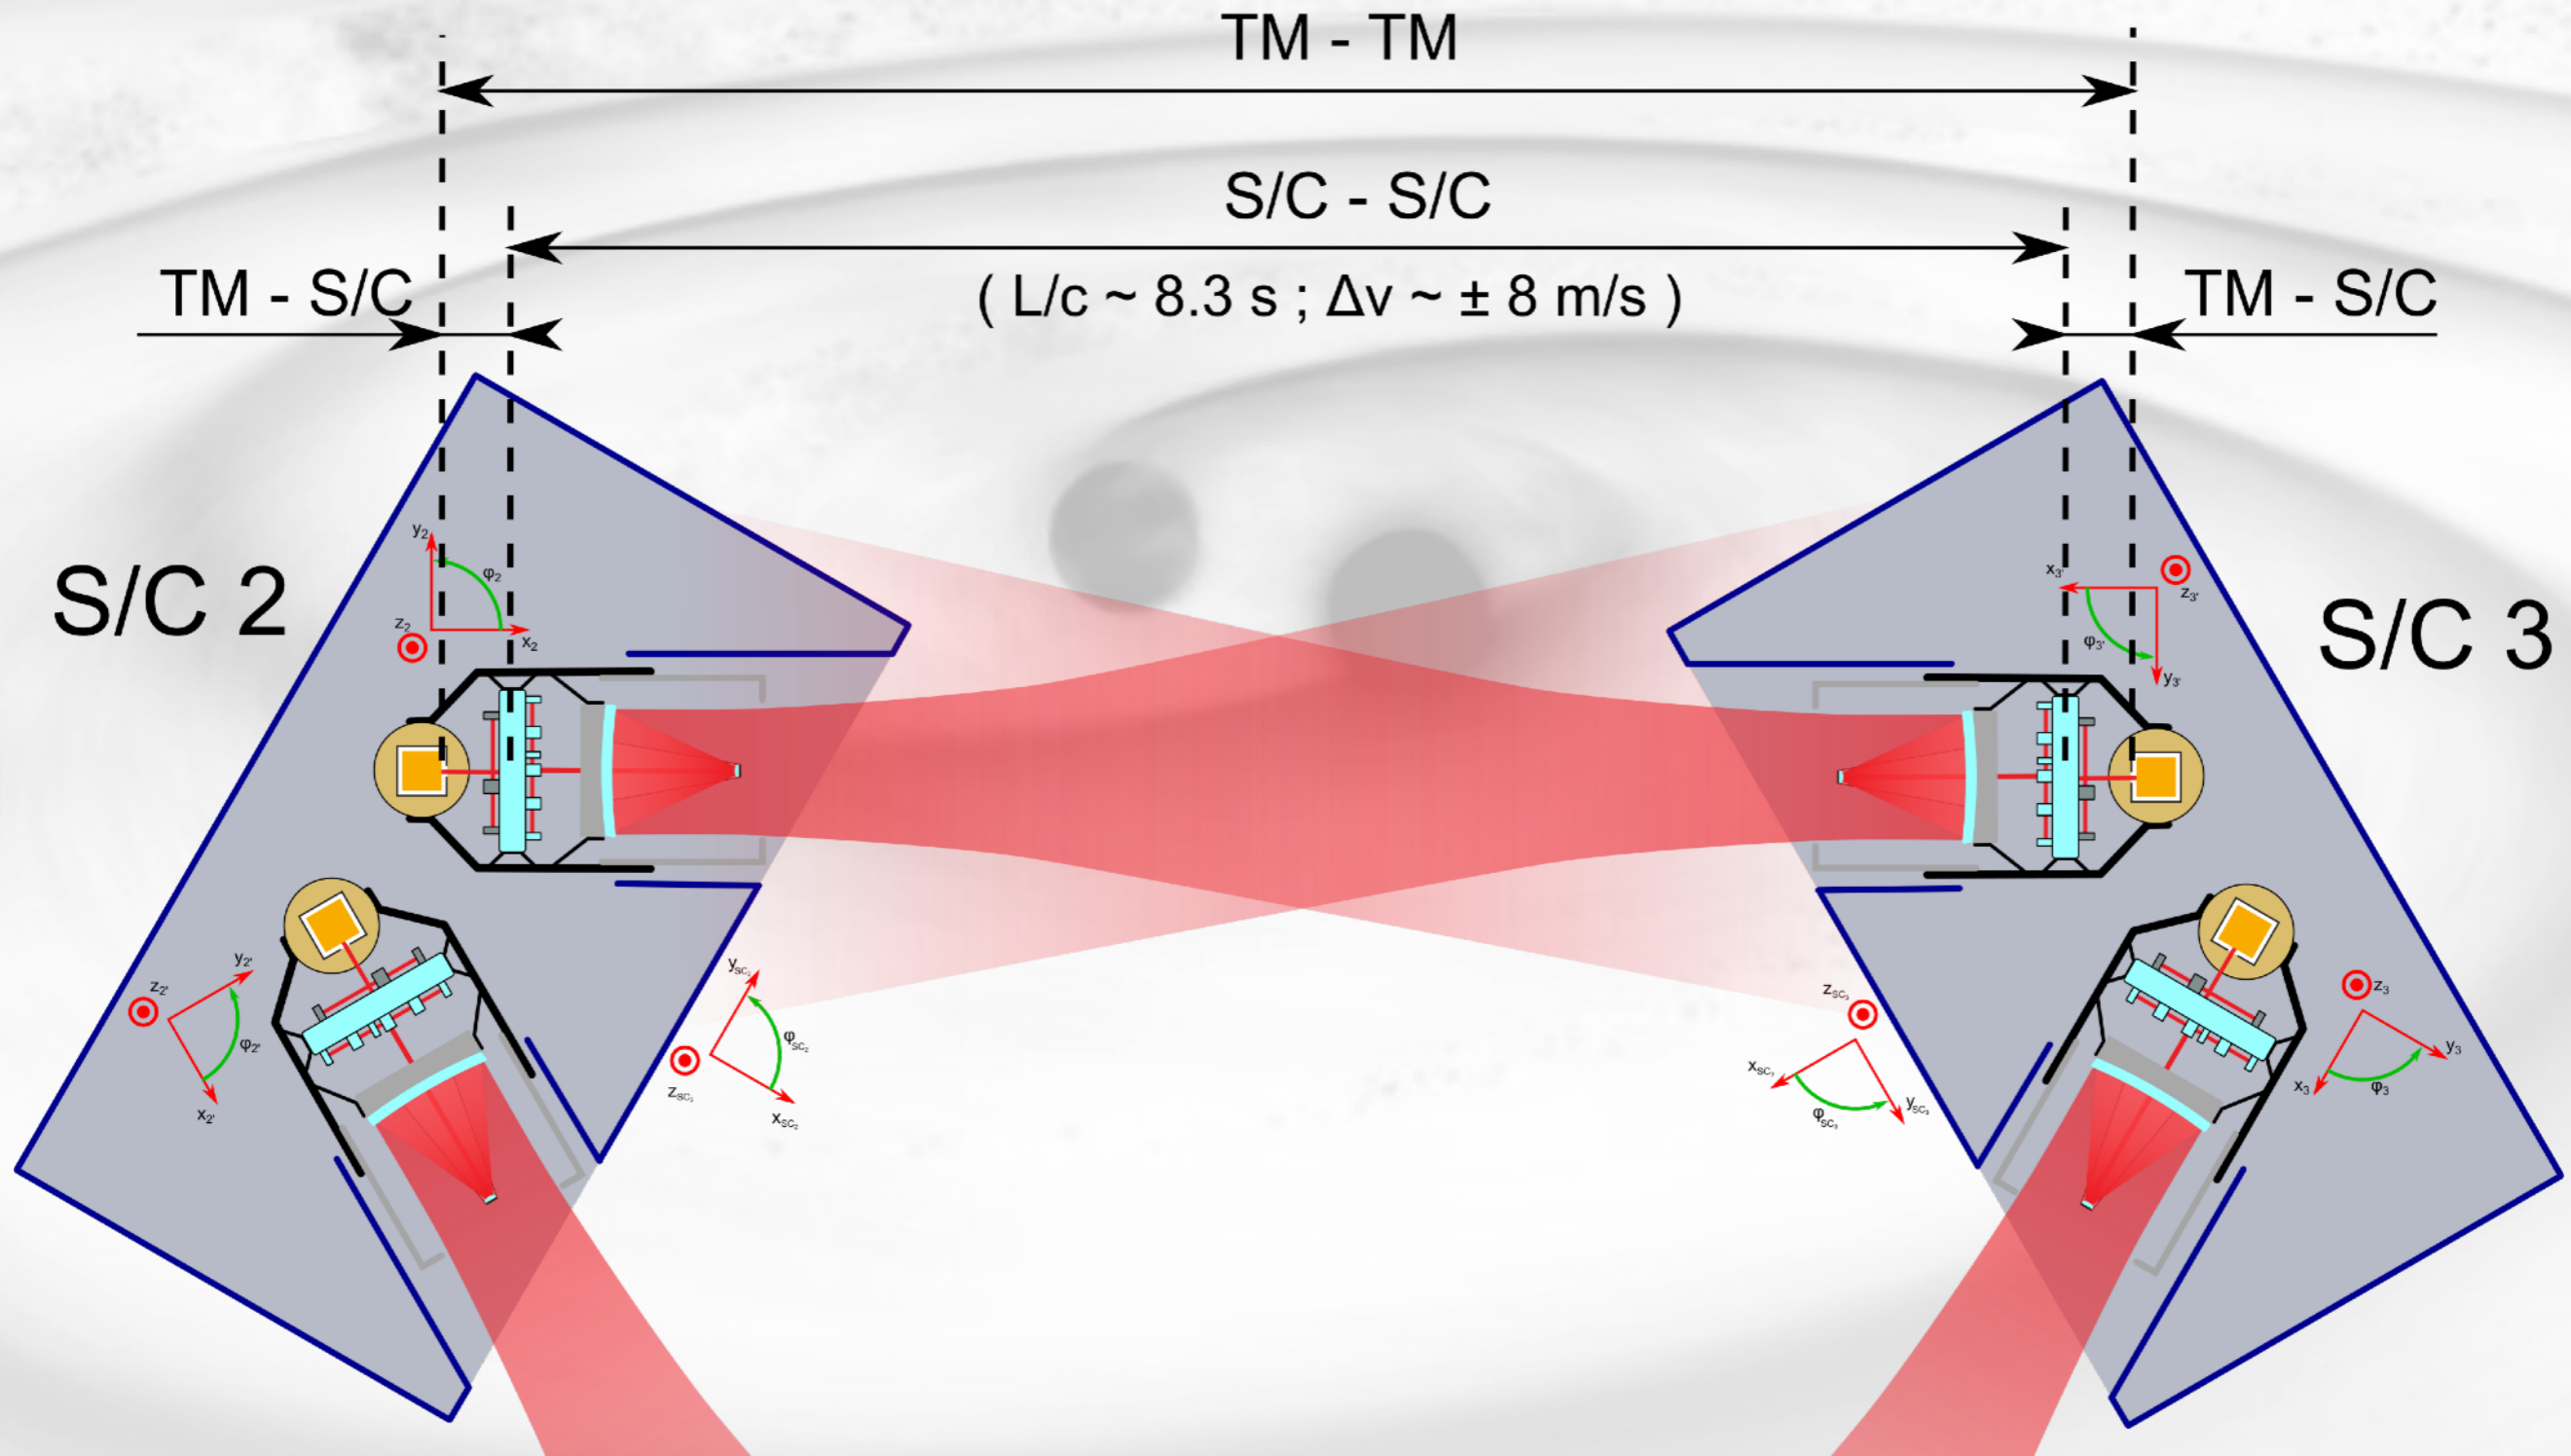



## Ground based interferometers



- Test masses = suspended mirrors
- Increase of arm-length using Fabry Perot cavities
- Power recycling mirror
- —> High optical power in the arms !
- —> Linear response only close to resonance: electronic feedback loops to lock the cavities

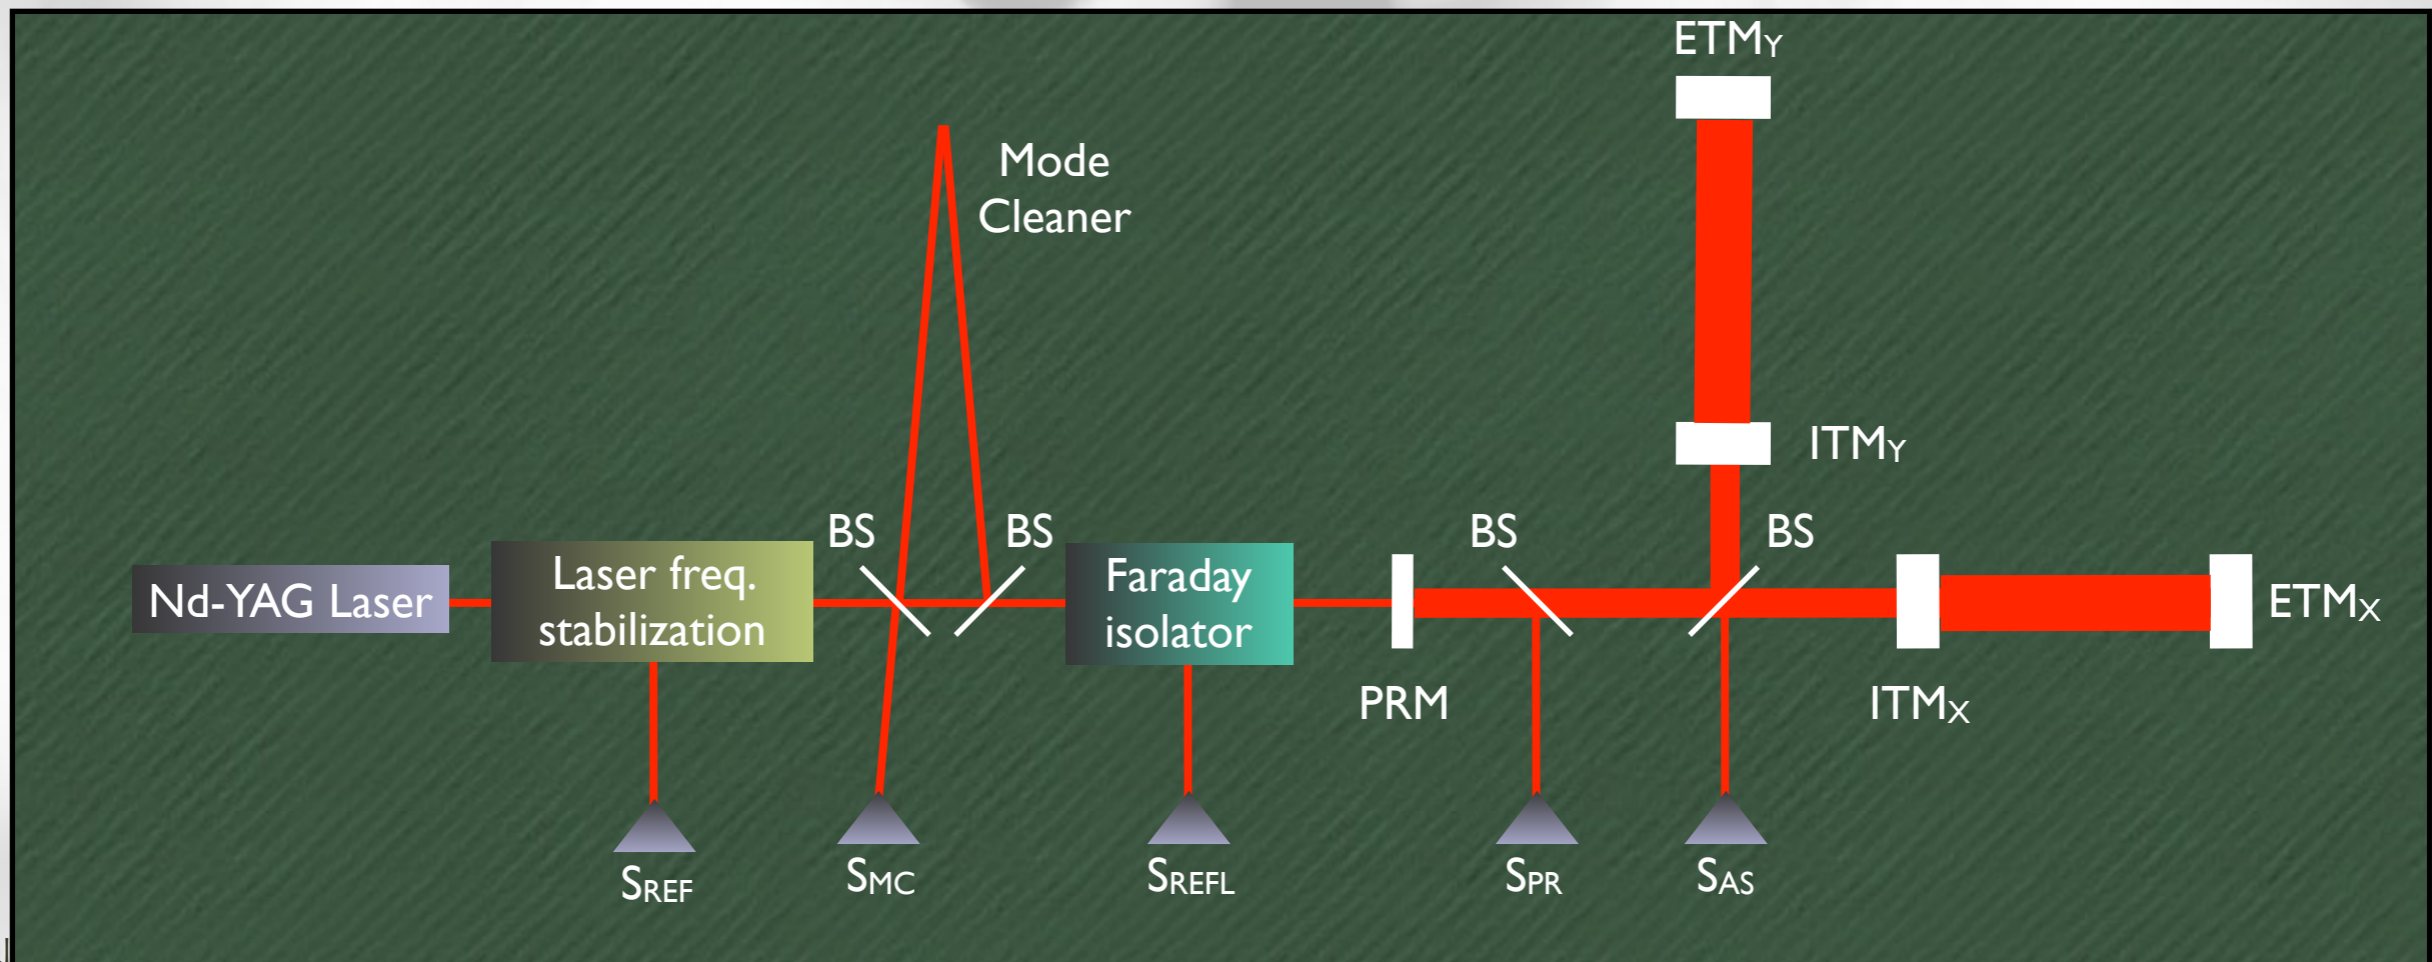




## Space-based interferometers

- Test masses : free floating mirrors, long arms
- → in LISA : 1.1 W emitted, 650 pW received
- Keplerian orbits : variable armlength. and Doppler shifts
- → requires heterodyne interferometry : distance measured as phase stability of a RF signal
- Independent S/C
- → phase-locked lasers (transponder mode) + clocks synchronisation signals

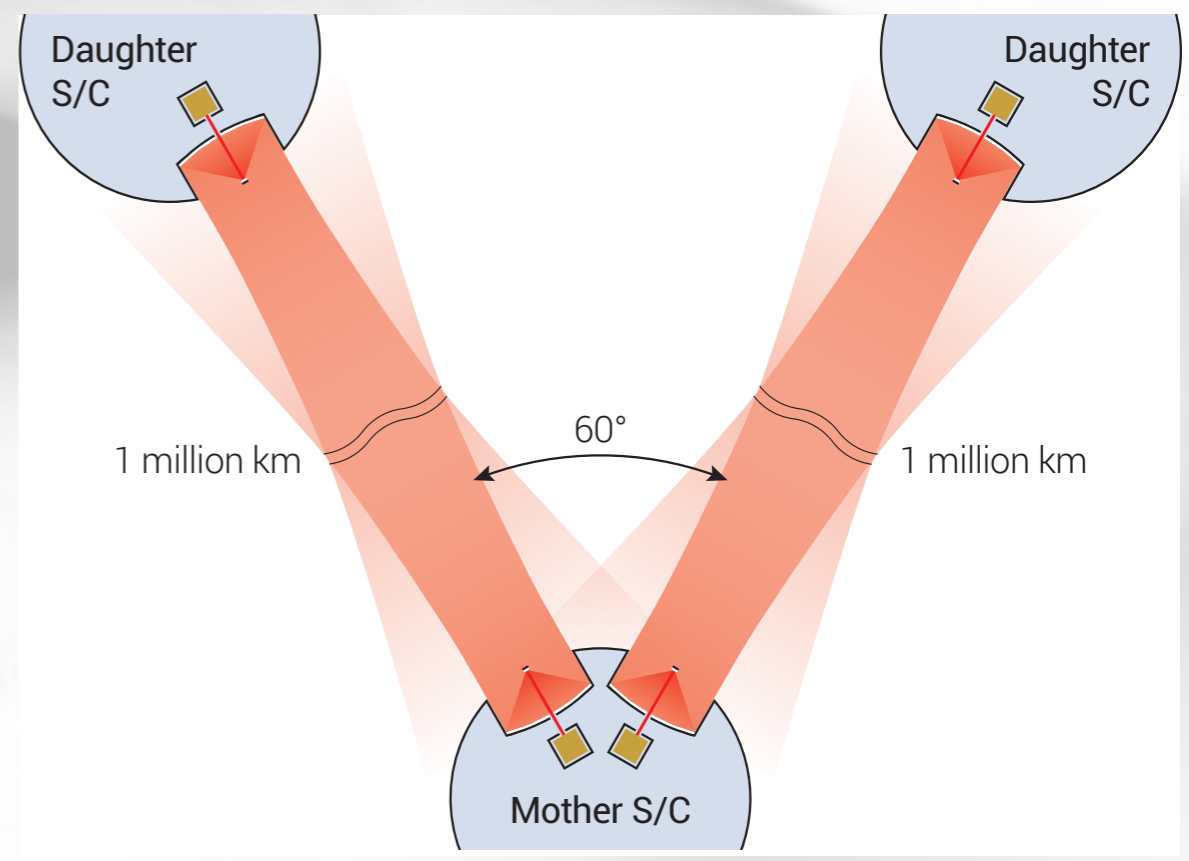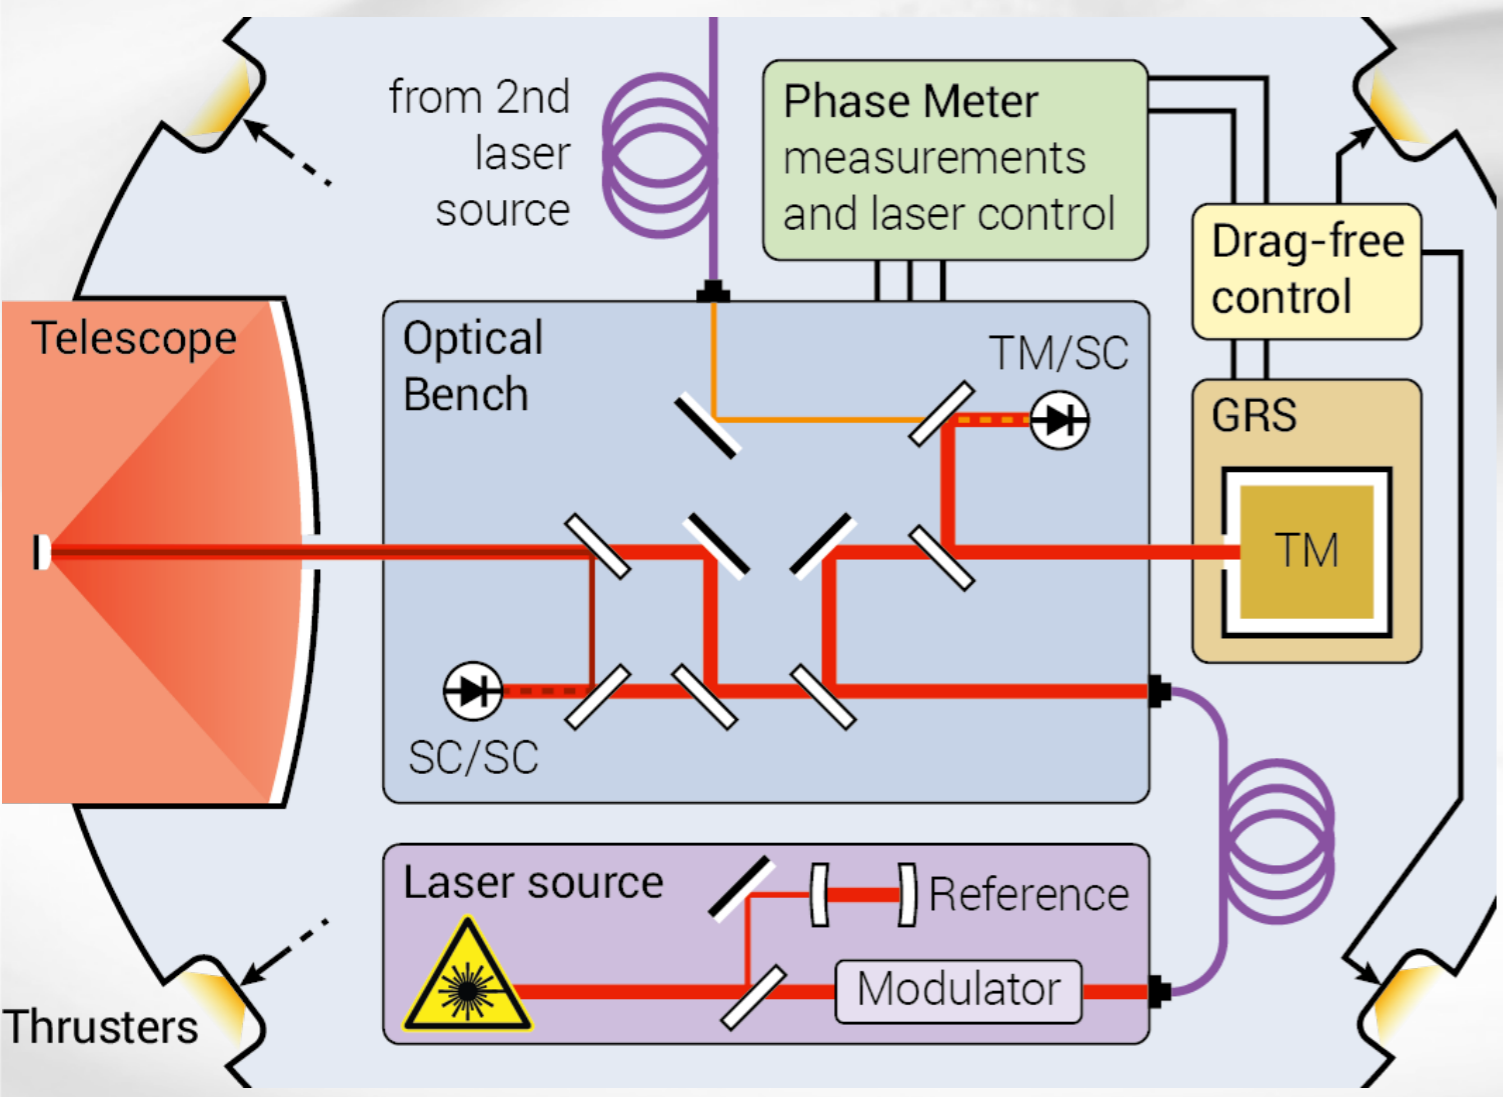




- Main payload elements
  - Gravitational Reference System (GRS)**
  - Zerodur Optical Bench**
  - Phase & frequency extraction (Phasemeter)**
  - Telescope**

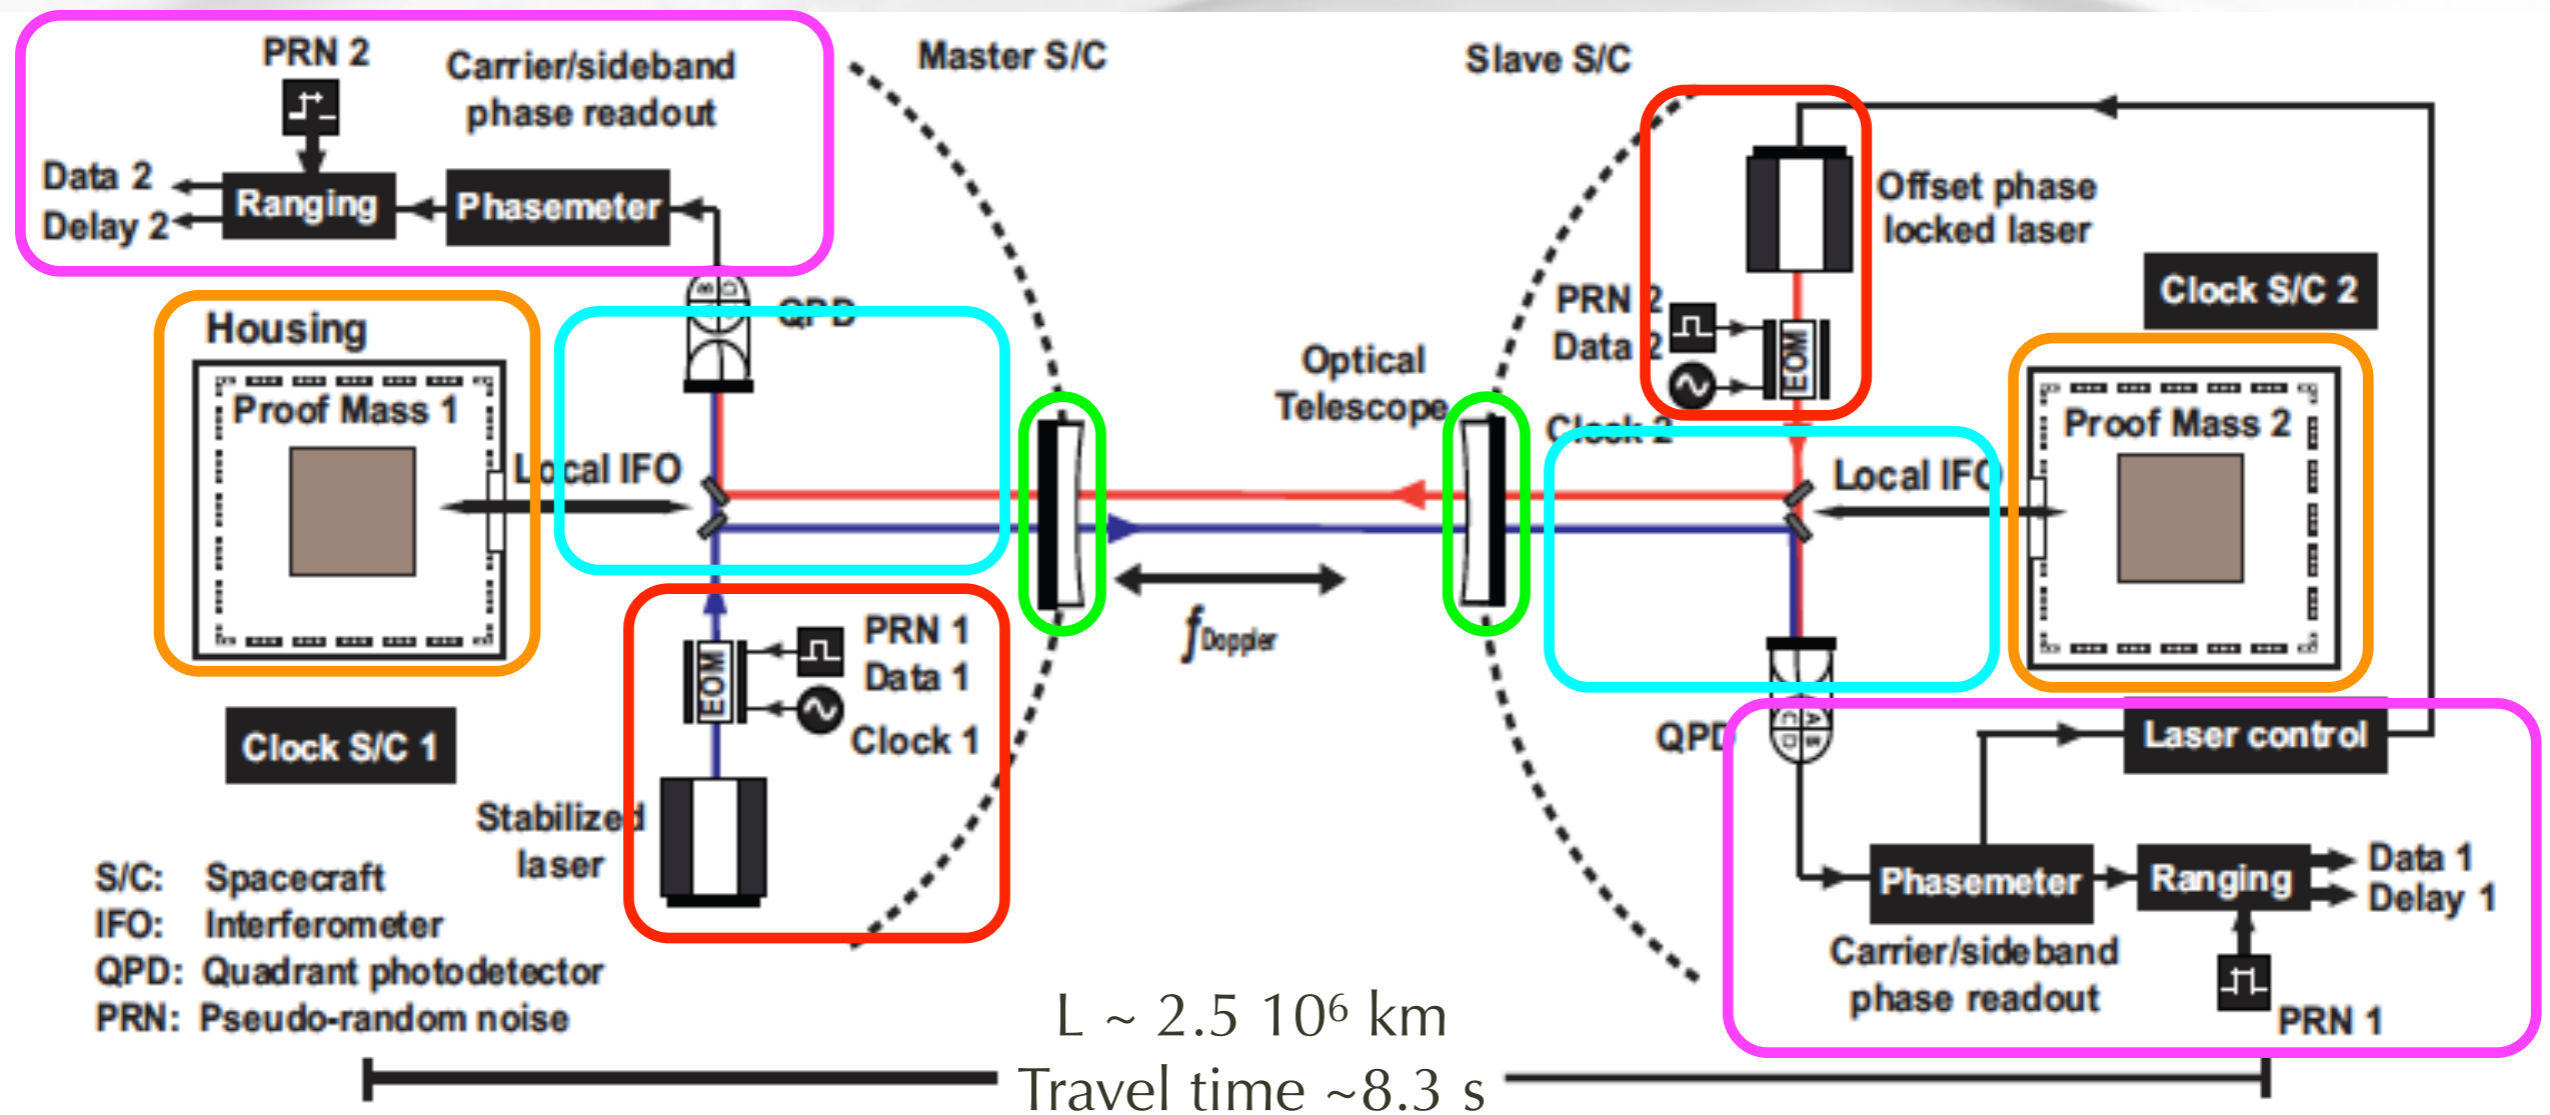



# Scheme of a instrument



MOSA = Movable Sub-assembly

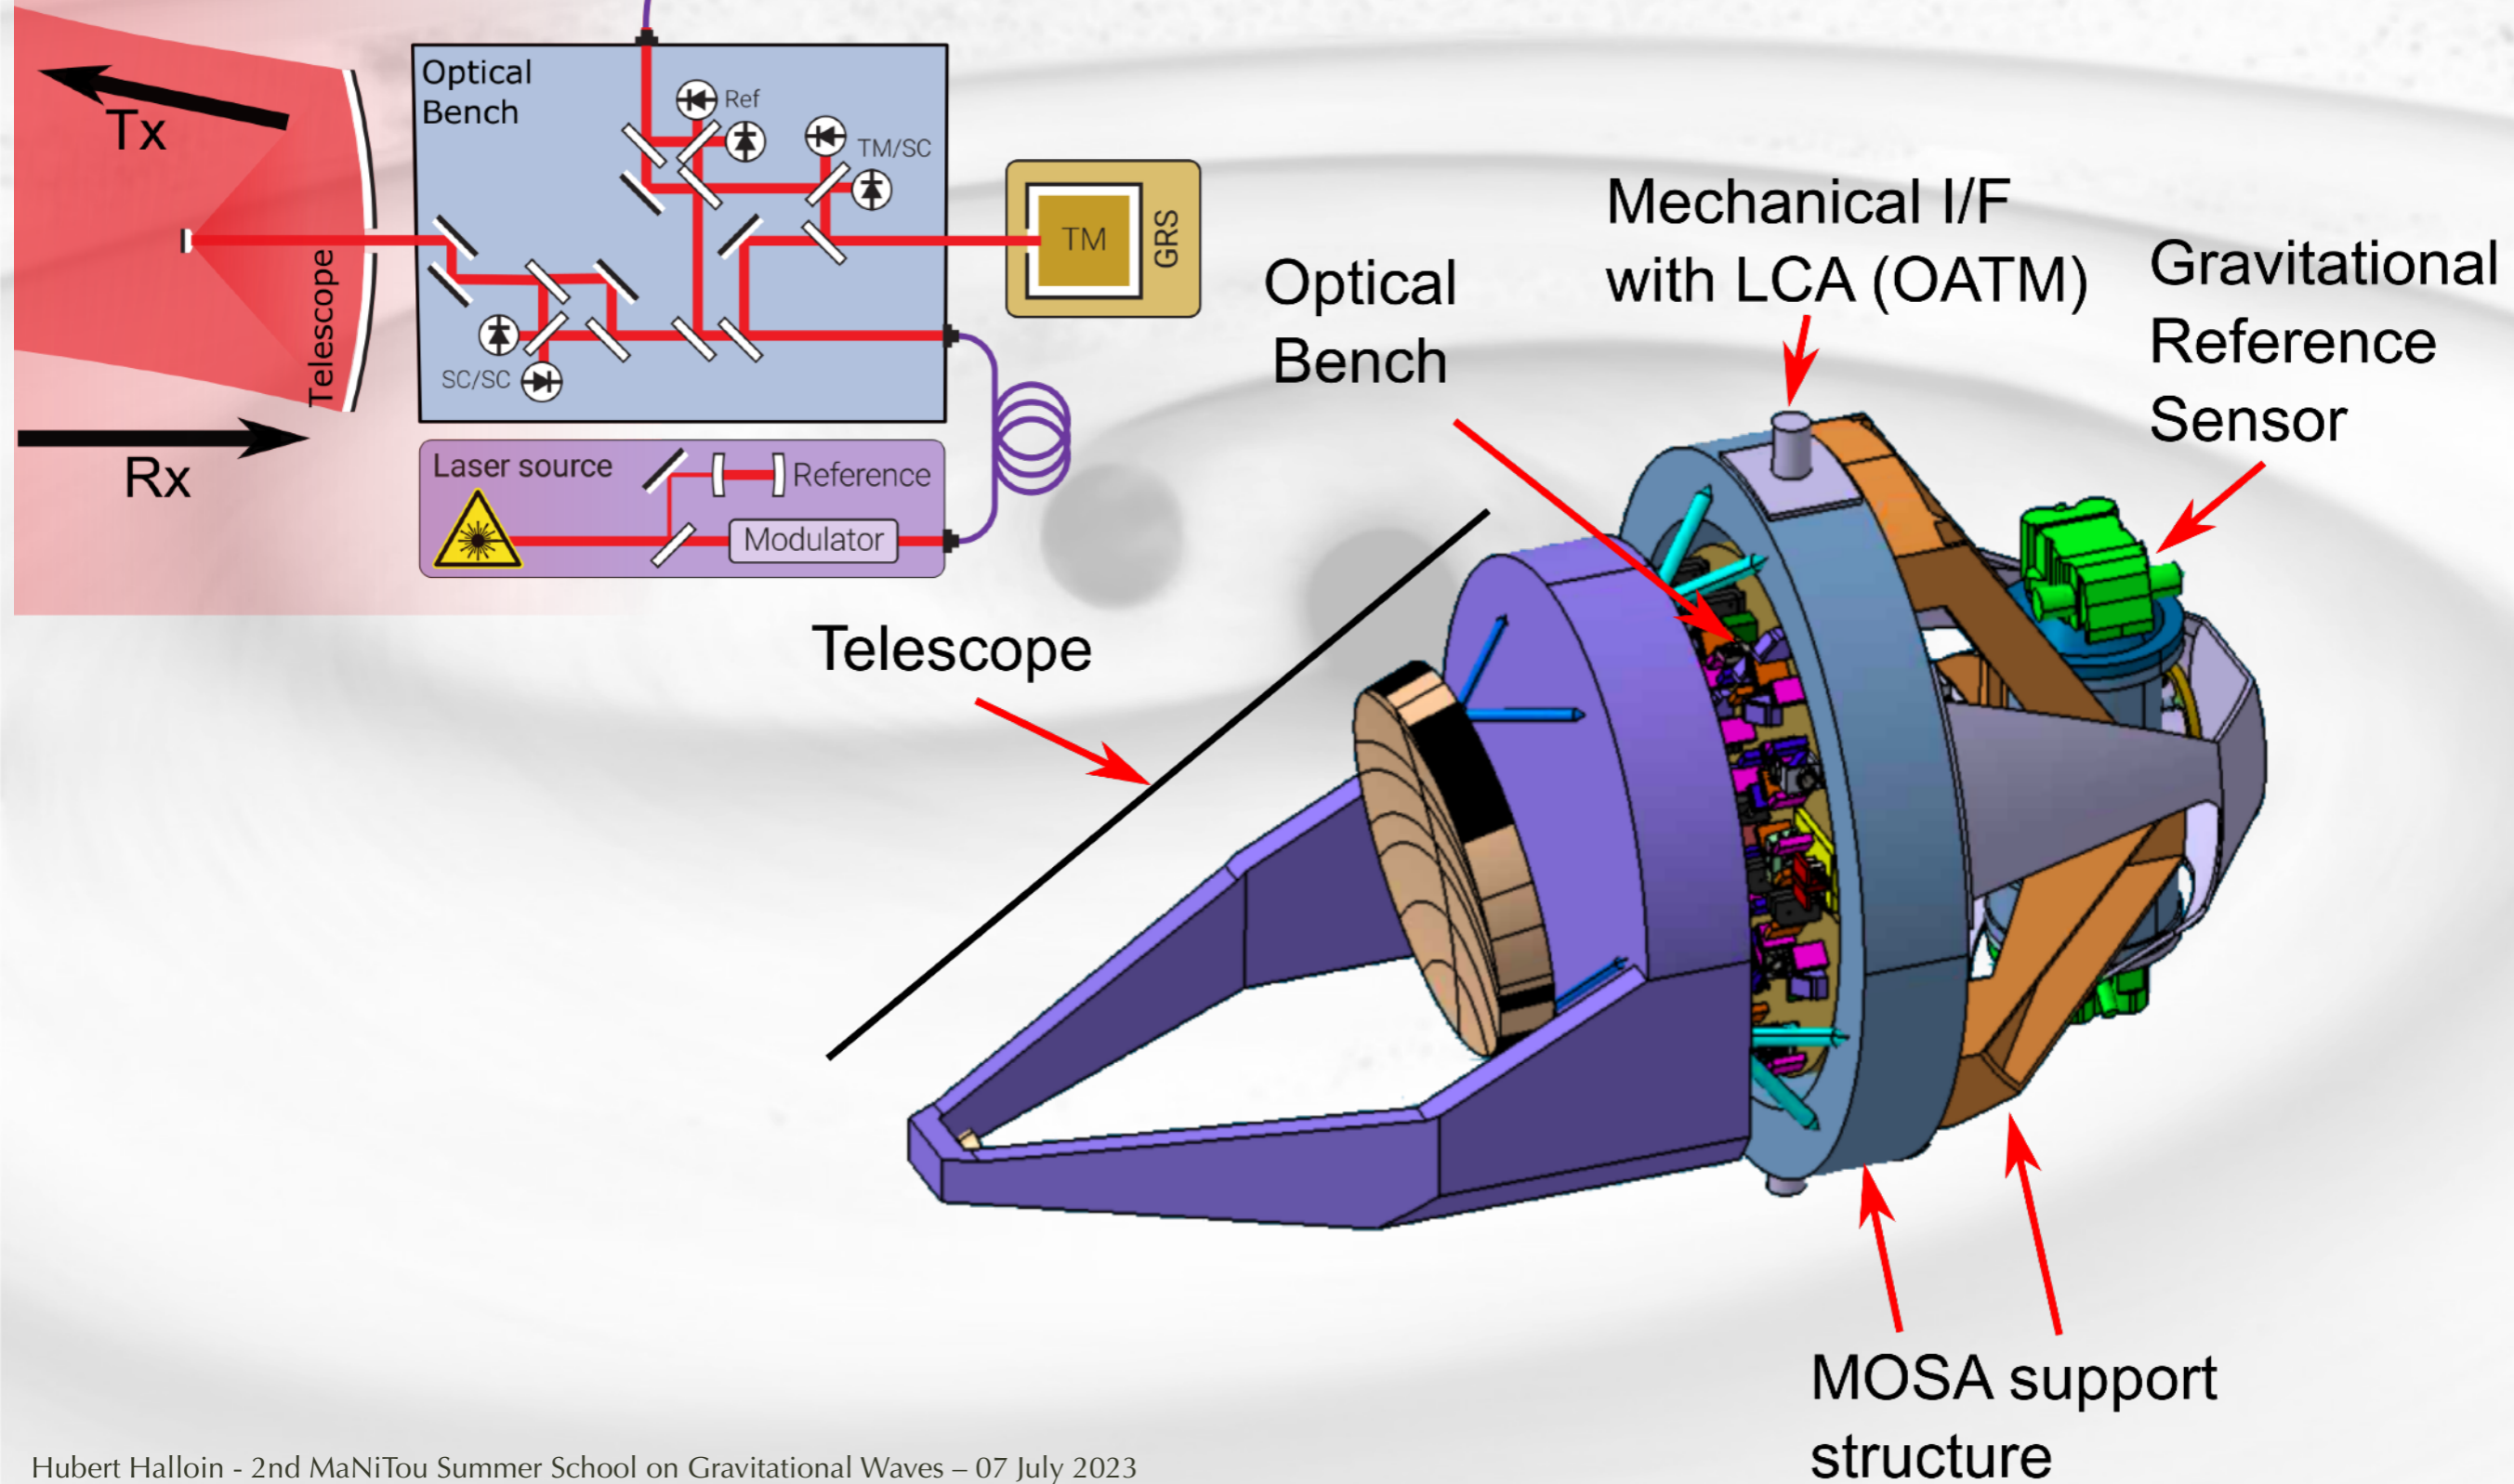





# Two MOSAs form an LCA ...

 LCA = LISA Core Assembly

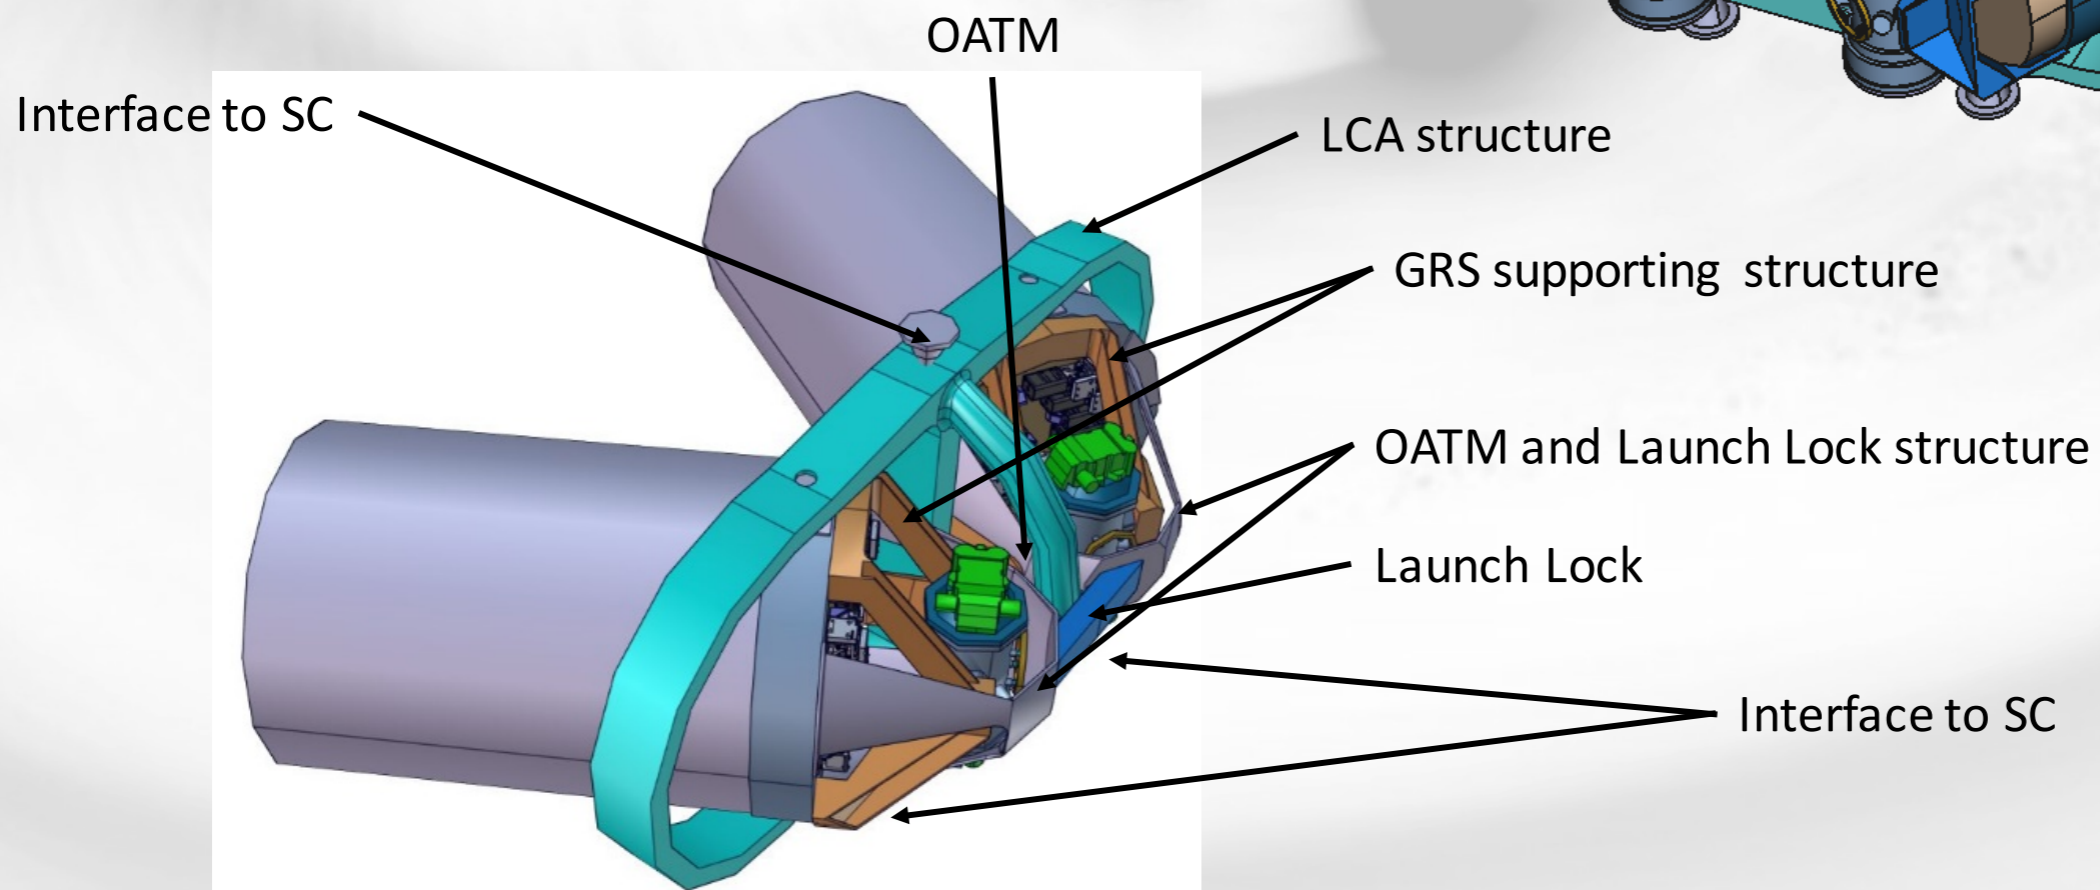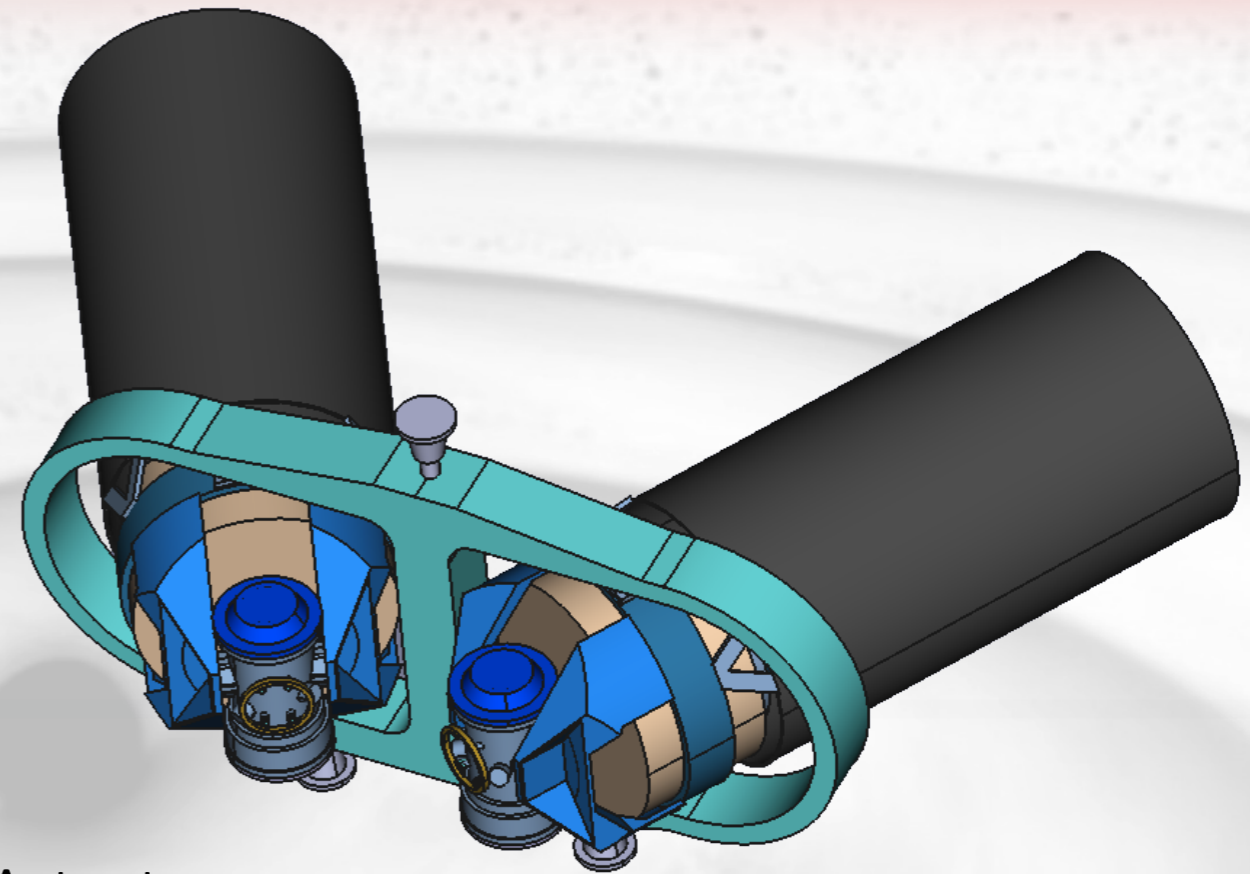



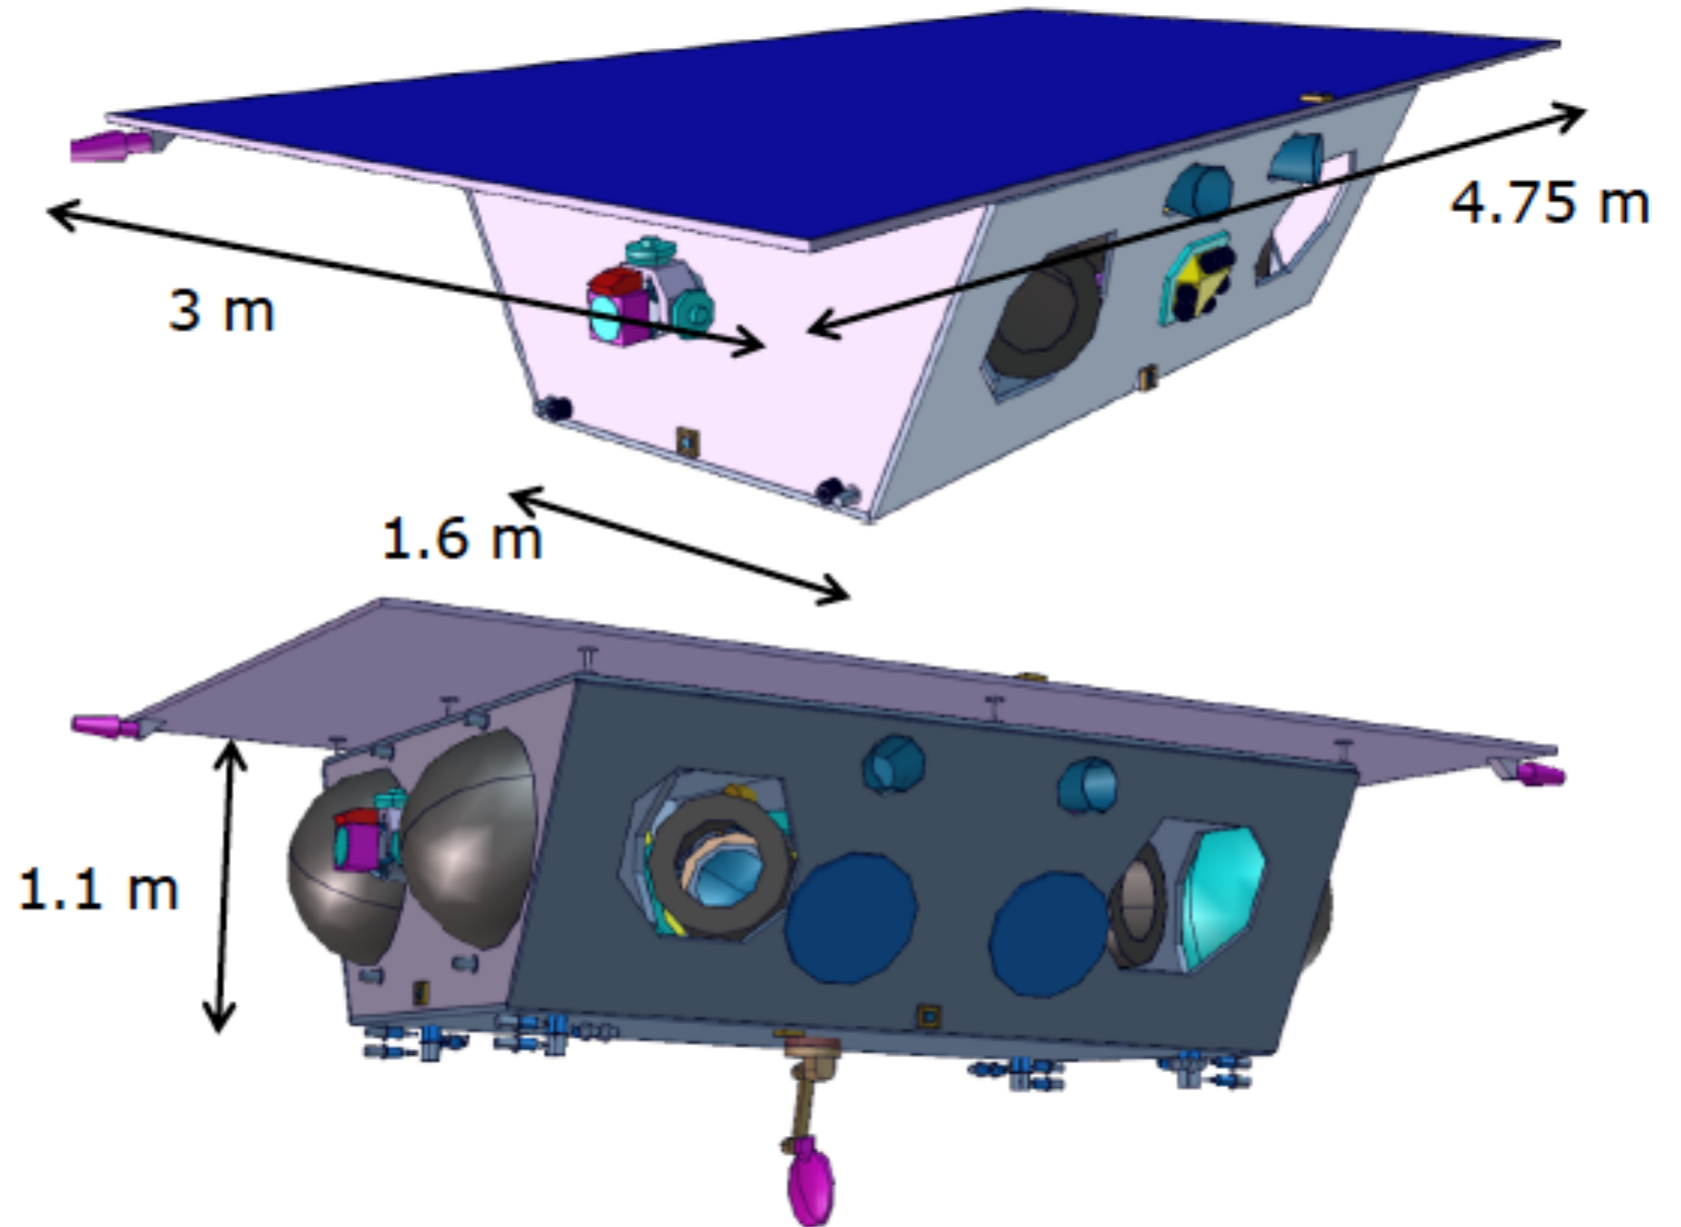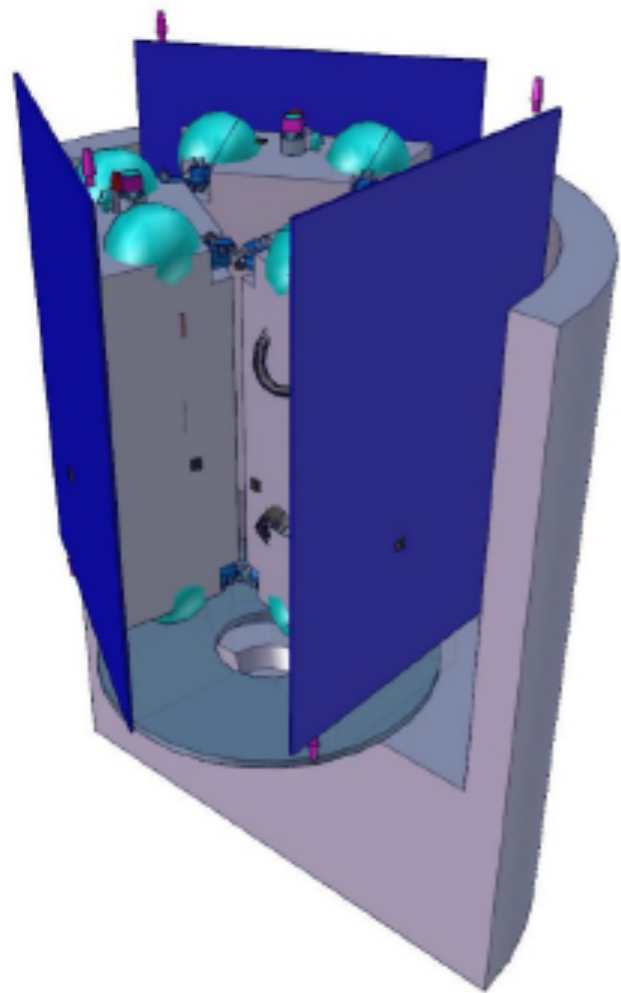


# Three S/C fit into an Ariane 6.4





-  Heliocentric orbits
-   $19^\circ$  to  $25^\circ$  trailing the Earth

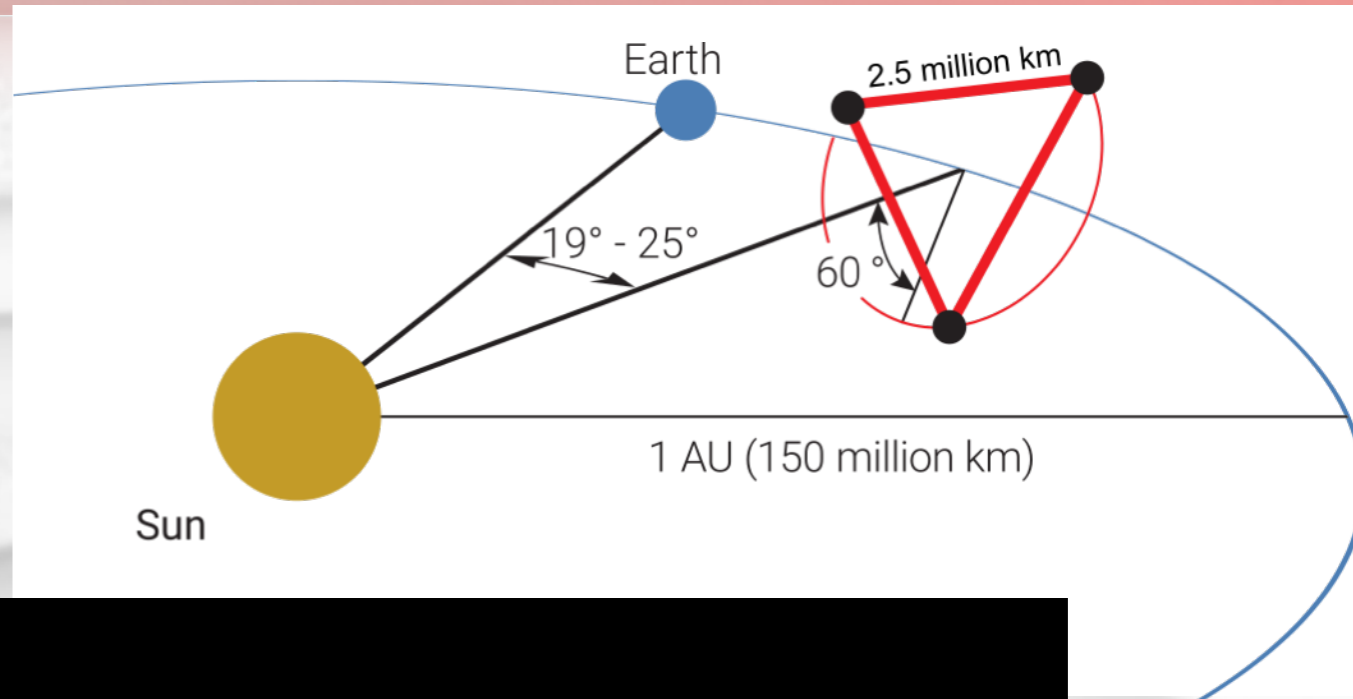

- The effect of a GW on a laser link is a Doppler shift of the laser frequency

$$\vec{k} = \begin{pmatrix} \sin \theta \cos \phi \\ \sin \theta \sin \phi \\ \cos \theta \end{pmatrix}; \vec{\theta} = \frac{\partial \vec{k}}{\partial \theta} = \begin{pmatrix} \cos \theta \cos \phi \\ \cos \theta \sin \phi \\ -\sin \theta \end{pmatrix}; \vec{\phi} = \frac{1}{\sin \theta} \frac{\partial \vec{k}}{\partial \phi} = \begin{pmatrix} -\sin \phi \\ \cos \phi \\ 0 \end{pmatrix}$$

$$\vec{n} = \vec{r}_B - \vec{r}_A$$

$$\xi_+ = (\vec{\theta} \cdot \vec{n})^2 - (\vec{\phi} \cdot \vec{n})^2; \xi_{\times} = 2(\vec{\theta} \cdot \vec{n})(\vec{\phi} \cdot \vec{n})$$


$$H(t) = \xi_+ \cdot h_+(t) + \xi_{\times} \cdot h_{\times}(t)$$

$$\frac{\delta \nu}{\nu_0}(t) = \frac{1}{2(1 - \vec{k} \cdot \vec{n})} \left[ H \left( t - \frac{\vec{k} \cdot \vec{r}_B}{c} \right) - H \left( t - \frac{L}{c} - \frac{\vec{k} \cdot \vec{r}_A}{c} \right) \right]$$

- $\xi_+$  and  $\xi_{\times}$  define the angular response to GW

- For a bouncing laser link :

$$\left. \frac{\delta \nu}{\nu_0} \right|_{2ways}(t) = \frac{1}{2(1 - \vec{k} \cdot \vec{n})} \left[ H \left( t - \frac{\vec{k} \cdot \vec{r}_B}{c} \right) - H \left( t - \frac{L}{c} - \frac{\vec{k} \cdot \vec{r}_A}{c} \right) \right] + \frac{1}{2(1 + \vec{k} \cdot \vec{n})} \left[ H \left( t - \frac{L}{c} - \frac{\vec{k} \cdot \vec{r}_A}{c} \right) - H \left( t - \frac{2L}{c} - \frac{\vec{k} \cdot \vec{r}_B}{c} \right) \right]$$

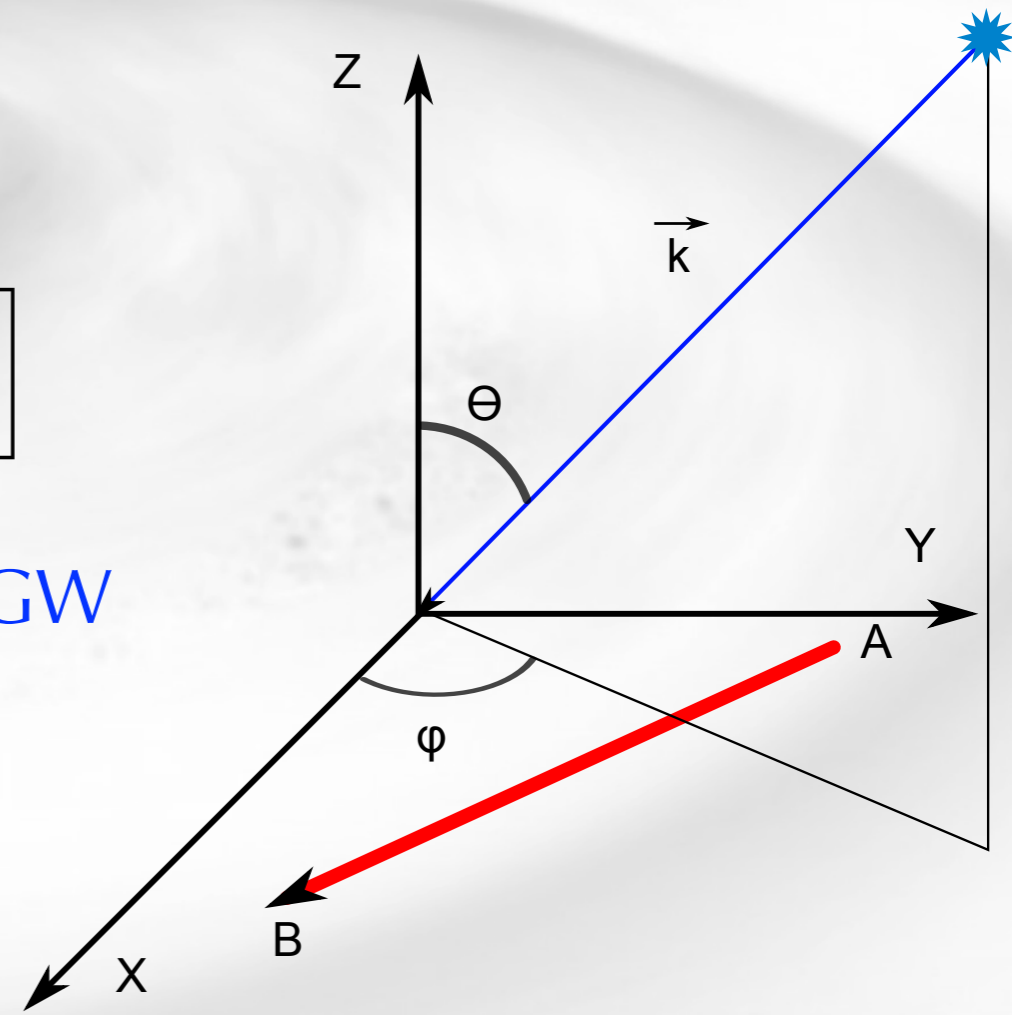




• For  $n_1=x, n_2=y, k=-z, \phi=0$

• i.e. Michelson interferometer with the source direction perp. to arms plane.

$$\xi_{+,1} = +1; \xi_{\times,1} = 0; \left. \frac{\delta\nu}{\nu_0} \right|_{2ways,1}(t) = \frac{1}{2} \left[ h_+(t) - h_+\left(t - \frac{2L}{c}\right) \right]$$

$$\xi_{+,2} = -1; \xi_{\times,1} = 0; \left. \frac{\delta\nu}{\nu_0} \right|_{2ways,2}(t) = -\frac{1}{2} \left[ h_+(t) - h_+\left(t - \frac{2L}{c}\right) \right]$$

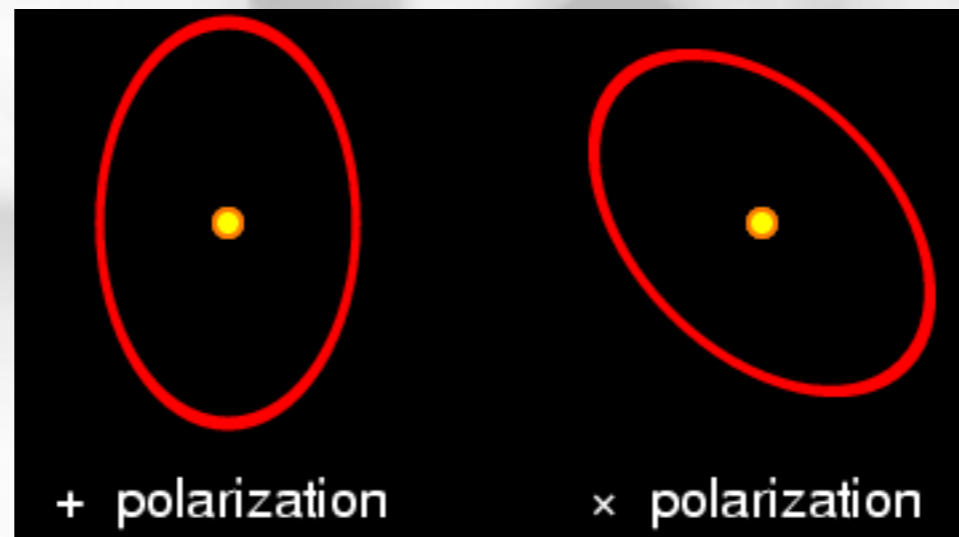

$$\left. \frac{\delta\nu}{\nu_0} \right|_{interf}(t) = \left. \frac{\delta\nu}{\nu_0} \right|_{2ways,1}(t) - \left. \frac{\delta\nu}{\nu_0} \right|_{2ways,2}(t) = h_+(t) - h_+\left(t - \frac{2L}{c}\right)$$


$$\Rightarrow \left. \frac{\delta\tilde{\nu}}{\nu_0} \right|_{interf}(f) = \tilde{h}_+(f) \left( 1 - e^{-2i\pi f \frac{2L}{c}} \right) = \tilde{h}_+(f) 2i \sin \frac{2\pi f L}{c} e^{-2i\pi f \frac{L}{c}}$$

$$\Phi(t) = 2\pi \int \nu(t) dt \Rightarrow \delta\tilde{\Phi}\Big|_{interf}(f) = \nu_0 \frac{\delta\tilde{\nu}(f)}{i \cdot f} = 2\pi \times \tilde{h}_+(f) \frac{2L}{\lambda} \text{sinc}\left(\frac{2\pi f L}{c}\right) e^{-2i\pi f \frac{L}{c}}$$

- 🚀 Cut-off frequency at  $f_c = c/2L$ 
  - 🚀 Correspond to more than 1 oscillation in  $L$
  - 🚀 Space based ( $L=2.5$  Mkm)  $\Rightarrow f_c \sim 60$  mHz
- 🚀 At low frequencies ( $f \ll f_c$ ) :



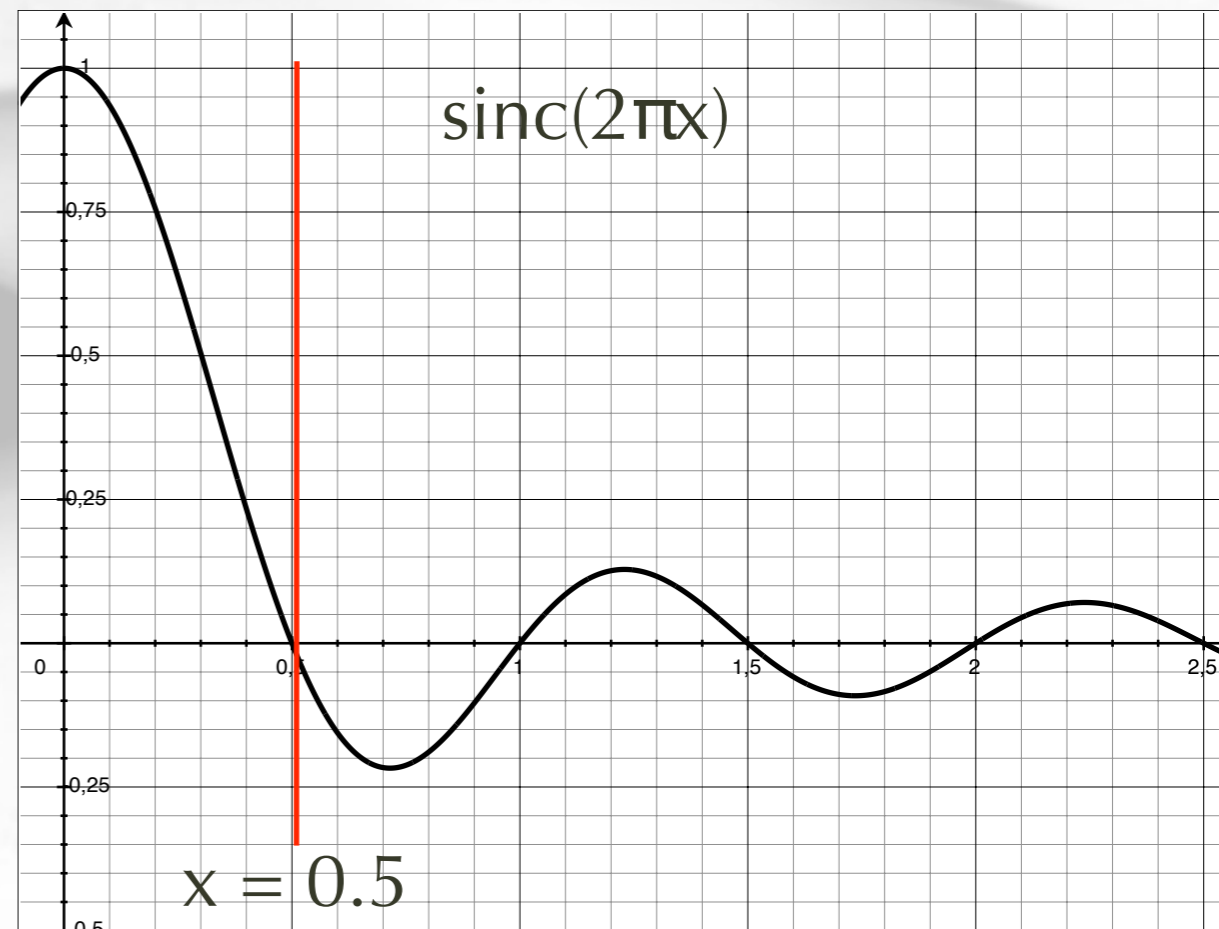

$$\delta\tilde{\Phi}\Big|_{interf}(f) \approx 2\pi \times \tilde{h}_+(f) \frac{2L}{\lambda} e^{-2i\pi f \frac{L}{c}}$$

$$\delta\Phi\Big|_{interf}(t) \approx 2\pi \times h_+\left(t - \frac{L}{c}\right) \frac{2L}{\lambda}$$







## LISA-type response in ecliptic coordinates

-  Neglecting Doppler effects (relative velocity w.r.t the source) and constellation deformations
-  Time modulation of the antenna pattern  $\rightarrow$  localization of the source
  -  Also possible at a given time from Doppler shifts
-  The 3 links allow to disentangle polarizations

$h_+$

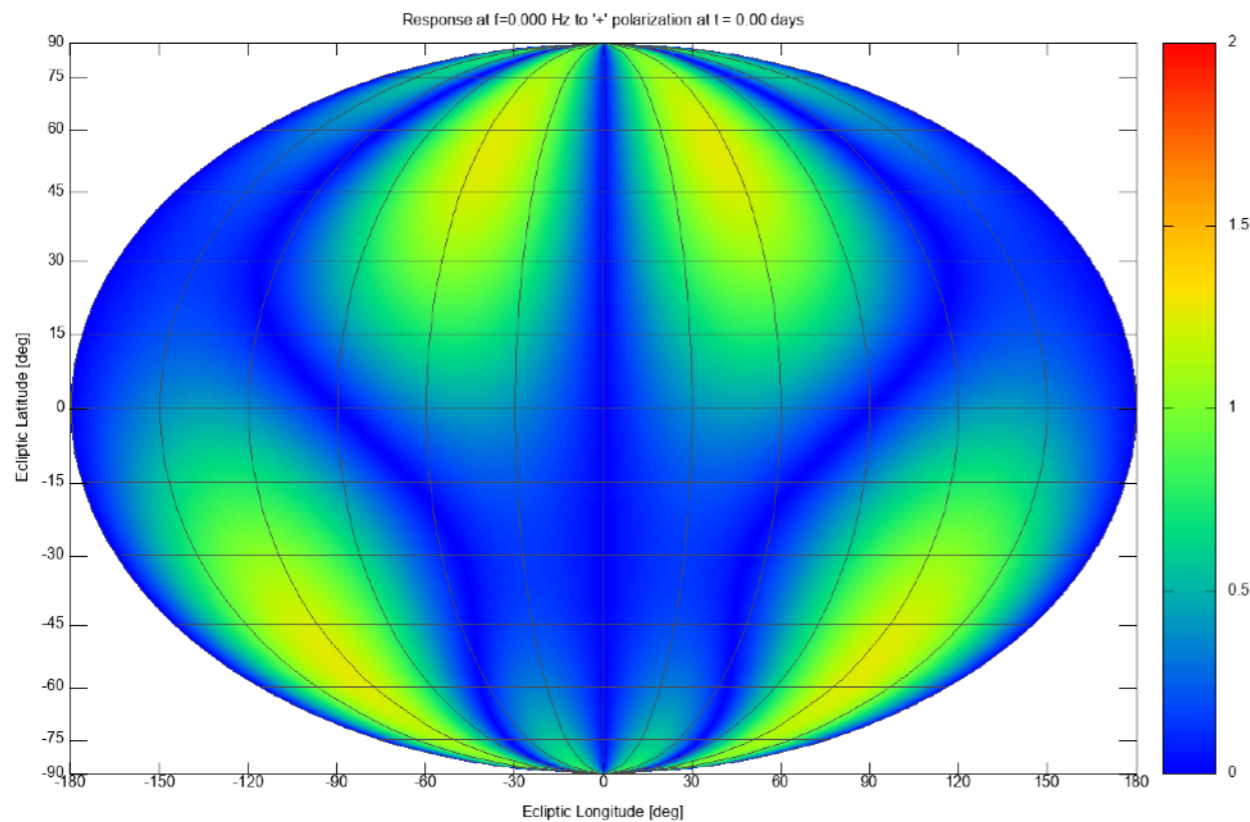

$h_x$

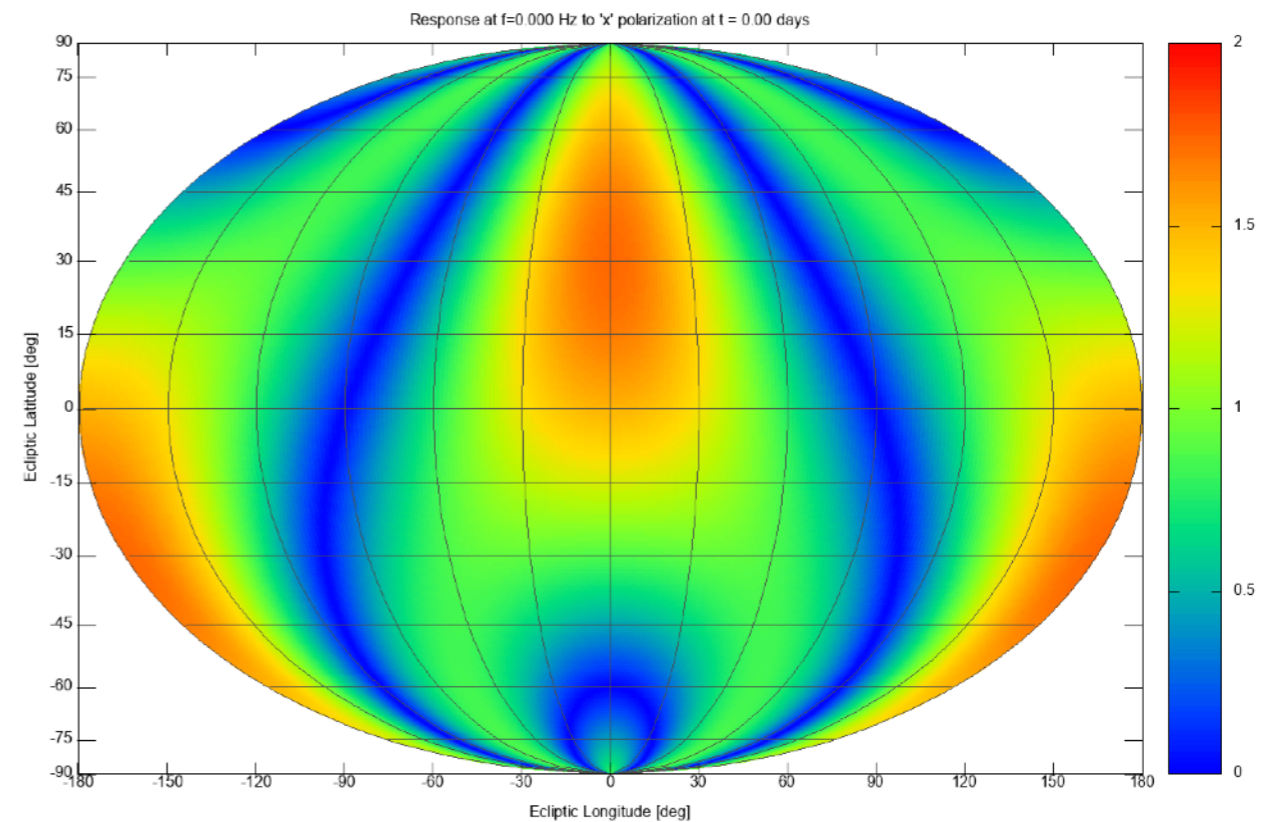


## LISA response in ecliptic coordinates


- Neglecting Doppler effects (relative velocity w.r.t the source) and constellation deformations
- Attenuation of the response with wave frequency

### Unpolarized

Response at  $f=0.001$  Hz to unpolarized GW at  $t = 0.00$  days

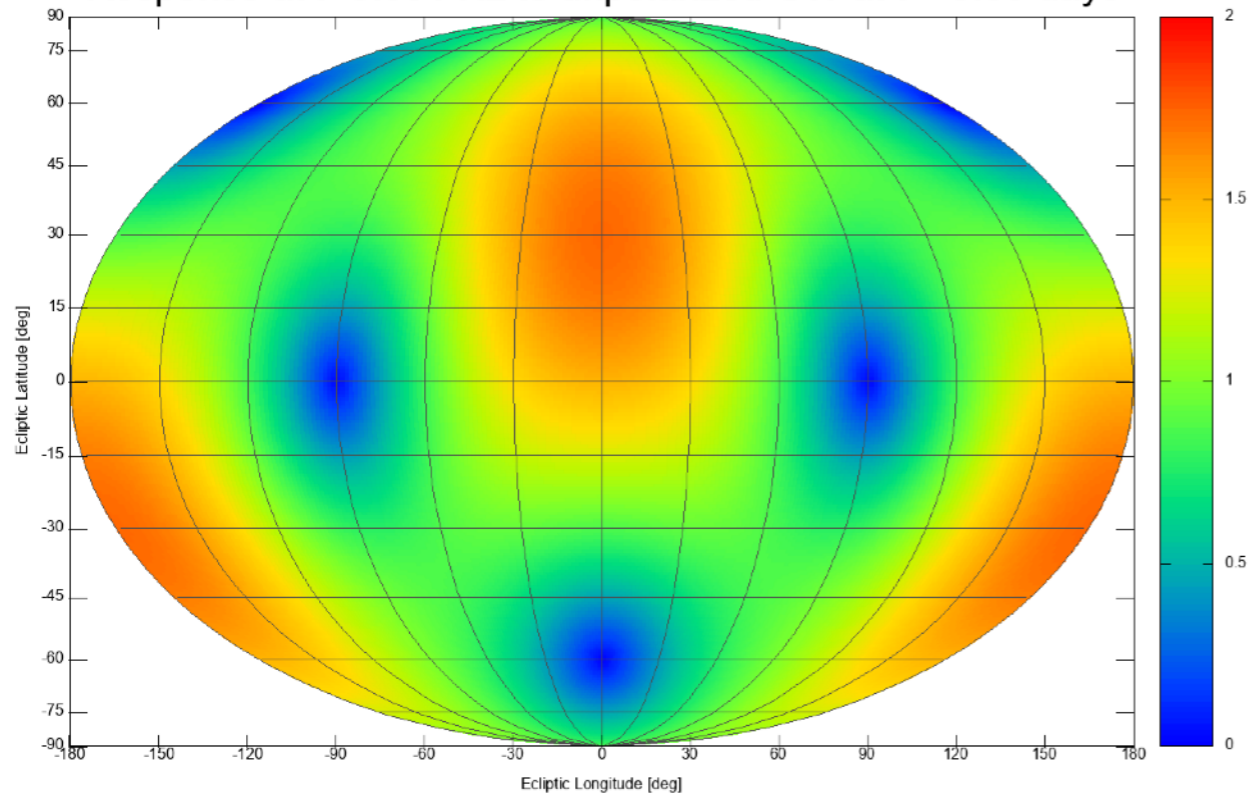

Réponses moyennes LISALog

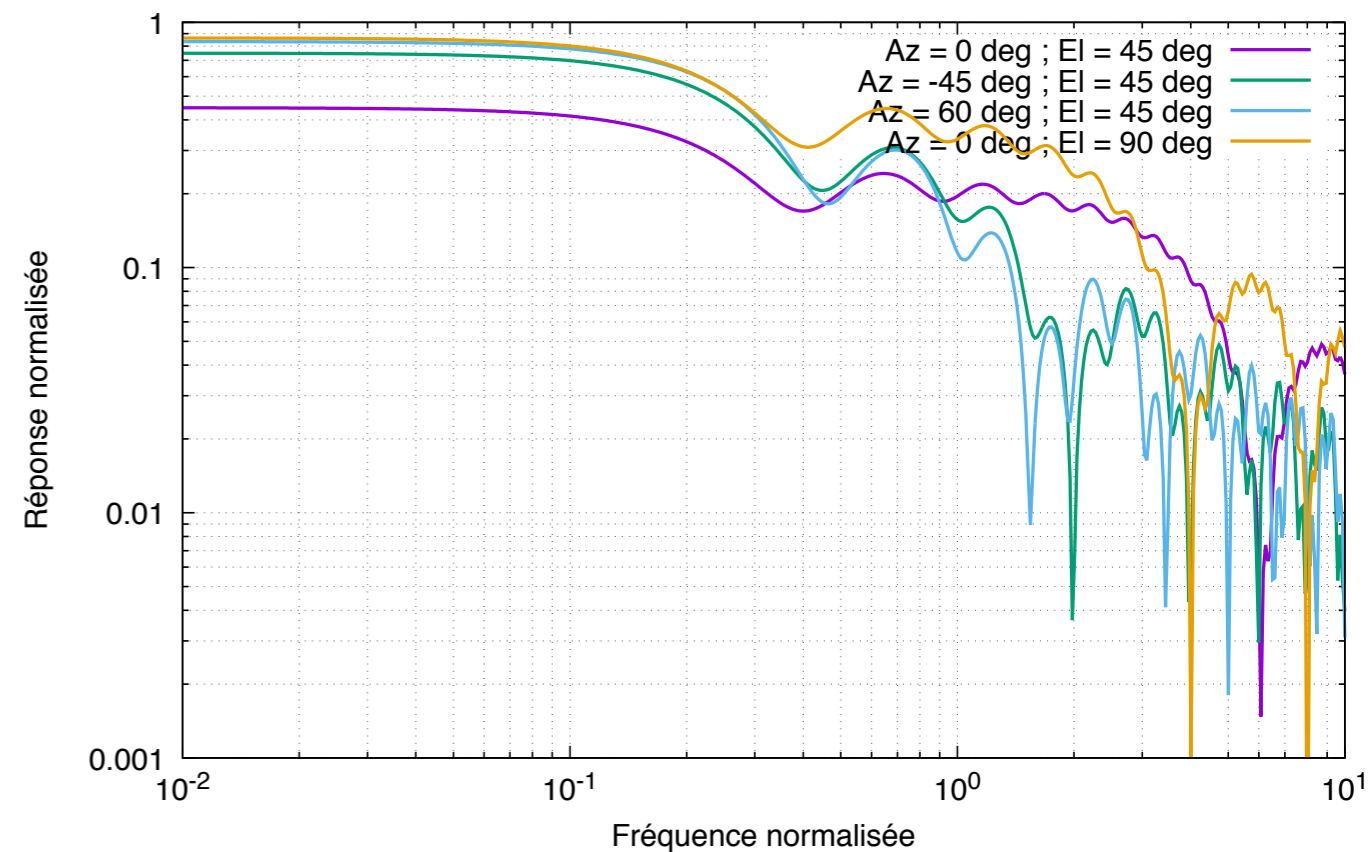



## 🚀 Mission constraints

- 🚀 Stable constellation over 12+ years
- 🚀 Constant inter-S/C distance :  $\sim 2.5$  Mkm
- 🚀 Relative velocity between S/C :  $< \sim 20$  m/s (20 MHz)
  - 🚀 Set by the photoreceiver bandwidth
- 🚀 Distance to Earth  $< 65$  Mkm
  - 🚀 Set by the required data rate with Earth
- 🚀 Pure inertial orbits
  - 🚀 Solar pressure compensation, no orbit correction

🚀 —> Do such orbits exists ?

🚀 Yes for a purely central force (i.e only Sun attraction)

- 🚀 Inclination of the constellation on the ecliptic :  $\sim 60.3^\circ$
- 🚀 Relative velocities :  $< 2$  m/s (2 MHz)
- 🚀 Armlength :  $2.5$ Mkm  $\pm 12\ 000$  km


🚀 However ...

- 🚀 Gravitational perturbations from other celestial objects (mostly Earth+Moon)
- 🚀 —> Keplerian solution not suitable
- 🚀 —> Requires numerical optimisation

# Orbital stability ?


## Trailing angle of LISA

Trailing angle -  $t = 0$  days / trace = 365 days

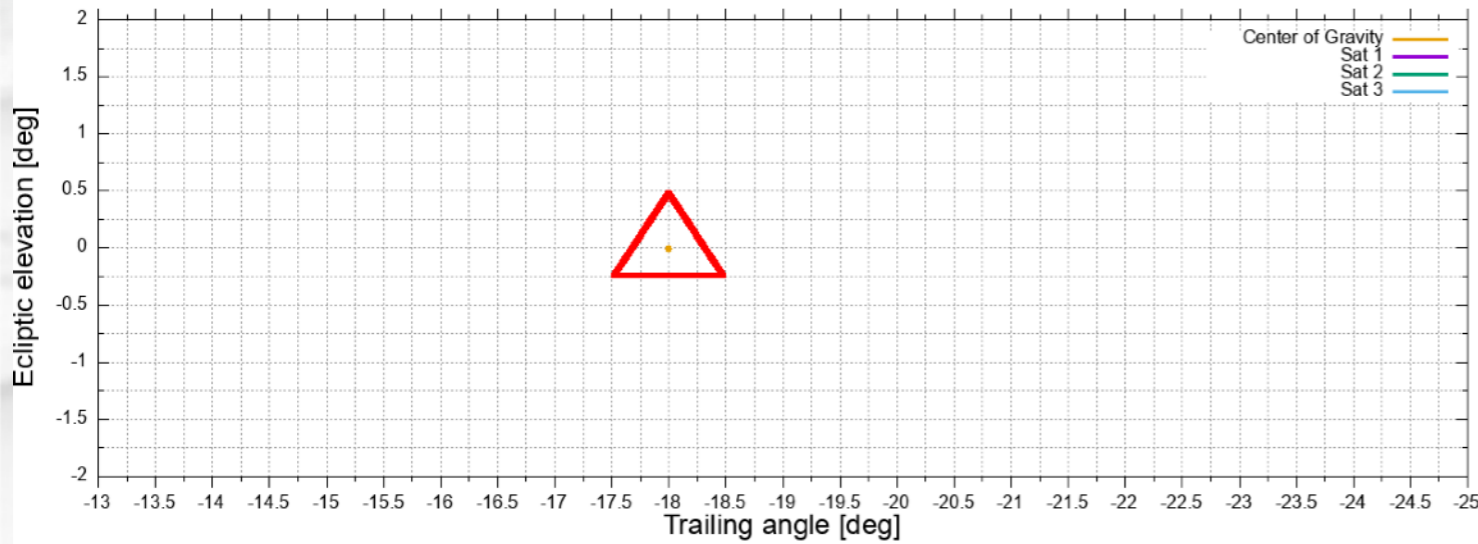


Constellation shape (L6A2.5M12E65W6CInfS1600) -  $t = 0$  days / t

## Constellation shape

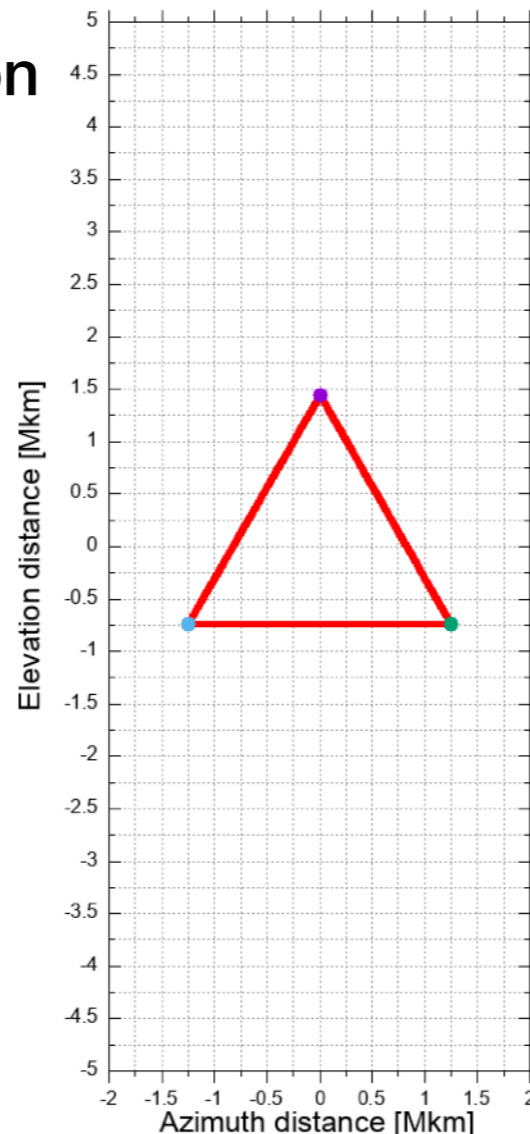


🚀 Using 'optimal' keplerian parameters in presence of Earth gravitational perturbations

## Armlength (deviation to 2.5 Mkm)

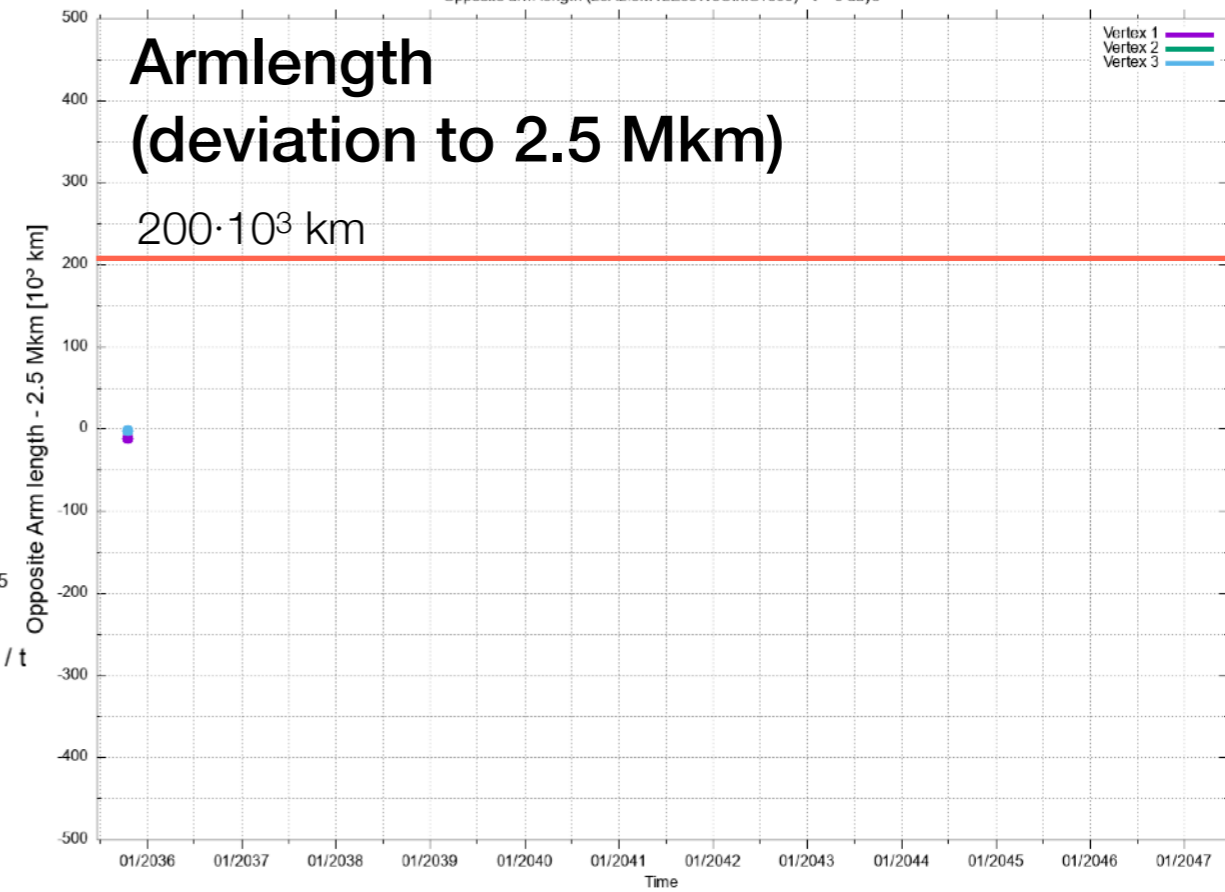


## Doppler effect

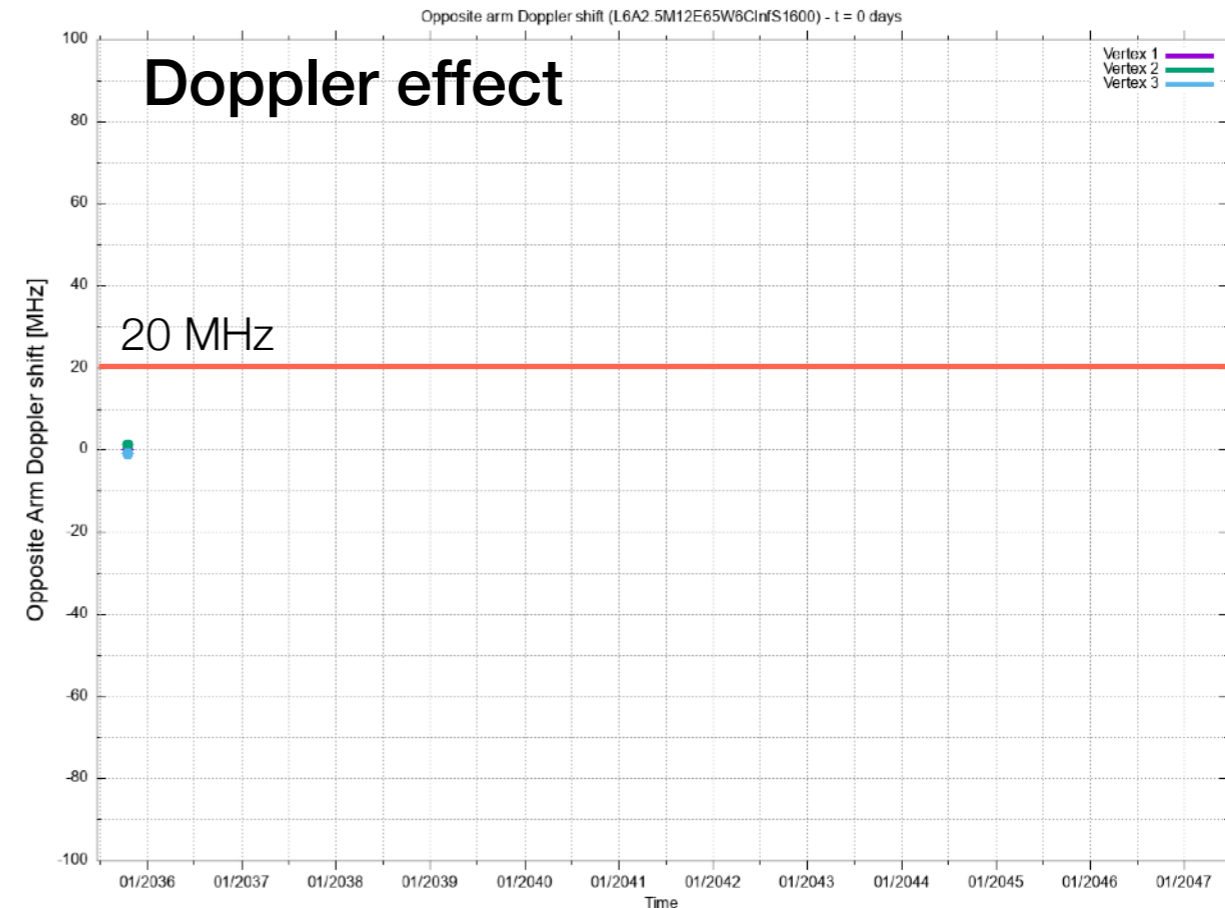




# Trailing angle of LISA

Trailing angle - t = 0 days / trace = 365 days


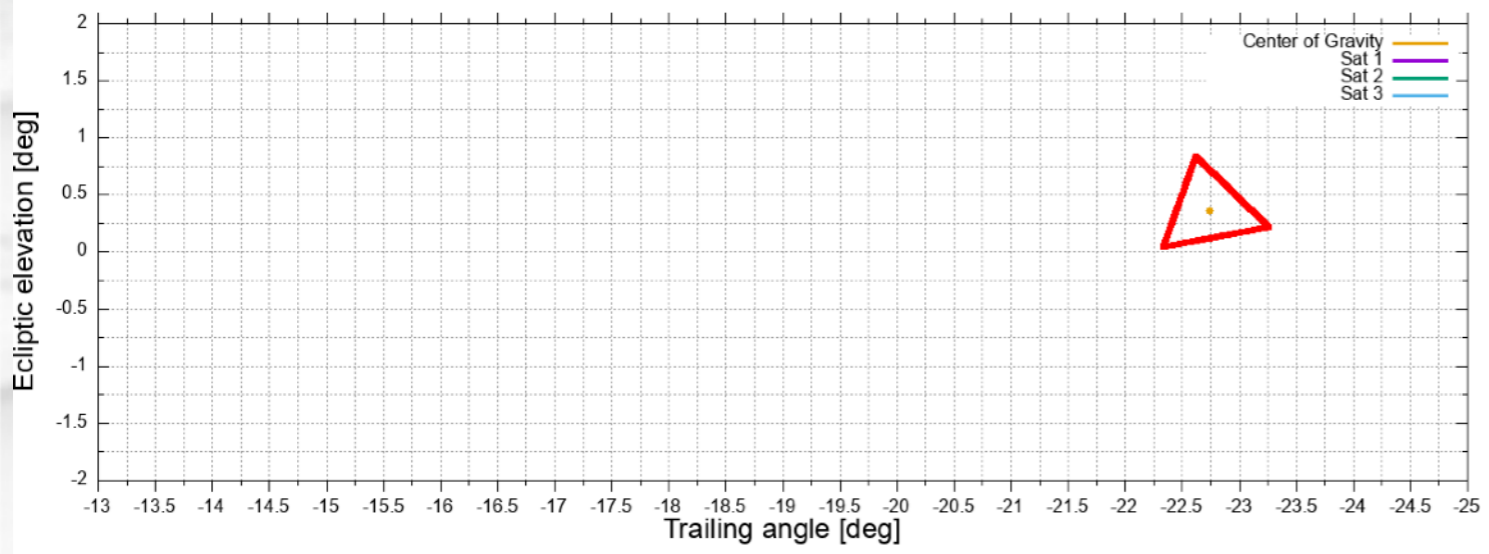


Constellation shape (L6A2.5M12E65W6CInfS1600) - t = 0 days / t

## Constellation shape

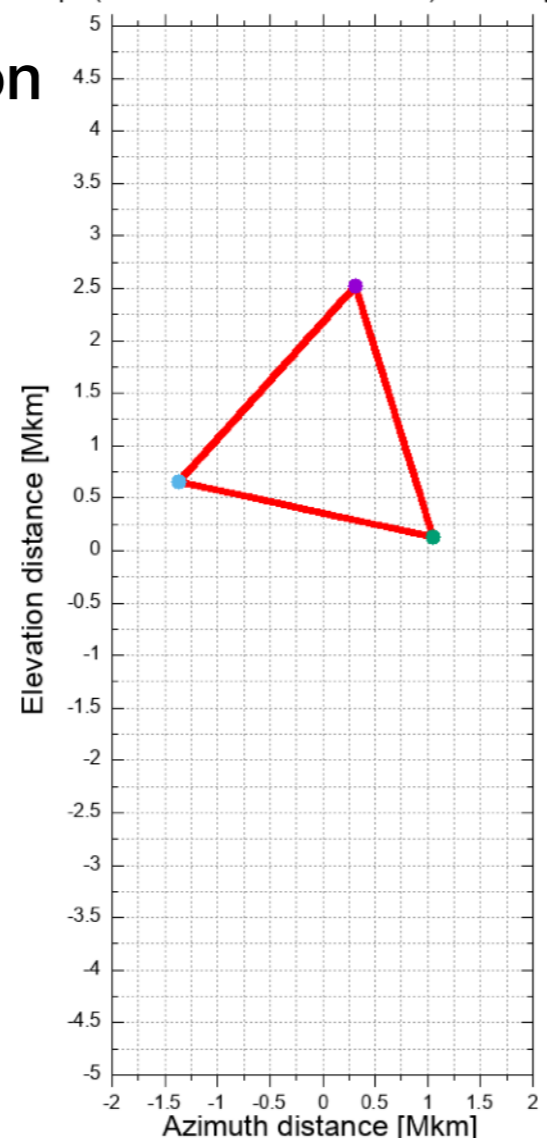



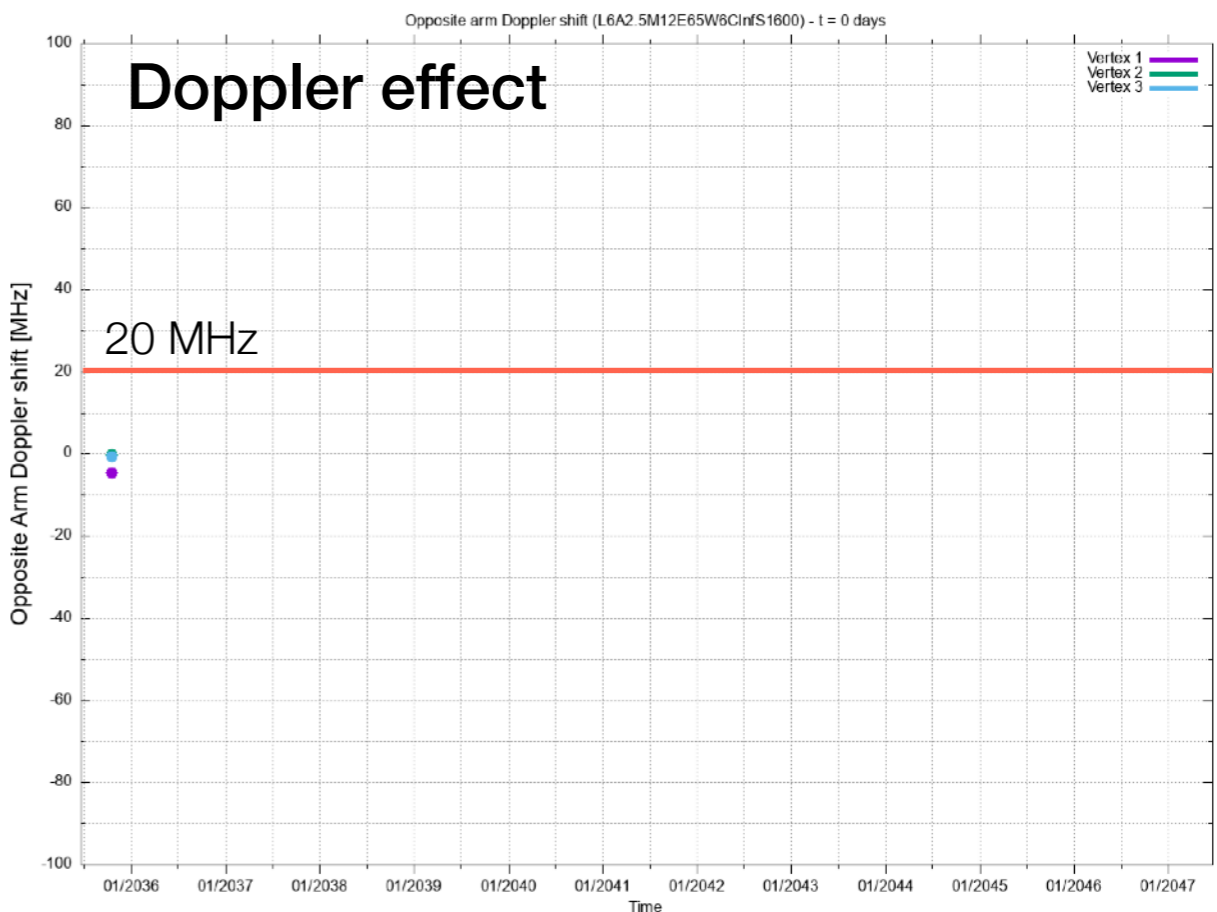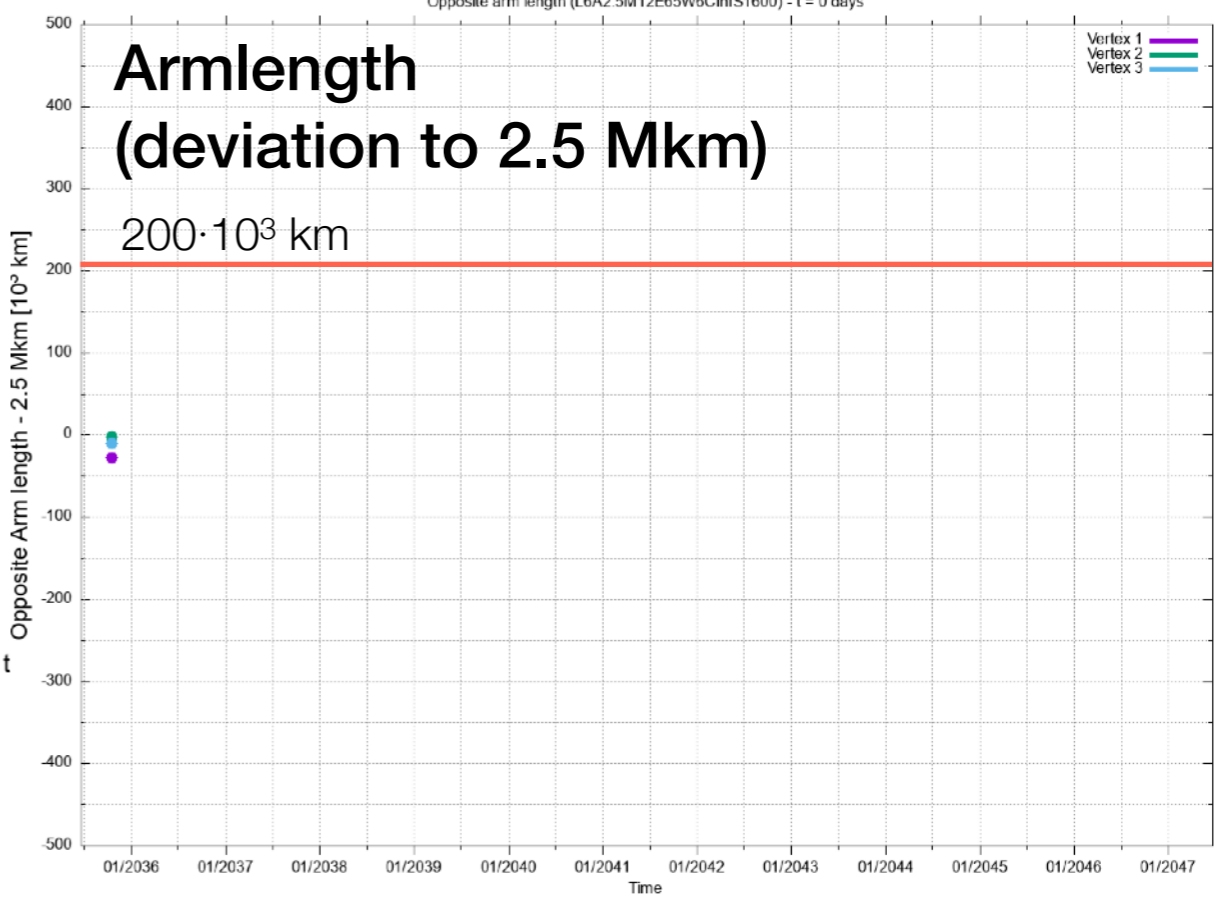


# Orbital stability ?





- After numerical optimization of the orbital parameters
- Yes, it works ;-)

# Orbital stability ?

## Sensitivity to local disturbances

-  Constraints on initial S/C positioning and velocity
  -   $\sim 50$  km and 1 cm / s max
-  Constraint on residual gravitational field at test mass location
  -   $\sim 1,5$  nm/s<sup>2</sup> max
  -  Equivalent to 10 kg at 60 cm

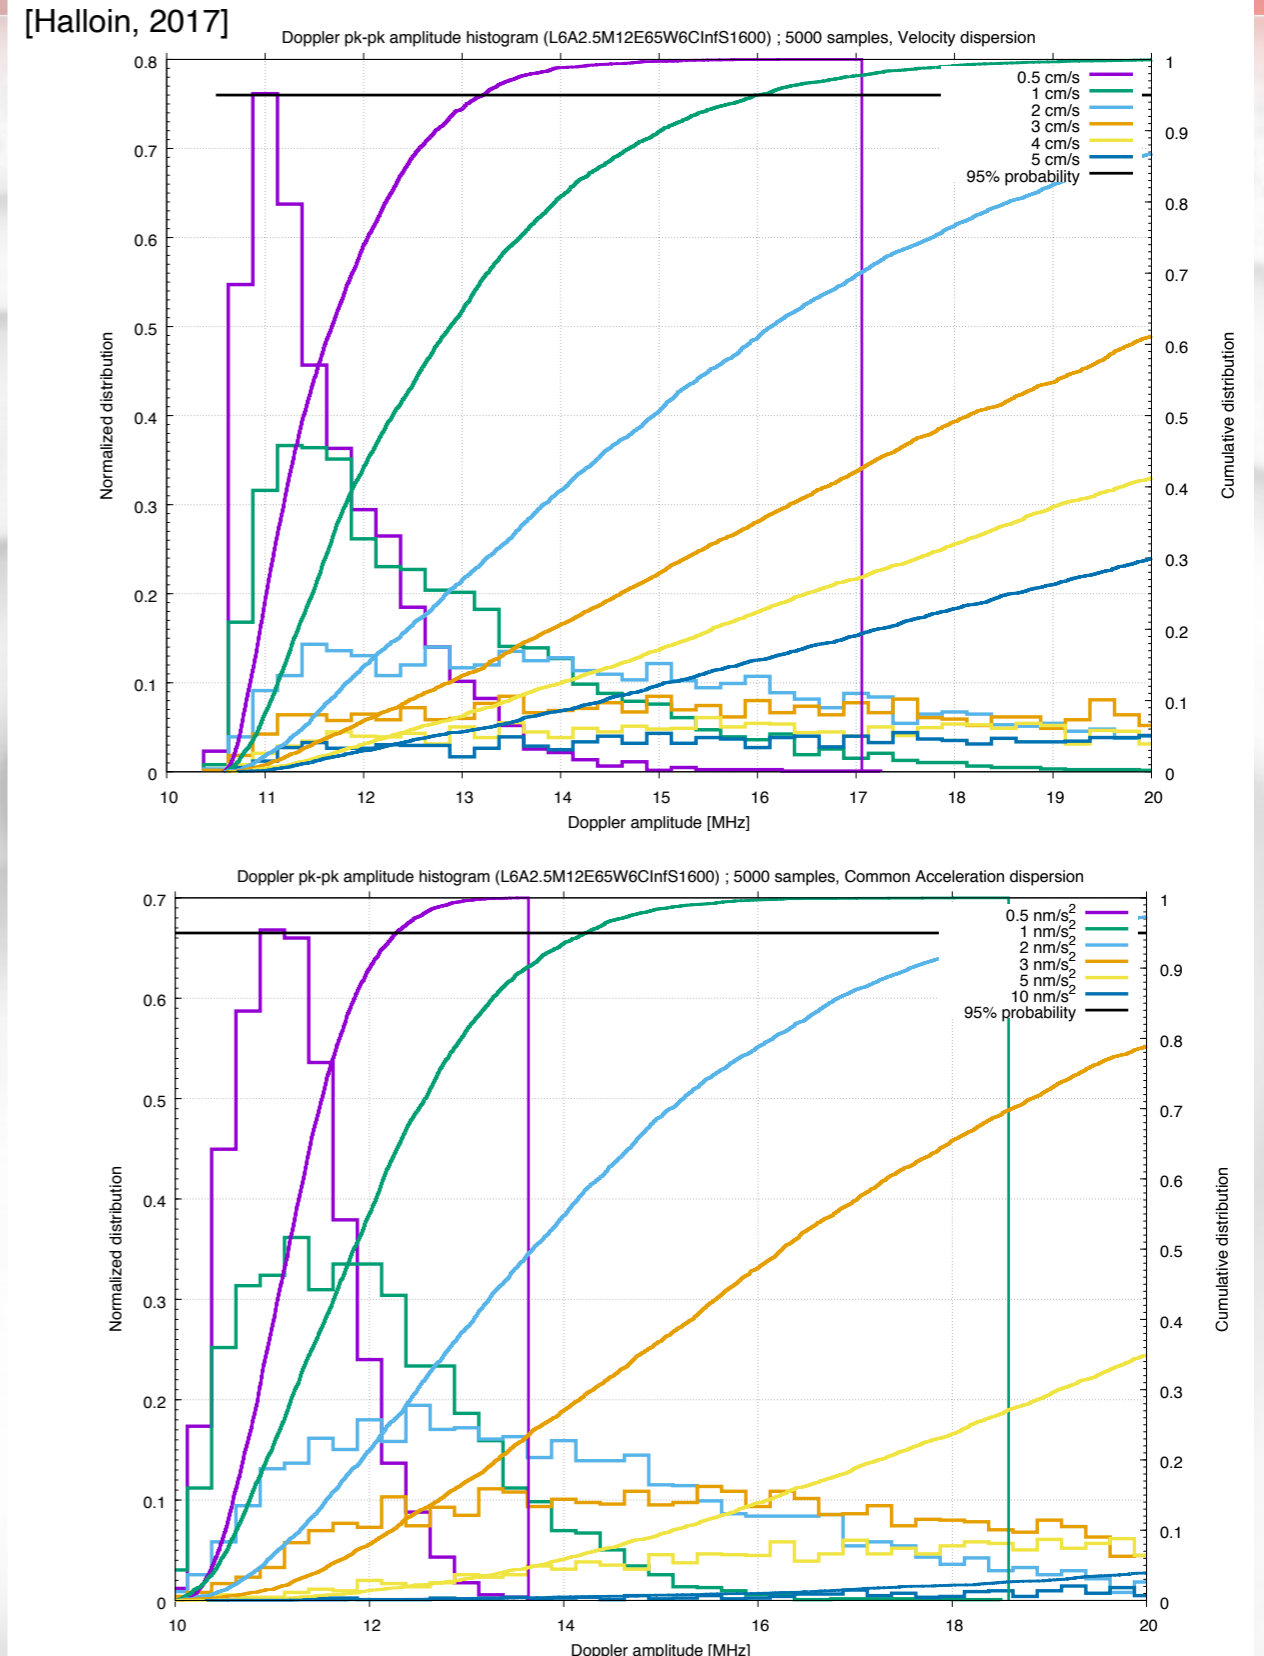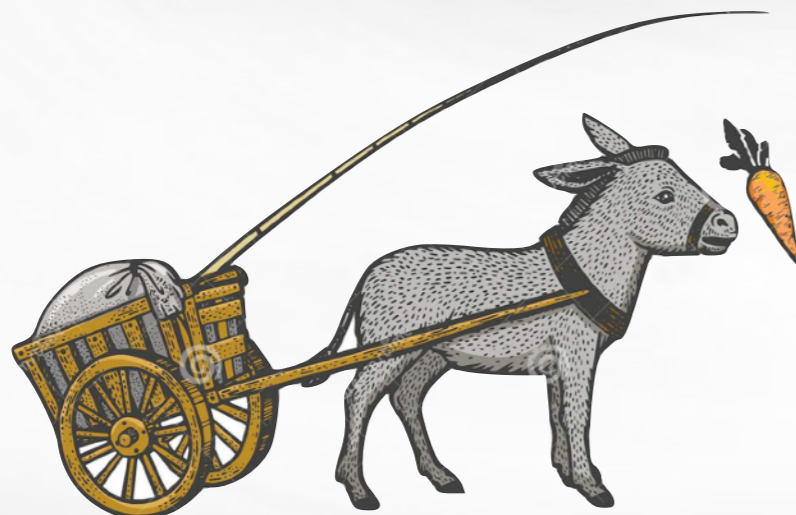



- Frequency instability of a laser beam couples to phase noise for unequal armlength



$$\begin{aligned}\delta\Phi &= \Phi(t - 2L/c) - \Phi(t - 2(L - \Delta L)/c) \\ &\approx \frac{2\Delta L}{c} \frac{\partial\Phi}{\partial t}(t - 2L/c) = \frac{2\Delta L}{c} 2\pi\delta\nu \\ \Rightarrow \delta x &= \lambda \frac{\delta\Phi}{2\pi} = 2\Delta L \frac{\delta\nu}{\nu}\end{aligned}$$

- For space-based detectors :
  - $\Delta L \sim 10\,000$  km (inertial orbits)
  - $\Rightarrow \delta\nu \sim 10^{-6}$  Hz/ $\sqrt{\text{Hz}}$  in the range [0.1 mHz : 10 Hz]

- Best 'transportable' stable laser at  $\sim 10$  Hz/ $\sqrt{\text{Hz}}$  ...
  - In LISA : ultra-stable Fabry-Perot cavity


- > How to reduce the frequency noise by 7 orders of magnitude ?
  - Time Delay Interferometry

- Separate measurement of the phase on both arm

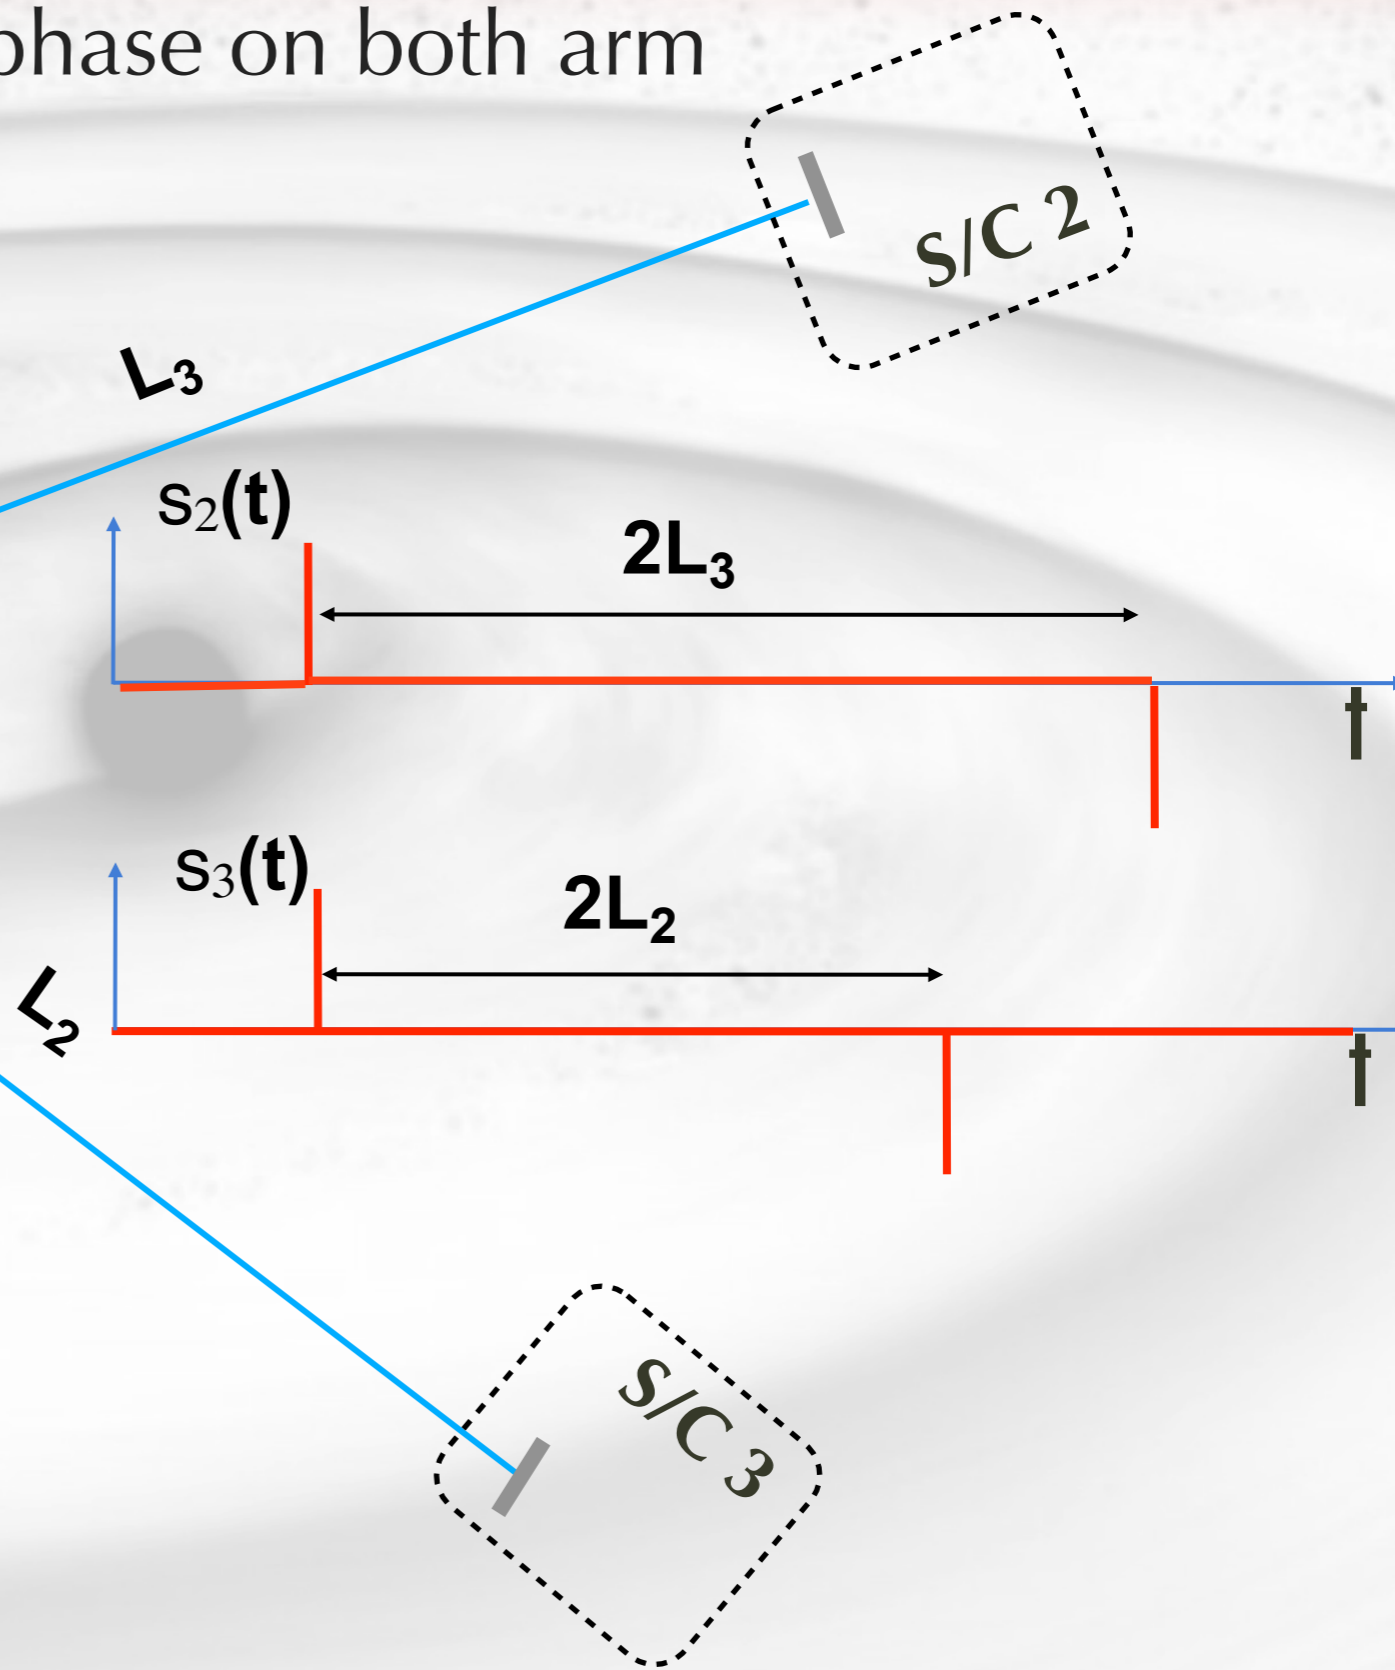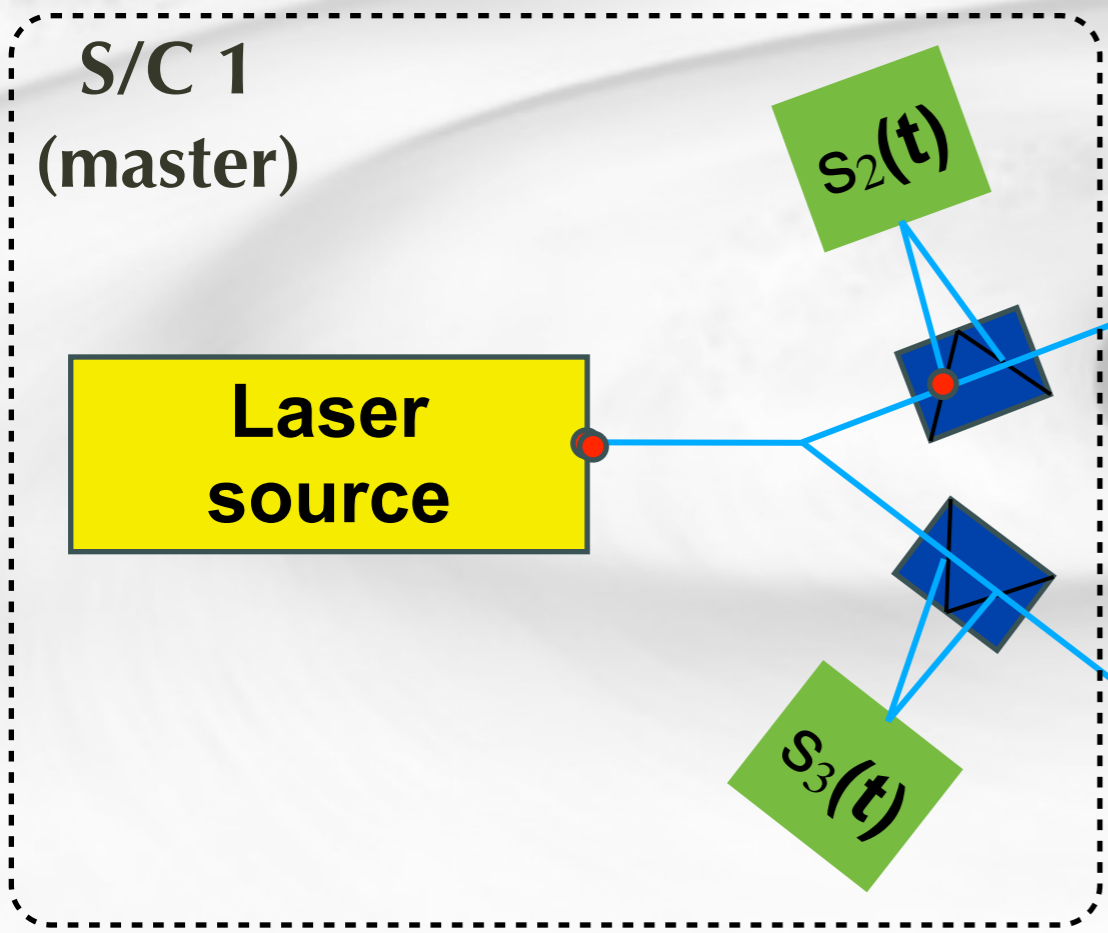



# Time Delay Interferometry

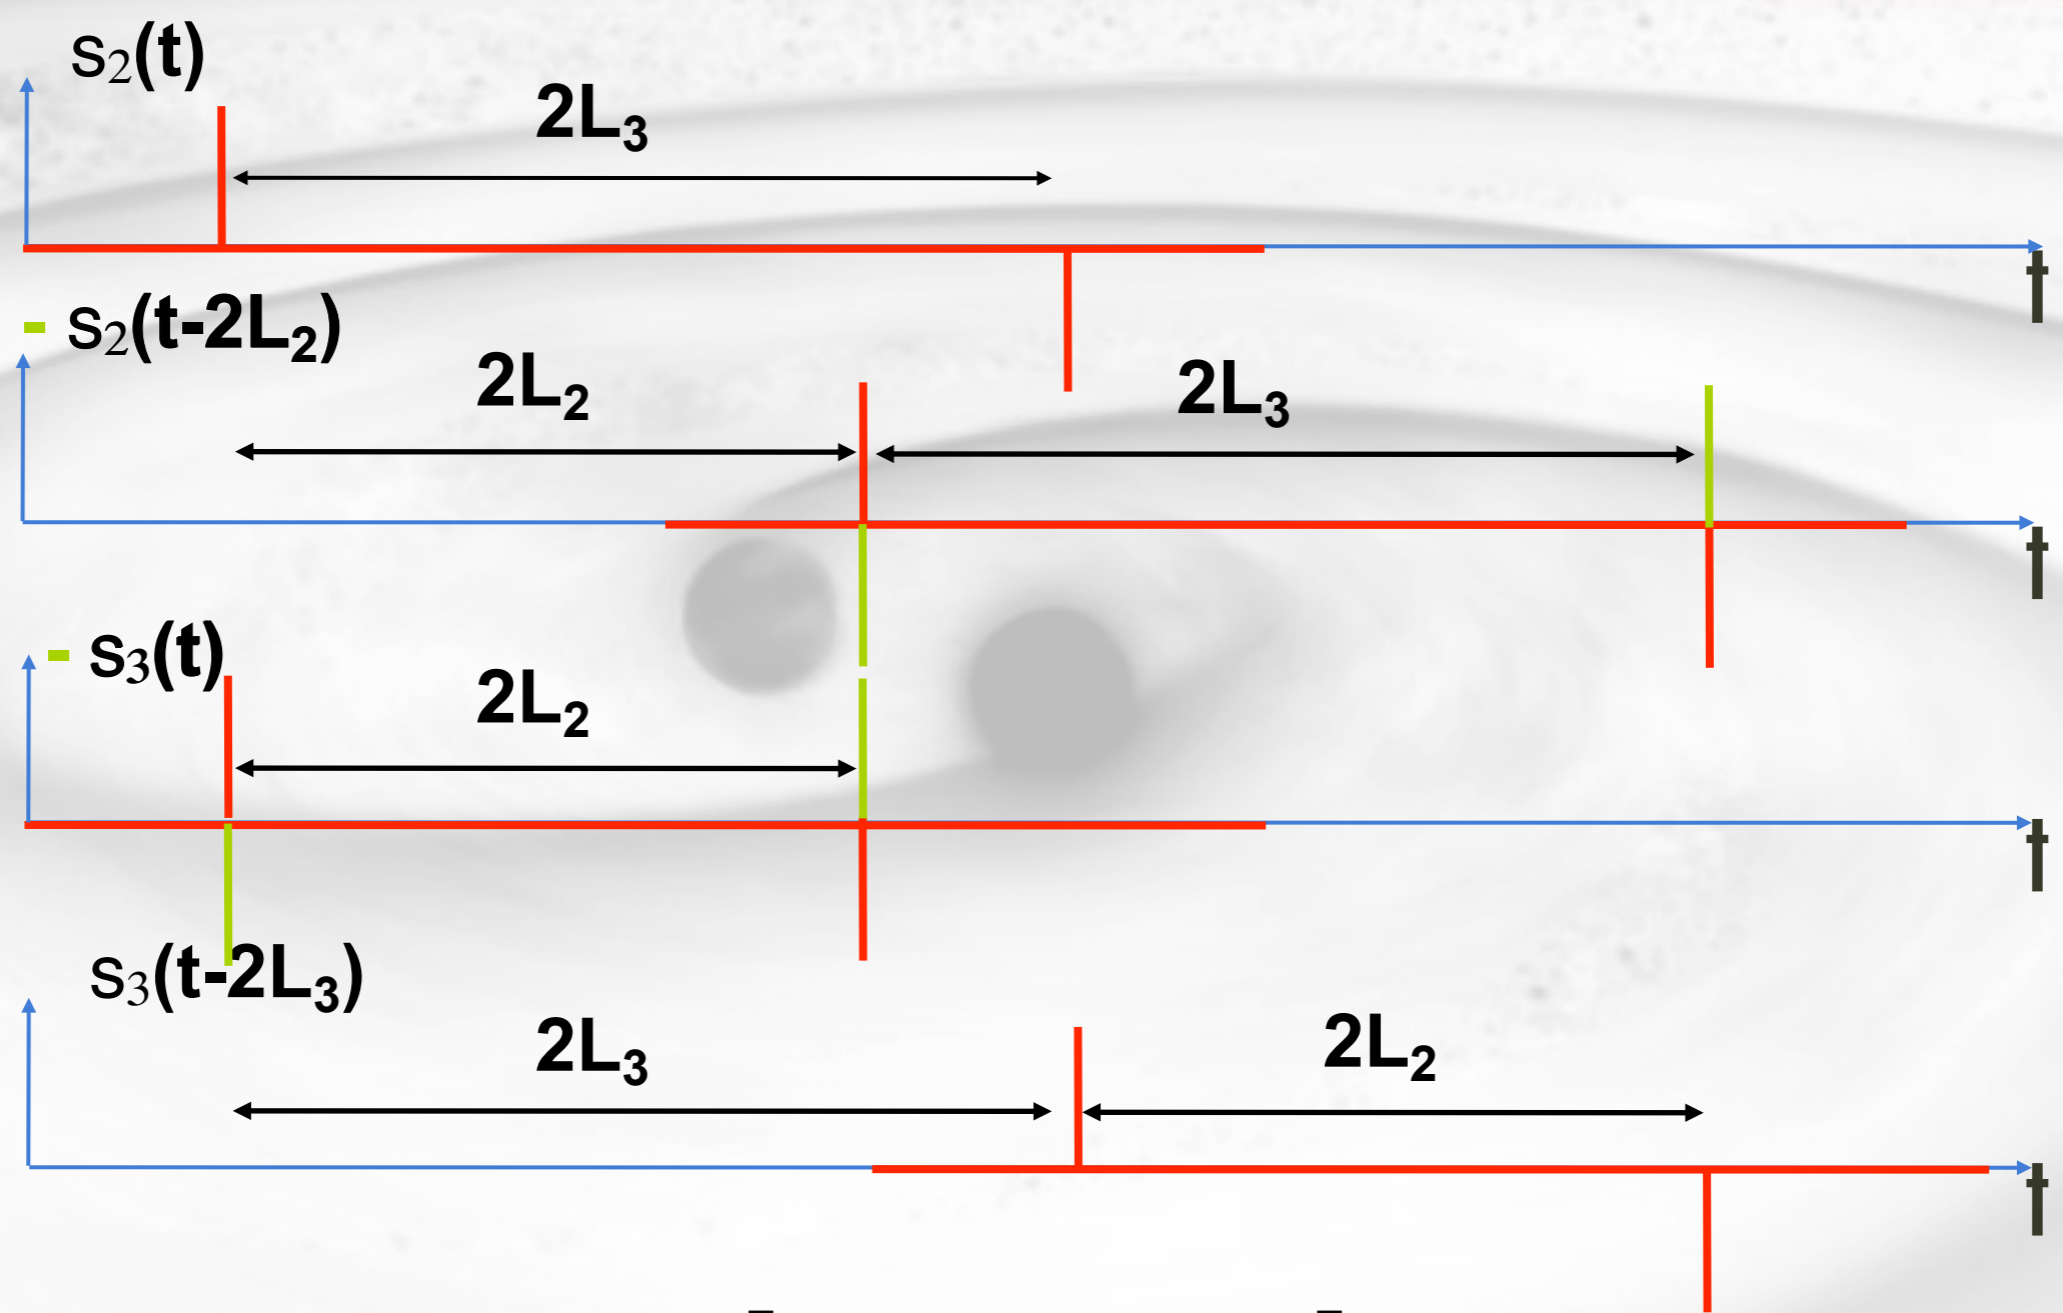


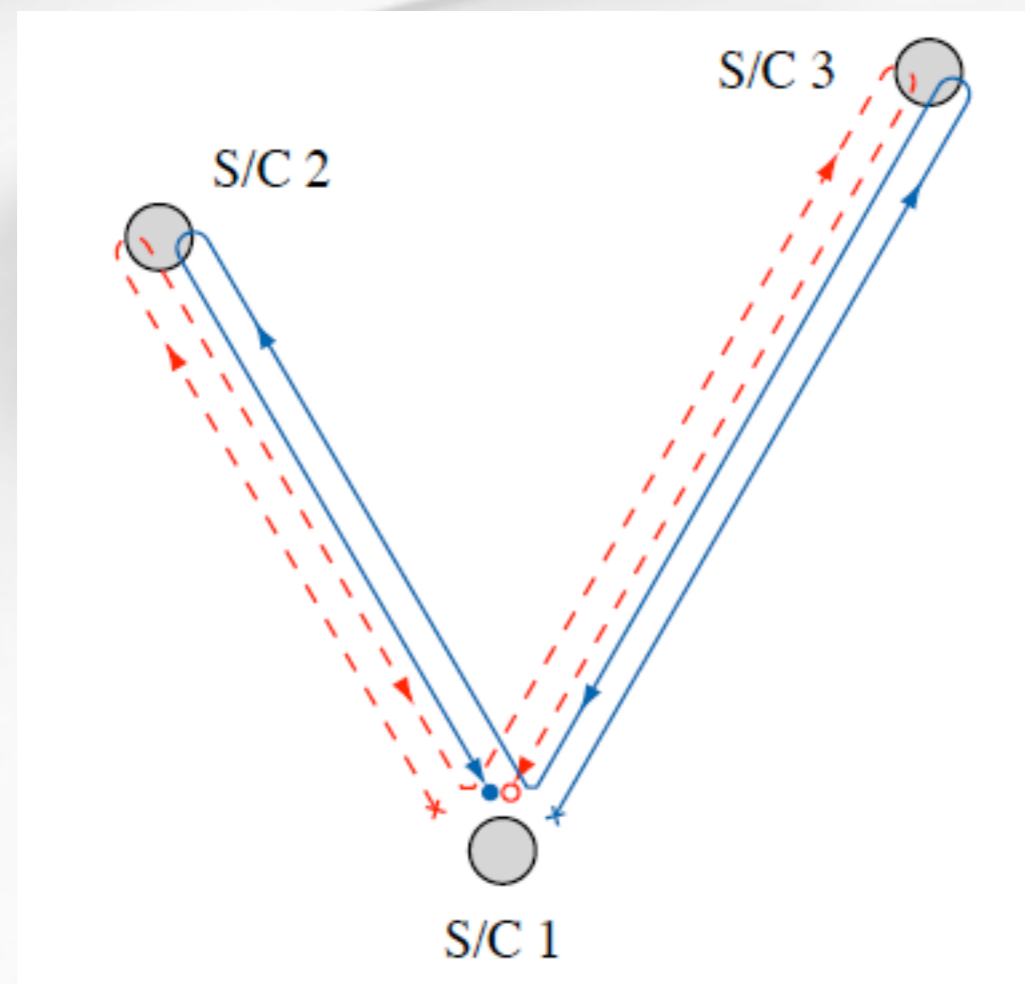
$$s_2(t) + s_3(t-2L_3) - [s_3(t) + s_2(t-2L_2)] = 0 \dots$$

$$s_2(t) + s_3(t-2L_3) - [s_3(t) + s_2(t-2L_2)] = 0 \dots$$


- The arm length difference is replaced by the uncertainty on the *knowledge* of the armlength
- Cancellation of propagated noises (mostly laser phase noise)
- Transfer function shaping (no signal at  $f$  multiple of  $1/(2L) \sim 60$  MHz )
- $\Rightarrow$  Requires the knowledge of :
  - S/C distances with a few meters accuracy
  - Relative clock drifts at a few ns




- 
 More sophisticated combinations exist to account for the non-reciprocity of the delays (Sagnac effect) and the time-varying arm-length (S/C relative velocities)



Fixed, unequal, non-reciprocal propagation delays

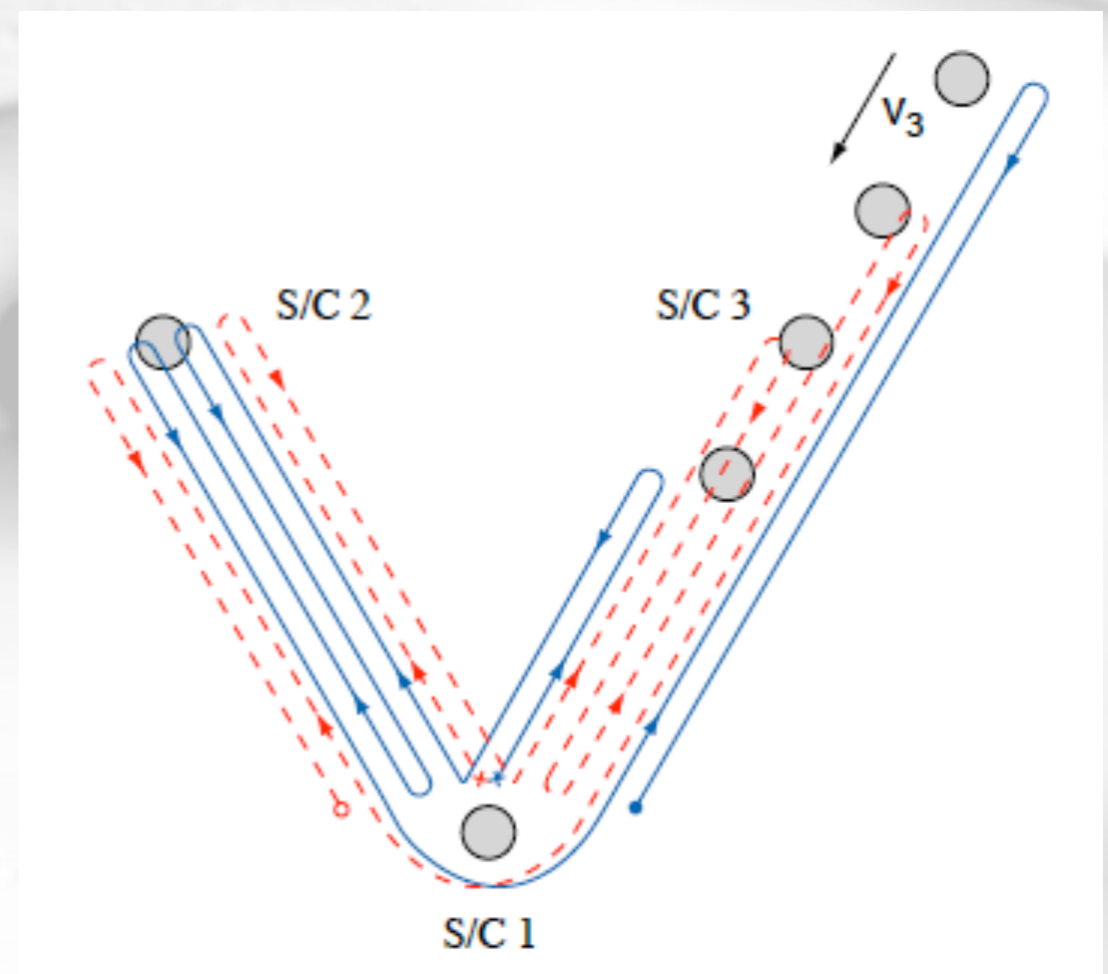

Time-varying, unequal, non-reciprocal propagation delays

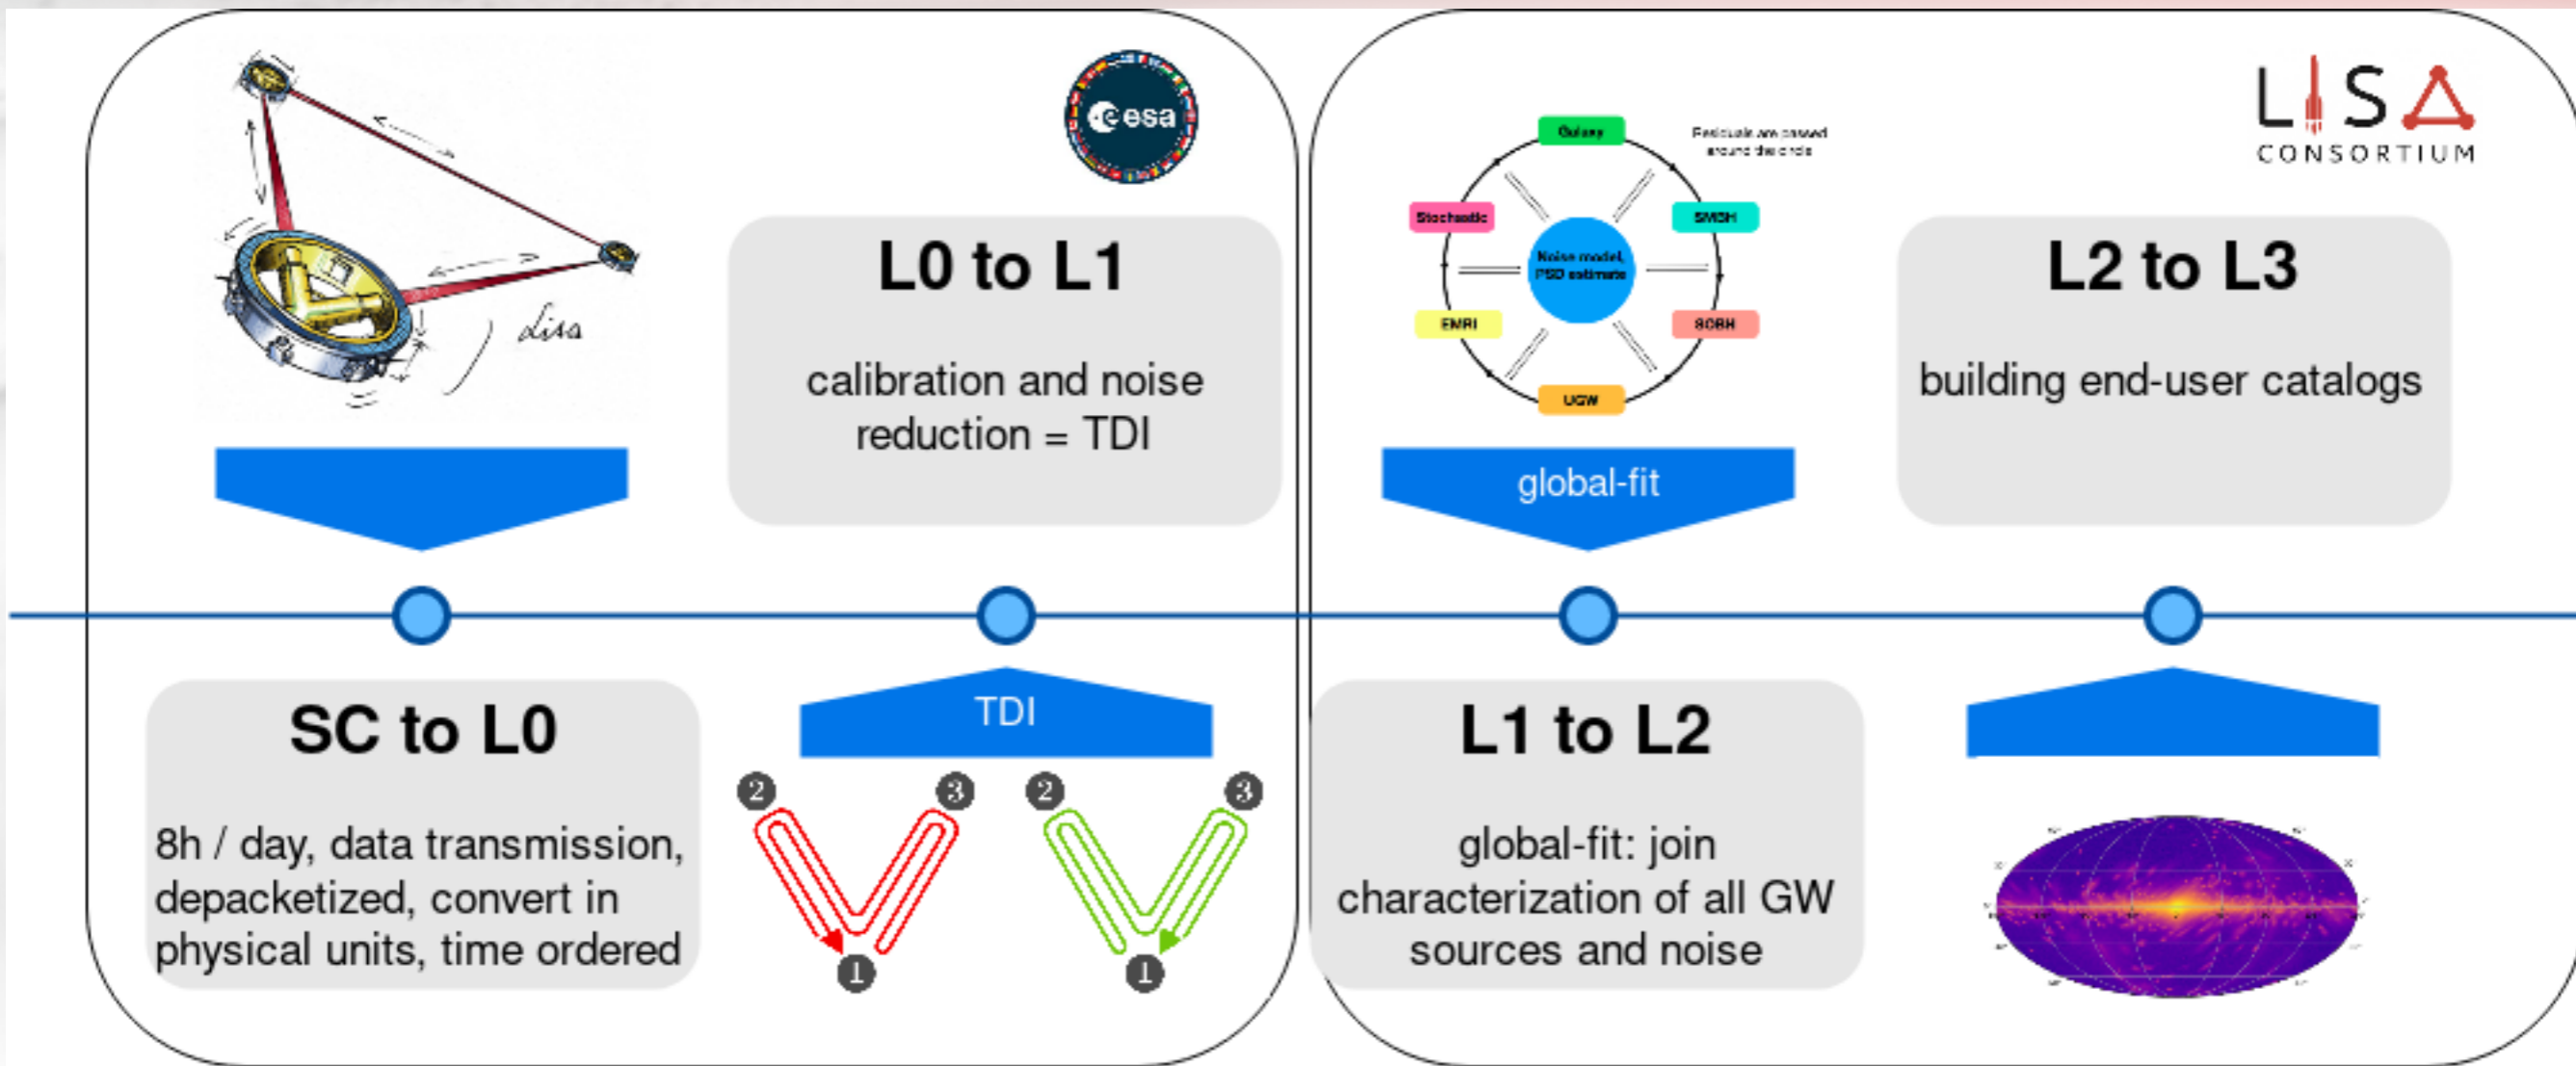

- SC to L1 = MOC+SOC = ESA leadership
- L1 to L3 = DDPC = LISA consortium through national agencies
- public data release by ESA (alerts, catalog, ...)



# Key performance values

- 6 laser links, 2.5 Mkm
  - Measurement bandpass : [0.1 mHz : 1 Hz]
- Drag free performance :  $3 \text{ fm}\cdot\text{s}^{-2}/\sqrt{\text{Hz}}$
- Telescopes:
  - ~300 mm diameter,
  - Internal pathlength stability: ~ a few pms/ $\sqrt{\text{Hz}}$
- Laser
  - Nd:YAG (1064 nm), 2 W emitted (received ~400 pW)
  - RIN :  $<10^{-8} /\sqrt{\text{Hz}}$  above 5 MHz
  - ~30 Hz/ $\sqrt{\text{Hz}}$
- Timing jitter in clock distribution: ~40 fs/ $\sqrt{\text{Hz}}$
- Absolute ranging accuracy: ~1 m
- Thermal stability (optical bench):  $< 10 \mu\text{K}/\sqrt{\text{Hz}}$  at 1 mHz
- Laser beam pointing jitter: ~5 nrad/ $\sqrt{\text{Hz}}$

- ❖ Free flying test mass subject to very low parasitic forces:
  - ❖ Drag free control of spacecraft (non-contacting spacecraft)
  - ❖ Low noise microthruster to implement drag-free
  - ❖ Large gaps, heavy masses with caging mechanism
  - ❖ High stability electrical actuation on cross degrees of freedom
  - ❖ Non contacting discharging of test-masses
  - ❖ High thermo-mechanical stability of S/C
  - ❖ Gravitational field cancellation
- ❖ Precision interferometric, local ranging of test-mass and spacecraft:
  - ❖ pm resolution ranging, sub-mrad alignments
  - ❖ High stability monolithic optical assemblies
- ❖ Precision million km spacecraft to spacecraft precision ranging:
  - ❖ High stability telescopes
  - ❖ High accuracy phase-meter
  - ❖ High accuracy frequency stabilization
  - ❖ Constellation acquisition
  - ❖ Precision attitude control of S/C



## Free flying test mass subject to very low parasitic forces:

- Drag free control of spacecraft (non-contacting spacecraft)
- Low noise microthruster to implement drag-free
- Large gaps, heavy masses with caging mechanism
- High stability electrical actuation on cross degrees of freedom
- Non contacting discharging of test-masses
- High thermo-mechanical stability of S/C
- Gravitational field cancellation

**Validated with  
LISA Pathfinder**

## Precision interferometric, local ranging of test-mass and spacecraft:

- pm resolution ranging, sub-mrad alignments
- High stability monolithic optical assemblies

## Precision million km spacecraft to spacecraft precision ranging:

- High stability telescopes
- High accuracy phase-meter
- High accuracy frequency stabilization
- Constellation acquisition
- Precision attitude control of S/C

## Free flying test mass subject to very low parasitic forces:

- Drag free control of spacecraft (non-contacting spacecraft)
- Low noise microthruster to implement drag-free
- Large gaps, heavy masses with caging mechanism
- High stability electrical actuation on cross degrees of freedom
- Non contacting discharging of test-masses
- High thermo-mechanical stability of S/C
- Gravitational field cancellation

**Validated with  
LISA Pathfinder**

## Precision interferometric, local ranging of test-mass and spacecraft:


- pm resolution ranging, sub-mrad alignments
- High stability monolithic optical assemblies

## Precision million km spacecraft to spacecraft precision ranging:


- High stability telescopes
- High accuracy phase-meter and frequency distribution
- High accuracy frequency stabilization (incl. TDI)
- Constellation acquisition and low jitter laser pointing
- Precision attitude control of S/C

**Ground-based  
demonstrators**



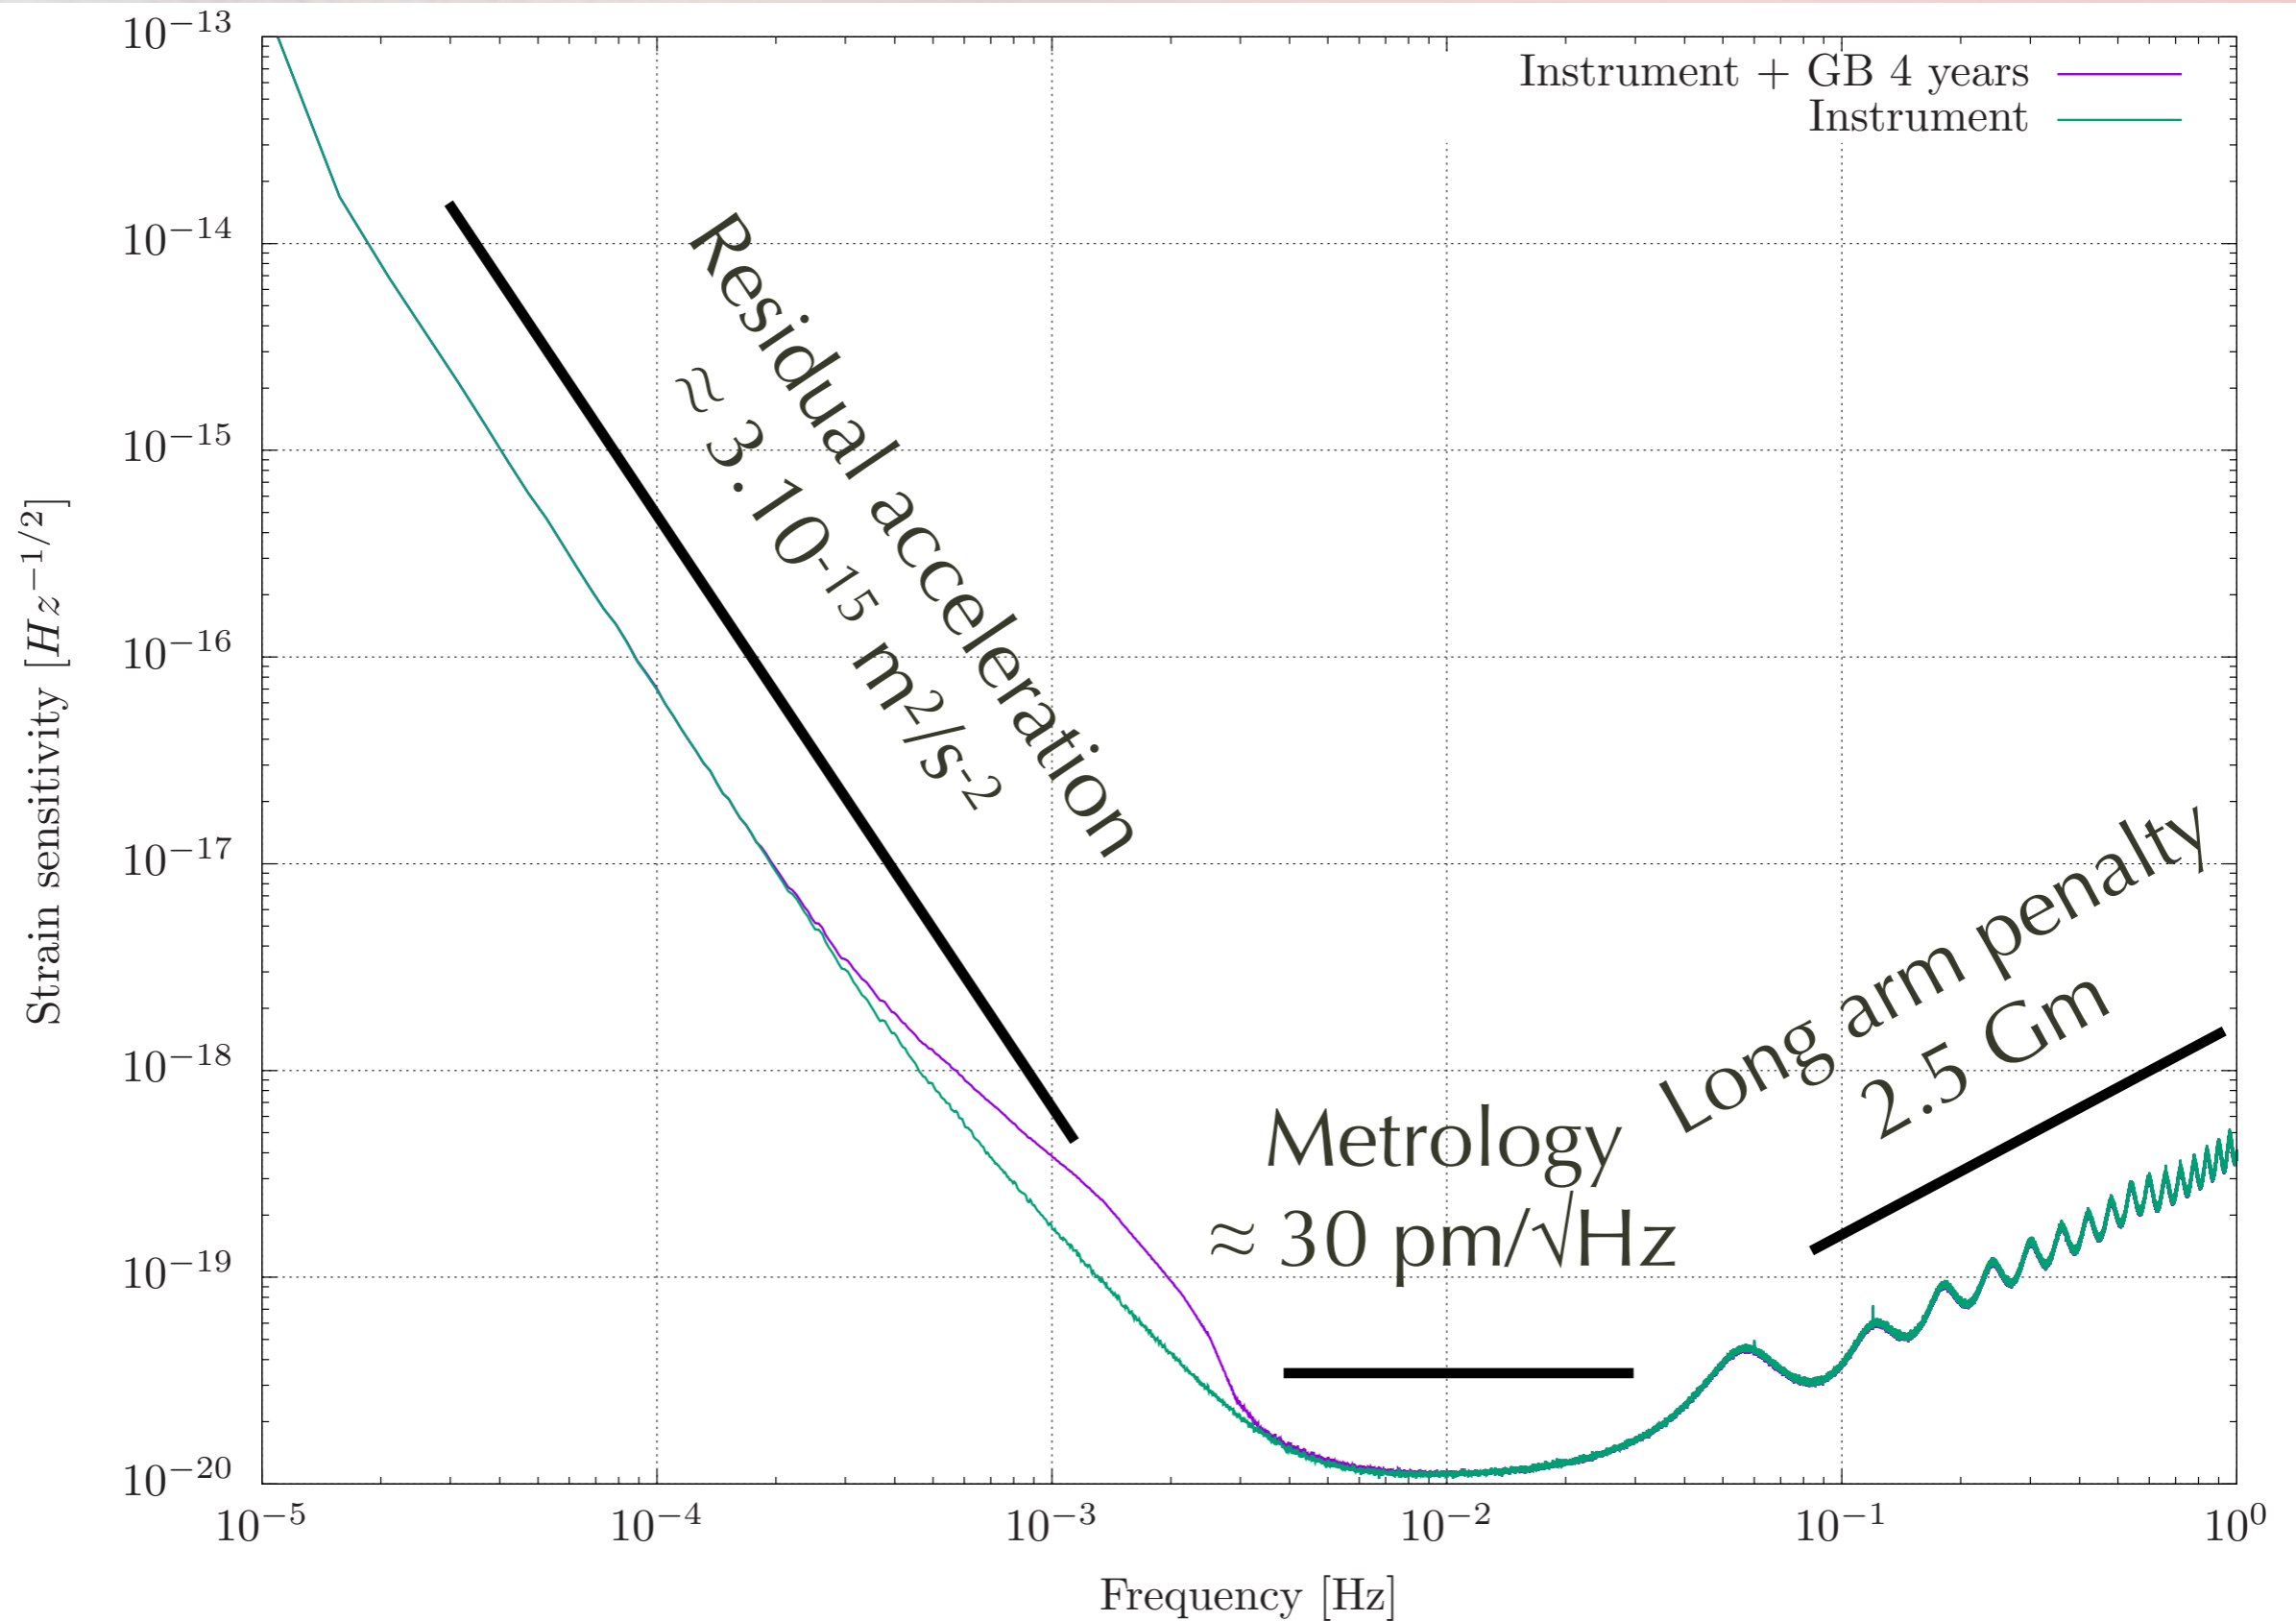


# LISA Strain Sensitivity

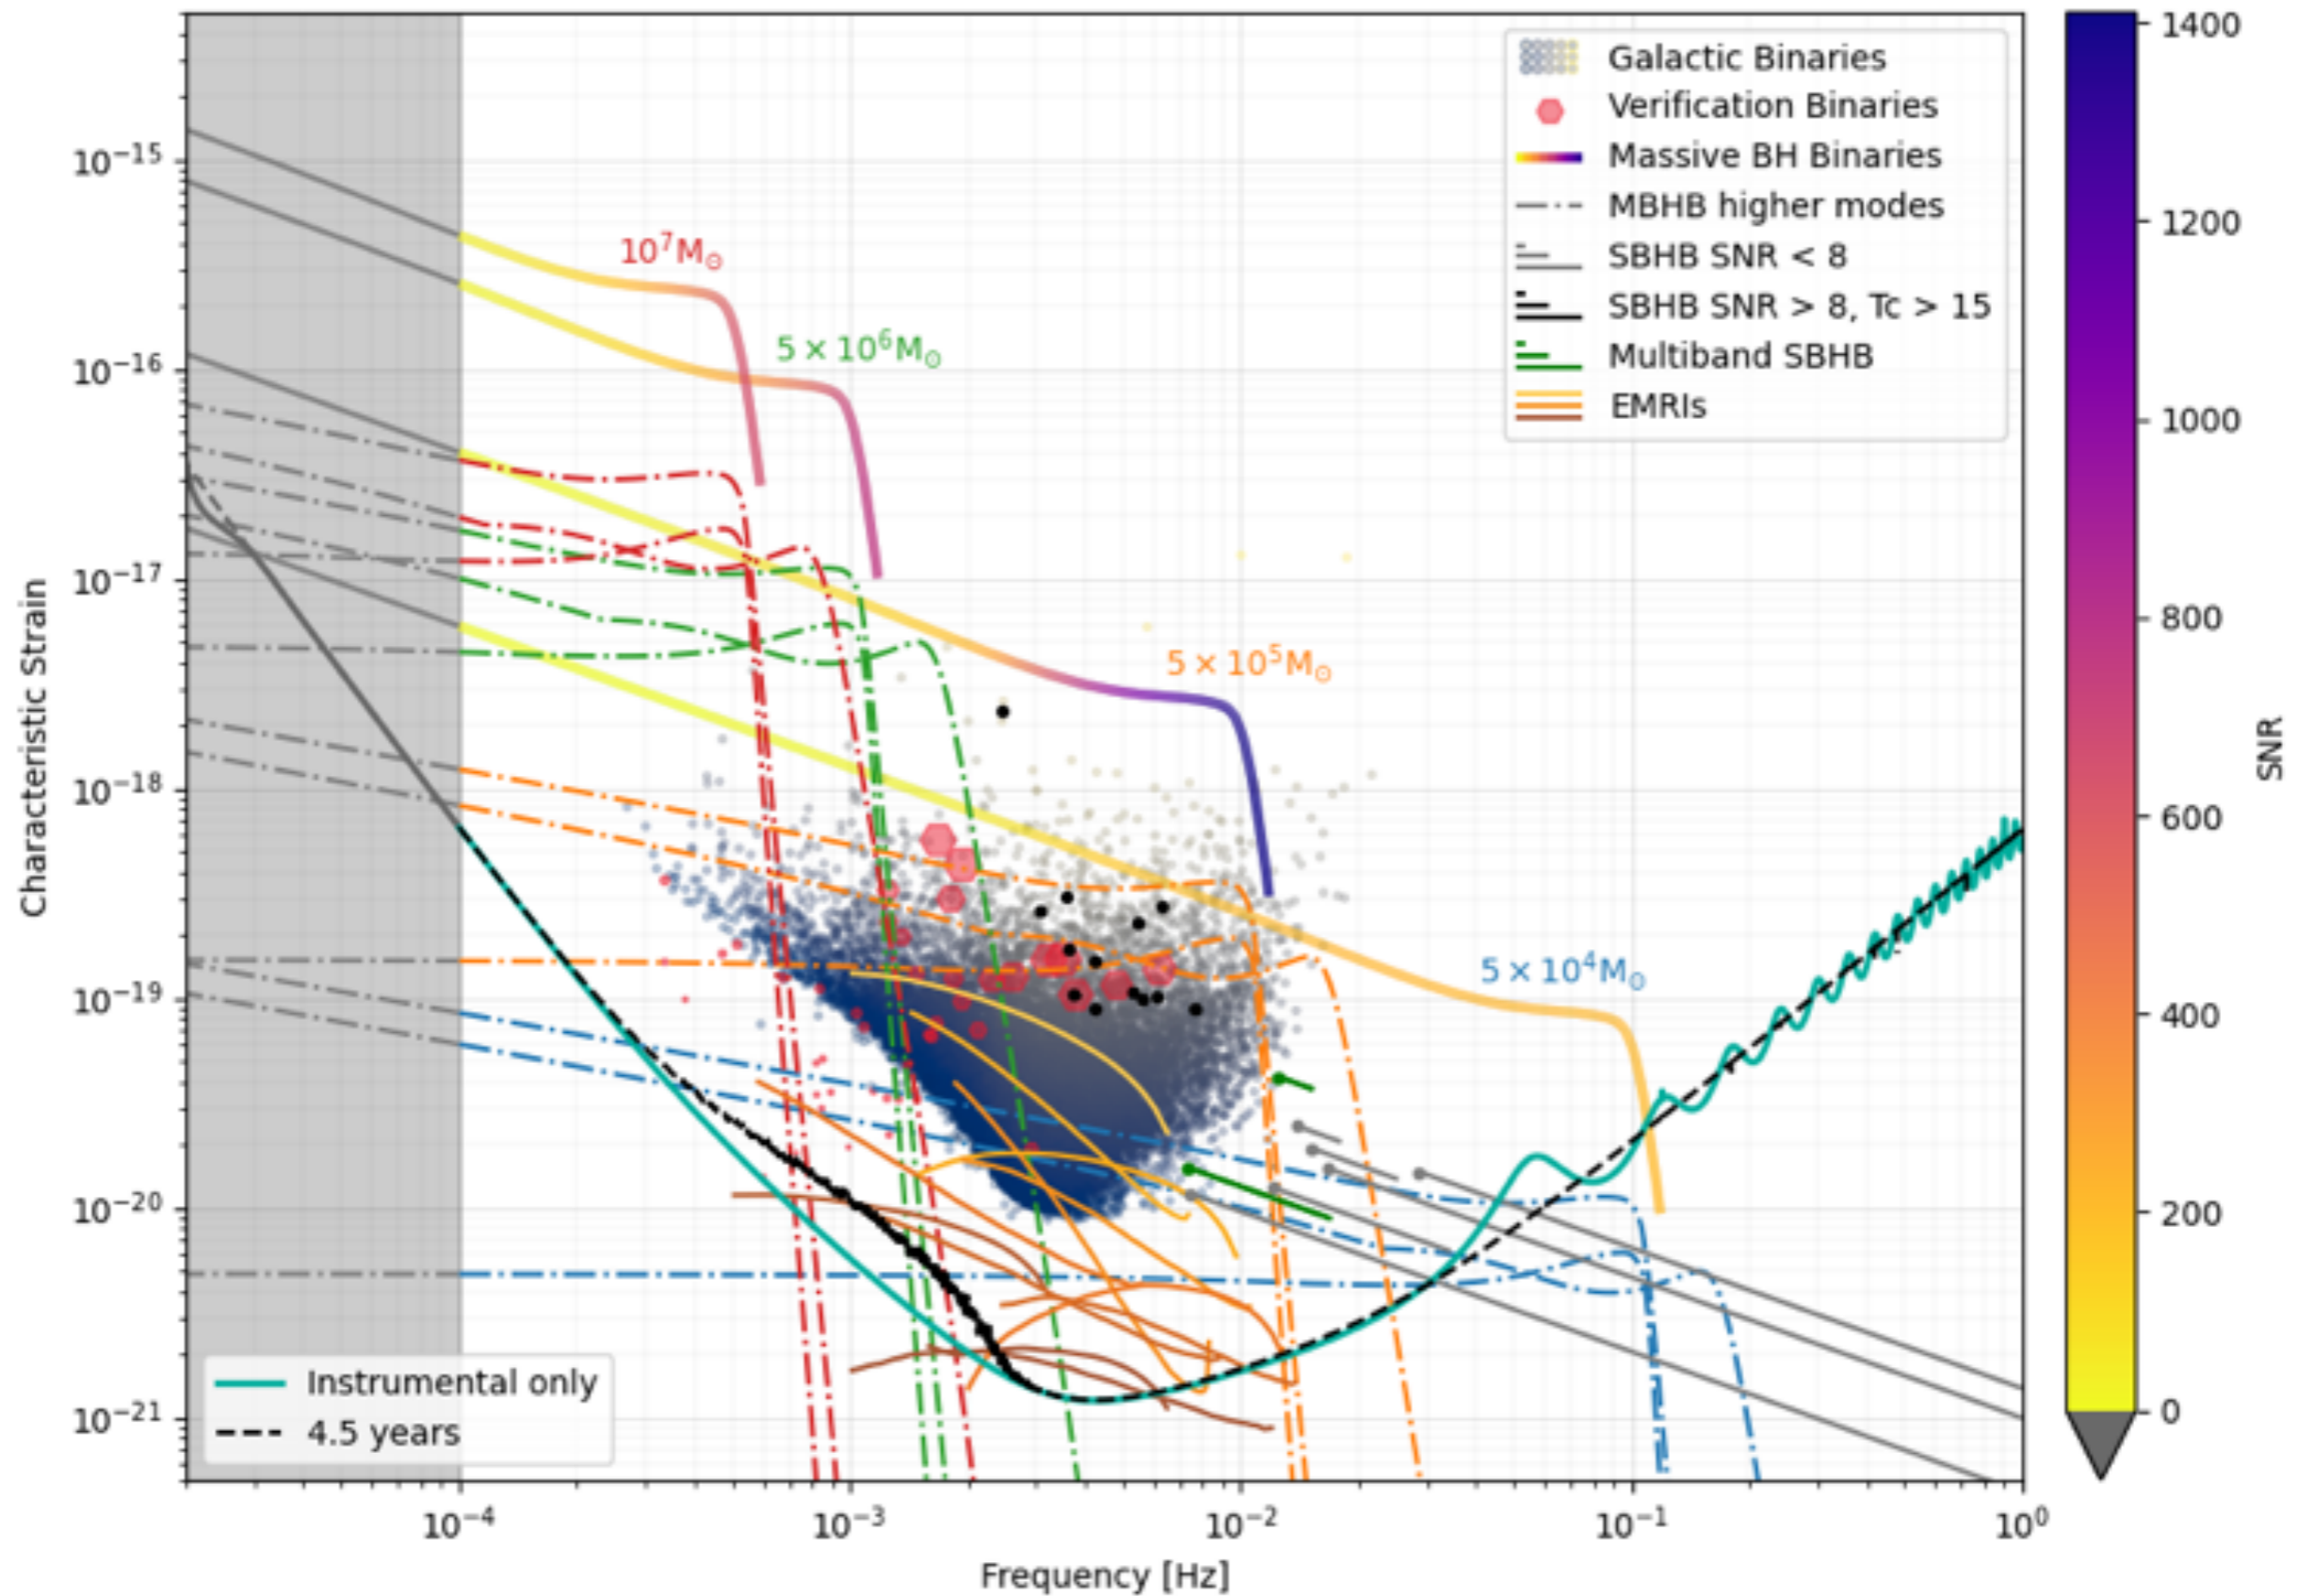




# LISA organisation

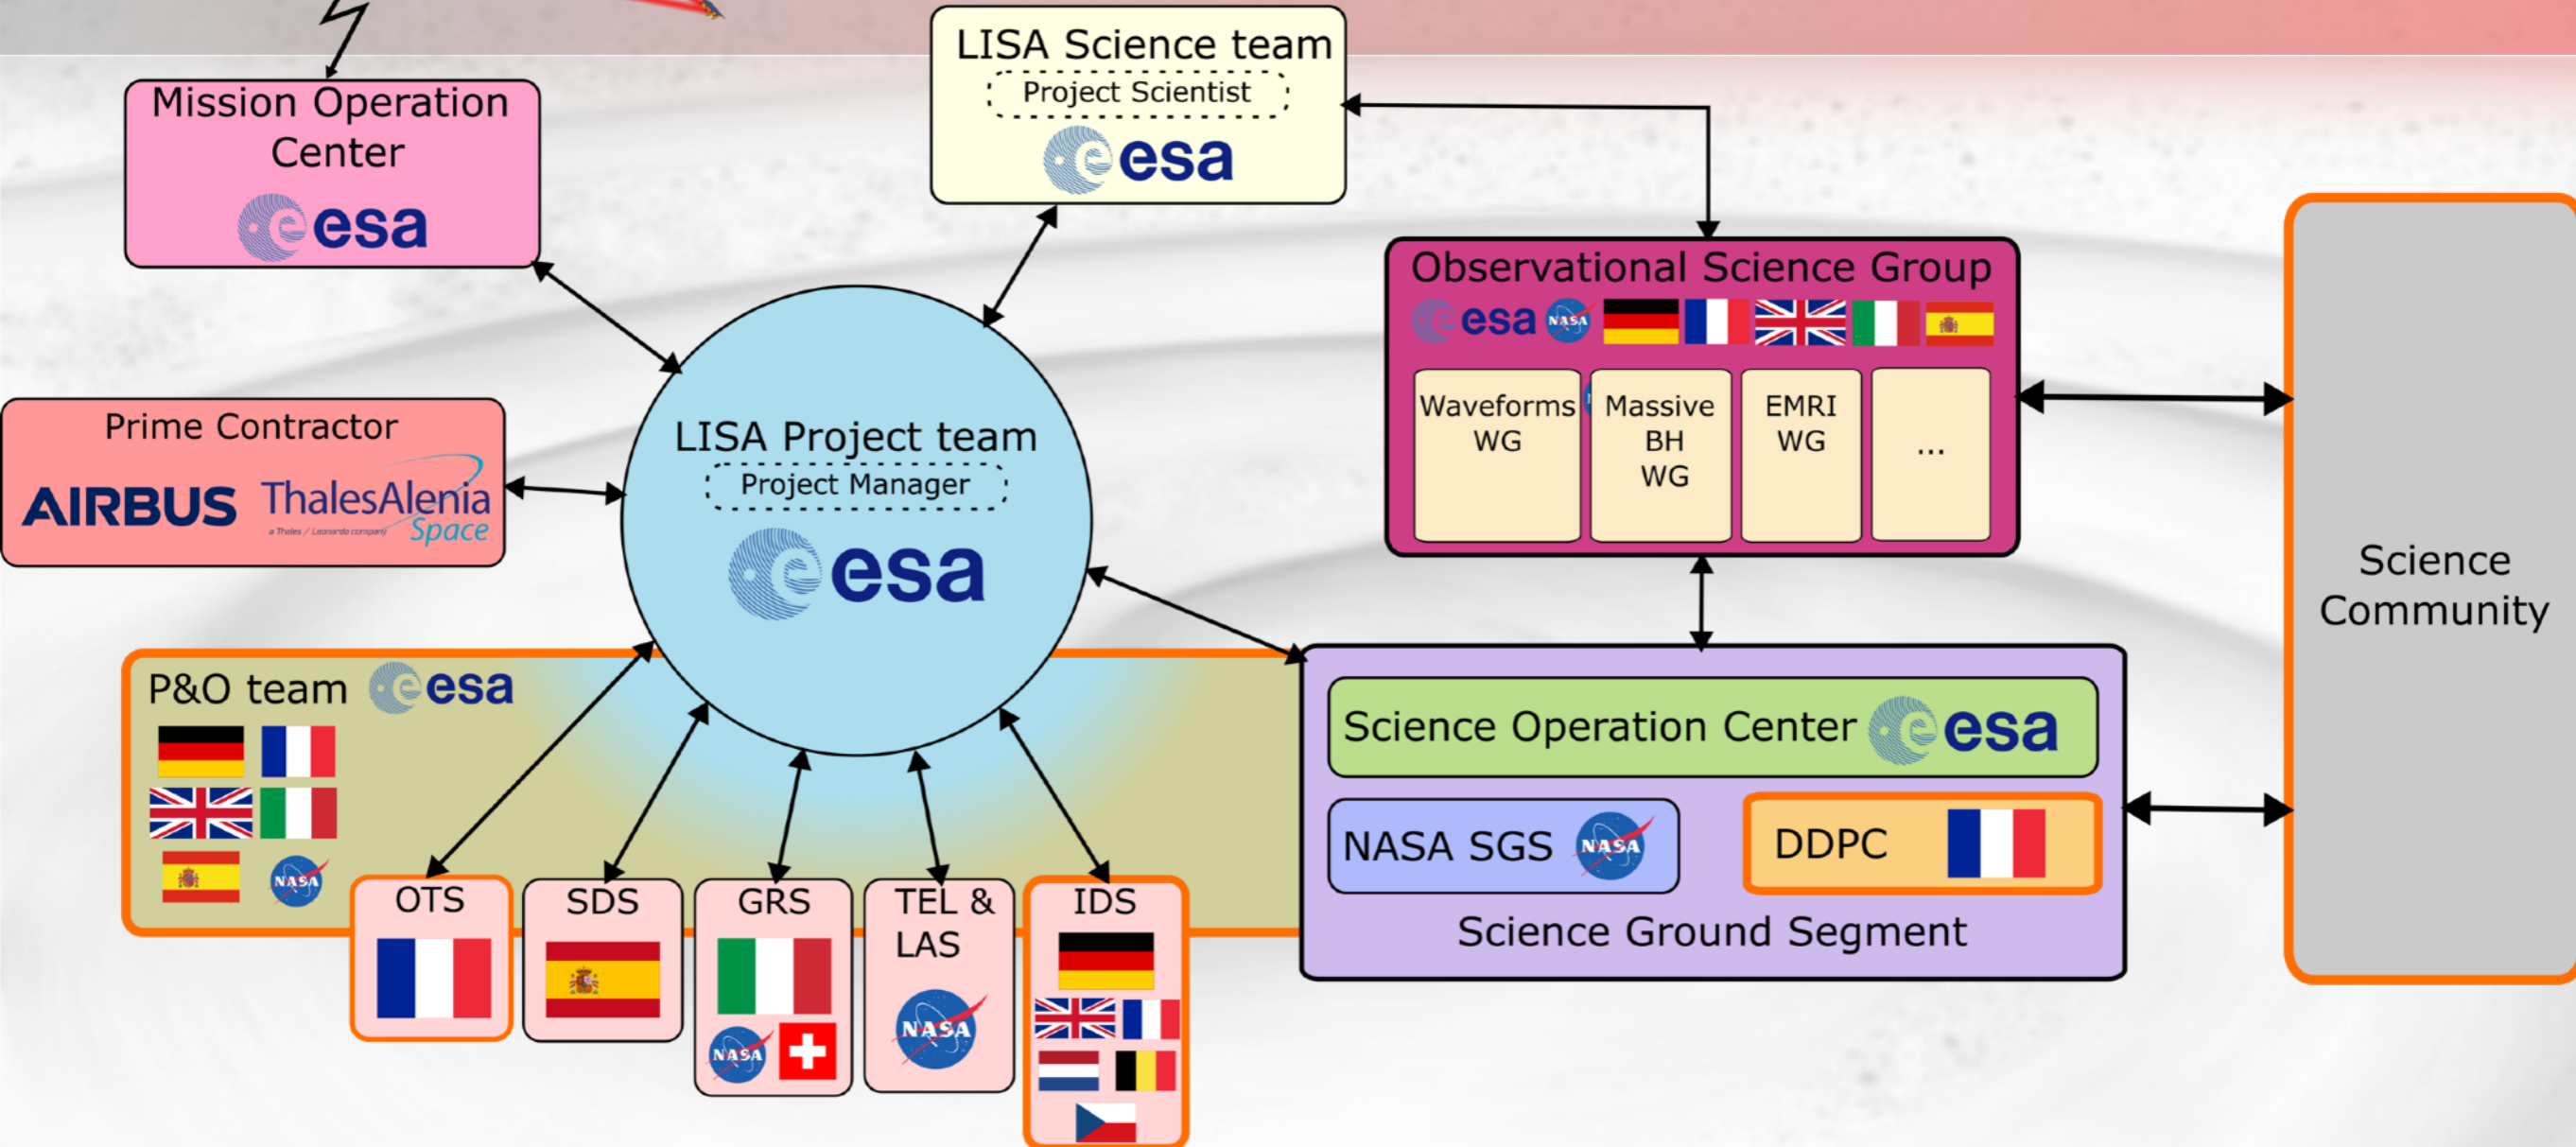

# LISA organisation

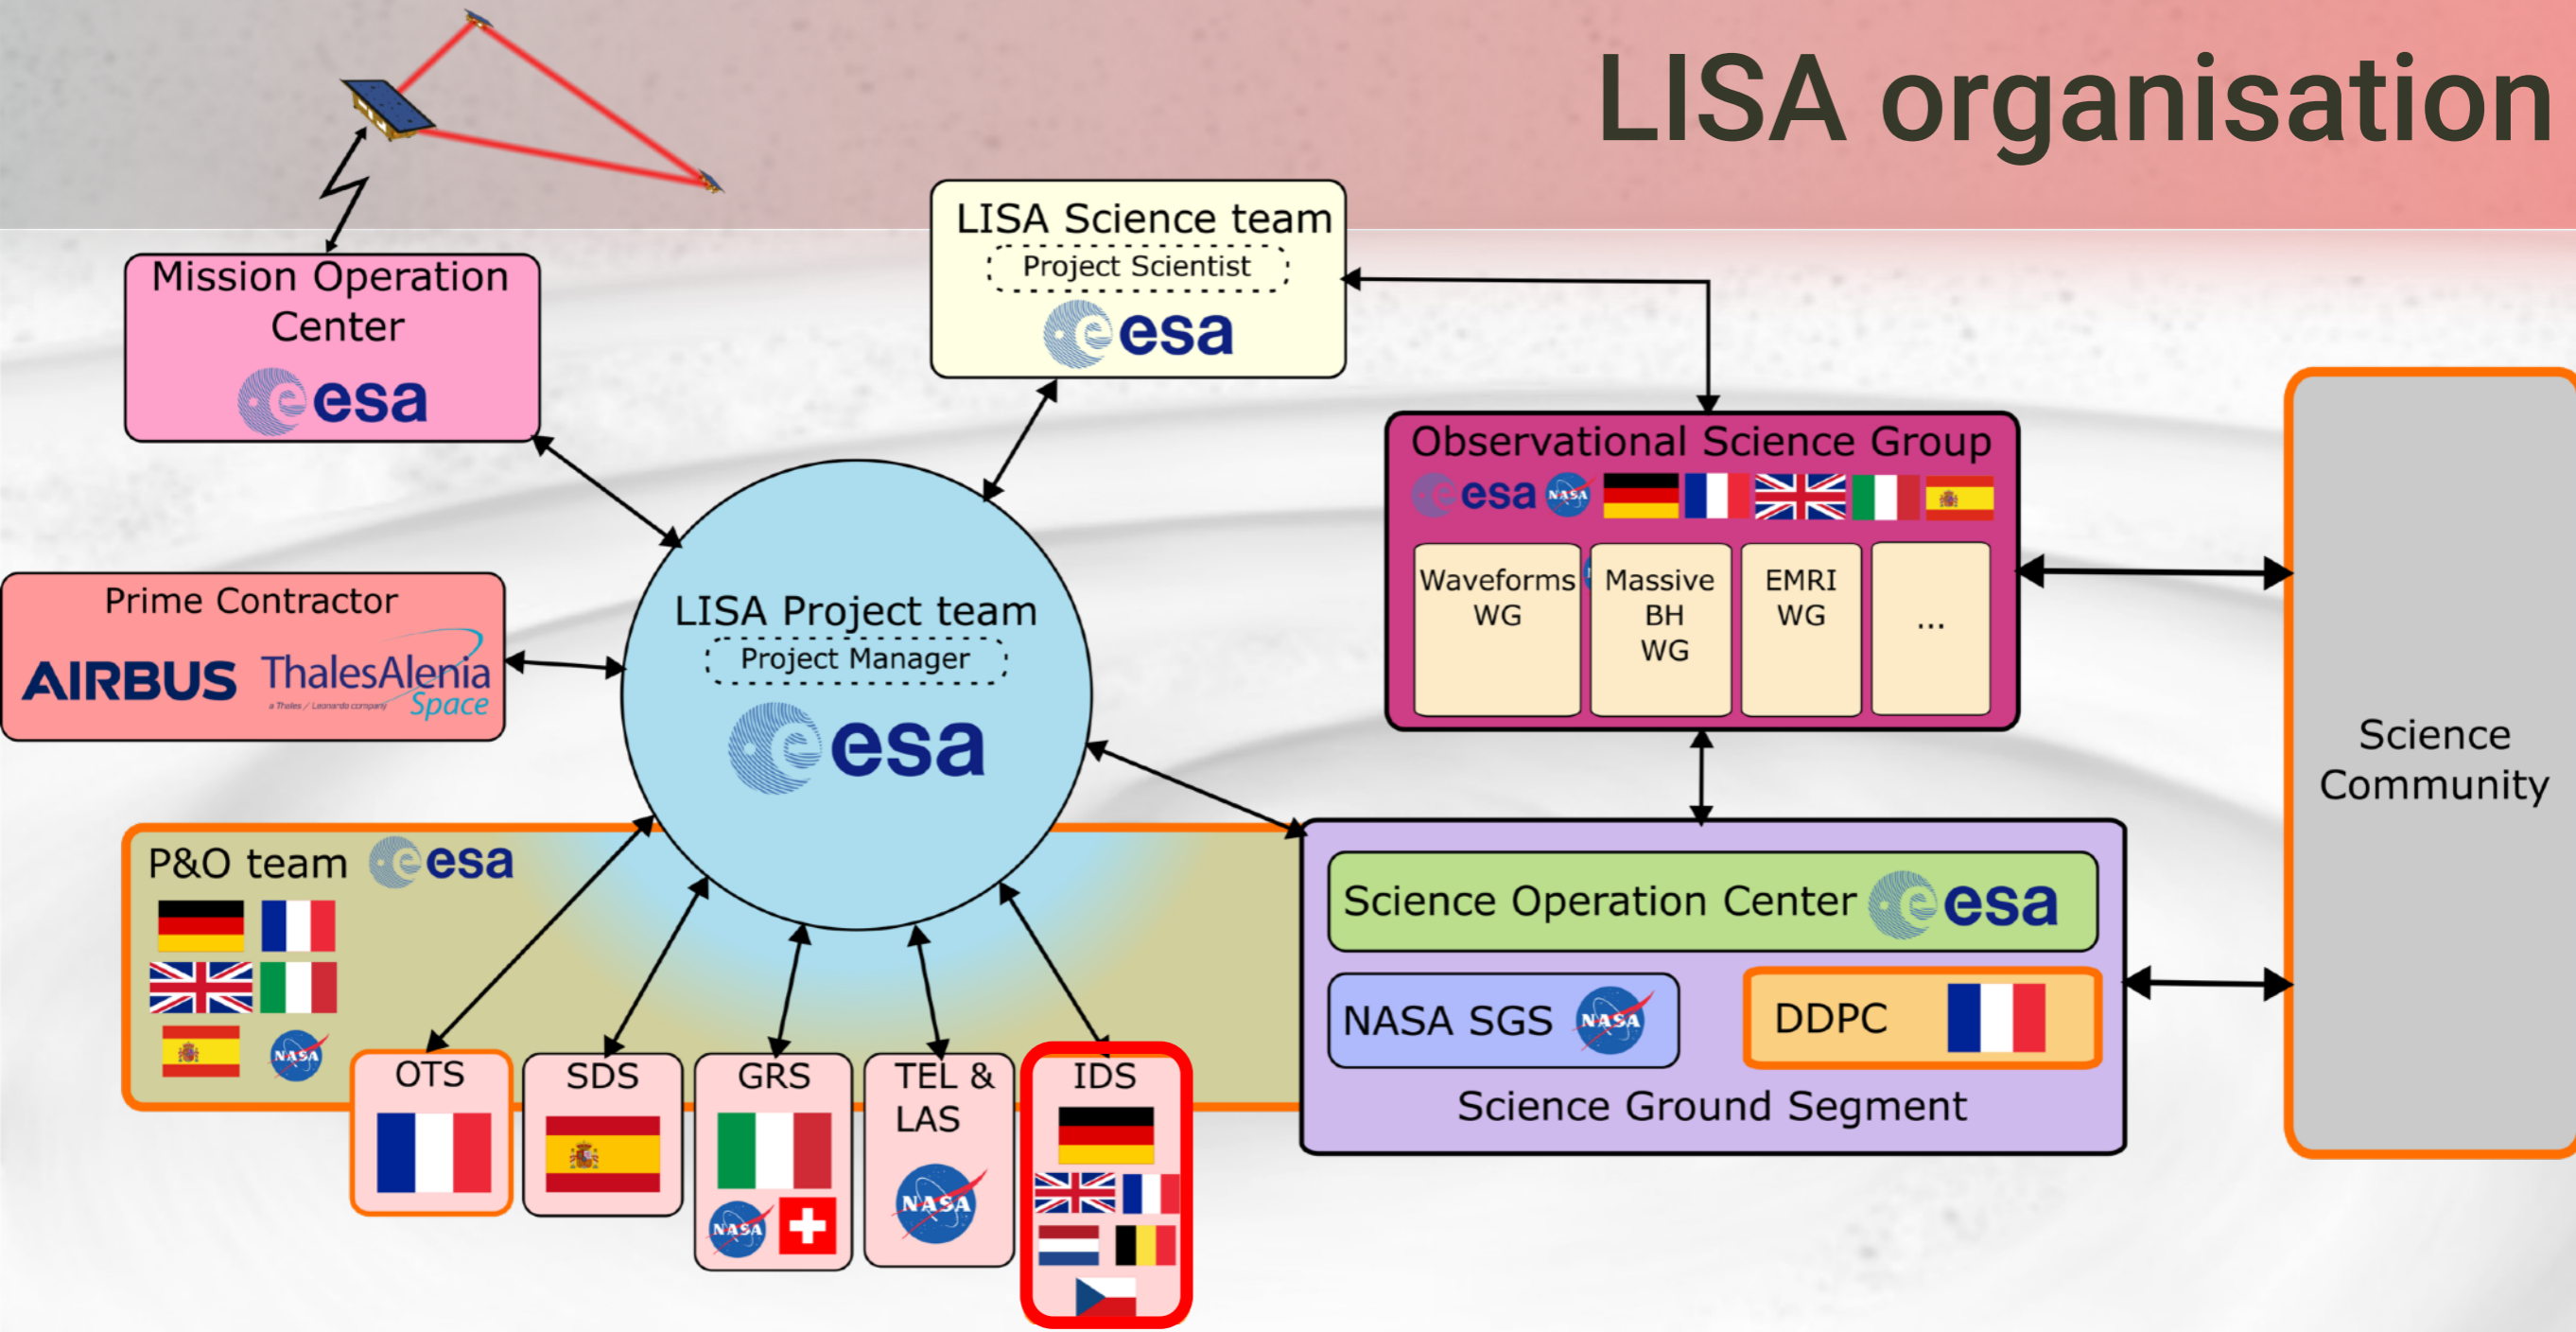


IDS (Interferometric Detection System)

French contribution : Tests infrastructures and benches



# Organisation et contributions

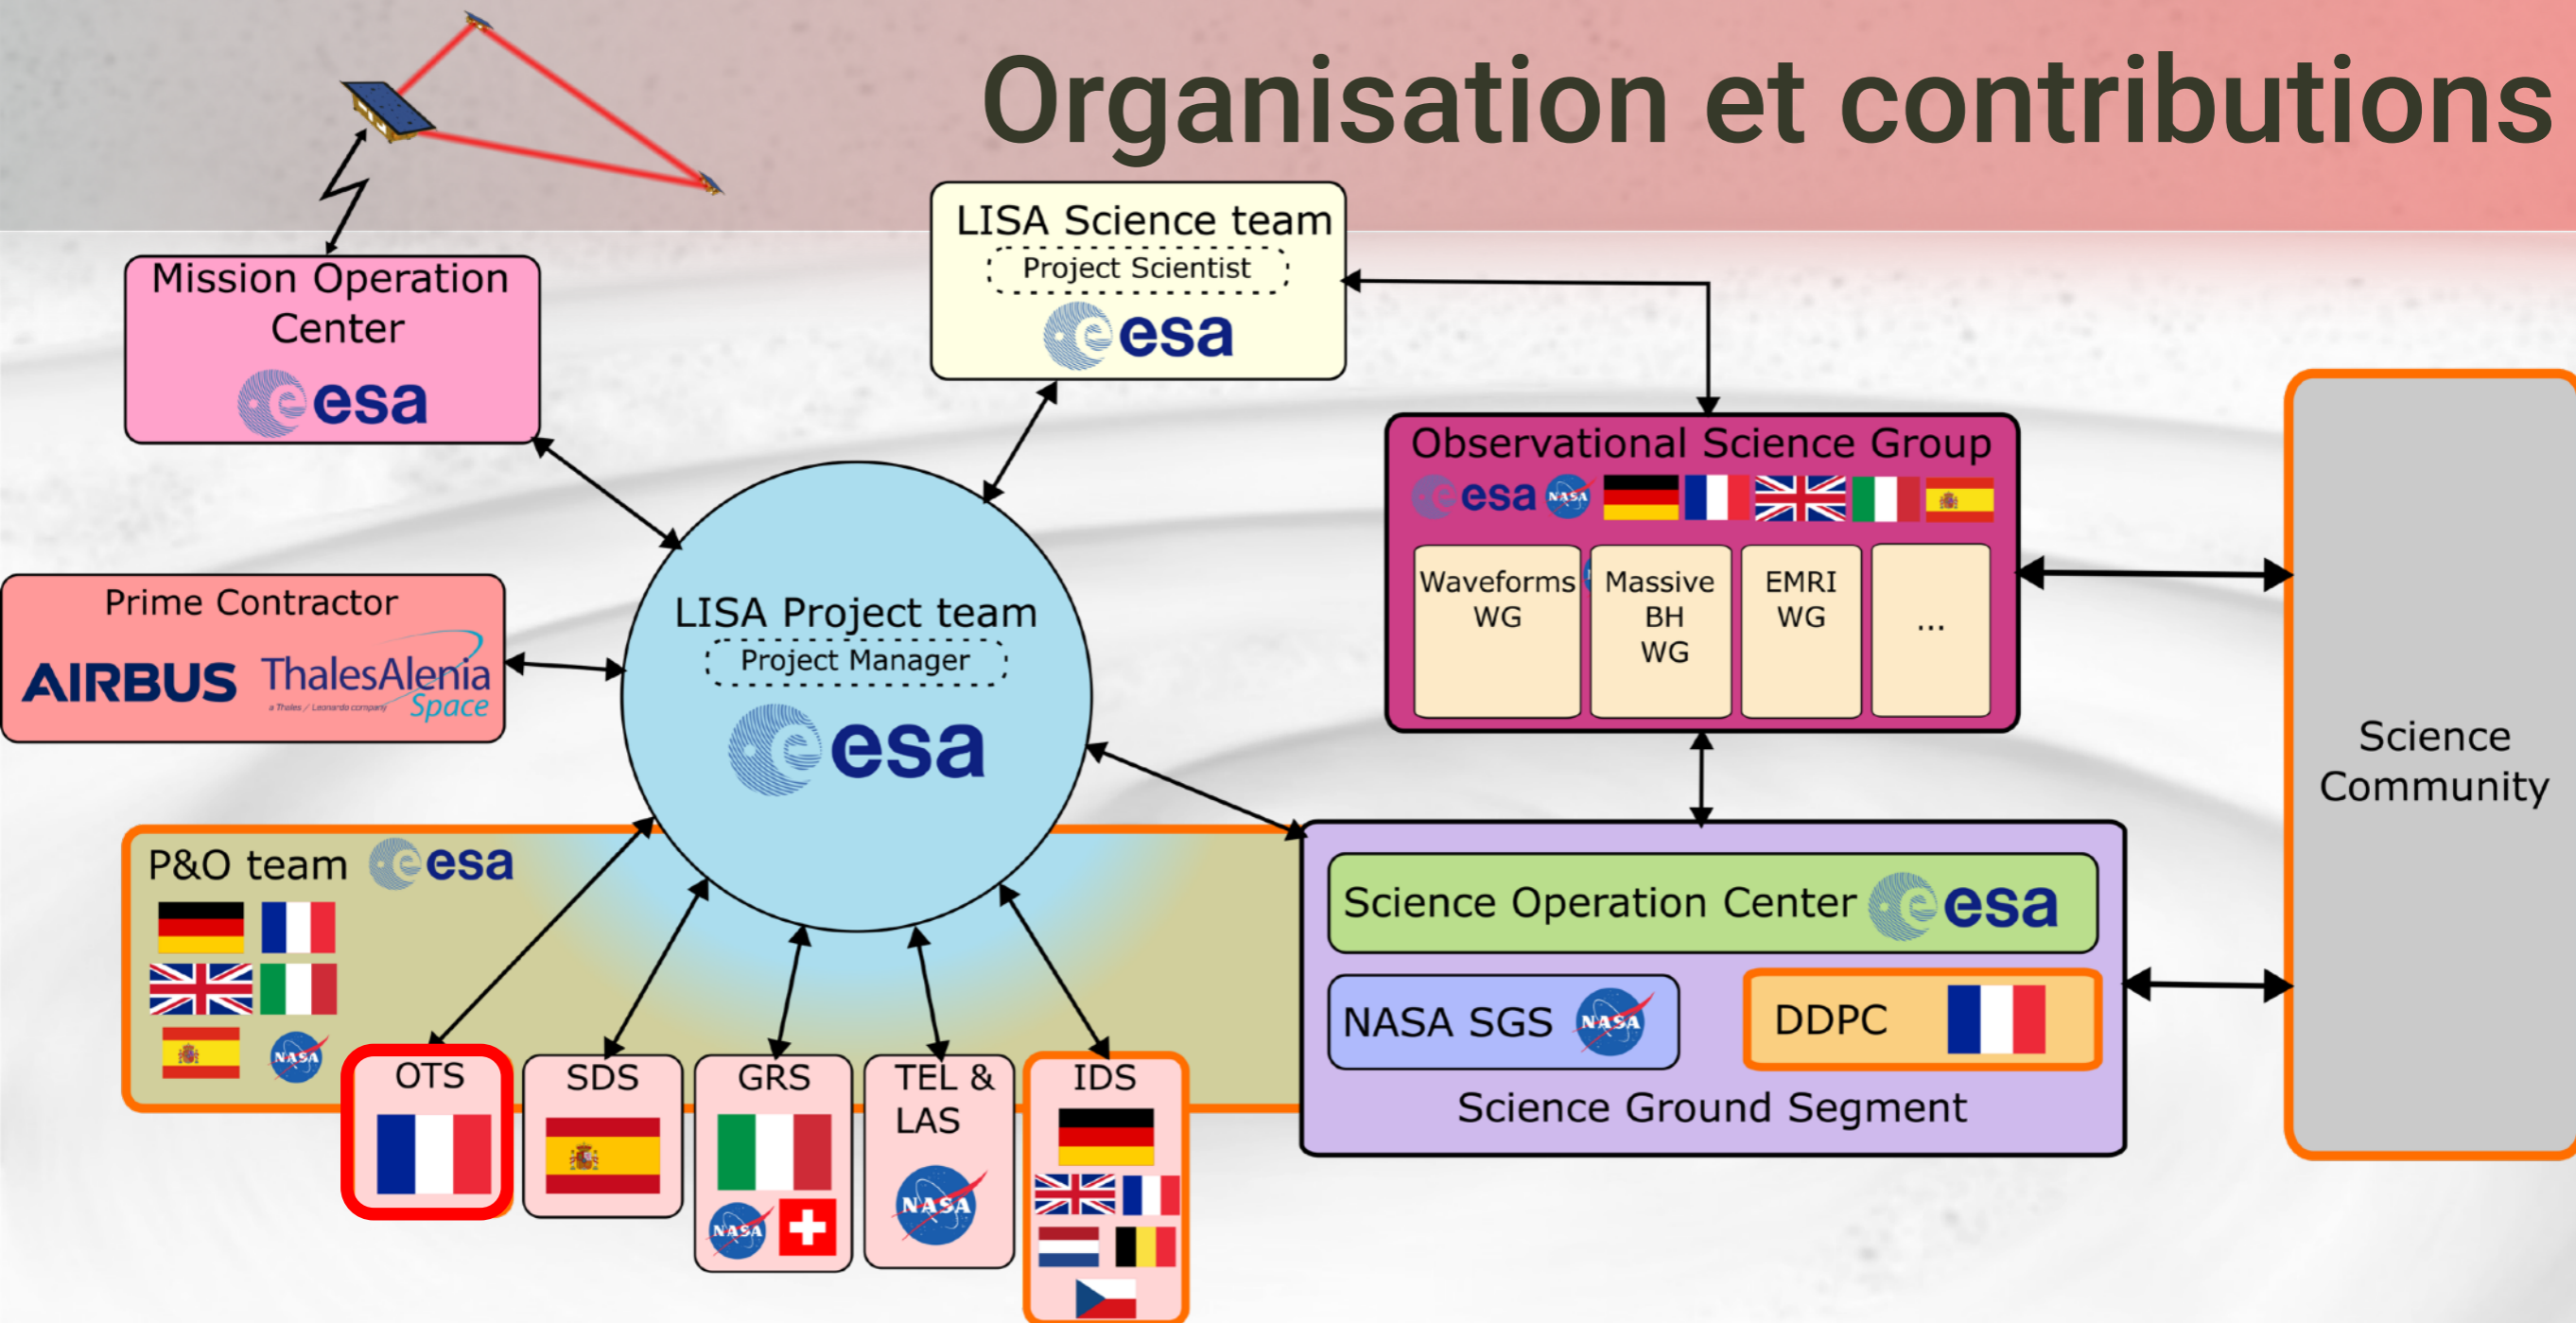


OTS (Optical Tests System)



French contribution : Complex OGSEs for testing the MOSA

# Organisation et contributions

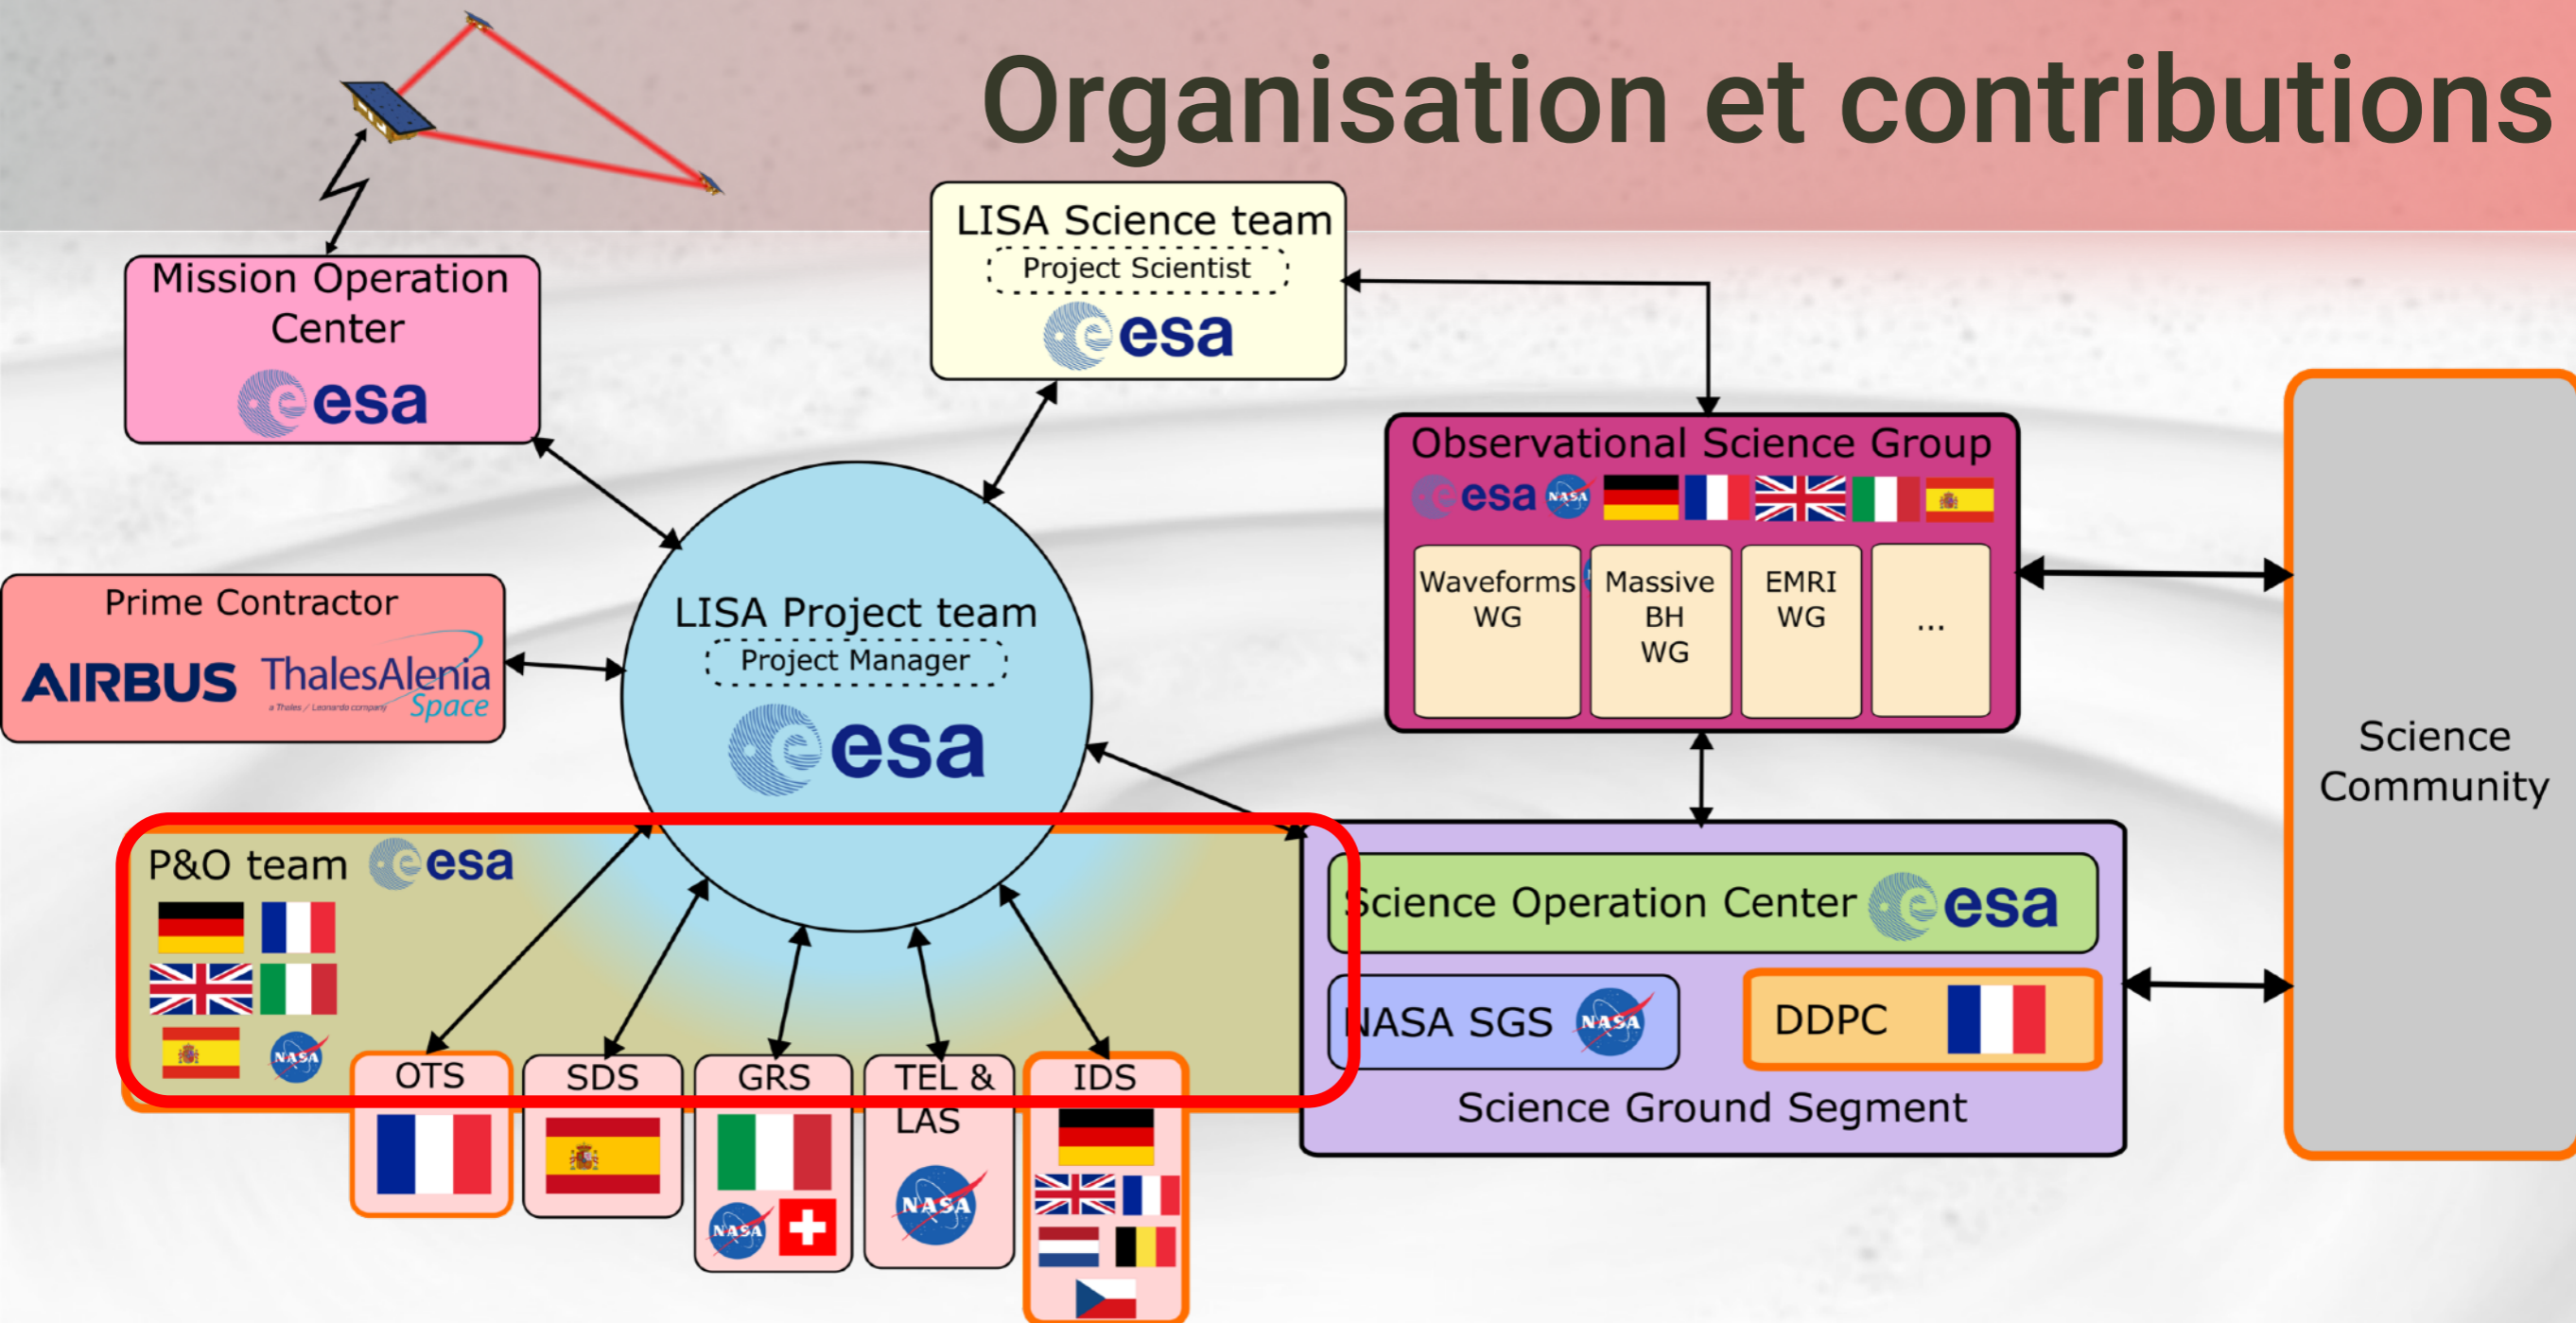


## 🚀 P&O (Performance and Operations)

### 🚀 Role

- 🚀 Support ESA with the development of the performance model of LISA
- 🚀 Participate to the definition of in-flight commissioning plans, early science phase characterization experiments.



# Organisation et contributions


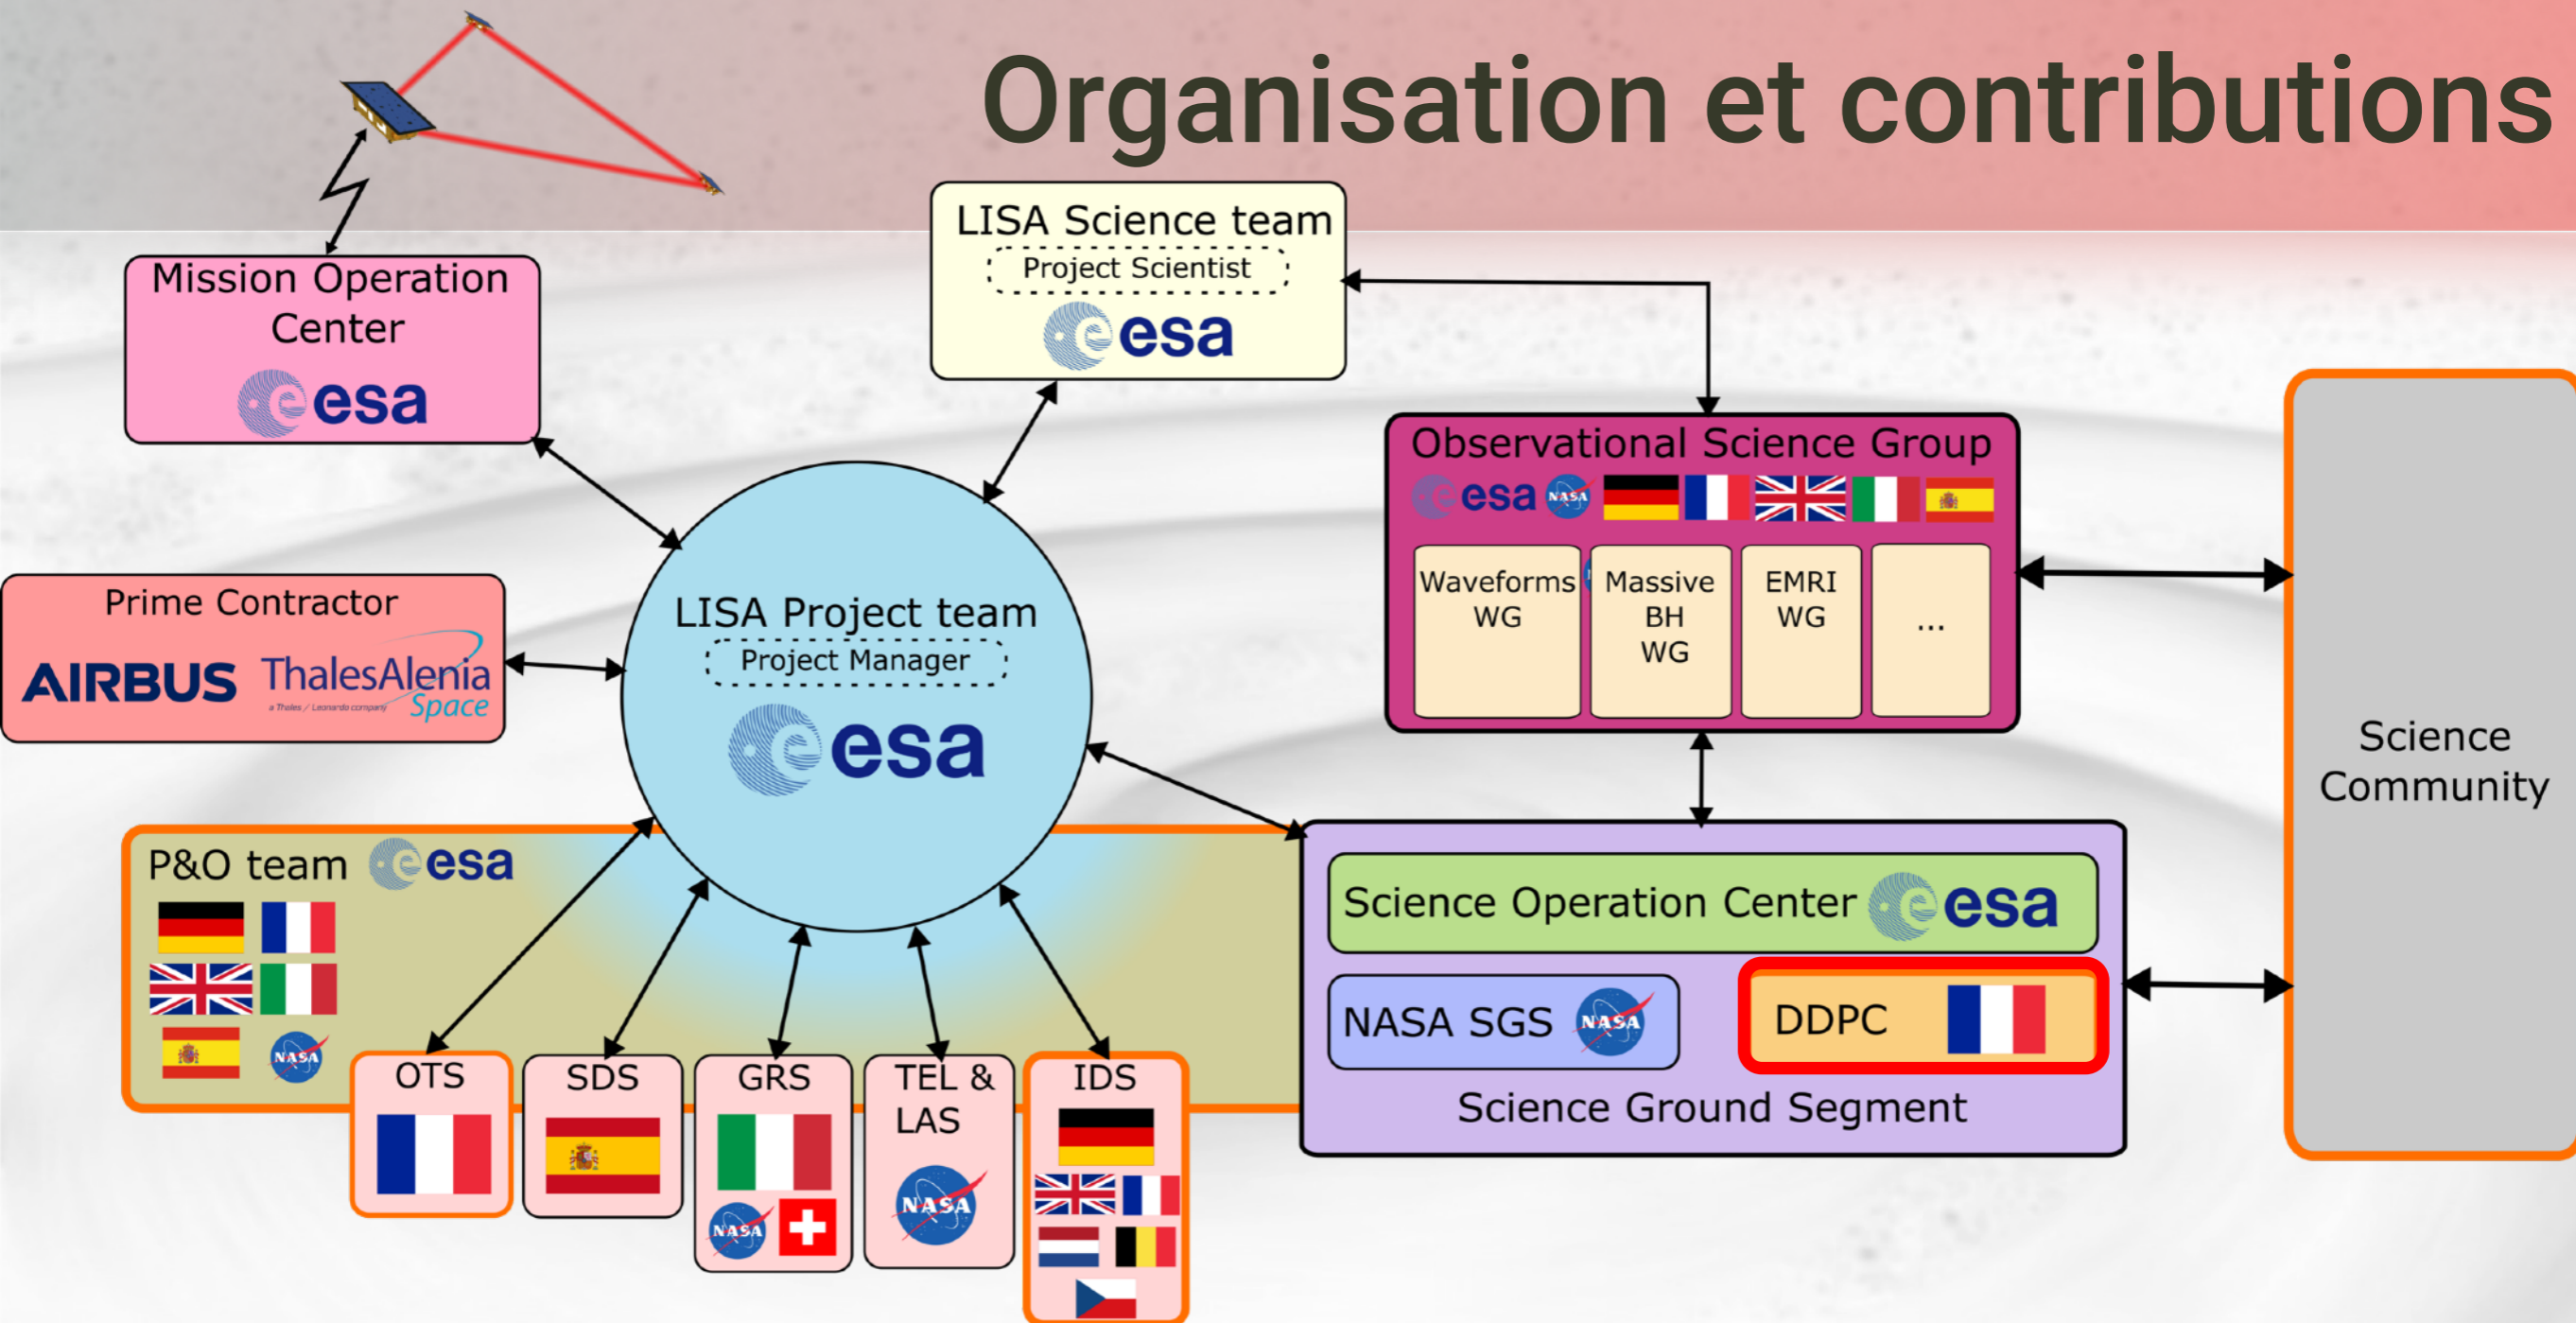


- 📡 DDPC (Distributed Data Processing Center)
  - 📡 Produce L3 (catalogs) data from L1 (calibrated) data





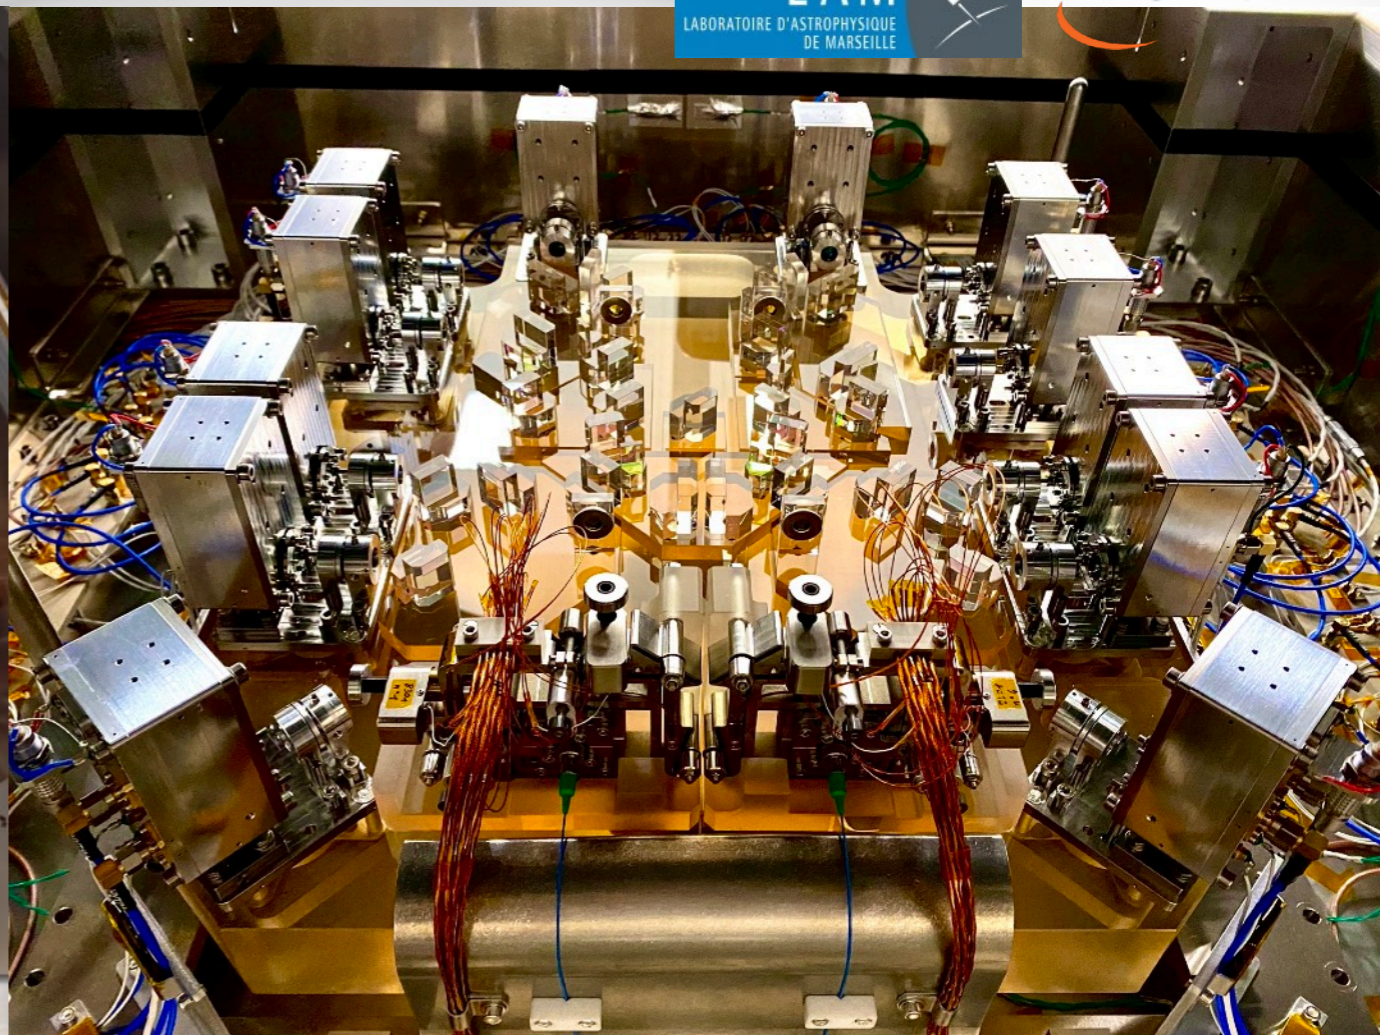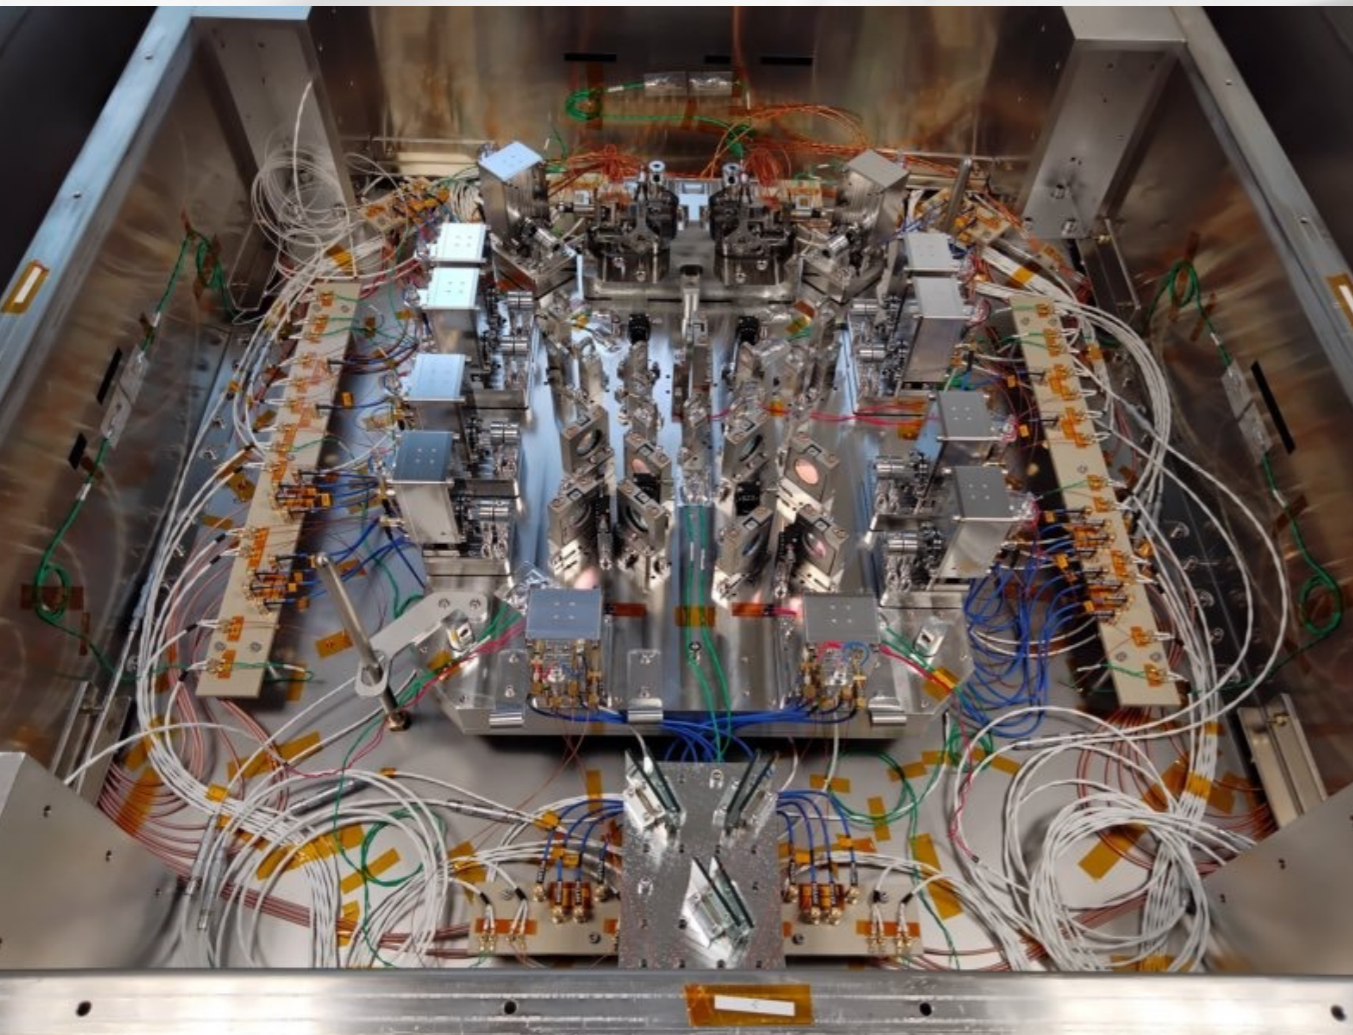

# MIFO & ZIFO prototypes


- 🚀 Invar and Zerodur interferometric benches for evaluating the achievable metrology performance in representative conditions on ground
  - 🚀 Return of experience for developing the IDS and OTS GSEs
- 🚀 MIFO tests completed in 2022 at the APC
- 🚀 ZIFO tests on going at the LAM (until sept. 2023)
  - 🚀 Further 'ad-hoc' experiments at the APC afterwards








 Main objective : validate the metrological concept of LISA

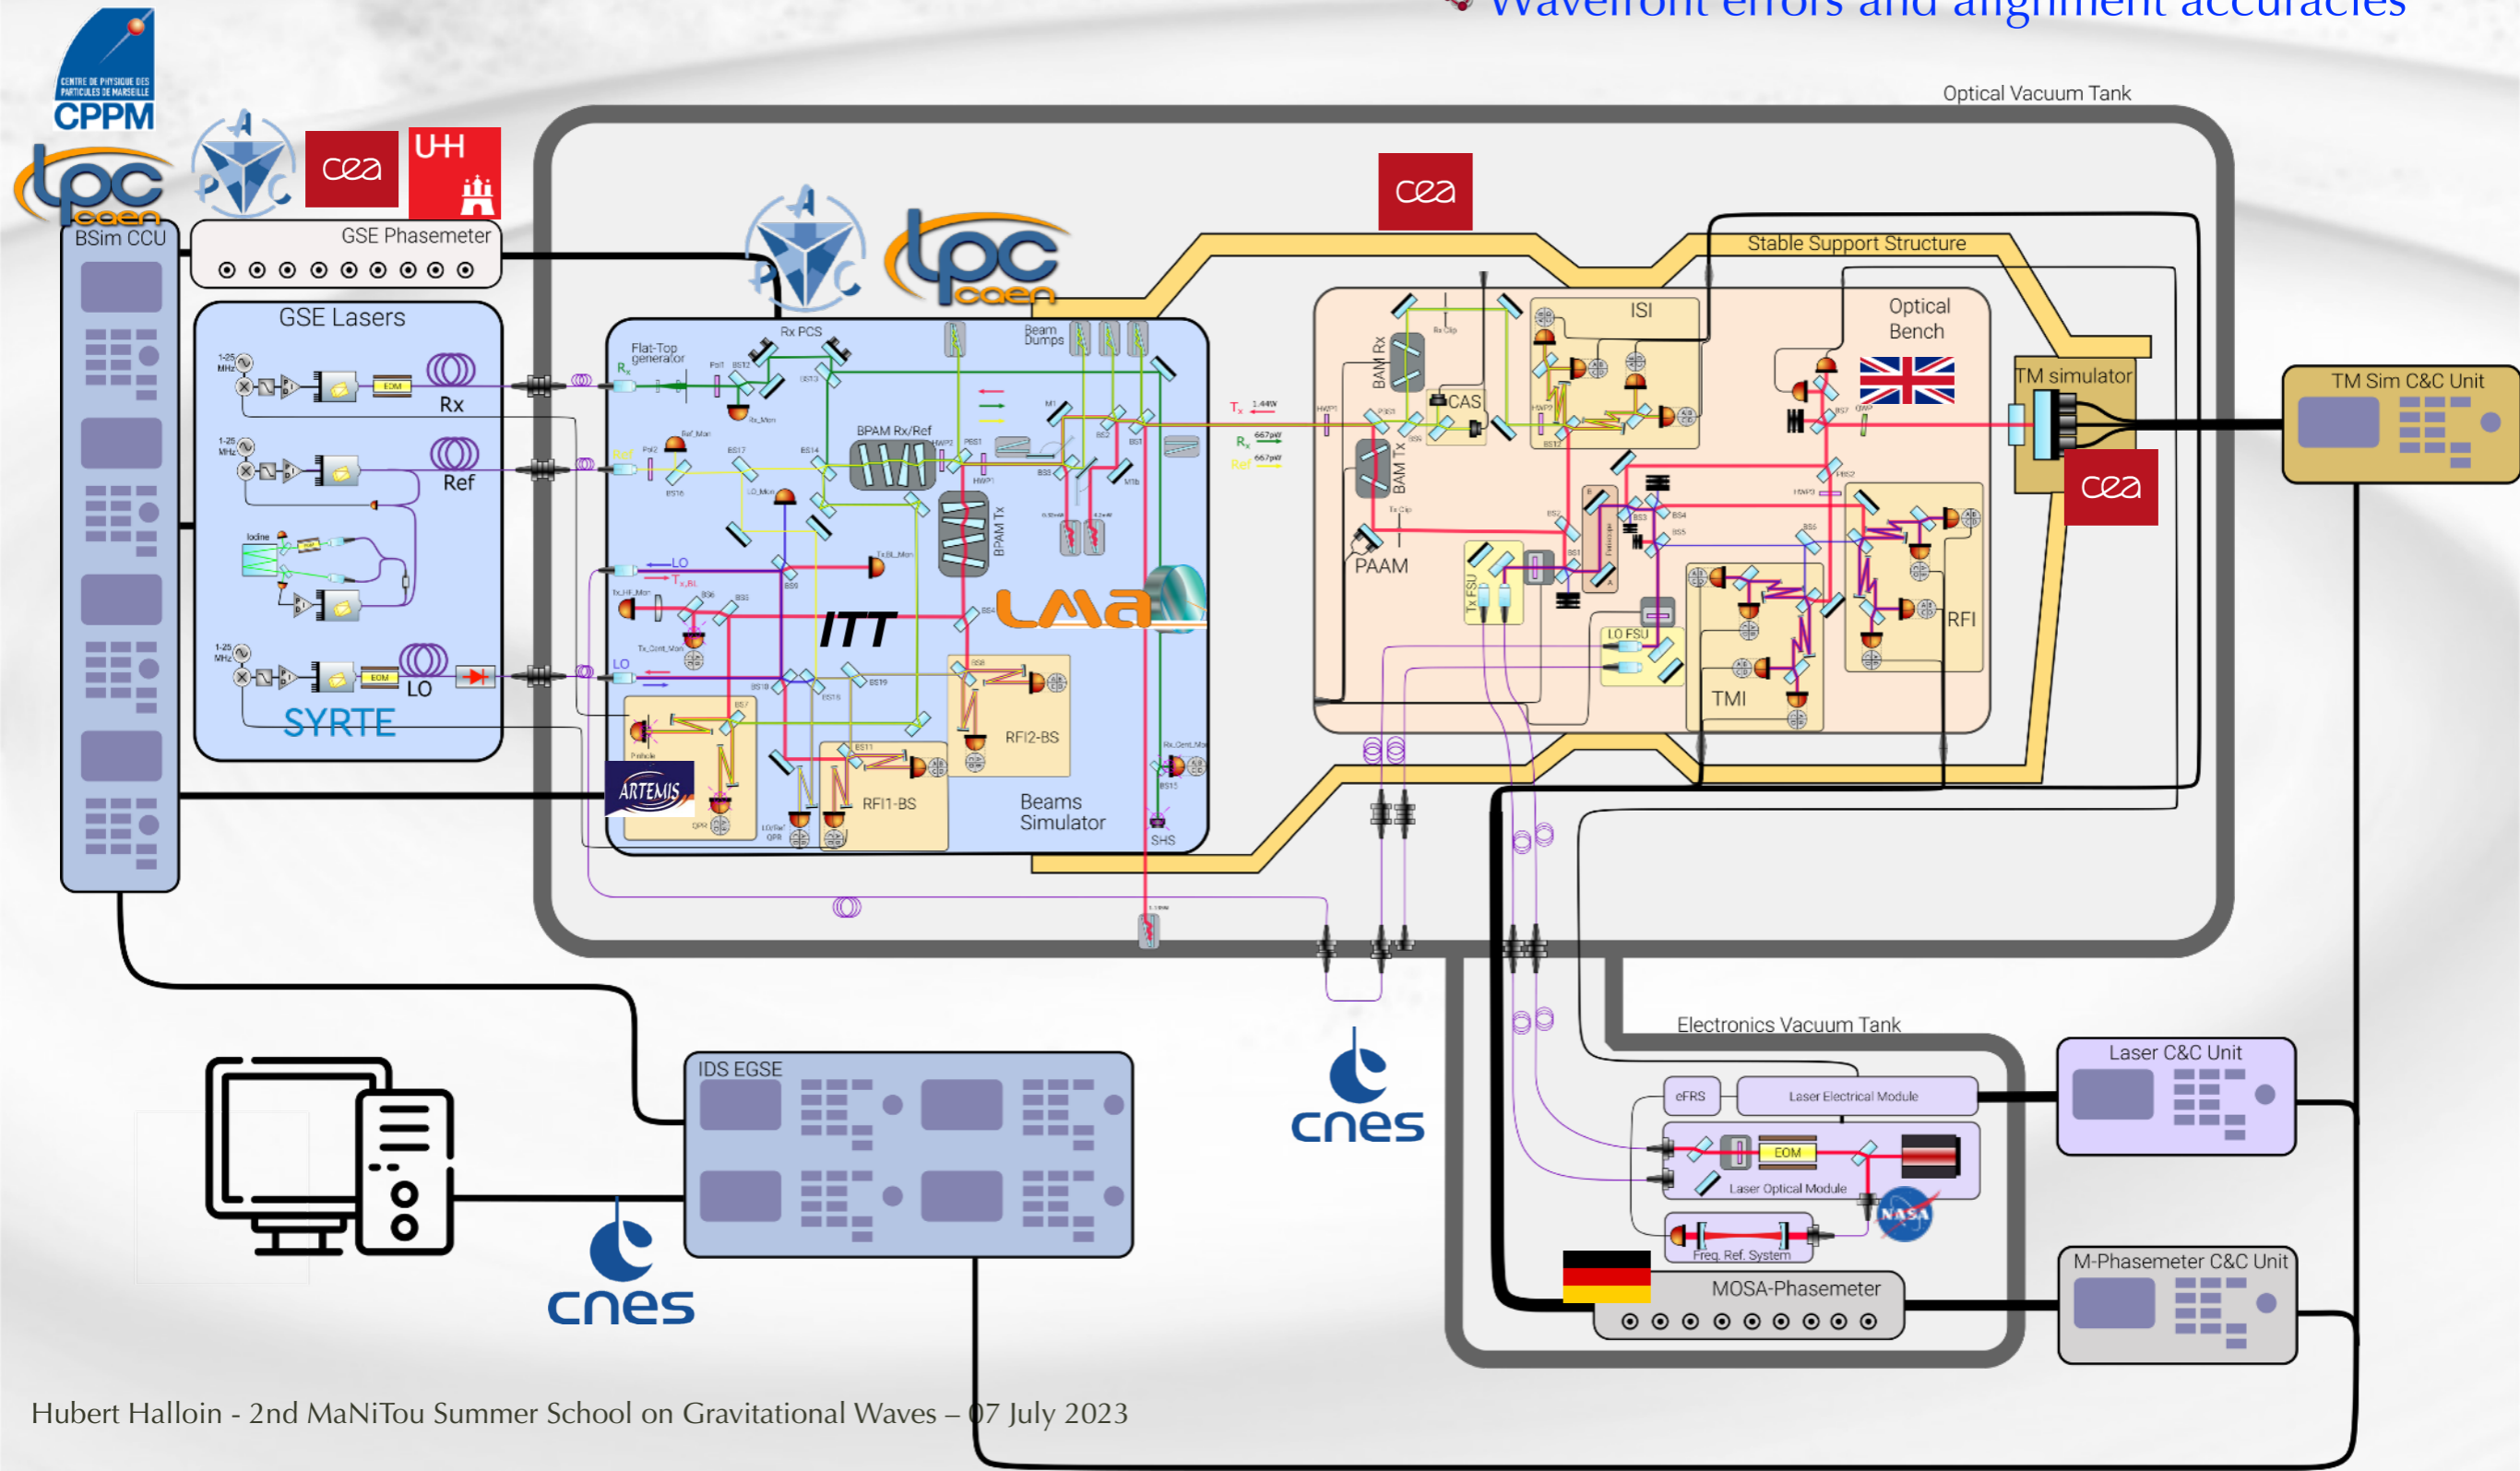-  Critical functionalities
-  Optical path length stability
-  Wavefront errors and alignment accuracies





# IDS Setup overview

-  CAD views of the IDS test assembly and vacuum chambers
-  Test campaigns conducted in CNES premises (Toulouse)

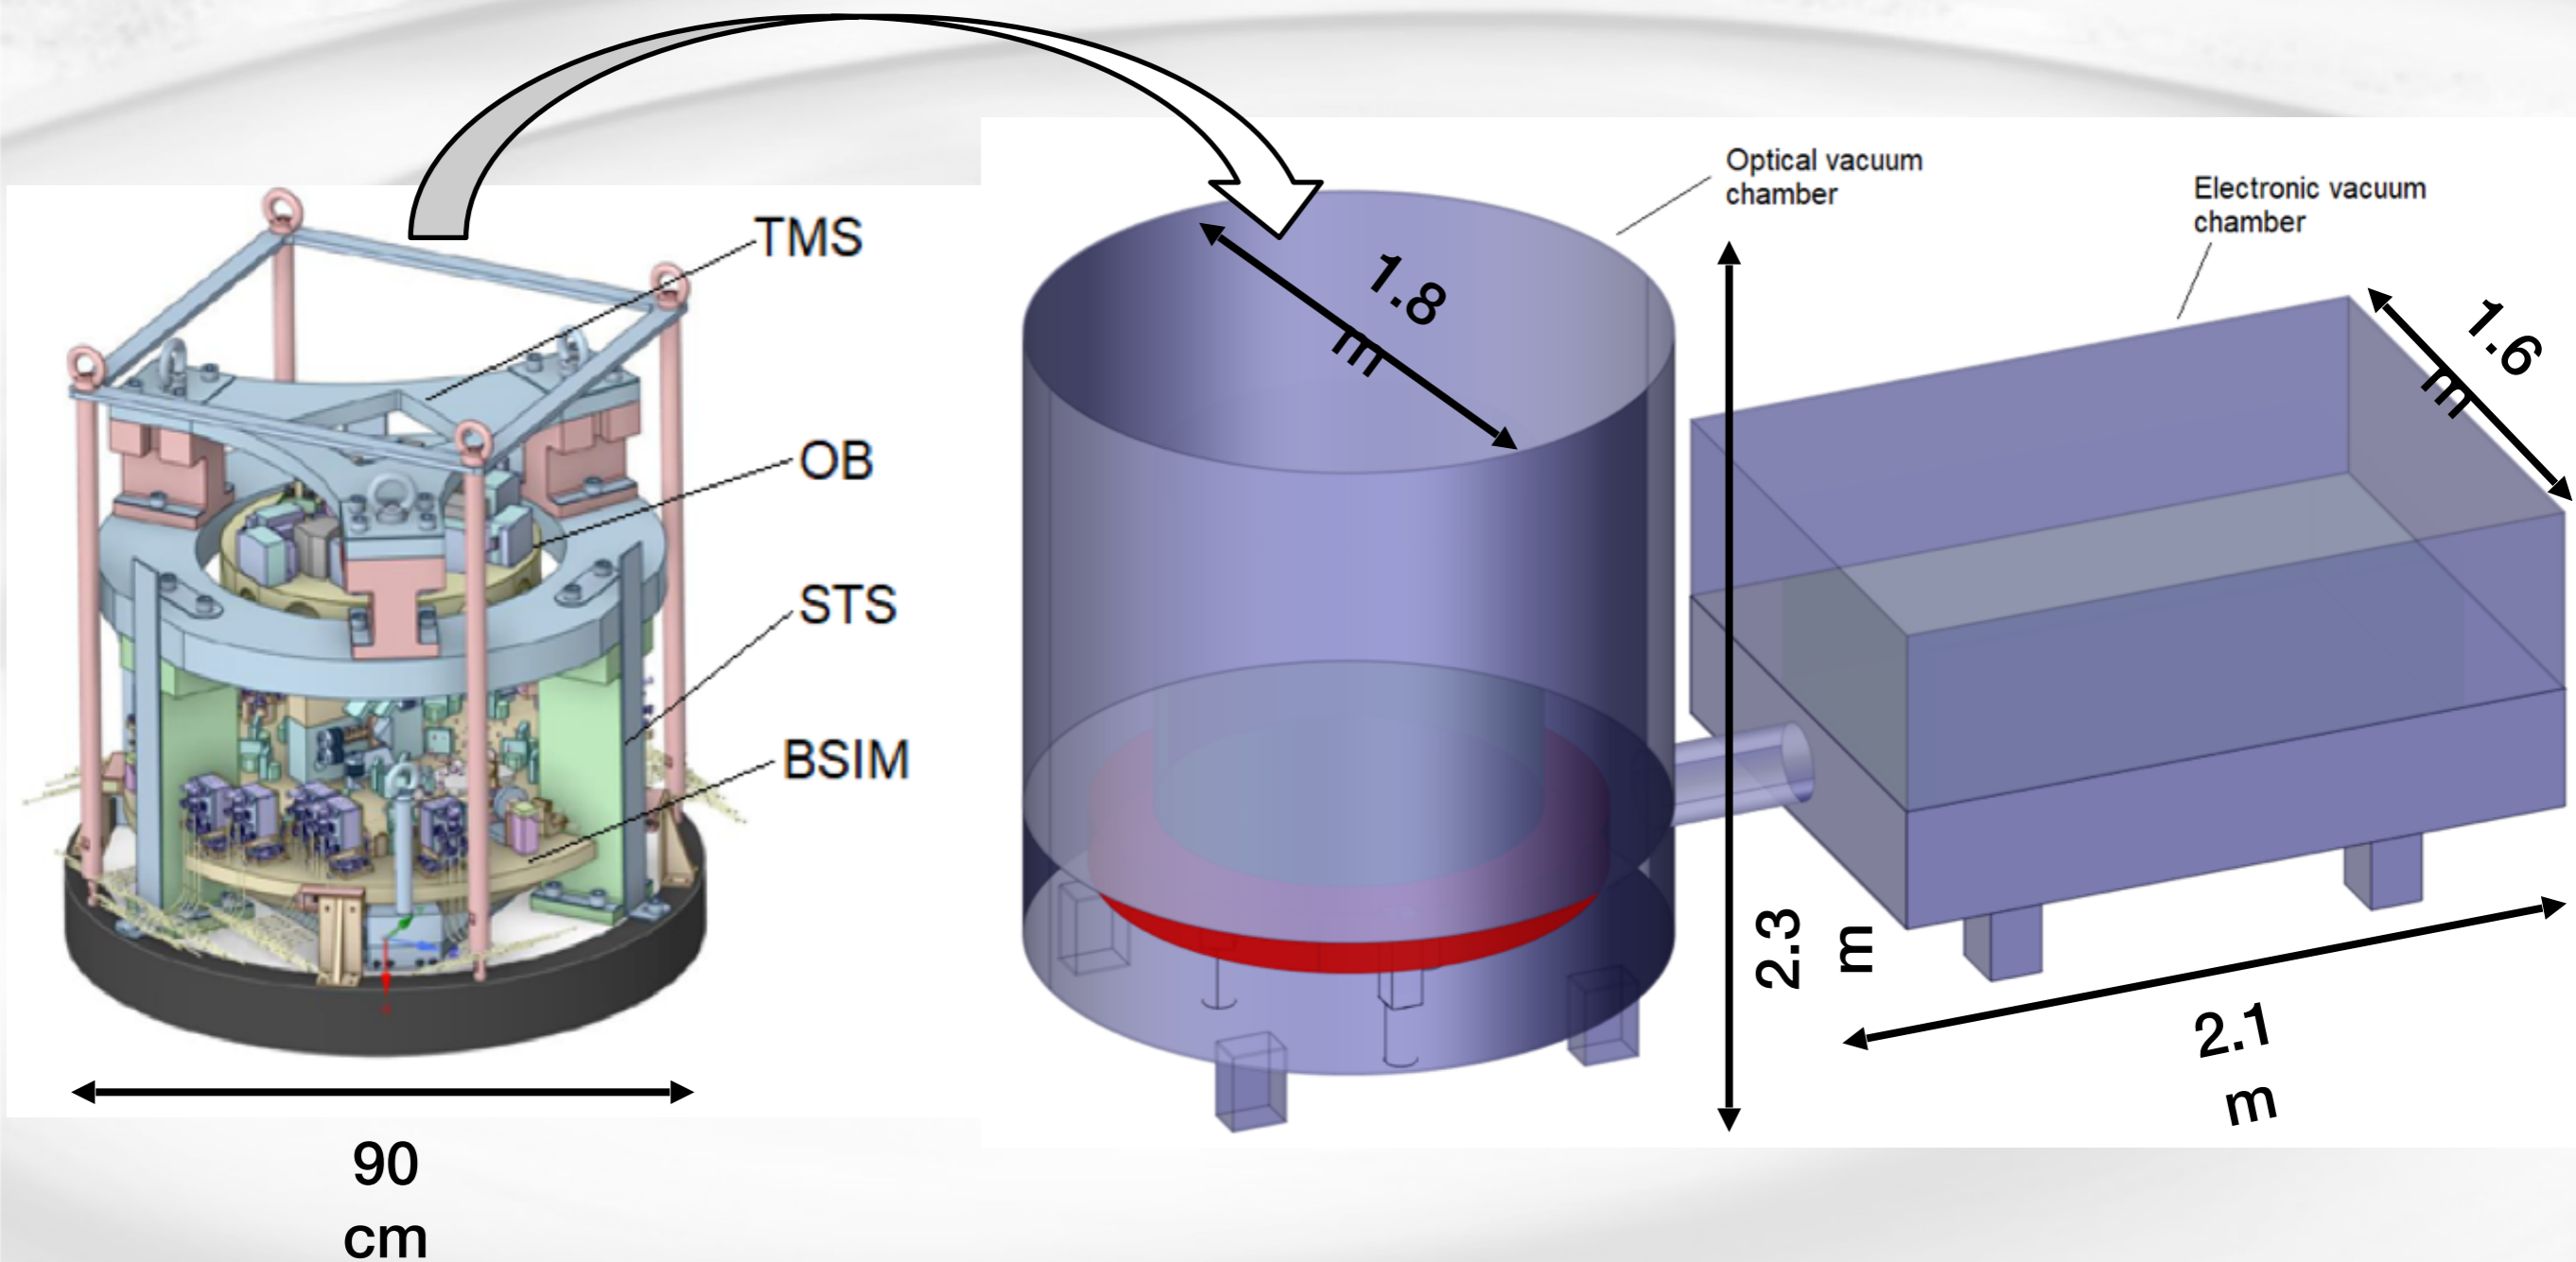




- Since 2018, LISA Data Challenges have been organized and fulfilled to :
  - Foster R&D on this challenging signal dominated analysis
  - Support phase A and B ESA reviews on that topic
  - Get preliminary cost estimate and DDPC design drivers
- Challenges
  - LDC 1a Radler
    - Various DA approaches for all GW source types
  - LDC 2a Sangria
    - 2/3 global-fit prototypes for first enchilada (GB+MBHB) challenge including one developed by APC+L2IT
  - LDC 2b Spritz
    - Dealing with gaps and glitches
- LDC have required :
  - development of a E2E simulation pipeline to produce realistic L1 TDI data
  - organization of weekly telecons to drive that effort
  - development of a web data portal to share data and results
  - development of evaluation and comparison tools
- This effort has mainly been supported by the French community

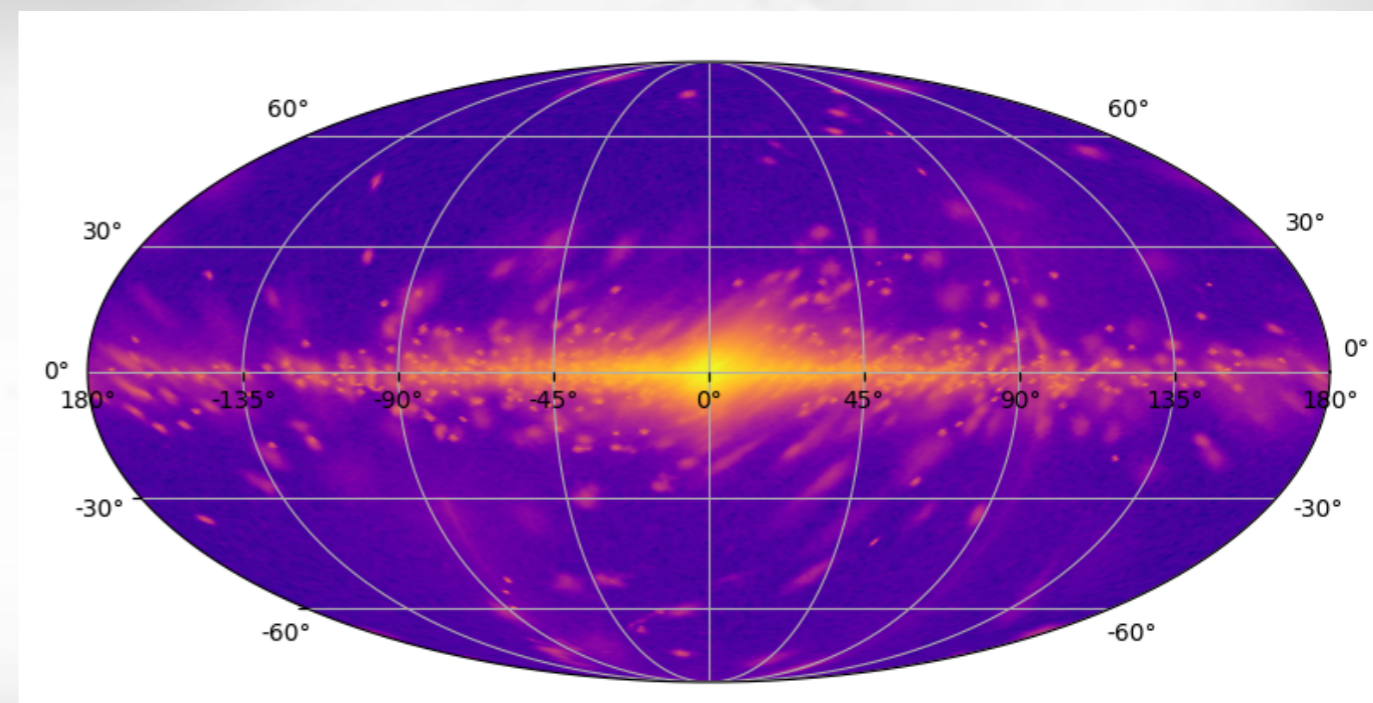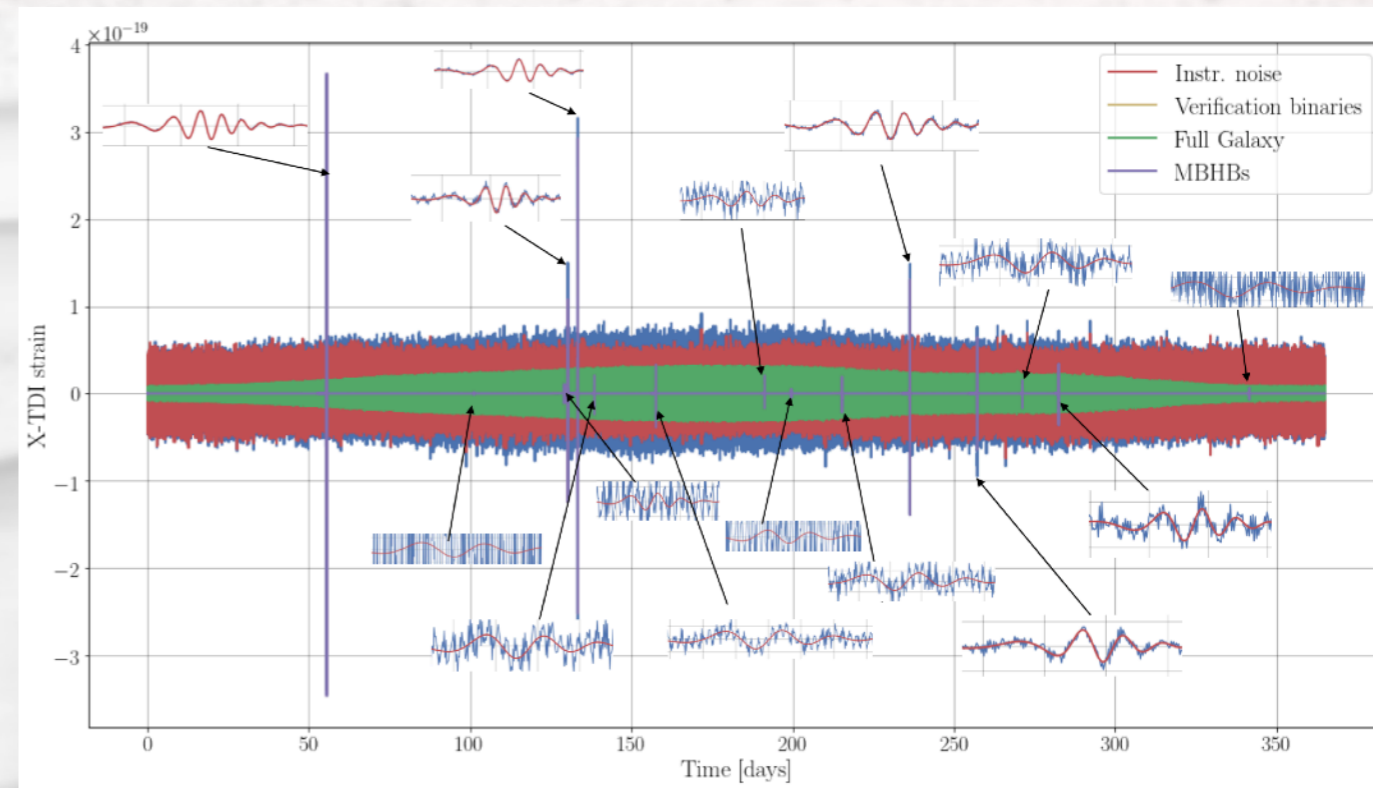

• Broad and continuous coverage from instrument development to GW science

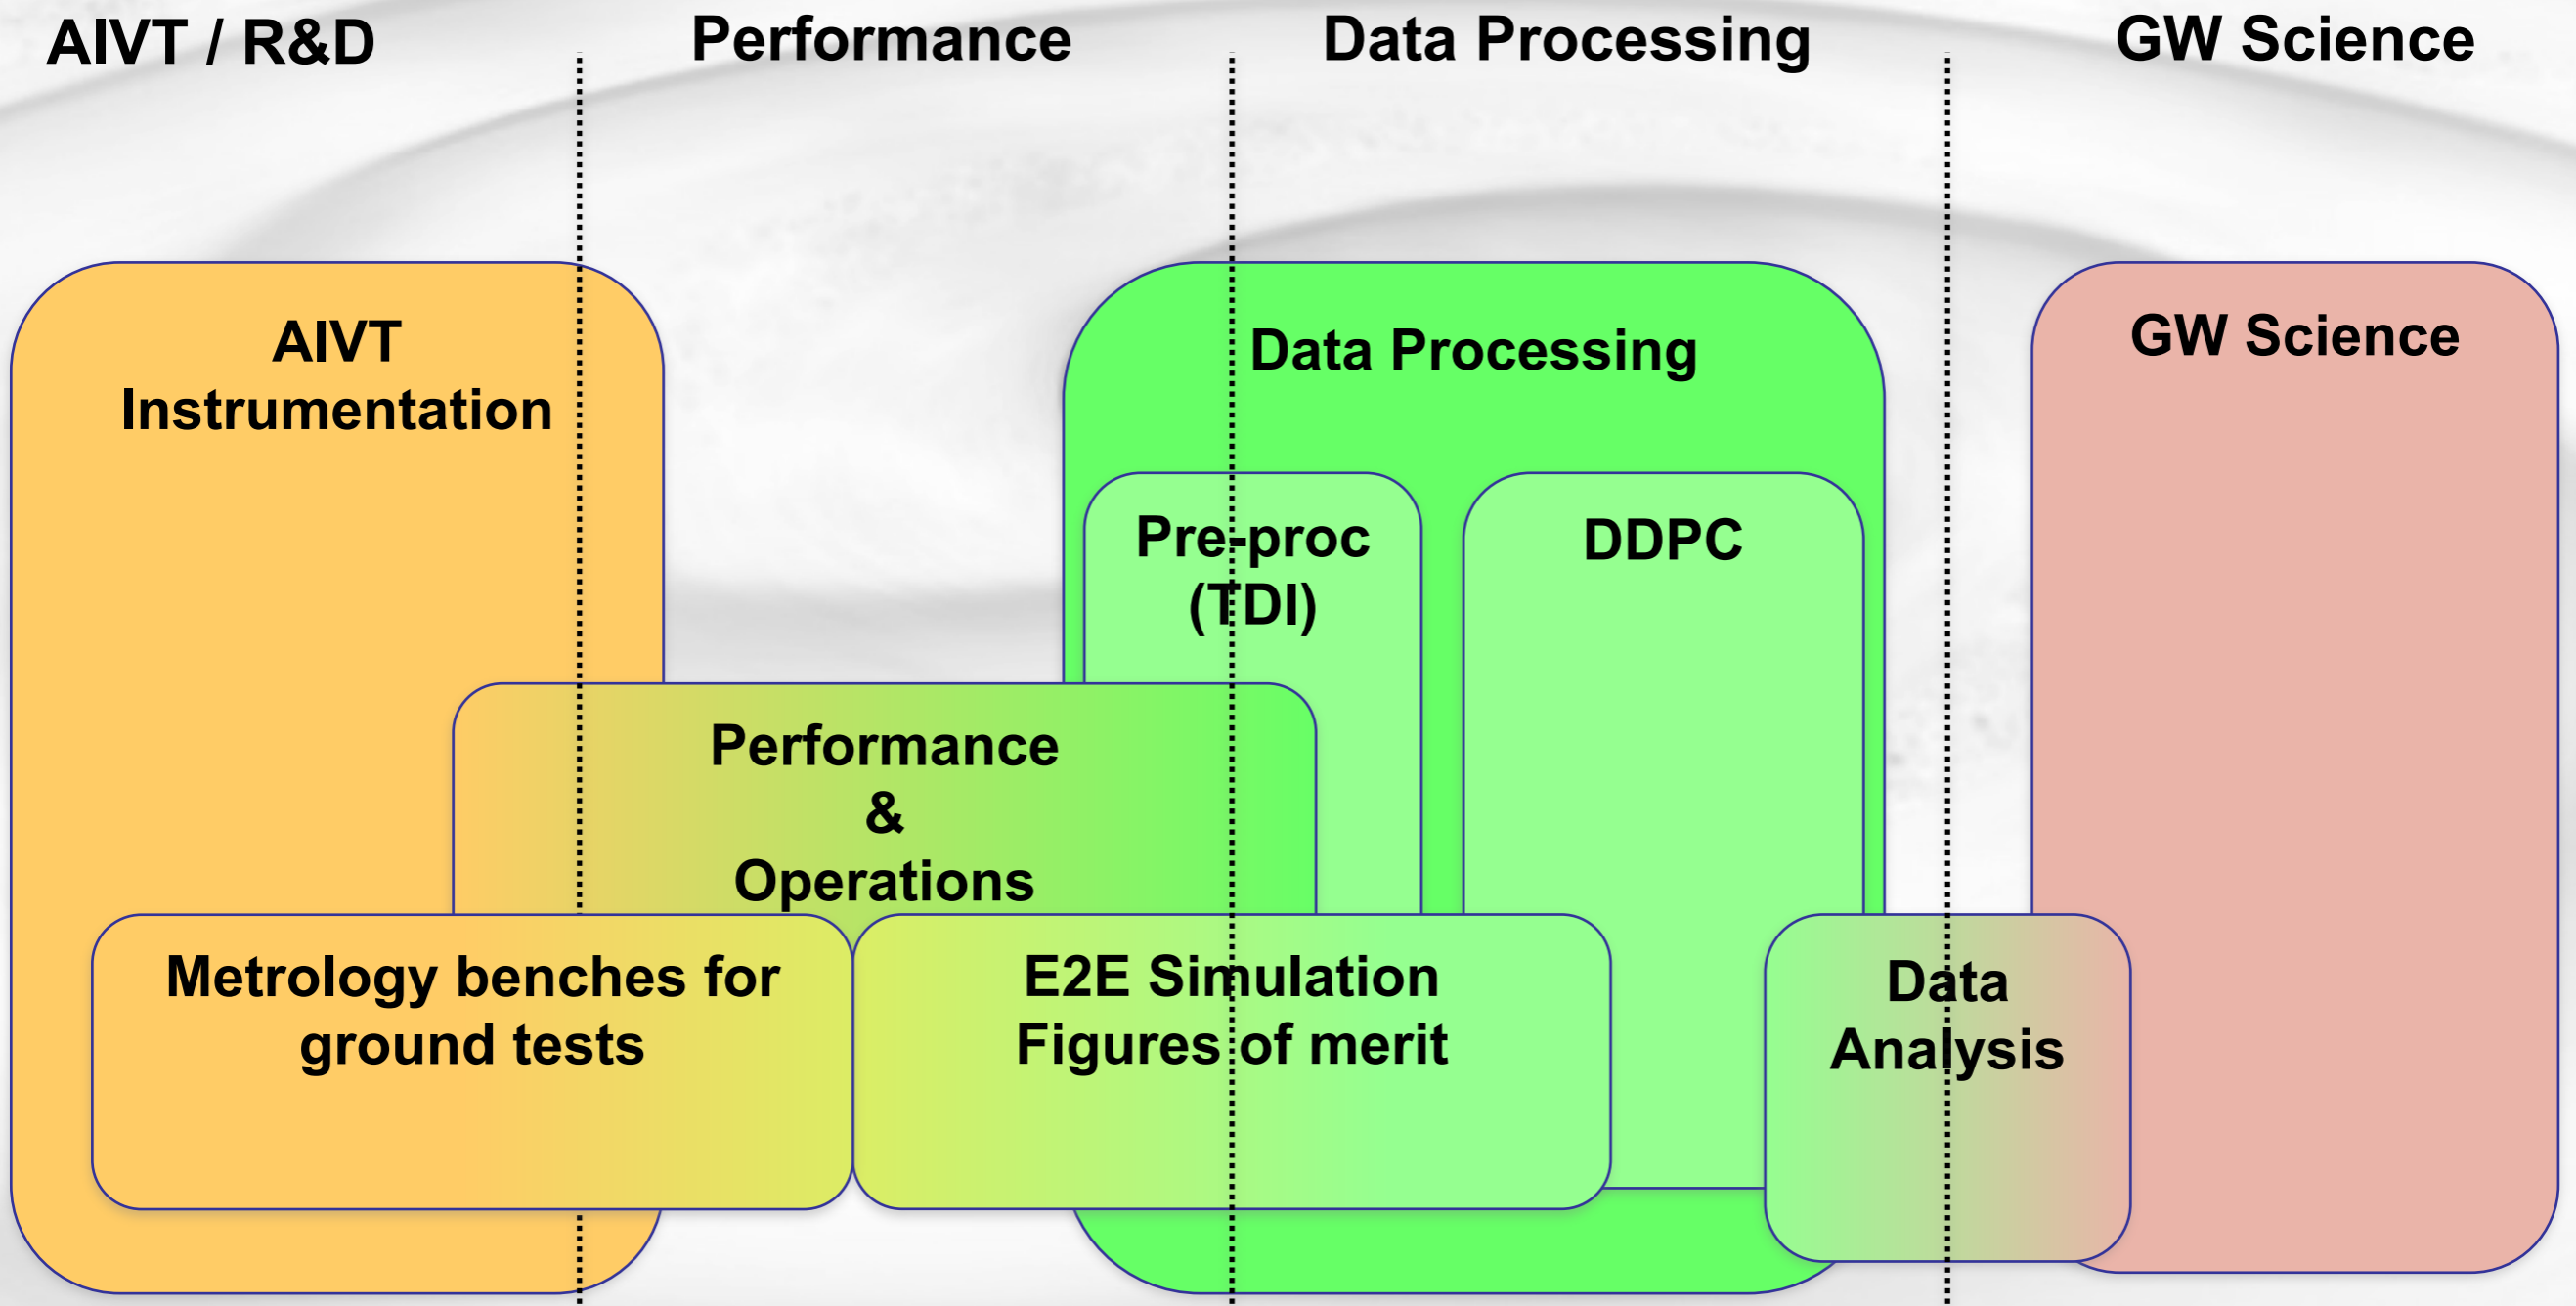




- *LISA Science Objectives*
- *From LISA Pathfinder to LISA*
- *Mission description*
- **Conclusion**

- Laser interferometry is currently the most sensitive technique for detecting GWs
- LISA will observe mHz GWs around from space
  - Complementary to ground-based detectors
- Many technological challenges have been demonstrated with LISA Pathfinder
- **LISA is at the eve of adoption !**
  - Formal adoption expected in January 2024
- Crucial contributions from French institutes
  - The hard work has now started ...





Coming soon...



- 🚀 Amaro-Seoane, P. *et al.* (2017) ‘Laser Interferometer Space Antenna’. arXiv. Available at: <https://doi.org/10.48550/arXiv.1702.00786>.
- 🚀 Armano, M. *et al.* (2019) ‘LISA Pathfinder’. arXiv. Available at: <https://doi.org/10.48550/arXiv.1903.08924>.
- 🚀 Klein, A. *et al.* (2016) ‘Science with the space-based interferometer eLISA. I: Supermassive black hole binaries’, *Physical Review D*, 93(2), p. 024003. Available at: <https://doi.org/10.1103/PhysRevD.93.024003>.
- 🚀 Caprini, C. *et al.* (2016) ‘Science with the space-based interferometer eLISA. II: Gravitational waves from cosmological phase transitions’, *Journal of Cosmology and Astroparticle Physics*, 2016(04), pp. 001–001. Available at: <https://doi.org/10.1088/1475-7516/2016/04/001>.
- 🚀 Tamanini, N. *et al.* (2016) ‘Science with the space-based interferometer eLISA. III: Probing the expansion of the Universe using gravitational wave standard sirens’, *Journal of Cosmology and Astroparticle Physics*, 2016(04), pp. 002–002. Available at: <https://doi.org/10.1088/1475-7516/2016/04/002>.
- 🚀 Bartolo, N. *et al.* (2016) ‘Science with the space-based interferometer LISA. IV: Probing inflation with gravitational waves’, *Journal of Cosmology and Astroparticle Physics*, 2016(12), pp. 026–026. Available at: <https://doi.org/10.1088/1475-7516/2016/12/026>.
- 🚀 Babak, S. *et al.* (2017) ‘Science with the space-based interferometer LISA. V: Extreme mass-ratio inspirals’, *Physical Review D*, 95(10), p. 103012. Available at: <https://doi.org/10.1103/PhysRevD.95.103012>.
- 🚀 Auclair, P. *et al.* (2023) ‘Cosmic string bursts in LISA’. arXiv. Available at: <https://doi.org/10.48550/arXiv.2305.11653>. Babak, S. *et al.* (2023) ‘Stochastic gravitational wave background from stellar origin binary black holes in LISA’. arXiv. Available at: <https://doi.org/10.48550/arXiv.2304.06368>.
- 🚀 Bayle, J.-B. *et al.* (2023) ‘End-to-end simulation and analysis pipeline for LISA’. arXiv. Available at: <https://doi.org/10.48550/arXiv.2305.09702>.
- 🚀 Cornish, N.J. and Shuman, K. (2020) ‘Black Hole Hunting with LISA’, *Physical Review D*, 101(12), p. 124008. Available at: <https://doi.org/10.1103/PhysRevD.101.124008>.
- 🚀 Digman, M.C. and Cornish, N.J. (2022) *Parameter Estimation for Stellar-Origin Black Hole Mergers In LISA*, *arXiv.org*. Available at: <https://arxiv.org/abs/2212.04600v1> (Accessed: 7 July 2023).
- 🚀 Mangiagli, A. *et al.* (2022) ‘Massive black hole binaries in LISA: multimessenger prospects and electromagnetic counterparts’, *Physical Review D*, 106(10), p. 103017. Available at: <https://doi.org/10.1103/PhysRevD.106.103017>.
- 🚀 Robson, T., Cornish, N. and Liu, C. (2019) ‘The construction and use of LISA sensitivity curves’, *Classical and Quantum Gravity*, 36(10), p. 105011. Available at: <https://doi.org/10.1088/1361-6382/ab1101>.
- 🚀 Savalle, E. *et al.* (2023) ‘Detection of magnetic galactic binaries in quasi-circular orbit with LISA’. arXiv. Available at: <https://doi.org/10.48550/arXiv.2304.07294>.
- 🚀 Staab, M. *et al.* (2023) *Laser noise residuals in LISA from onboard processing and time-delay interferometry*, *arXiv.org*. Available at: <https://arxiv.org/abs/2306.11774v1> (Accessed: 7 July 2023).
- 🚀 Toubiana, A. *et al.* (2021) ‘Discriminating between different scenarios for the formation and evolution of massive black holes with LISA’, *Physical Review D*, 104(8), p. 083027. Available at: <https://doi.org/10.1103/PhysRevD.104.083027>.