



status and first dark matter searches

Vijay Dabhi

Aix-Marseille Univ, CNRS/IN2P3, CPPM, Marseille, France

IRN Terascale

14 November 2024

On behalf of the MADMAX collaboration

Outline

- Dielectric haloscope concept
- First dark matter searches with MADMAX prototypes
- Plans for final prototype
- Conclusions



Dark matter axion



□ CP violation in strong sector

- QCD Lagrangian has a CP violating term that is controlled by θ parameter ($-\pi < \theta < \pi$)
- This term leads to a neutron electric dipole moment

$$d_n = (2.4 \pm 1.0) \theta \times 10^{-3} \text{ e fm}$$


- Current experiments give upper bound of $|d_n| < 1.8 \times 10^{-13} \text{ e fm}$ leading to $|\theta| < 0.8 \times 10^{-10}$

□ Strong CP problem = fine tuning problem: Why is a free parameter θ so small?

□ Solution: Introduce a new U(1) symmetry spontaneously broken -> 'QCD Axion'


- A strongly motivated dark matter candidate

□ Axion like particles (ALPs) solve the dark matter problem but not the strong CP problem

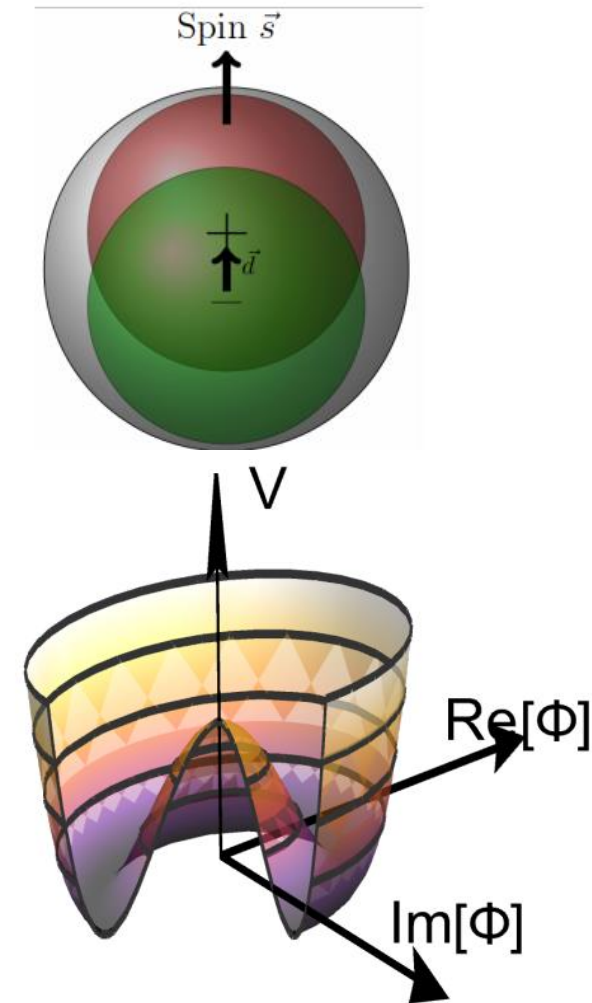

How to see the dark matter axions ?

- ❑ If axions comprise all of dark matter $\rightarrow 0.3 \text{ GeV/cm}^3$ in the galactic halo
- ❑ Preferred detection: Convert it to a photon in the presence of magnetic field

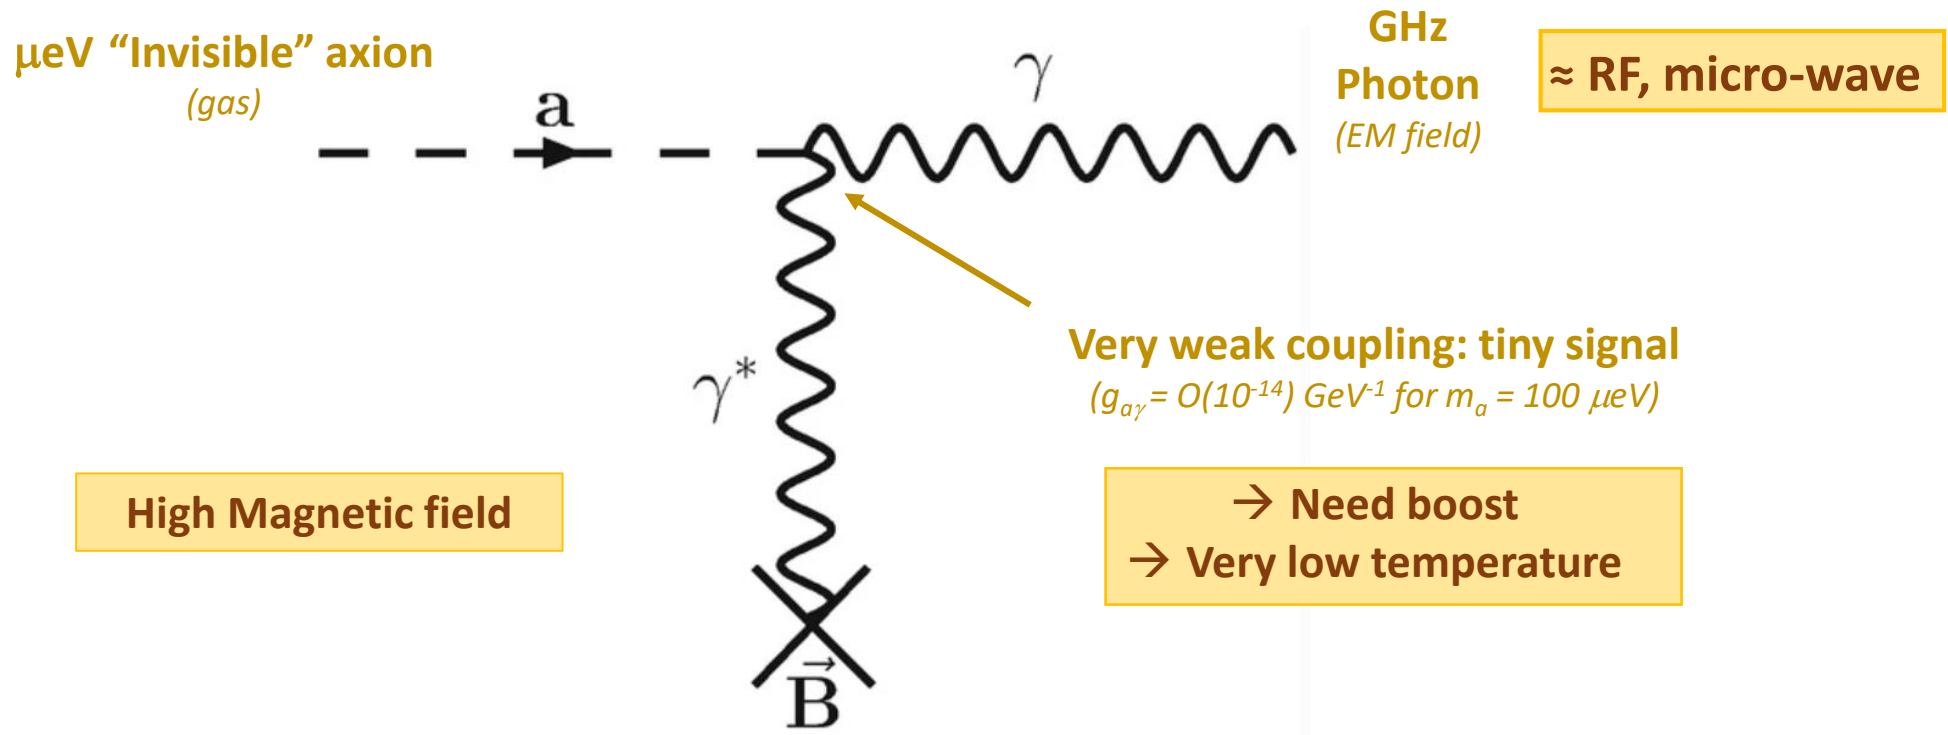

Axion search very rich in experimental challenges


Dielectric haloscope: principles

- ❑ **Constructive interference** (and resonance) of coherent photon emission at dielectric layers surface (leaky resonators cavities)

$$P_{sig} = 10^{-22} \text{ W} \times \left(\frac{\beta^2}{50000} \right) \times \left(\frac{B_e}{10 \text{ T}} \right)^2 \times \left(\frac{A}{1 \text{ m}^2} \right) \times C_{a\gamma}^2$$

$$P_{sig} = 10^{-22} \text{ W} \times \left(\frac{SNR}{5} \right) \times \left(\frac{T_{sys}}{4 \text{ K}} \right) \times \left(\frac{4 \text{ days}}{t} \right)^{1/2}$$

$$|C_{a\gamma}| = \left(\frac{|g_{a\gamma}|}{2 \times 10^{-14} \text{ GeV}^{-1}} \right) \left(\frac{100 \mu\text{eV}}{m_a} \right)$$

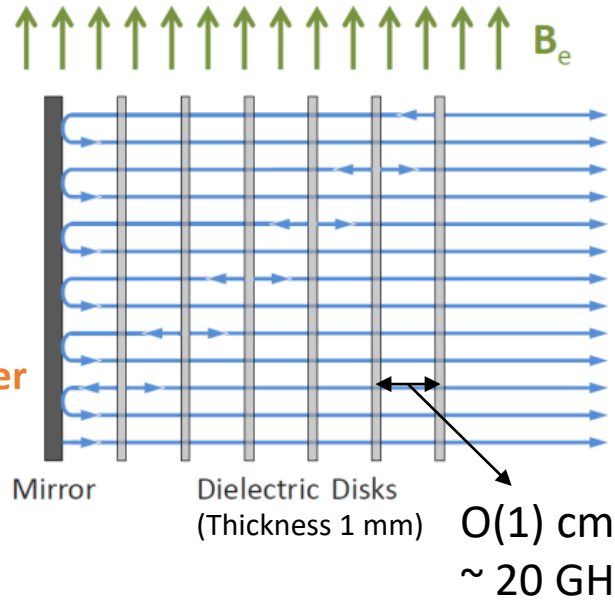

Power boost factor:

$$\beta^2 = \frac{P_{\text{mirror+disk}}}{P_{\text{mirror}}}$$


Booster

Mirror

Dielectric Disks
(Thickness 1 mm)

O(1) cm
~ 20 GHz

Receiver
10⁻²² W

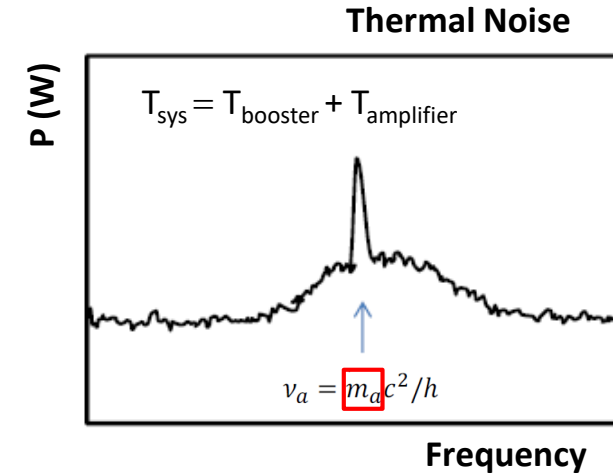


- ❑ **Axion mass scan** : by positioning discs with μm precision at 4K under 10 T (50 MHz step)


The MADMAX collaboration



Formed in 2017, 11 institutes: French (3), German (6), Spanish (1) and US (1) → ~50 people

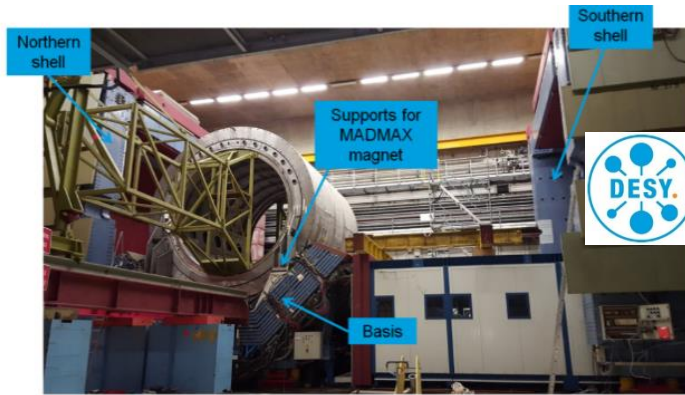

Experiment location: HERA H1 iron yoke in DESY, Hamburg

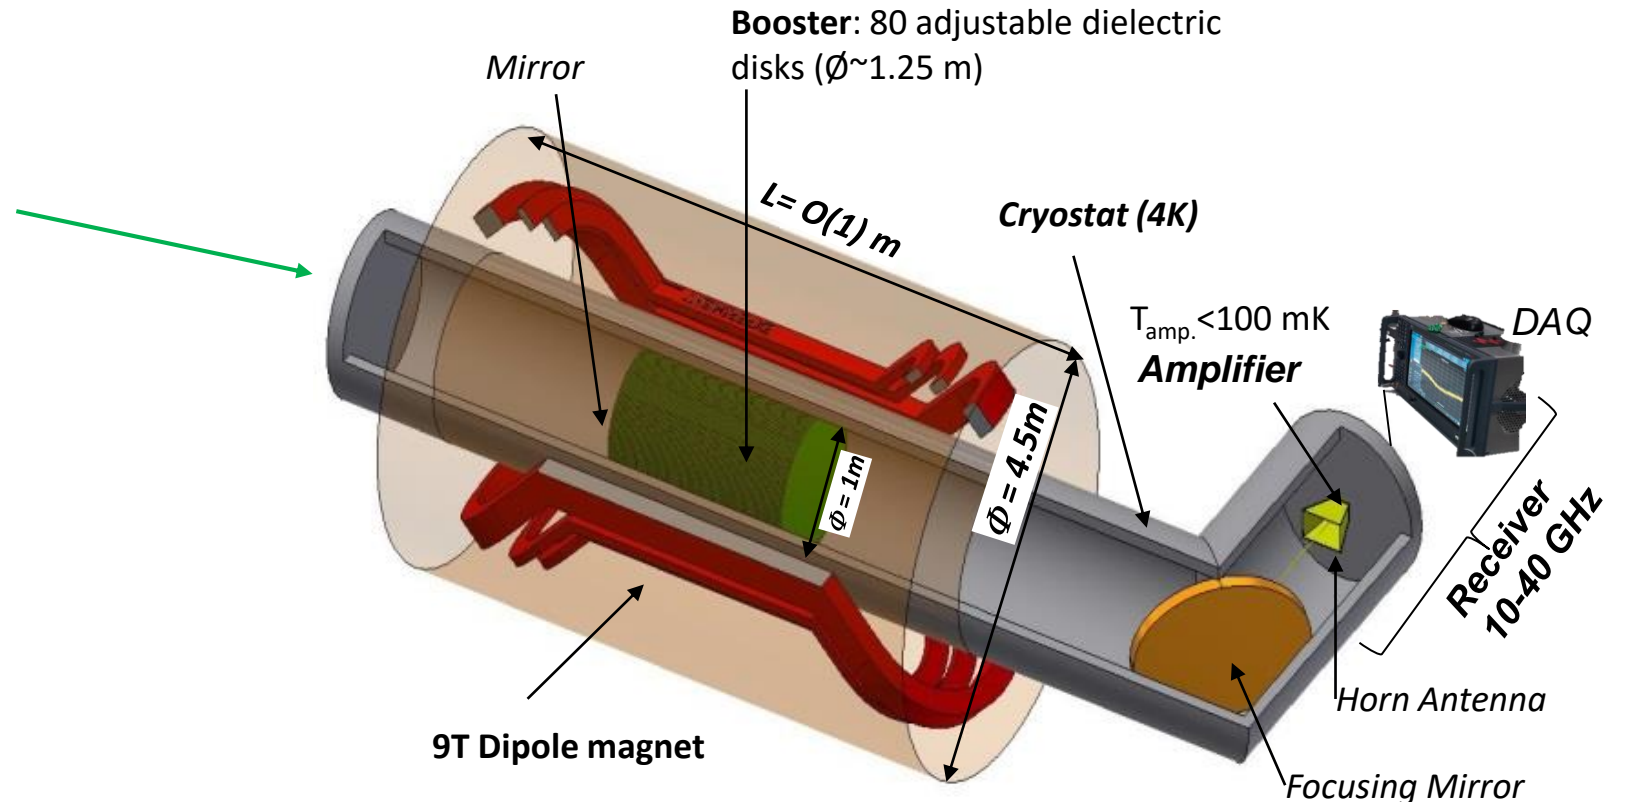

[Eur. Phys. J. C 79 (2019) 186]


Experimental Challenges :

- High B-field
- Low Temp. (4 K)
- O(10) GHz regime
- μm precision for mechanics


MADMAX prototypes




- Validate the new concept of dielectric haloscope using several prototypes

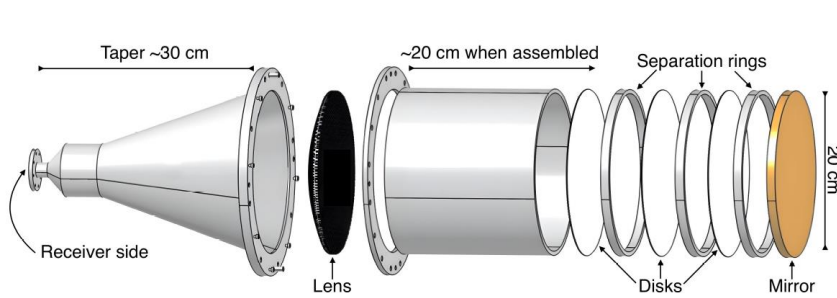

Closed booster with 200 mm disks (CB200)

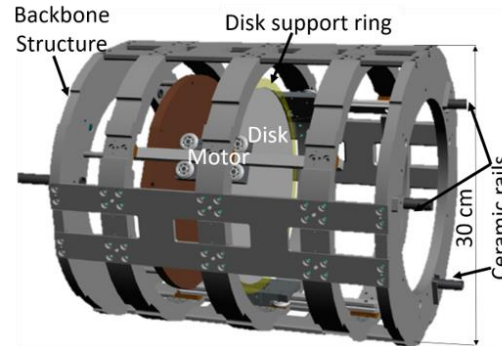

Open booster OB200

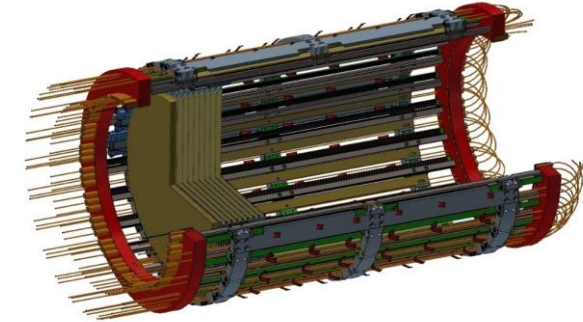


Open booster OB300


Name	Setup	Temperature	Goal
CB200	3 fixed disks	Warm	First ALPs search
OB300v1	3 fixed disks	Warm	First Open booster
OB200	1 moveable disk	Warm	Moving the disks
OB300v2	≥ 3 moveable disks	Cold	Final prototype

I participated to CB200 data taking/analysis, OB200 data analysis and OB300 simulations

First ALPs search with MADMAX

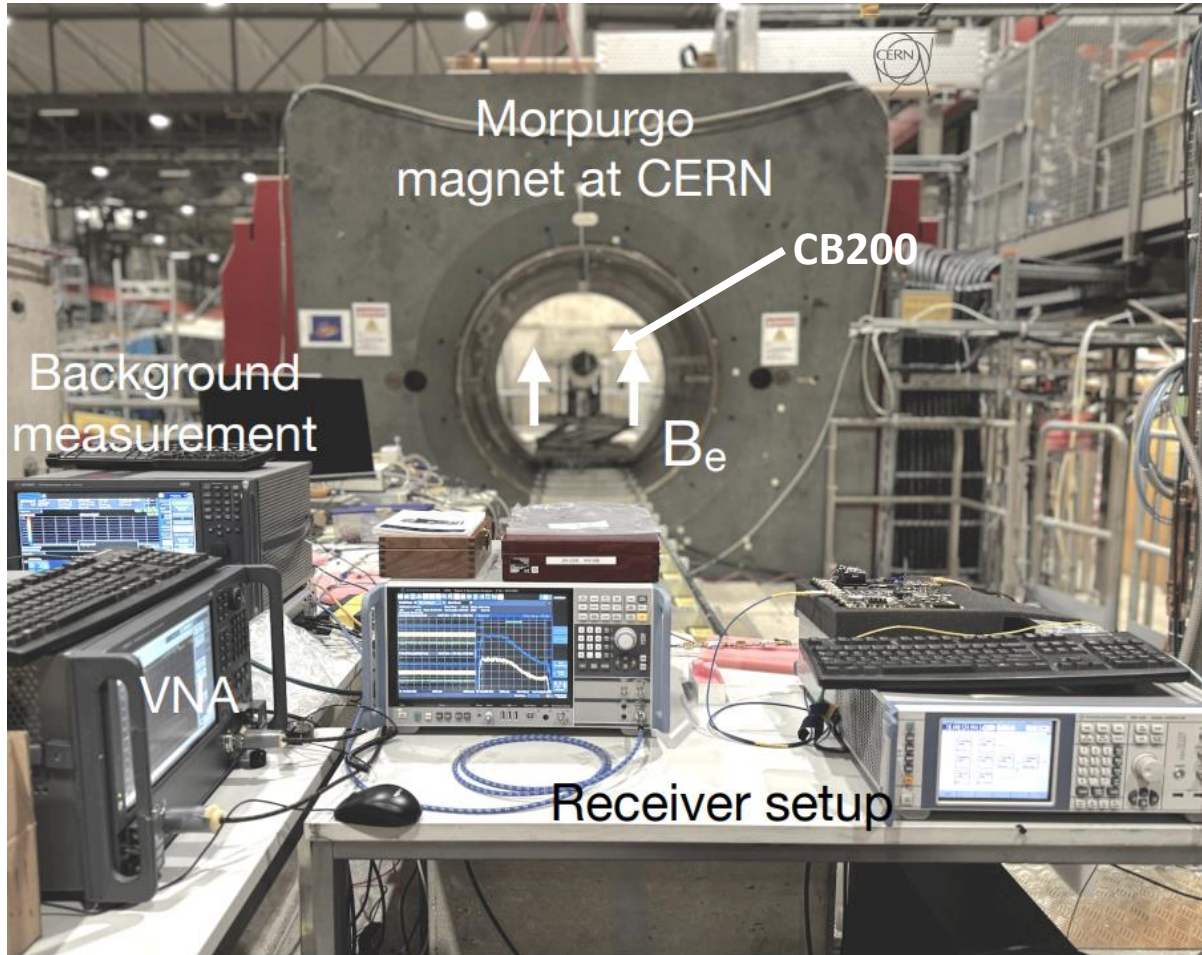


- Room temperature
- 1 - 1.6 T magnetic field inside the Morpurgo magnet

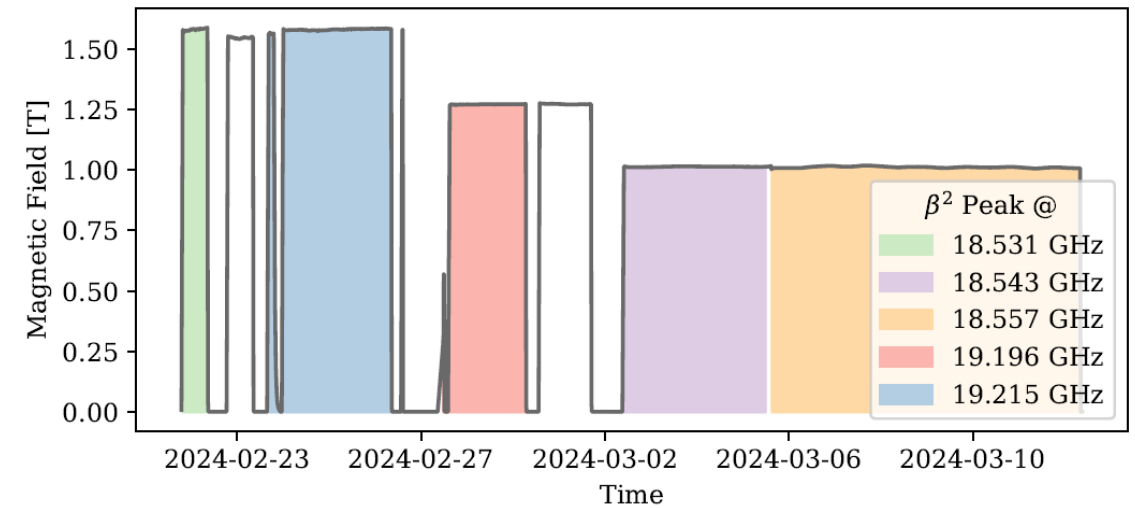

14.5 days of physics data at CERN with CB200 prototype

First ALPs search with MADMAX

- ❑ A prototype with 1 mirror and three sapphire disks of 200 mm diameter
- ❑ Distance between the disks is determined by separation rings, optimized for 76-80 μeV axion search
- ❑ Tuning rod can push the mirror to change the desired search range

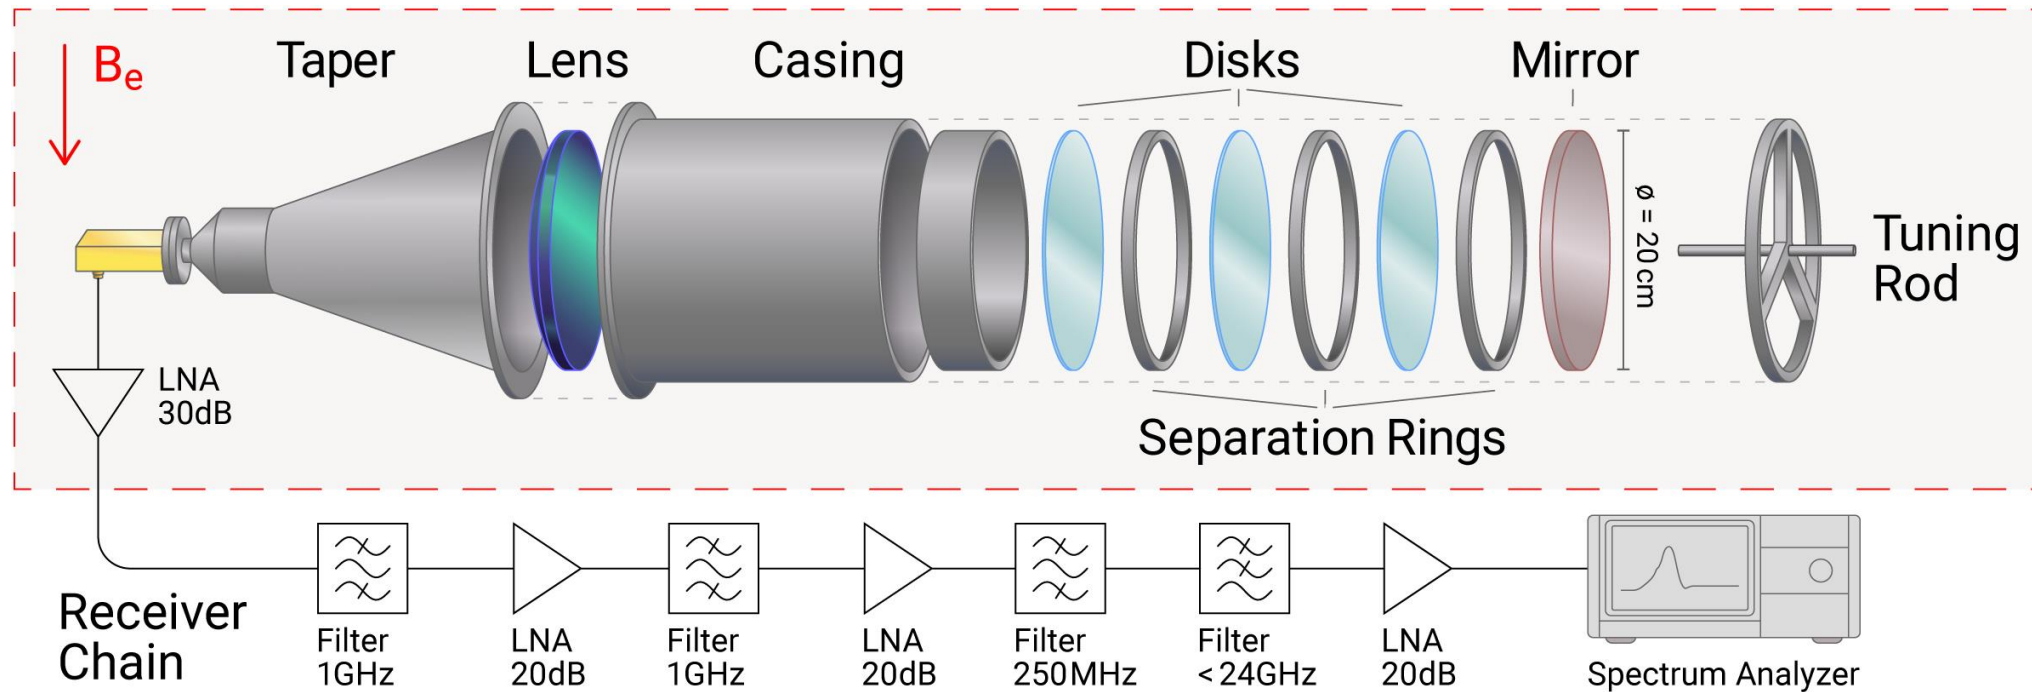


Five data runs in two configurations (two sets of separation rings) $\sim 18.5\text{ GHz}$ and 19.2 GHz

Booster modelling



□ β^2 extracted from booster measurements and 1D modelling using ADS software


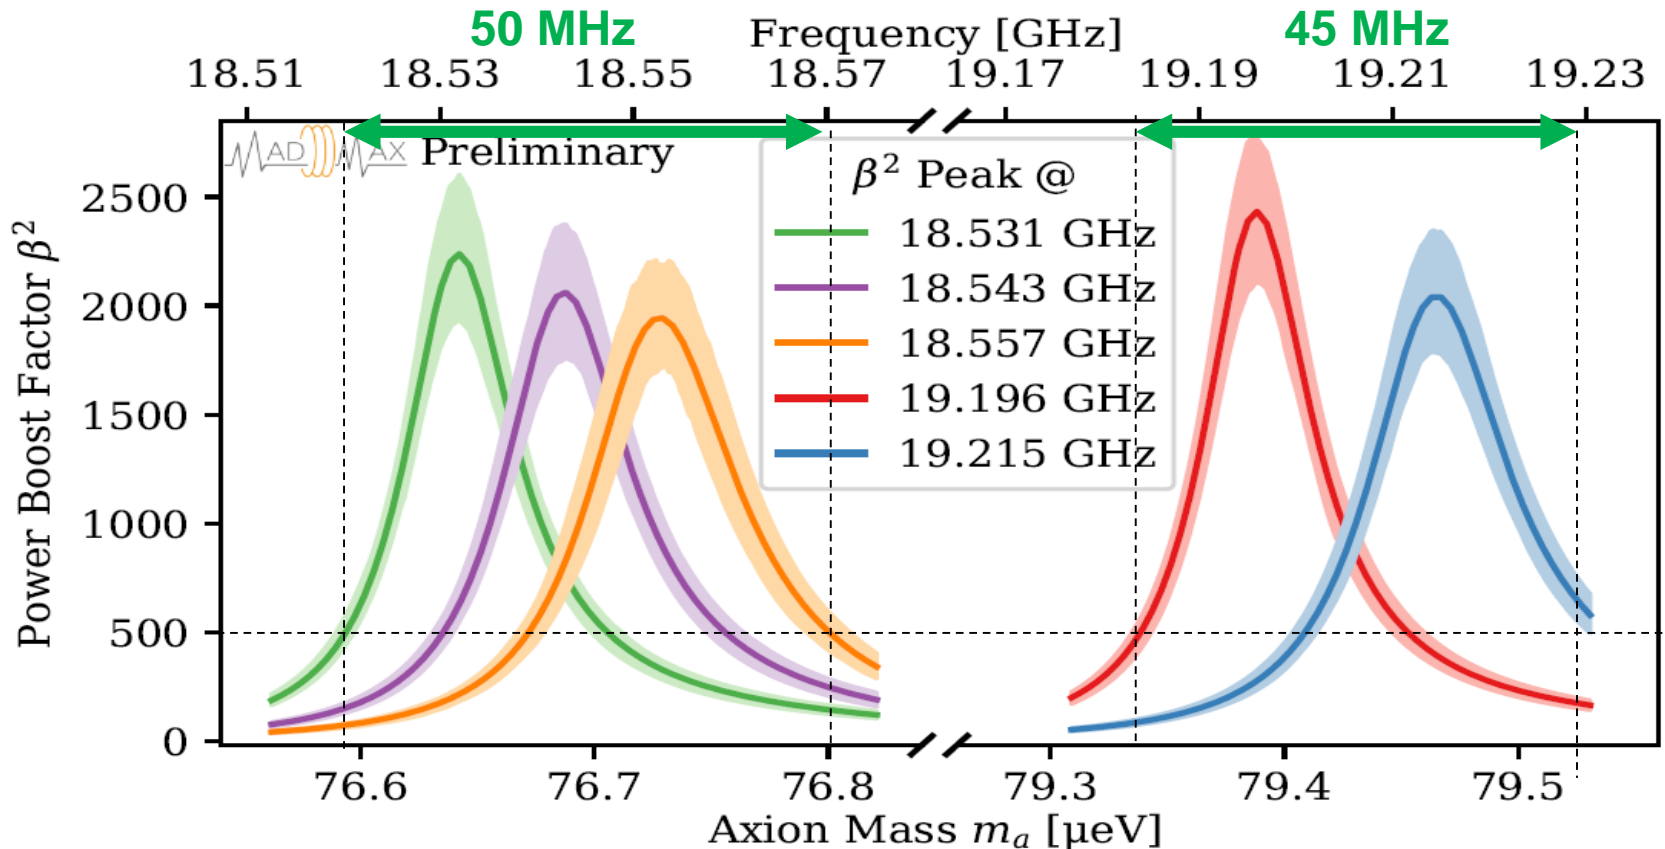


- $\beta^2 > 500$ in 100 MHz bandwidth
- β^2 peaks around 2000 for all 5 data runs with $\sim 15\%$ uncertainty

Statistical analysis



- Combining all raw spectra measurements to get one “grand spectrum”
 - Optimize the SNR in the process
 - Based on HAYSTAC analysis procedure (PRD 96 (2017) 123008)

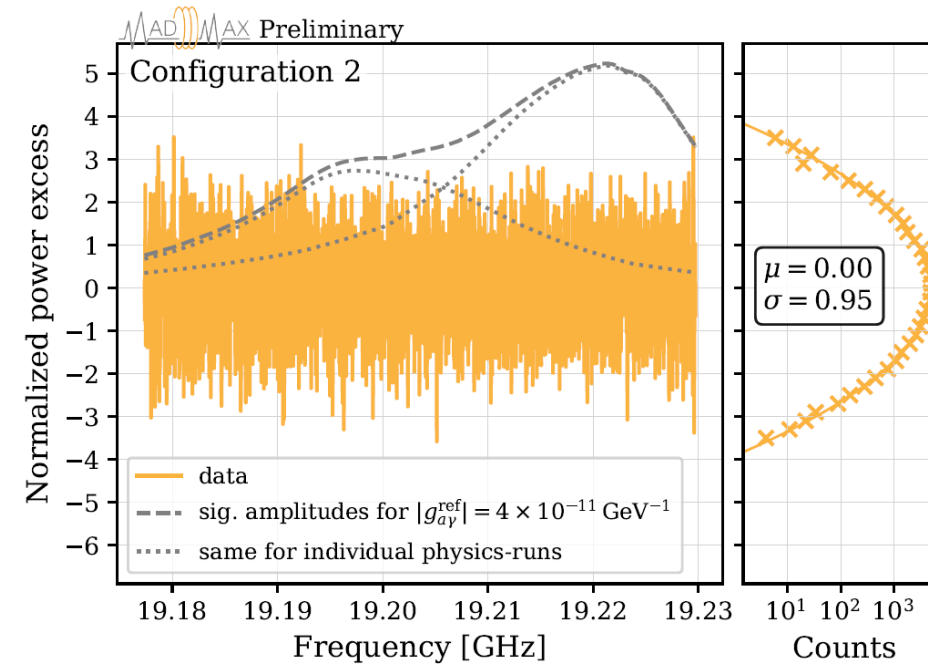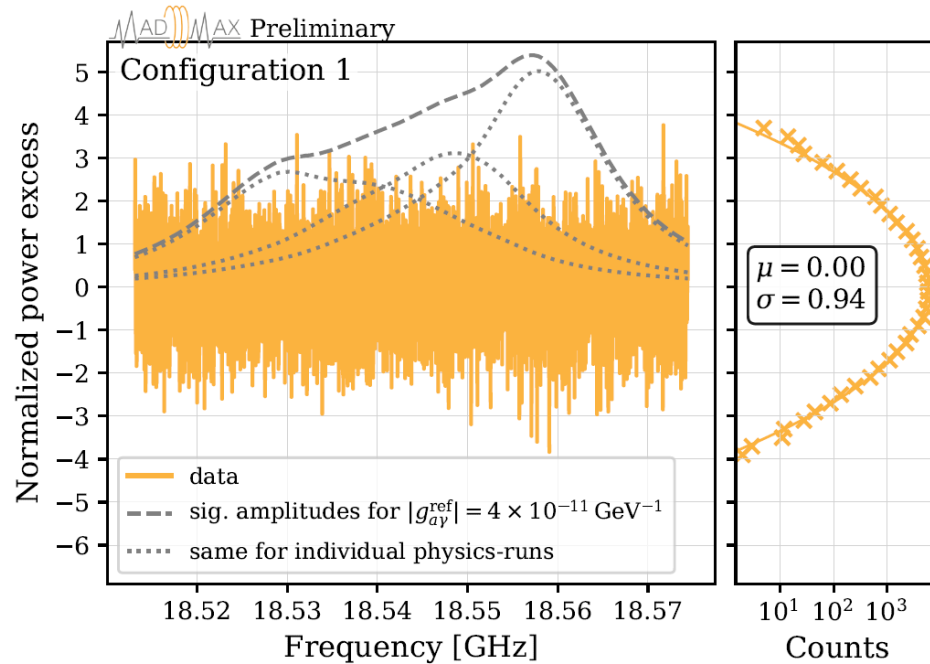


Grand spectrum for two different configurations @ 18.5 GHz and 19.2 GHz

First ALPs limit with MADMAX



□ First axion dark matter limit using dielectric haloscope

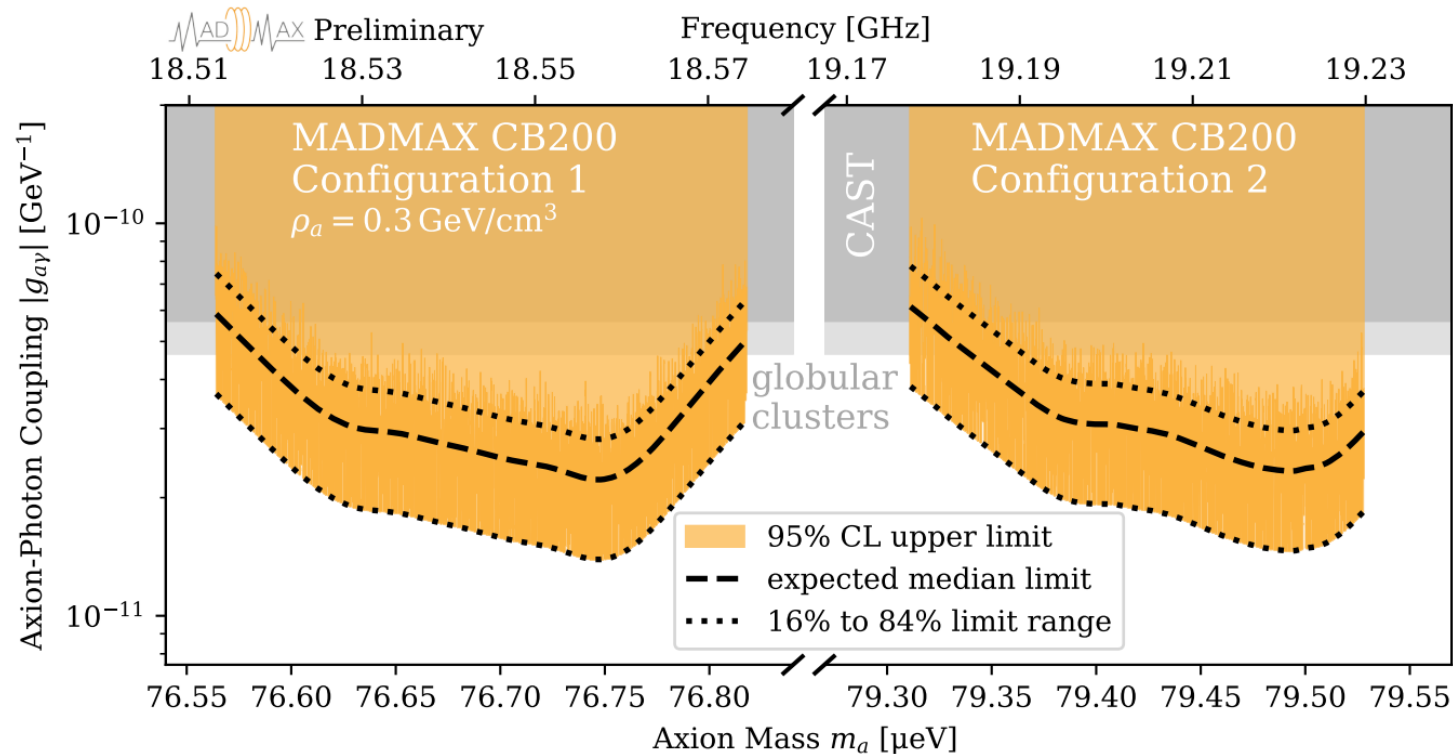

arXiv:2409.11777v1
(submitted to PRL)

95% confidence exclusion limit
bin width = 0.9 kHz

- World best median limit down to $2 \times 10^{-11} \text{ GeV}^{-1}$ around $78 \mu\text{eV}$
- I am currently working on producing a dark photon exclusion limit using the same data

First Dark photon search with MADMAX




- ❑ Moving from closed booster towards bigger and open booster
 - OB300v1 with fixed disks
 - OB300v2 with movable disks
- ❑ OB300v1 booster for dark photon (DP) search with 12 days of data taking (no B field)
 - Setup at room temperature, surrounded by RFI shielding walls



In-situ β^2 determination

1. Reflectivity (Γ_R) measurements with and without a small bead to make a 3D scan inside the booster (not possible with closed booster)
2. Calculate the electric field $E_R \propto \sqrt{\Delta\Gamma_R}$

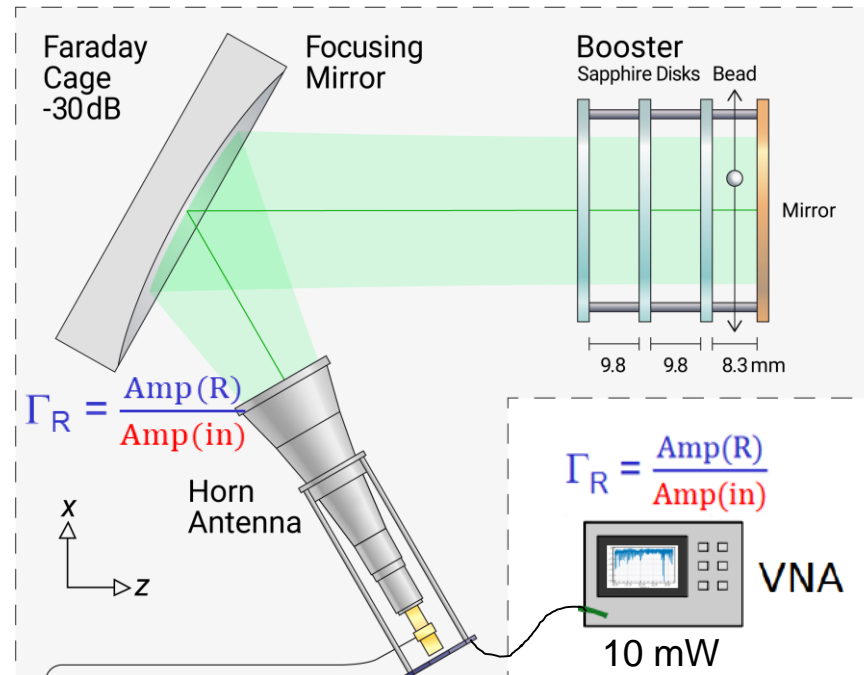


JCAP 04 (2023) 064
JCAP 04 (2024) 005


In-situ β^2 determination



3. Fit the electric field measurements to a 1D booster model
4. Deconvolute the bead response to get axion induced electric field
5. Integrate the electric field over the booster volume to calculate the boost factor

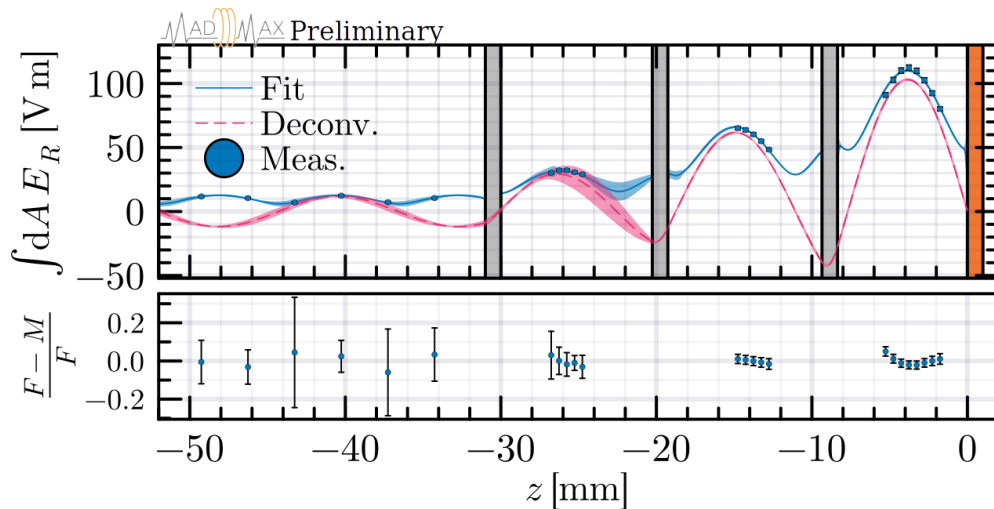

$$\beta^2 \propto \left| \int dV E_R \right|^2$$

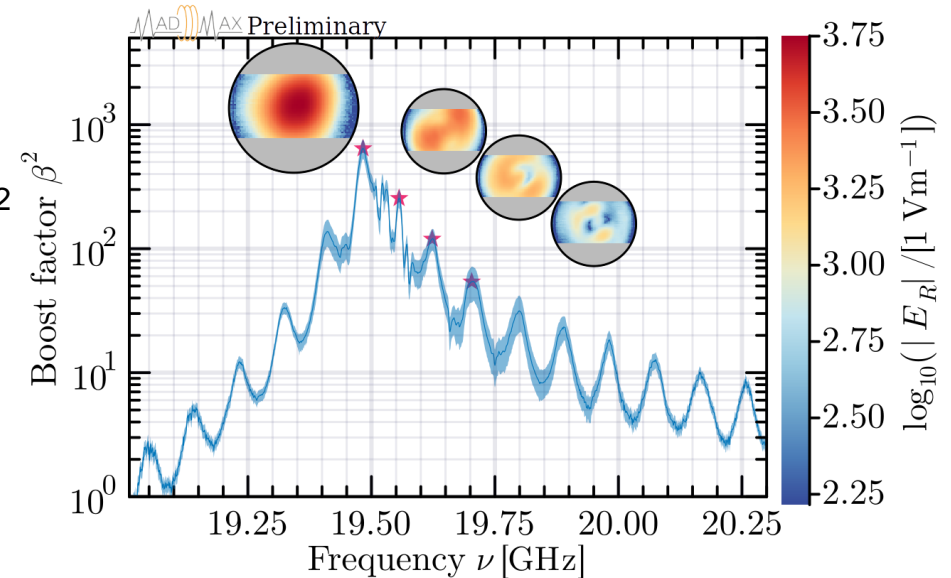


- $\beta^2 > 1$ in 1.3 GHz bandwidth
- β^2 peak around 600 with $\sim 15\%$ uncertainty


First Dark Photon limit with MADMAX



arXiv:2408.02368v1
(submitted to PRL)

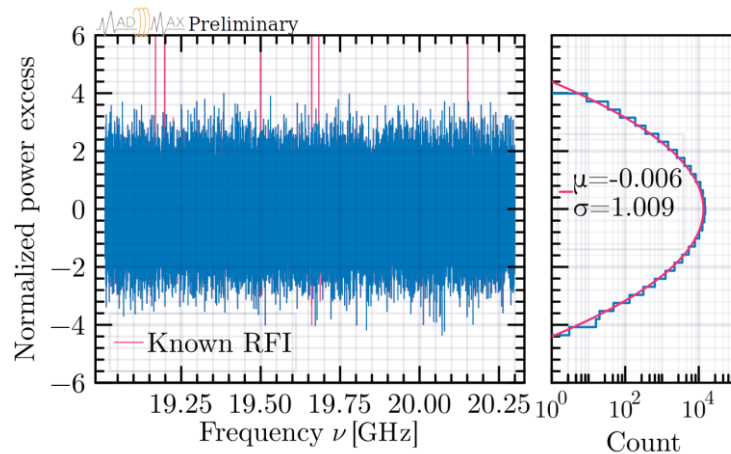



No peaks of unknown origin is observed

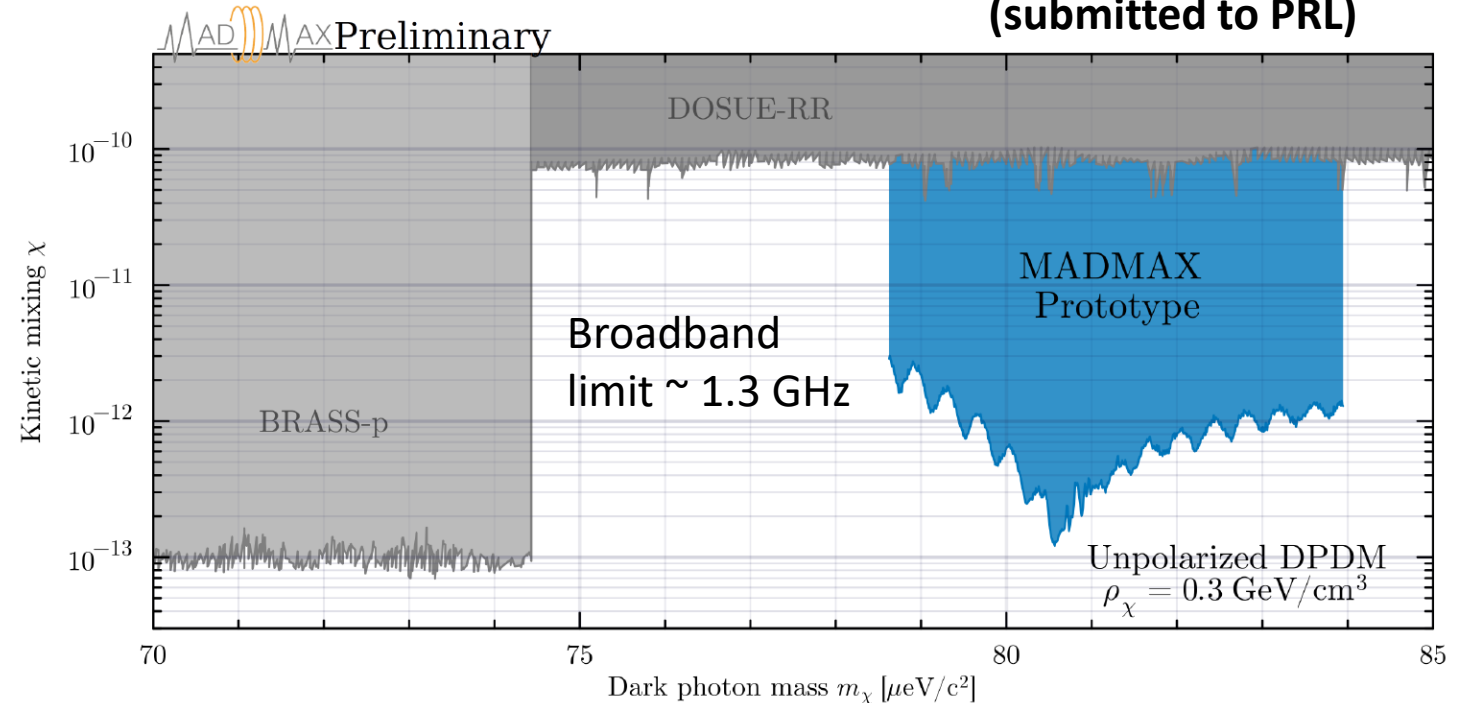

- World best 95% CL limit on DP kinetic mixing χ in m_χ [78.6, 83.9] μeV using OB300v1
 - 1-3 order of magnitude below previous limits
- I worked on simulations for this setup (see next slides)

3D simulation

- Planarity of sapphire disks of 300 mm diameter and 1 mm thickness measured at CPPM Marseille with $O(1) \mu\text{m}$ precision

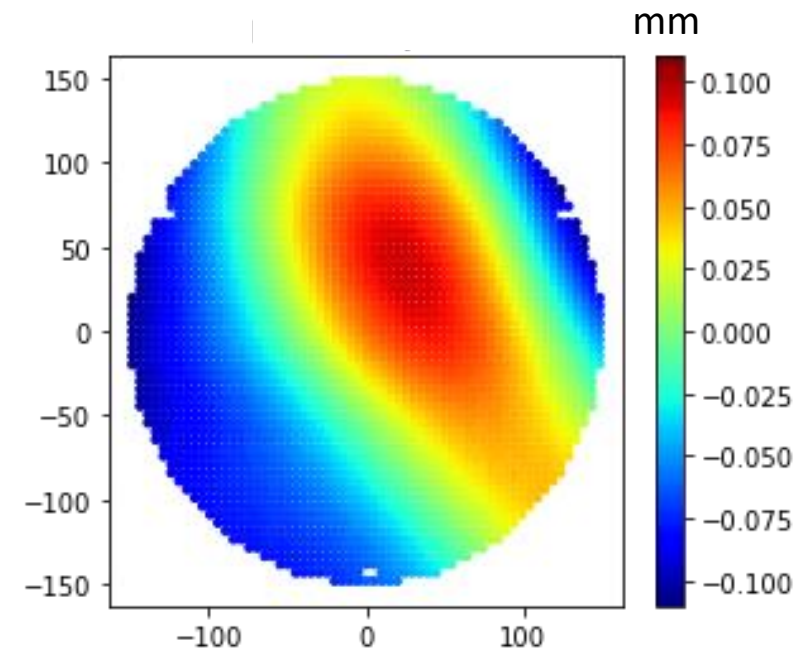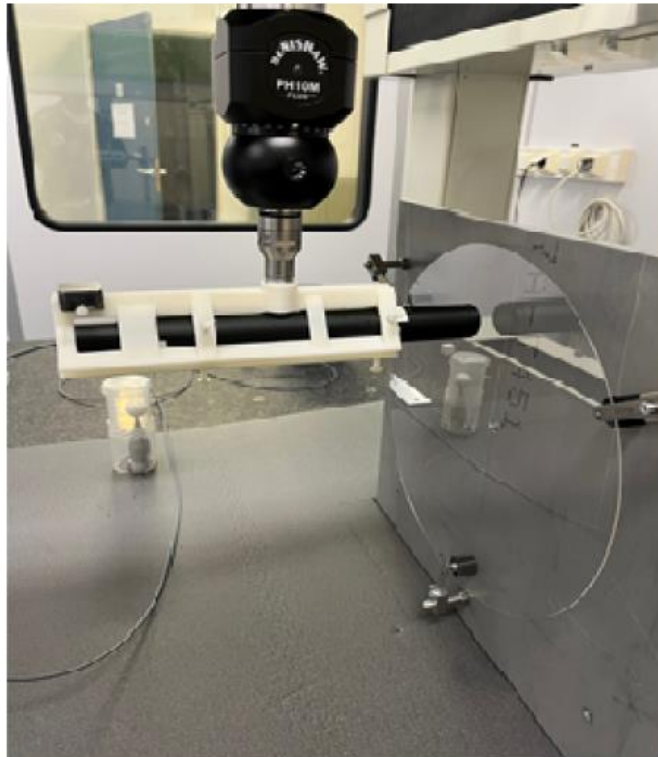


Surface planarity deviation RMS : $50 \mu\text{m}$, and min-max : $200 \mu\text{m}$

3D Simulation





- ❑ Software from MADMAX collaboration based on axion electrodynamics (1906.02677)
- ❑ Based on recursive Fourier propagation of EM waves in the booster geometry

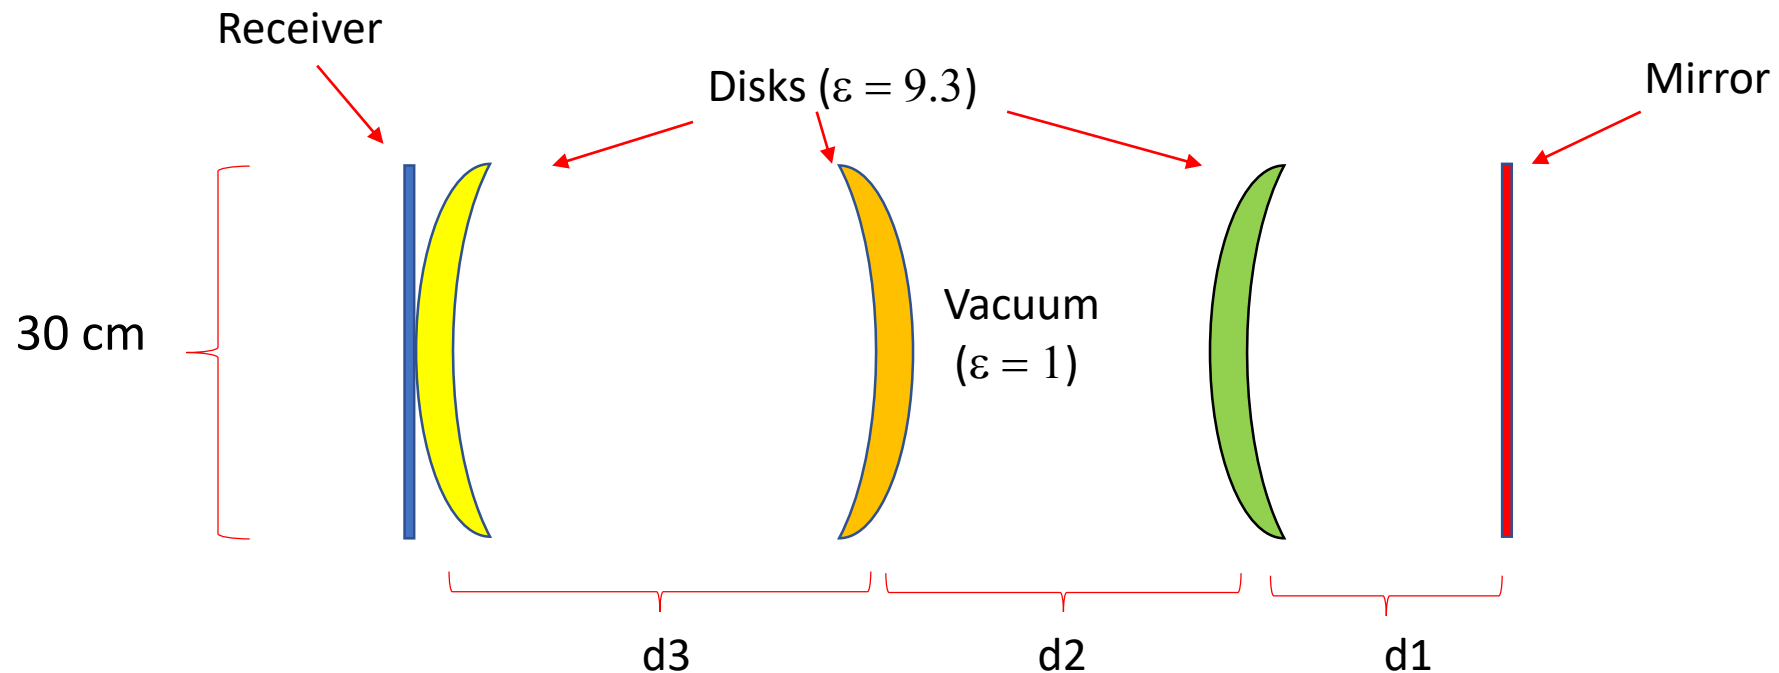

3D Simulations



- ❑ First 3D simulation of open booster to take into account the disk planarity
 - Smoothed measurement to filter the boost-antenna resonances
 - Simulation uncertainty obtained by varying all booster parameters

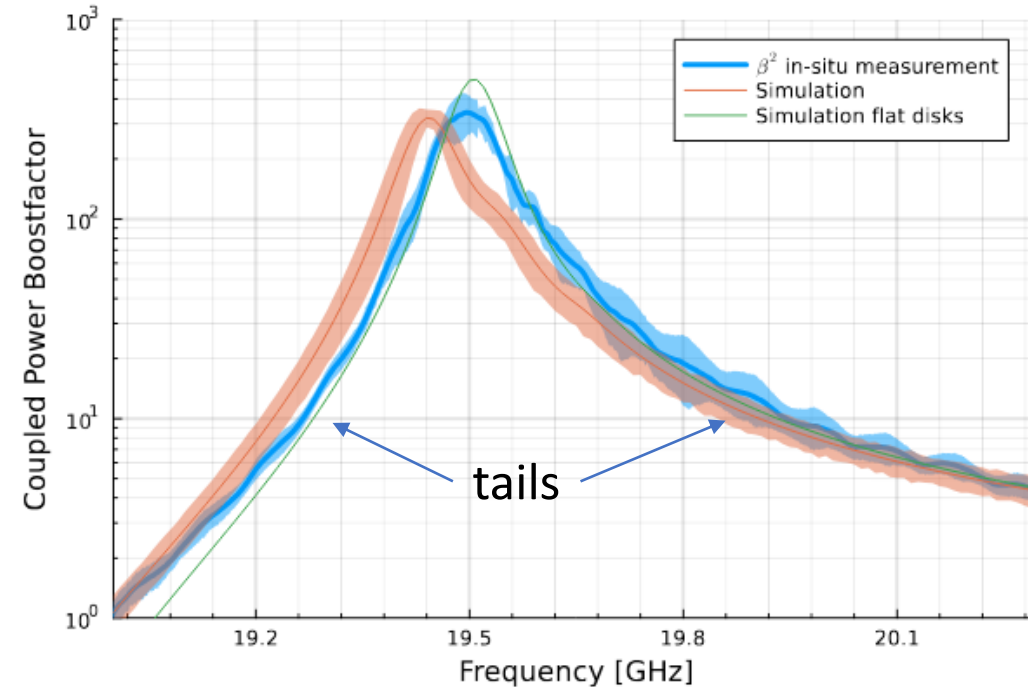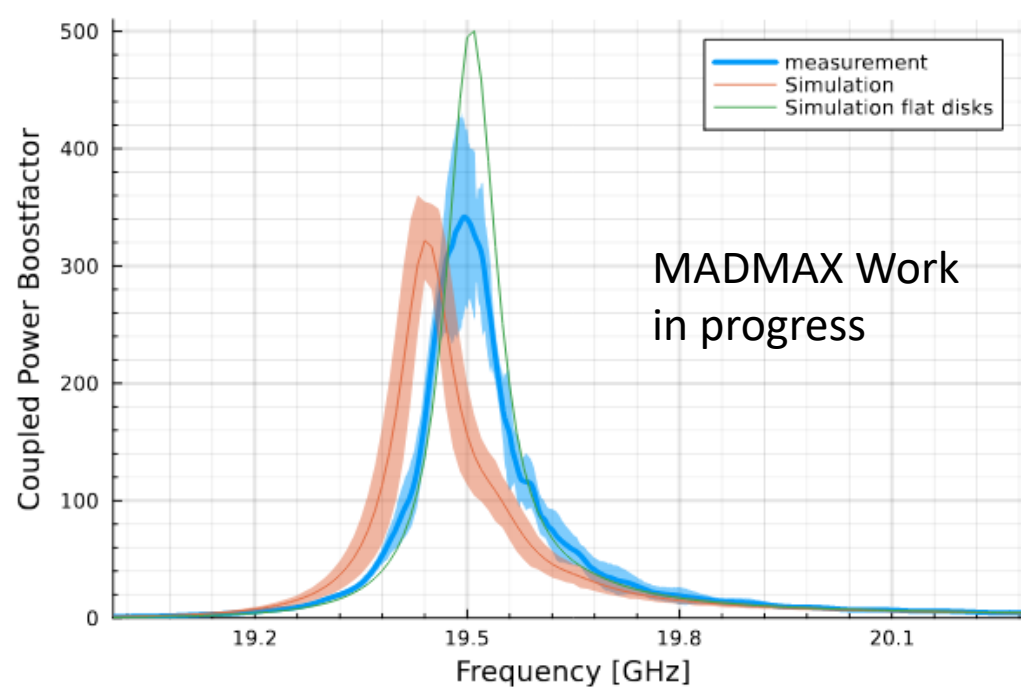


β^2 peak for simulation = 335

Good agreement between measurement and simulation apart from a peak frequency offset ~ 50 MHz


Disk positioning system

- ❑ Moving from fixed disks to movable disks -> dedicated prototype OB200

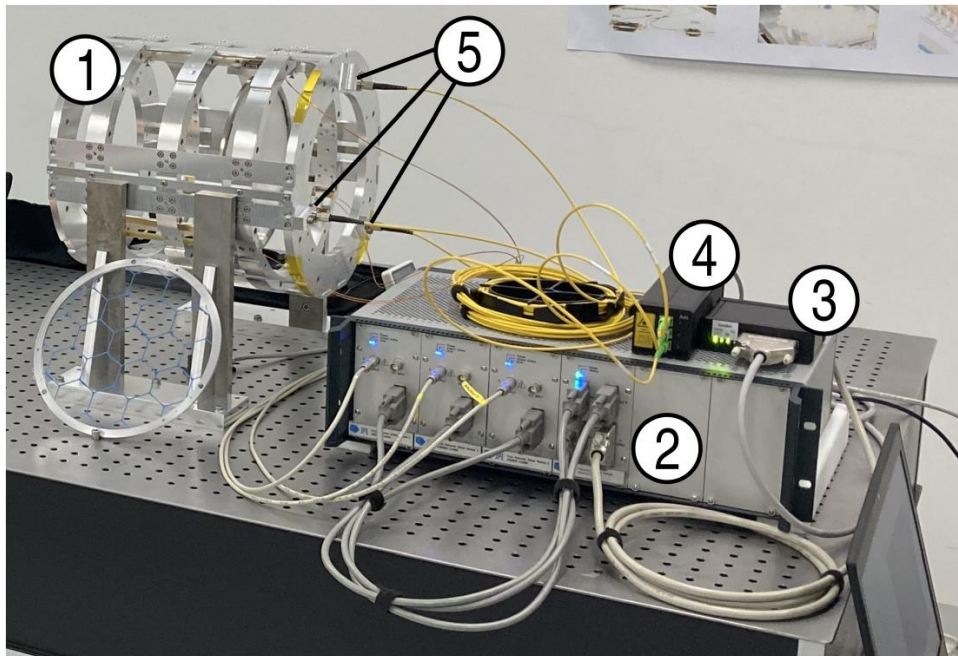

1. OB200 and motor controllers
2. FPGA board
3. Laser interferometer
4. Optical sensor
5. mounted to the backbone


JINST, 18(08):P08011, 2023

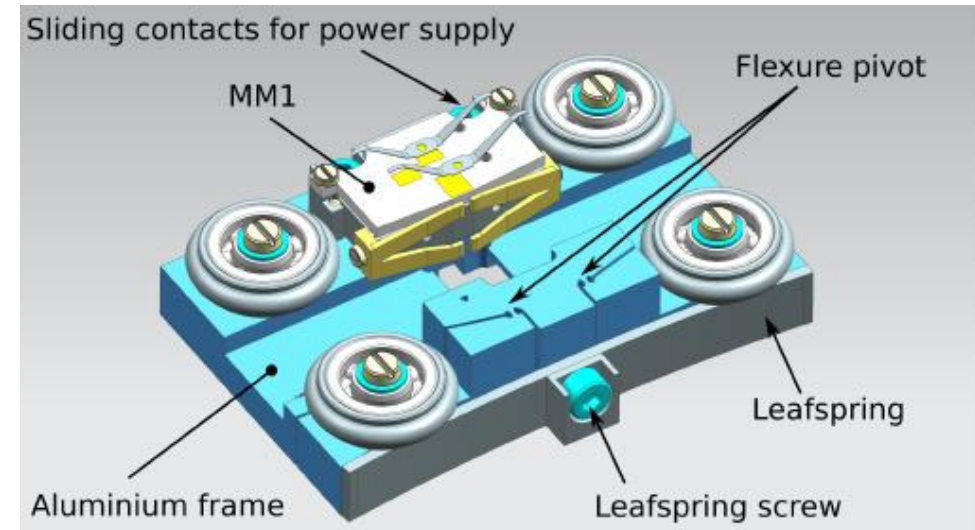

- ❑ Piezo motors for precision movement in cryogenic temperatures up to 4 K and high magnetic field up to 9 T
- ❑ 3 of them required to move one disk



Disk positioning system: Tests

- ❑ Motors tested in 2022 in B field (CERN) and cryogenic temperatures (CERN cryolab)
 - Precise control of 200 mm diameter sapphire disk position with three piezo motors
 - Many tests were made to test the precision, speed, operability, drift, step size of the motors, etc.

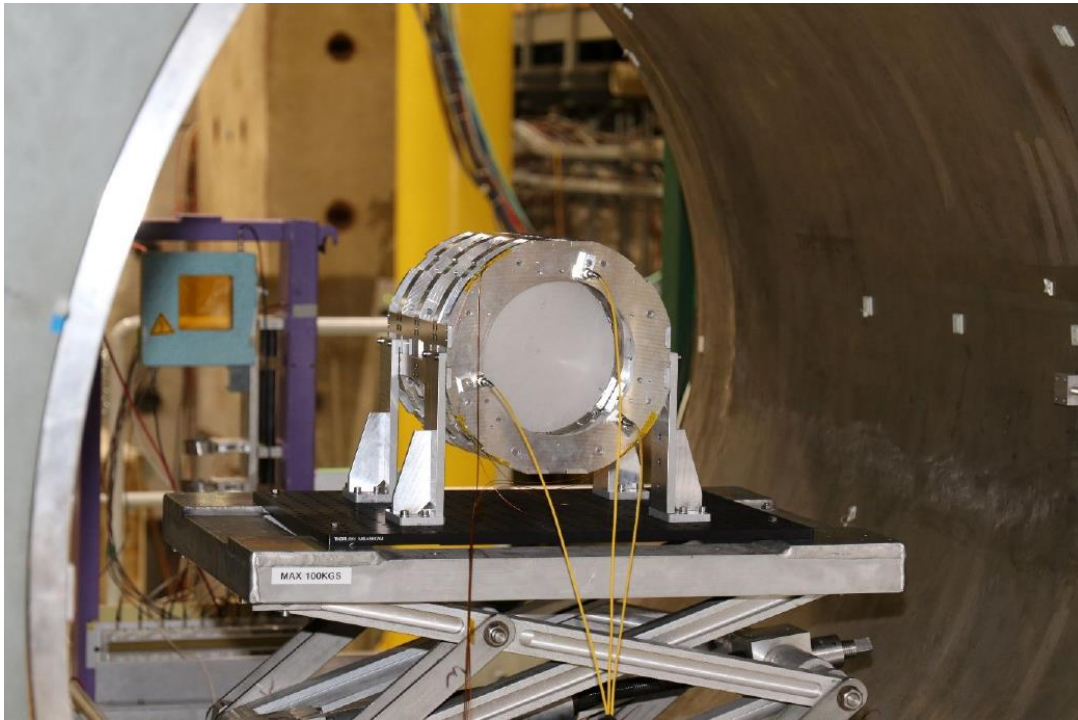

Disk positioning system: Test results

□ I performed some data analysis to produce representative plots of the tests

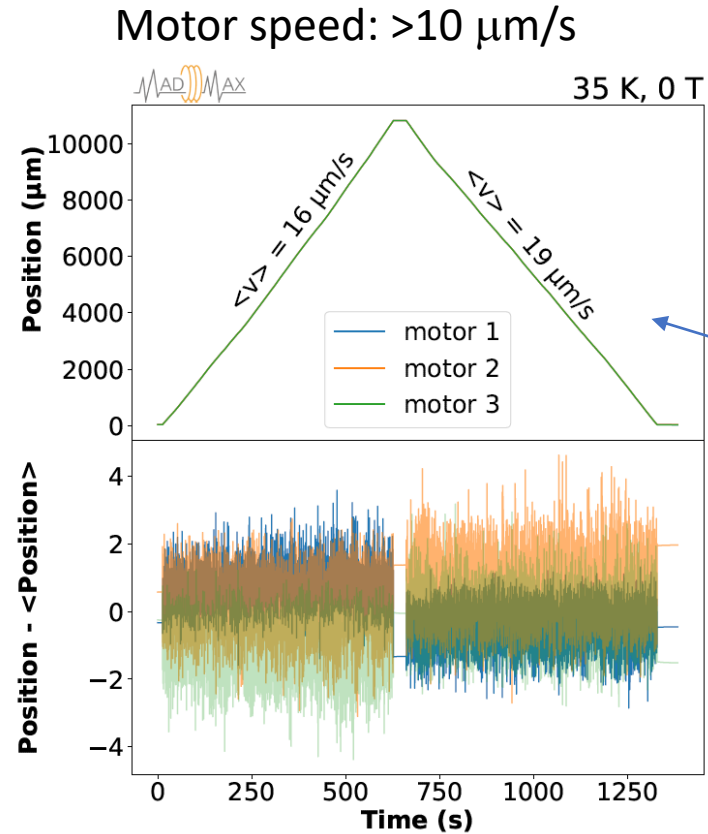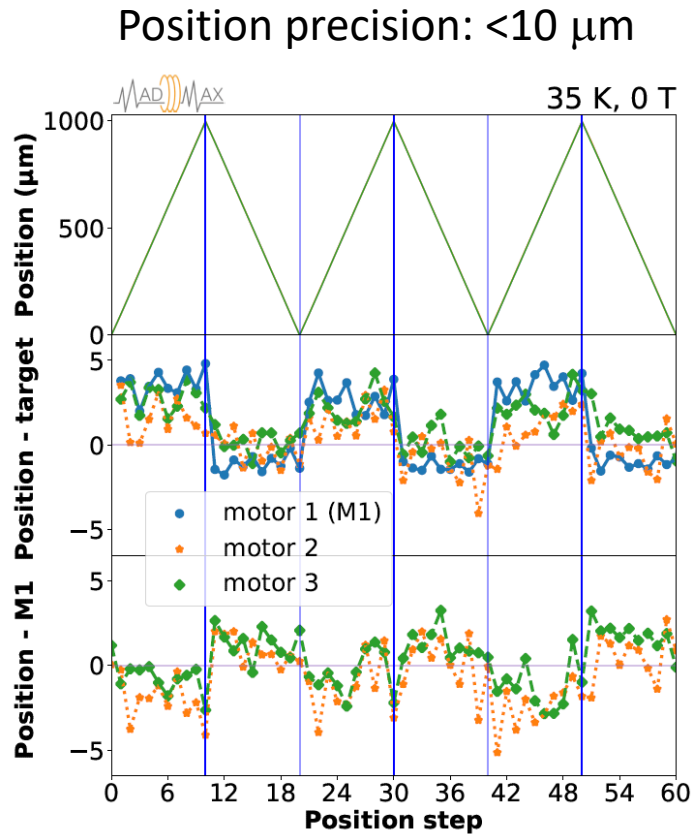



An example figure (from the paper) of a test performed at cryogenic temperatures

JINST 19 (2024) T11002

The positioning system shown to work according to requirements

Final prototype: Future plan


- ❑ OB300v2 prototype with 3 to 20 movable disks
- ❑ Under 1.6 T magnetic field and 4 K temperature
- ❑ 3 physics runs with different search ranges during the long shutdown period 2026-2028 at CERN

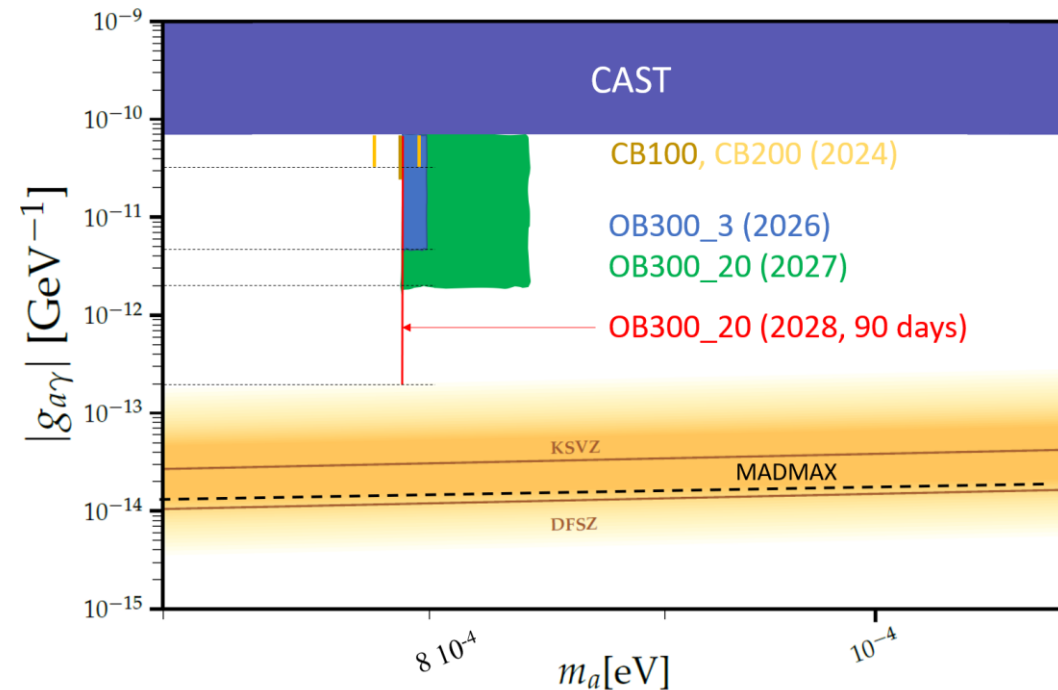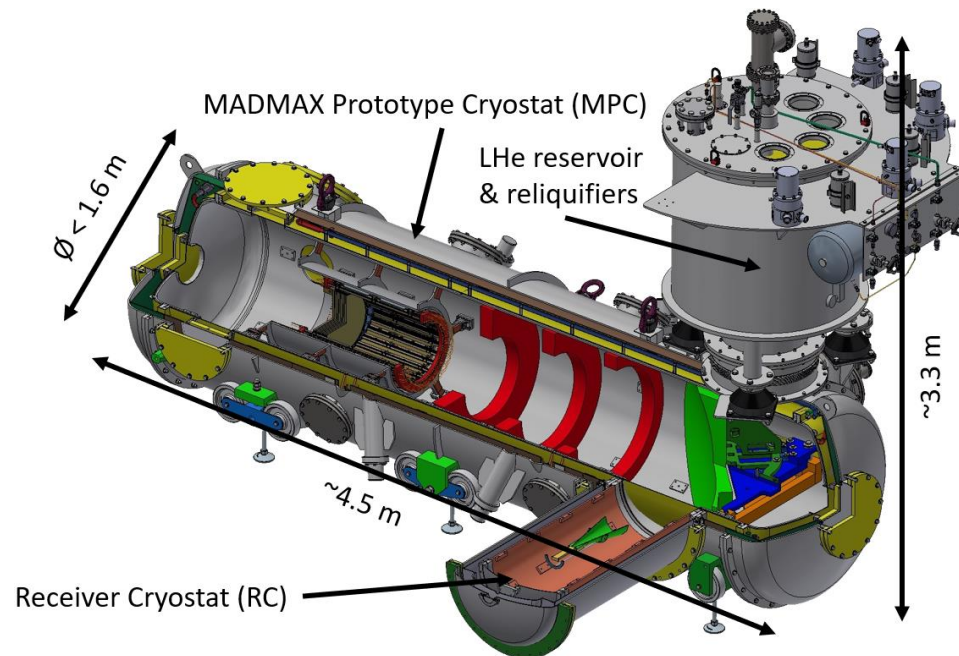

Conclusions




- ❑ MADMAX: [dielectric haloscope experiment](#) for dark matter search around $100 \mu\text{eV}$
- ❑ First dielectric haloscope to search for ALPs
 - World-leading limits in both [dark photon](#) and [axion searches](#) around $80 \mu\text{eV}$ (20 GHz)
- ❑ Novel booster calibration methods developed for closed and open boosters
- ❑ Validated the mechanics at [cryogenic temperature and high magnetic field](#)
- ❑ Current timeline:

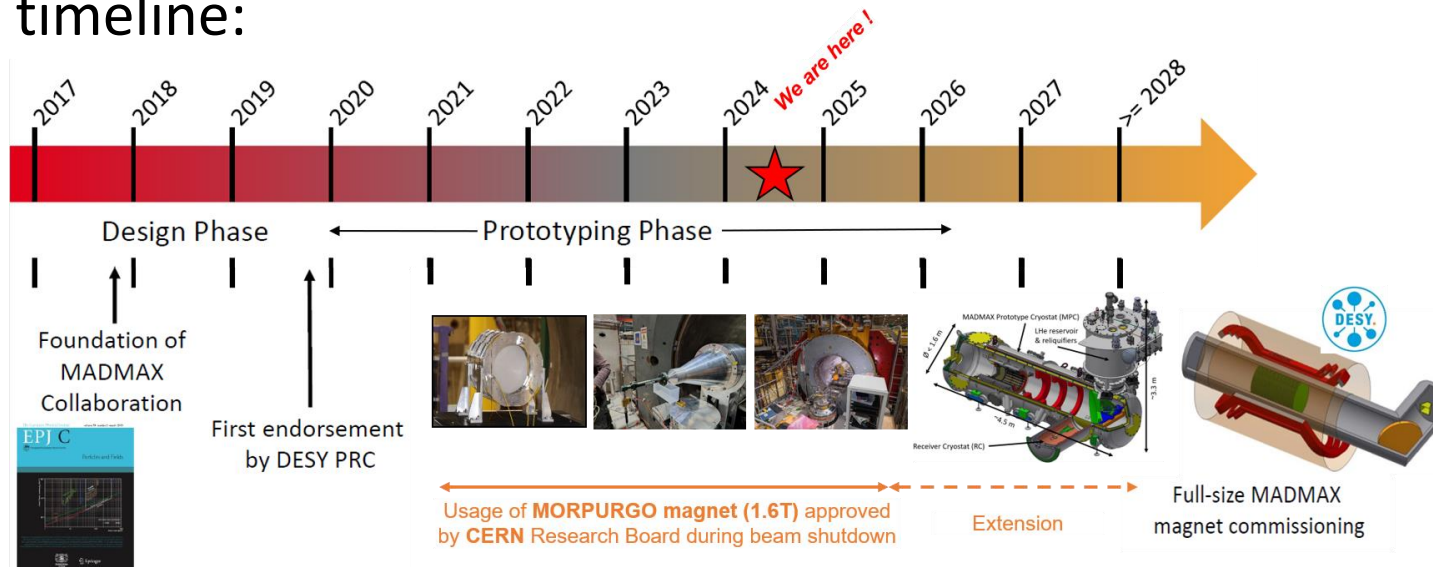



Backup

Axion scales

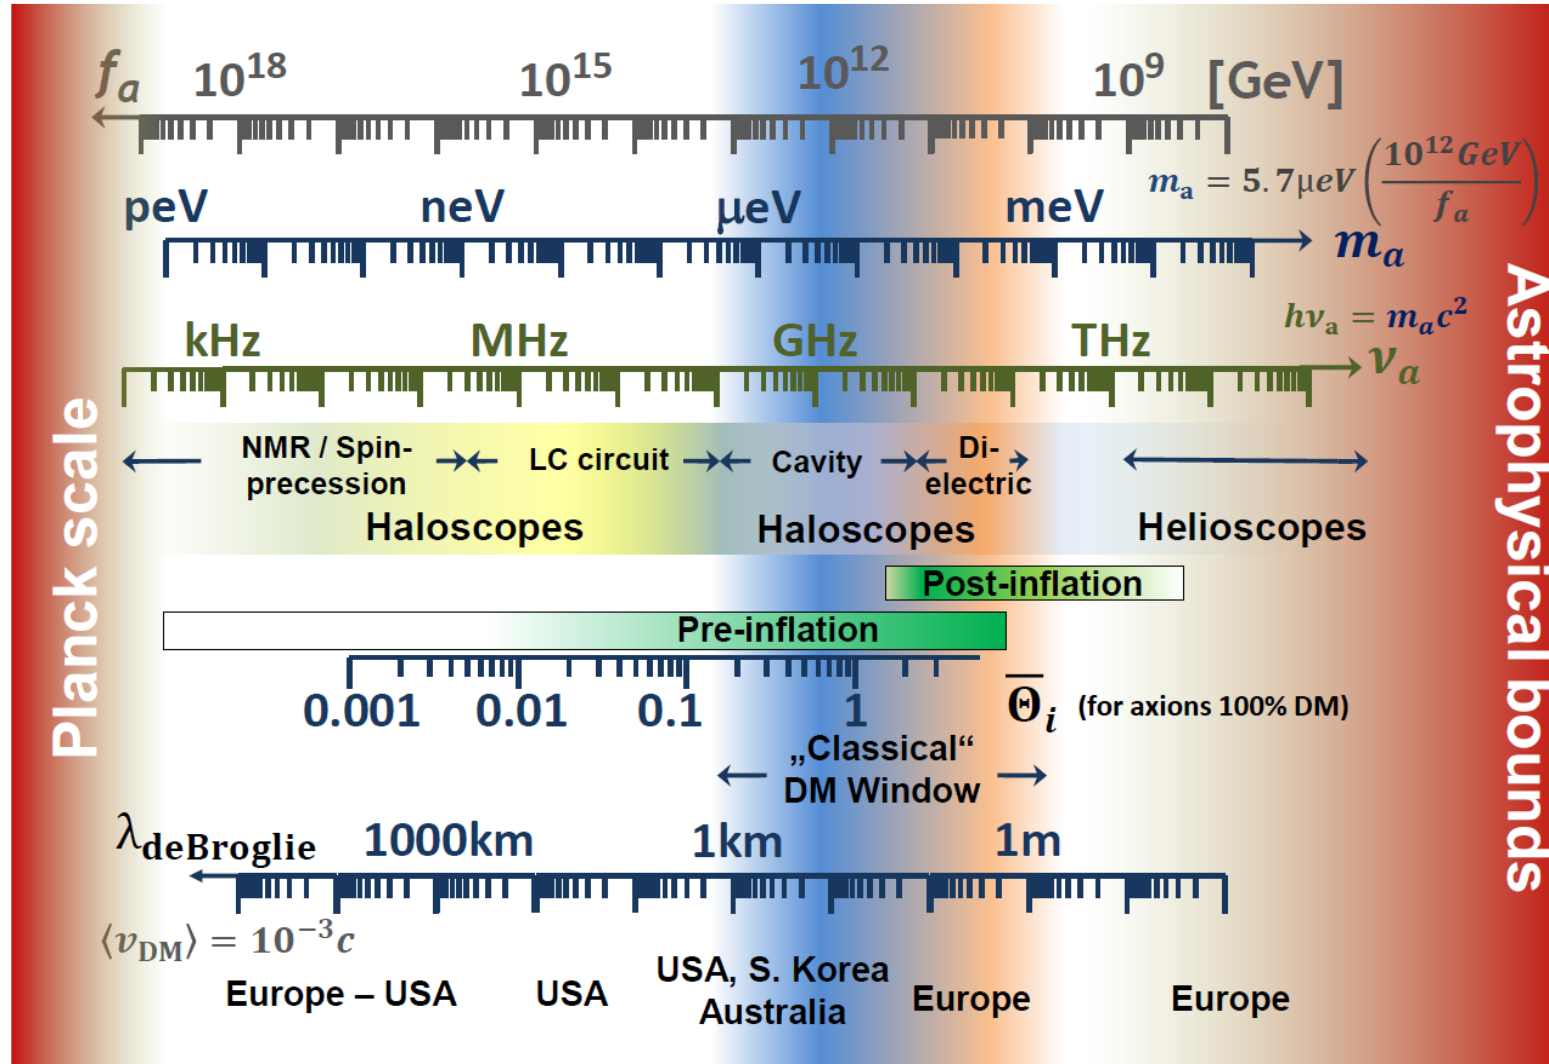

Dielectric haloscope: principles





In an external magnetic field B_e the axion field $a(t)$ sources an oscillating electric field E_a






$$E_a \cdot \epsilon \sim 10^{-12} \text{ V/m for } B_e = 10 \text{ T}$$

E_a is different in materials with different ϵ






At the surface, E_{\parallel} must be continuous
 → Emission of electromagnetic waves

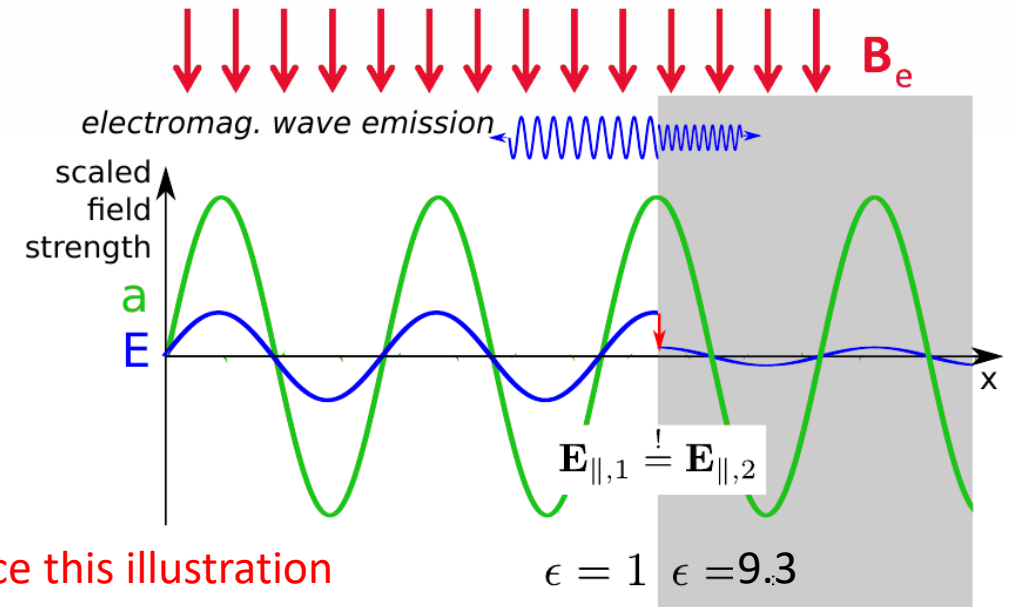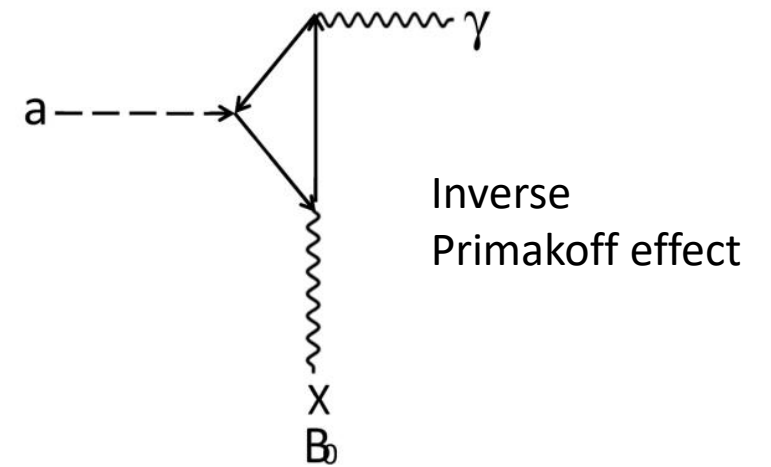

Disk raw measurements

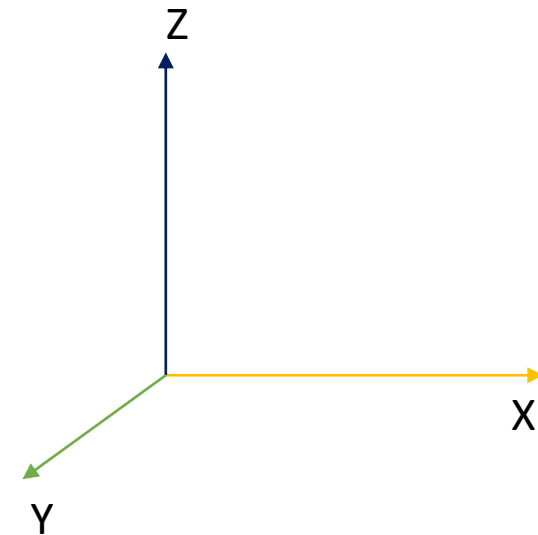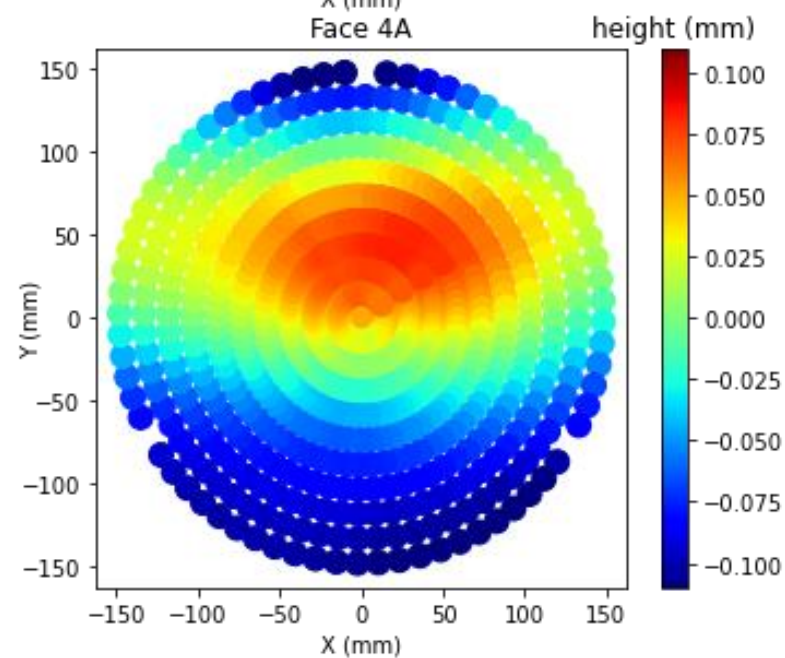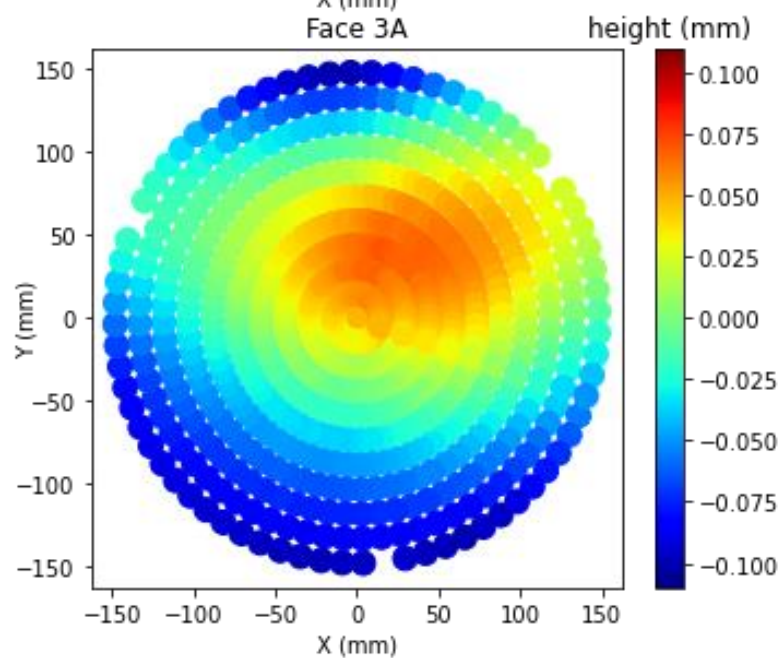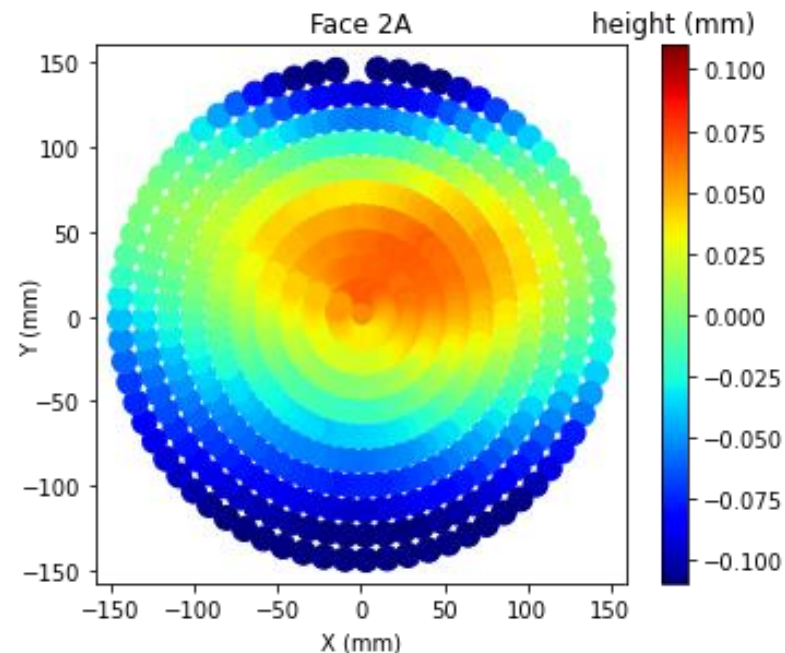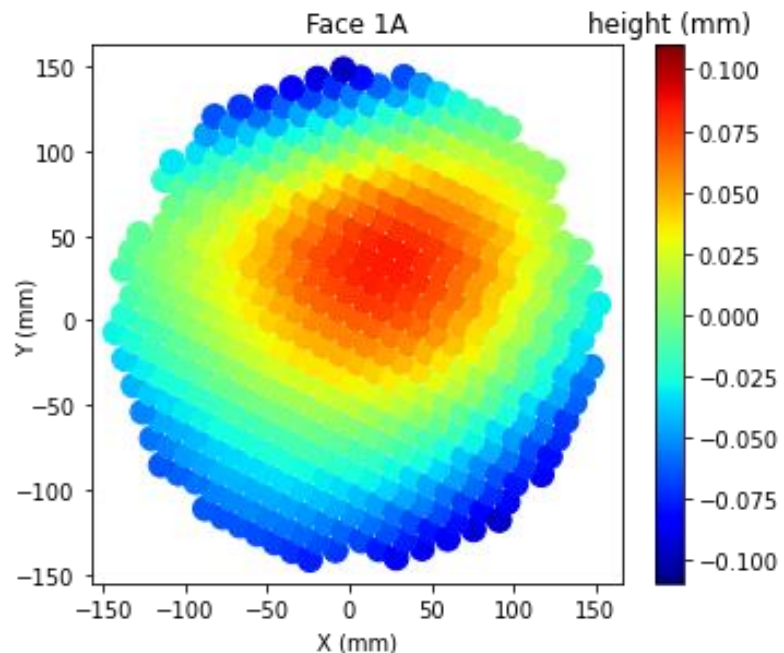

Disk raw measurements

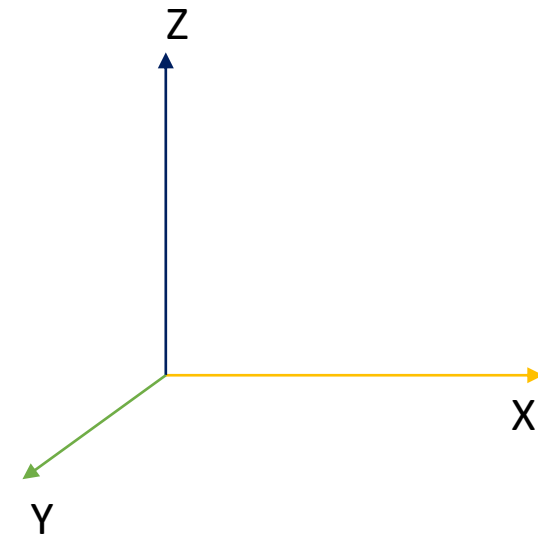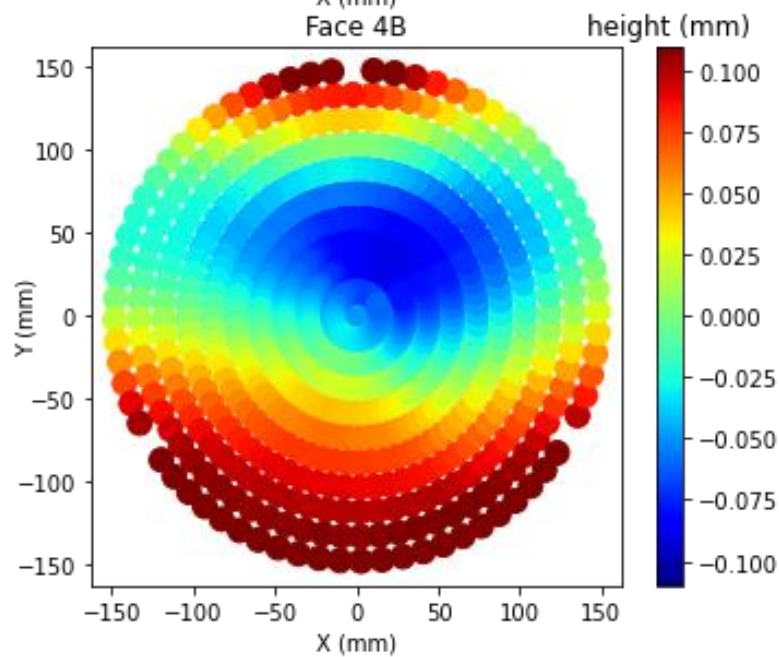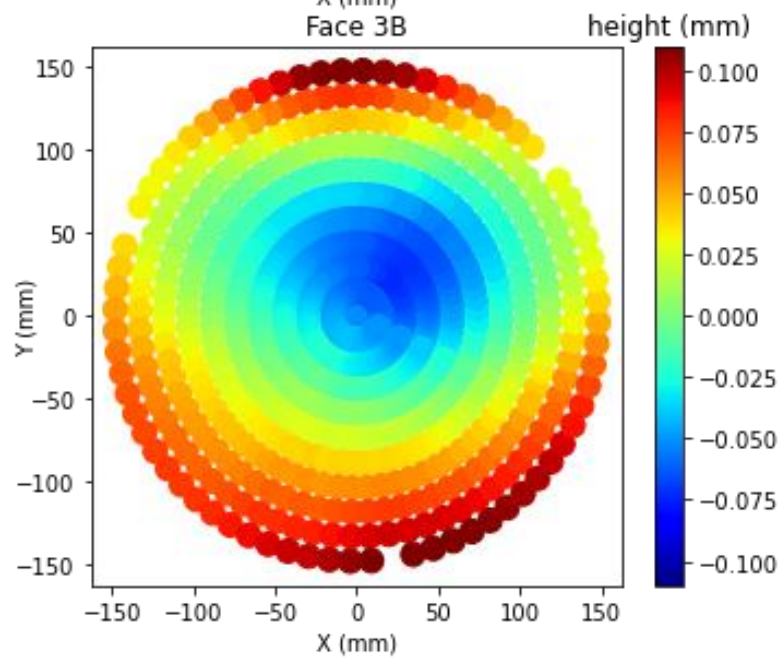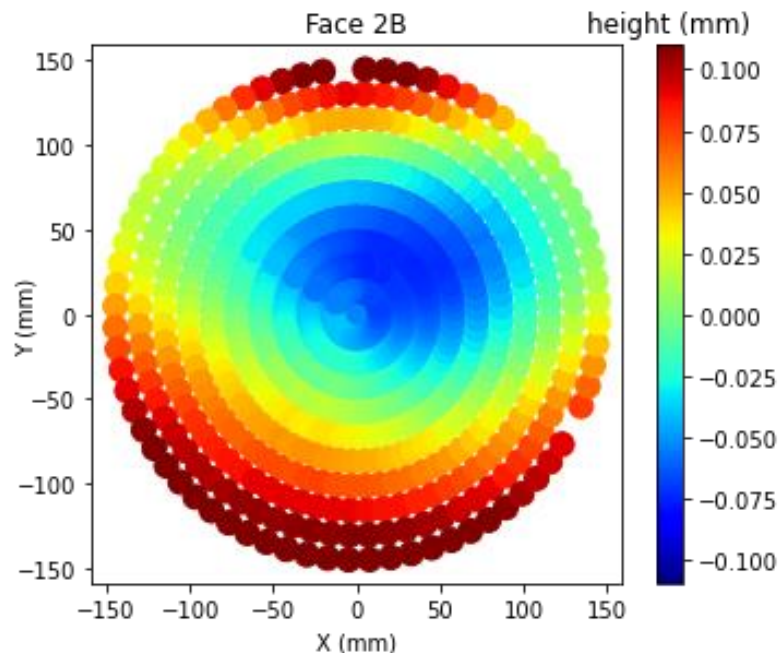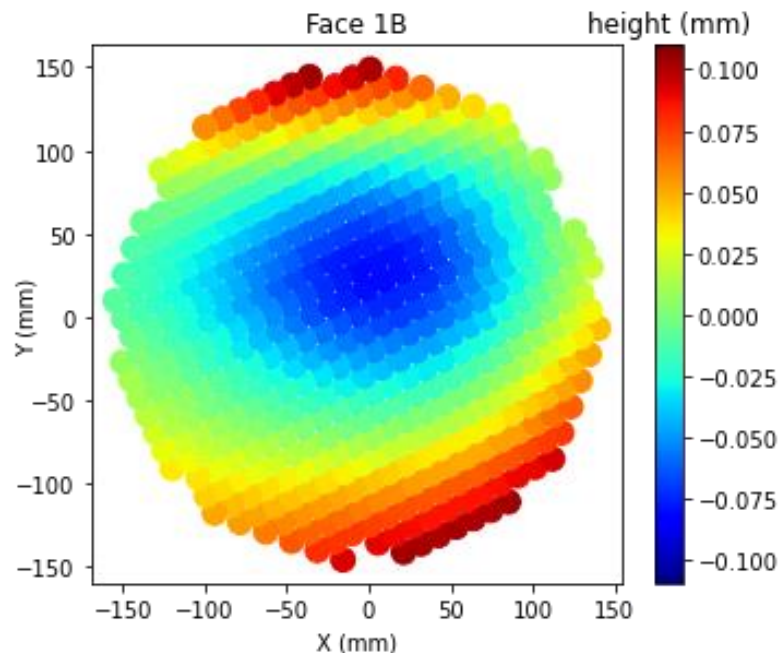


All the disk faces similar to each other

OB300v1 3D simulations: uncertainty

- The booster parameters and their uncertainty calculated from measurements
 - mirror conductivity [S/m]: $5e7 \pm 1e7$
 - Disk1 distance [m]: $0.0083664 \pm 1.7e-6$
 - Disk2 distance [m]: $0.0099606 \pm 3.2e-6$
 - Disk3 distance[m]: $0.0097314 \pm 3.6e-6$
 - Disk thickness[m] (3 parameters): $0.001 \pm 5e-6$
 - Disk epsilon (3 parameters) : 9.3 ± 0.1
 - Disk loss tangent (3 parameters) : $1e-5 \pm 1e-6$
- Simulation uncertainty corresponds to std of 100 boost factor simulations
 - Each simulation picks a parameter value randomly from a gaussian distribution of mean and std as shown above

Booster calibration using the bead pull method

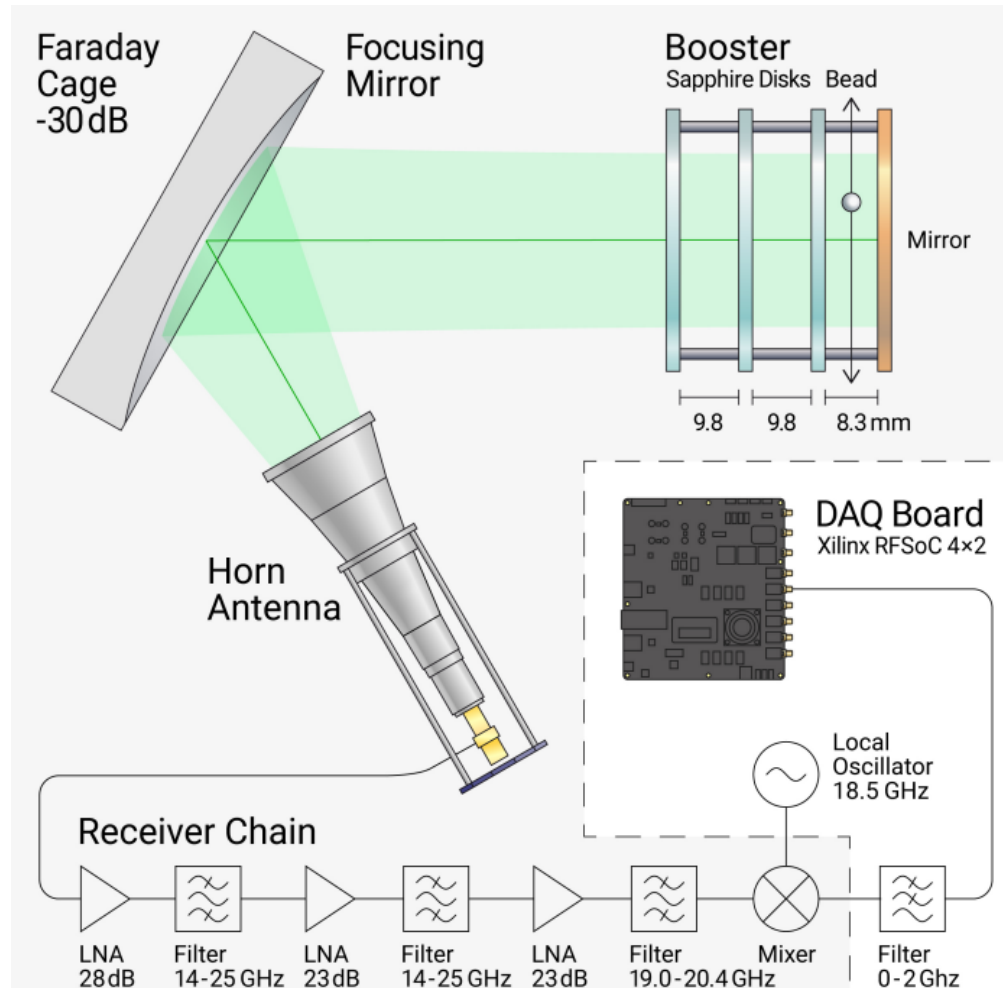


$$P_{sig} = \frac{g_{ayy}^2}{16 P_{in}} \left| \int_{V_a} dV \underline{E_R} \cdot \dot{a} \mathbf{B}_e \right|^2$$

Electric field excited
by reflection
measurement

$$\mathbf{E}_R^2 = \frac{4 P_{in}}{\alpha_e \omega} \Delta \Gamma$$

CB200 booster modelling


Simulation of booster System temperature as a function axion mass compared to data

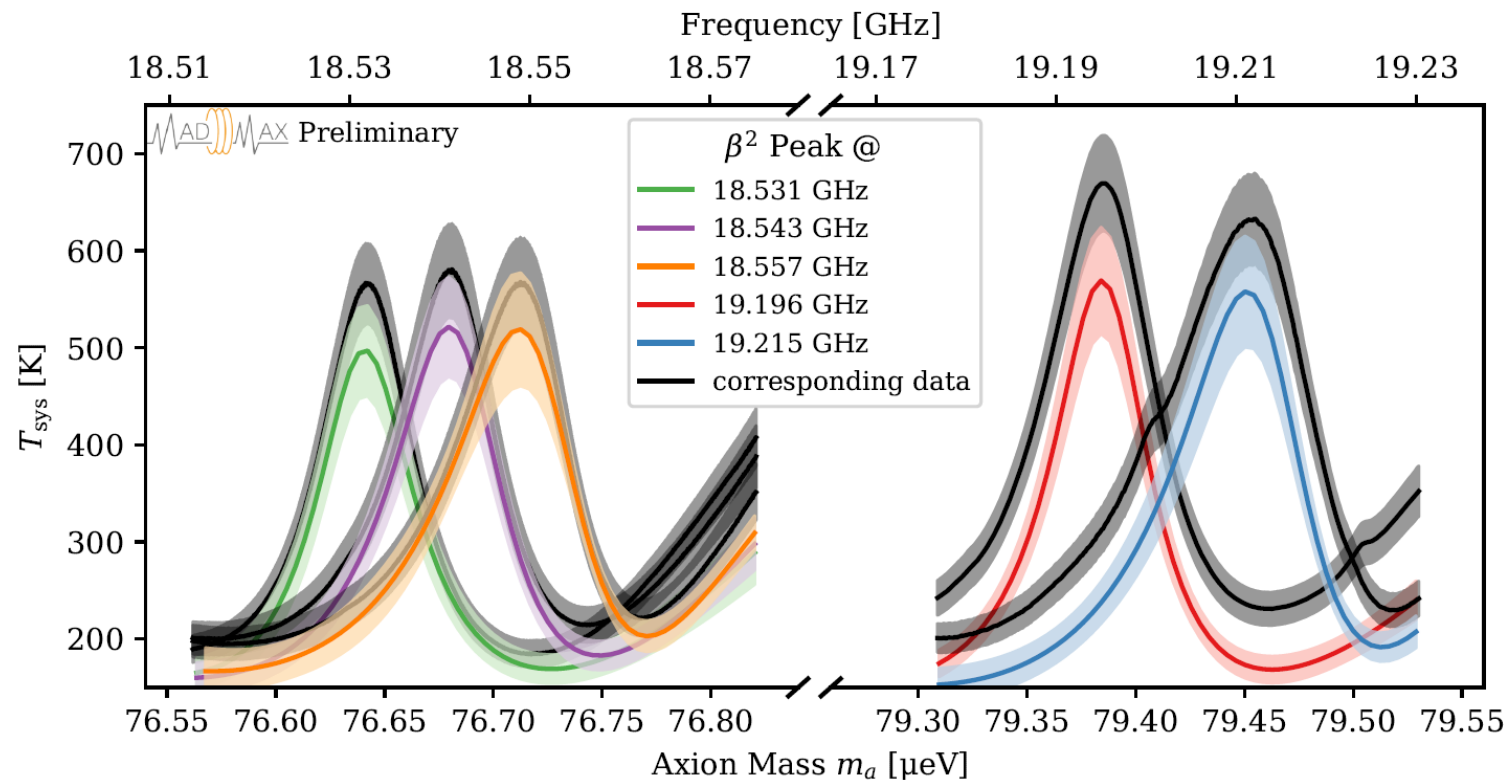

MADMAX sensitivity

$$\begin{aligned} |g_{a\gamma}| = & 4 \times 10^{-11} \text{ GeV}^{-1} \sqrt{\frac{2 \times 10^3}{\beta^2}} \sqrt{\frac{T_{\text{sys}}}{300 \text{ K}}} \\ & \times \left(\frac{0.1 \text{ m}}{r} \right) \left(\frac{1 \text{ T}}{B_e} \right) \left(\frac{1.3 \text{ days}}{\Delta t} \right)^{1/4} \sqrt{\frac{\text{SNR}}{5}} \\ & \times \left(\frac{m_a}{80 \text{ } \mu\text{eV}} \right)^{5/4} \sqrt{\frac{0.3 \text{ GeV/cm}^3}{\rho_a}}, \end{aligned}$$

MADMAX ALPs limit

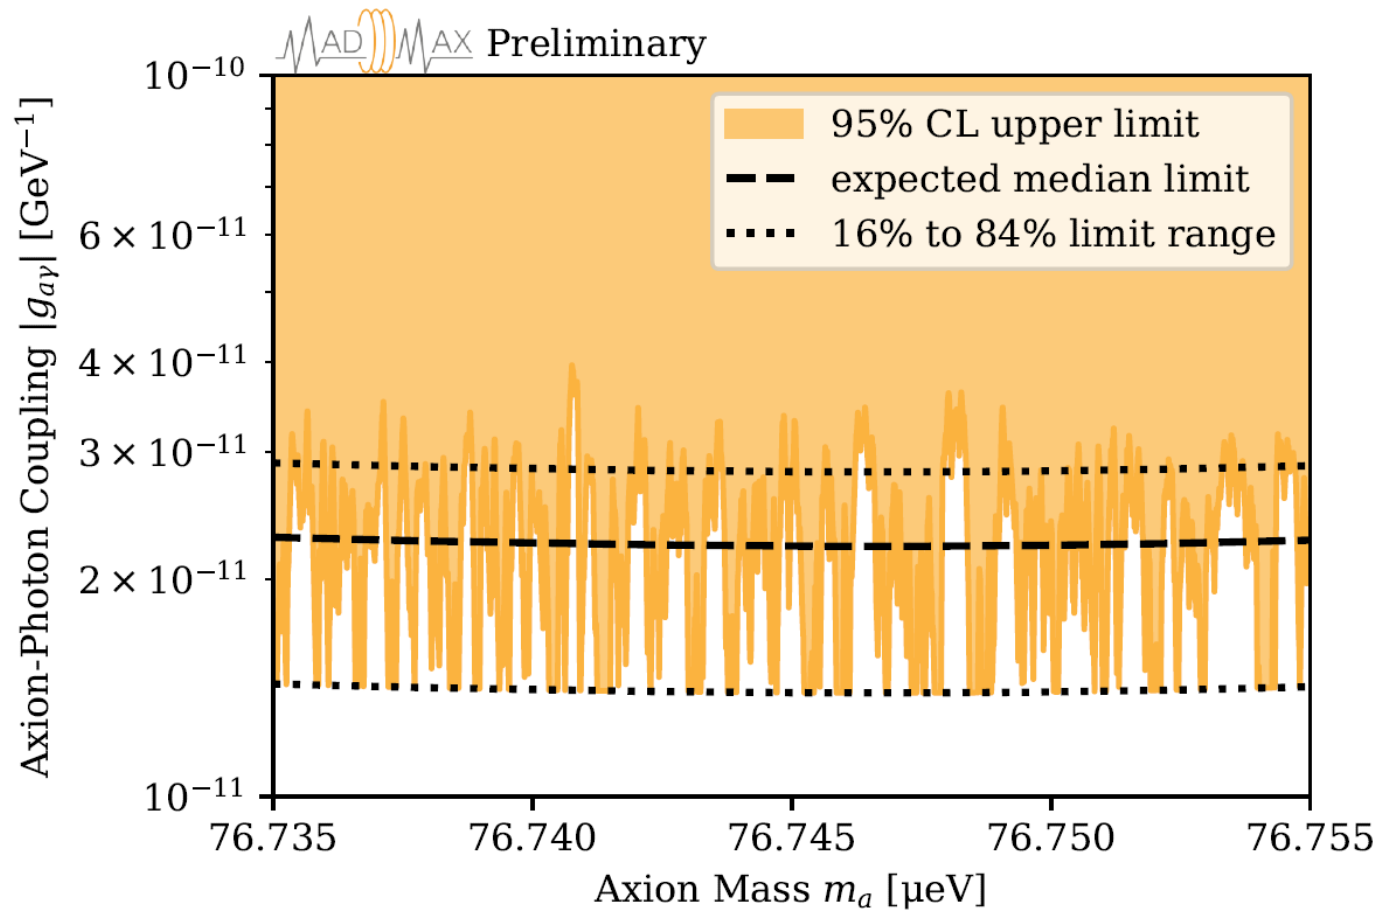

Systematics

Axion search

Effect	Uncertainty in $ g_{a\gamma} $
Y-factor power calibration	3% to 5%
Receiver chain power stability	$\leq 2\%$
Axion field – TE ₁₁ overlap	6%
Boost factor determination	$< 5\%$
Frequency stability of TE ₁₁ mode	$< 2\%$
Total	5% to 10%

Dark photon search

Effect	Uncertainty on χ
Bead-pull measurements	2 to 17%
Bead pull finite domain correction	5%
Receiver chain impedance mismatch	$< 1\%$
Y-factor calibration	4%
Power stability	3%
Frequency stability	2%
Line shape discretization	4%
Total	9 to 19%

MADMAX future plan

Type	acronym	ϕ disc [mm]	Nb of discs	Available	Test at CERN	
					Temp. [K]	Year
Open Booster 200	OB200	200	1	2021	290	2022
Closed Booster 100	CB100	100	3	2021	290	2022, 2023
					10	2024
Closed Booster 200	CB200	200	3	2022	290	2024
			10	2025	290	2025
<i>Open Booster 300</i>	<i>OB300</i>	<i>300</i>	<i>3</i>	<i>2024</i>	<i>10</i>	<i>2026</i>
<i>Prototype Open Booster</i>	<i>OB300_F</i>	<i>300</i>	<i>20</i>	<i>2026</i>	<i>10, 7</i>	<i>2027, 2028</i>

Table 1: MADMAX tests performed (plain) and planned (italic) in the Morpurgo magnet.

Booster	Cryostat	β^2	T_{sys} [K]	Sensitivity [GeV ⁻¹]	freq. range [MHz]	Duration [Months]	Year
CB200	–	2000	600	$\approx 35 \times 10^{-12}$	50	0.1	2024
CB100	G10	1000	20	$\approx 20 \times 10^{-12}$	10	0.03	2024
<i>CB200</i>	–	<i>7000</i>	<i>600</i>	$\approx 10 \times 10^{-12}$	<i>10</i>	<i>0.2</i>	<i>2025</i>
<i>OB300</i>	<i>MPC</i>	<i>1000</i>	<i>10</i>	$\approx 5 \times 10^{-12}$	<i>200 (scan)</i>	<i>3</i>	<i>2026</i>
<i>OB300_F</i>	<i>MPC</i>	<i>7000</i>	<i>10</i>	$\approx 2 \times 10^{-12}$	<i>1000 (scan)</i>	<i>3</i>	<i>2027</i>
		<i>50000</i>	<i>7</i>	$\approx 0.2 \times 10^{-12}$	<i>1</i>	<i>3</i>	<i>2028</i>

Table 2: Physics reach of various booster setups tested in the Morpurgo magnet. For the 2024 measurements, values from the most sensitivity run are taken. while for the planned measurements, shown in italic, 1 day measurement is assumed for scanning runs with $SNR = 5$, a DAQ efficiency of 85 % and an ALP mass around $80 \mu\text{eV}$. At this ALP mass, the corresponding CAST limit is $66 \times 10^{-12} \text{ GeV}^{-1}$ [6]. For the last line, no scan is performed instead a 10 times higher boost factor is obtained by reducing the frequency width to 1 MHz.