


Double backend design for sustainable and mockable data communication software


Thibaut Oprinsen, Pierre Aubert, Vincent Pollet, Sami Caroff
LAPP - CNRS - Annecy

Mocking the hardware

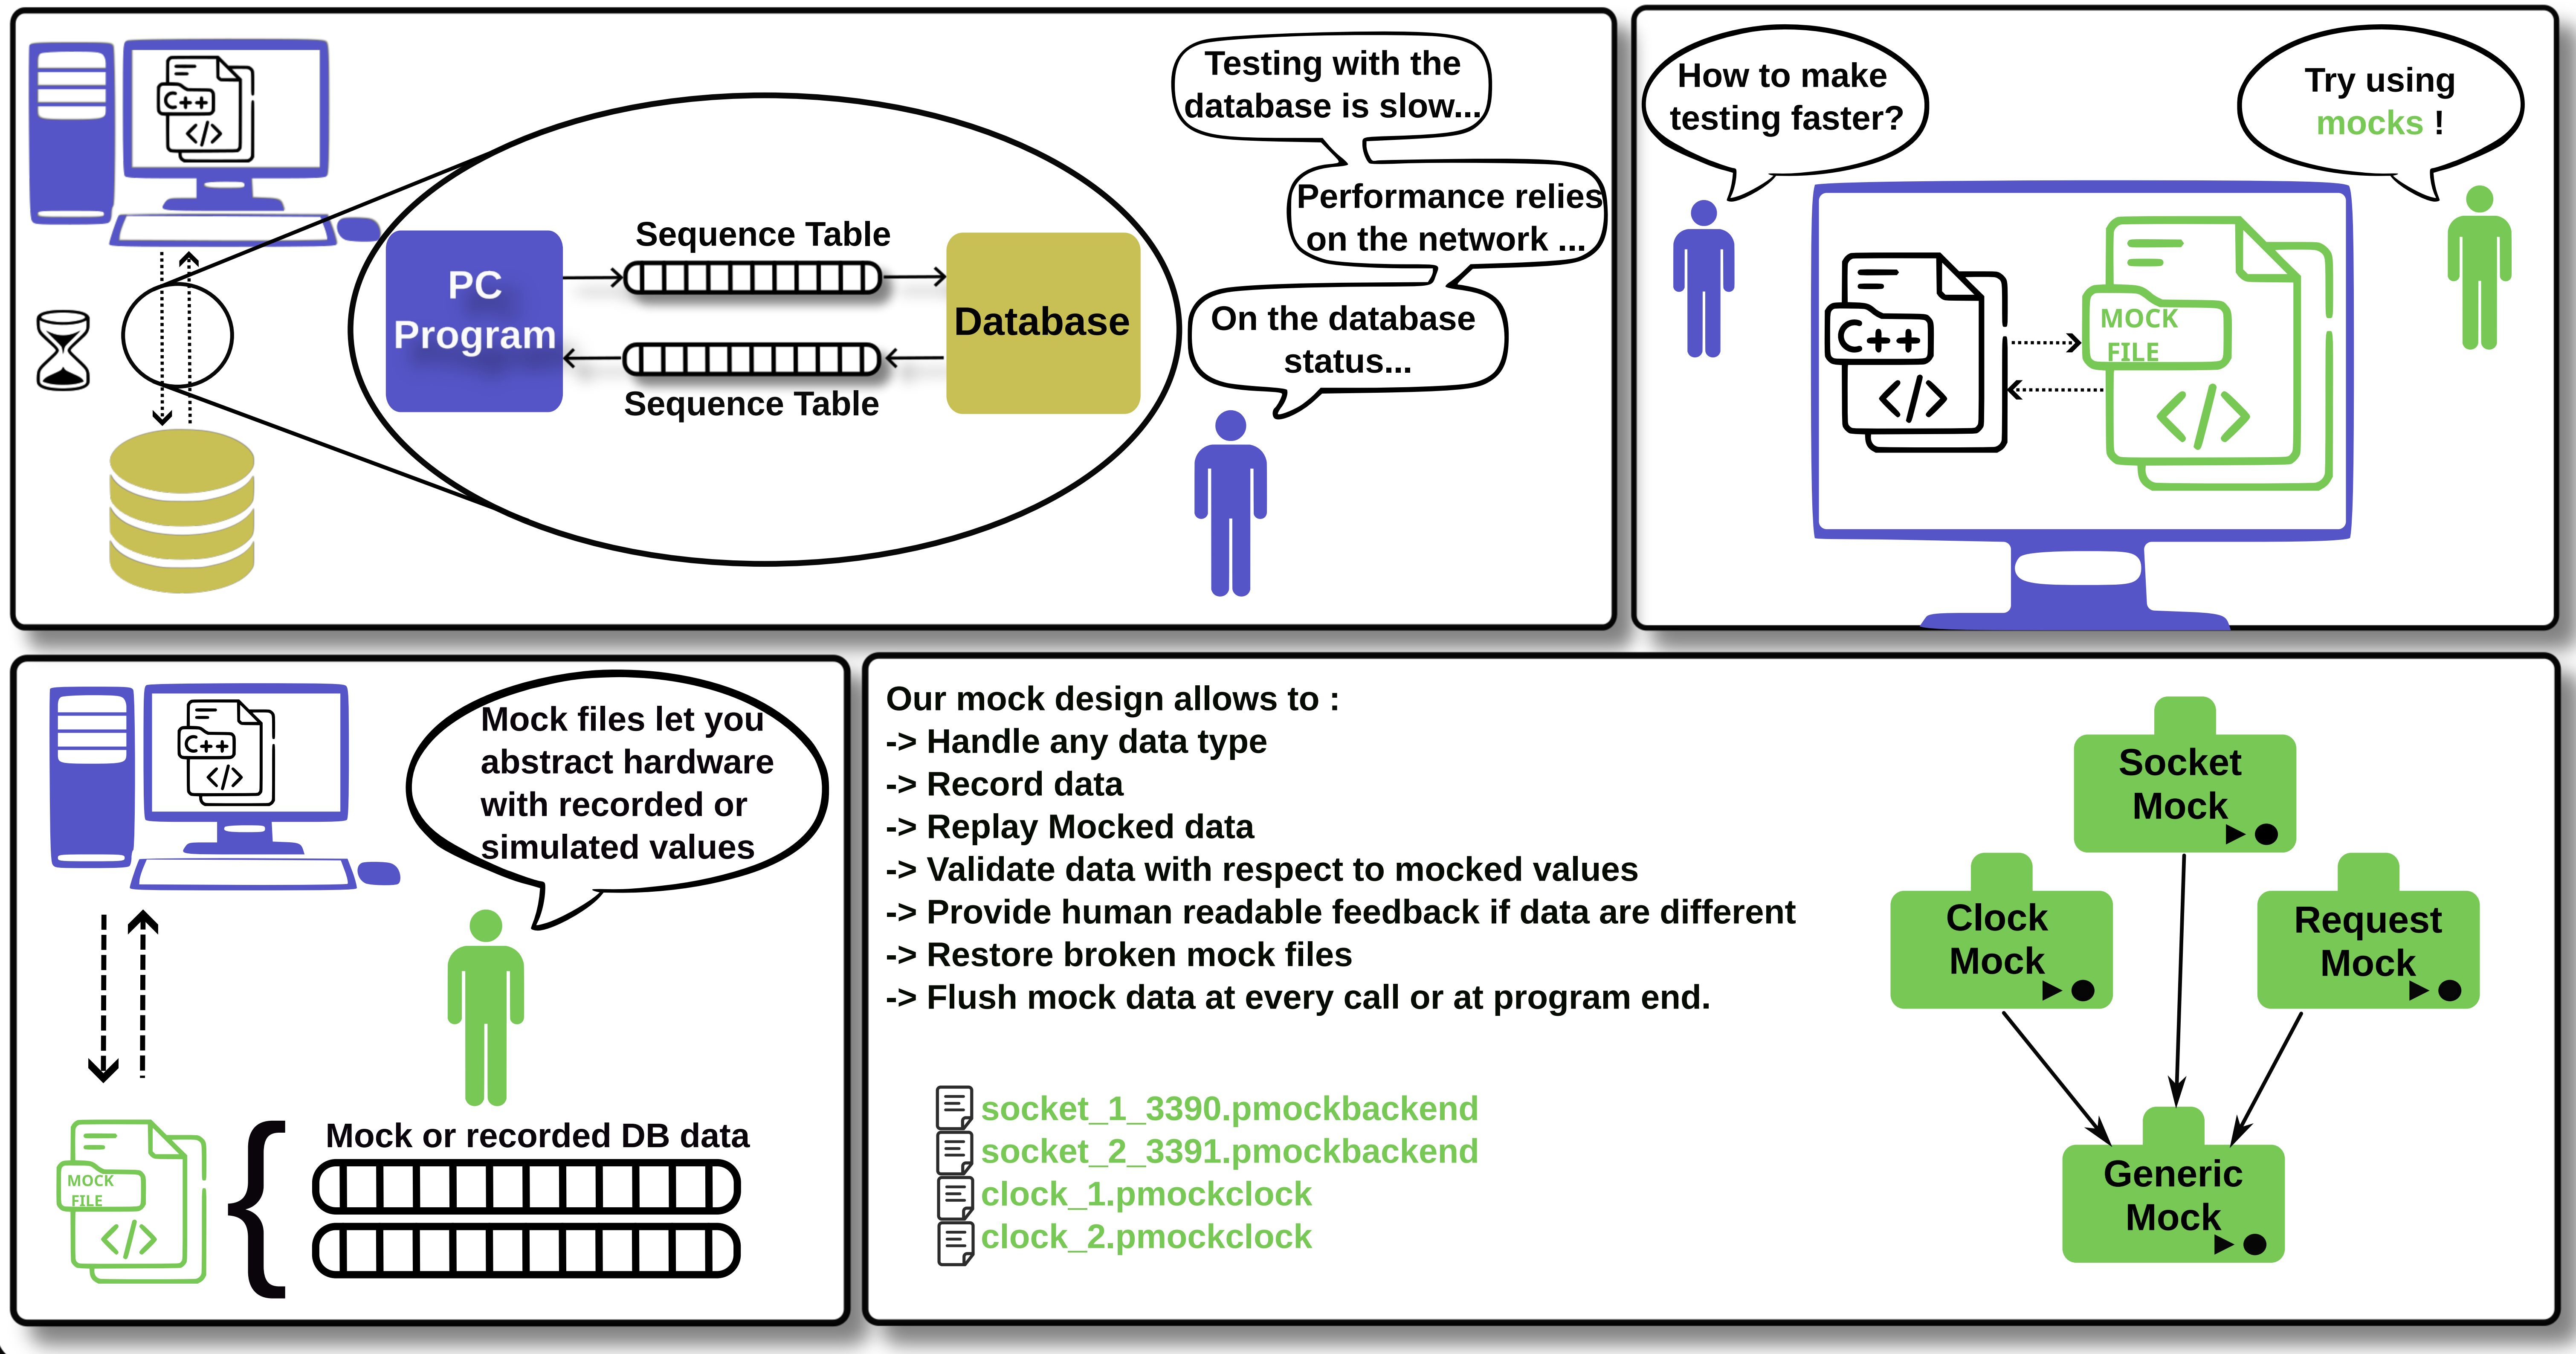

Double backend design

- > **Normal** mode uses the real backend for all operations.
- > **Mock** mode uses saved or simulated data instead of calling the real backend.
- > **Record** mode uses the real backend and saves the responses, so they can be replayed later in mock mode.

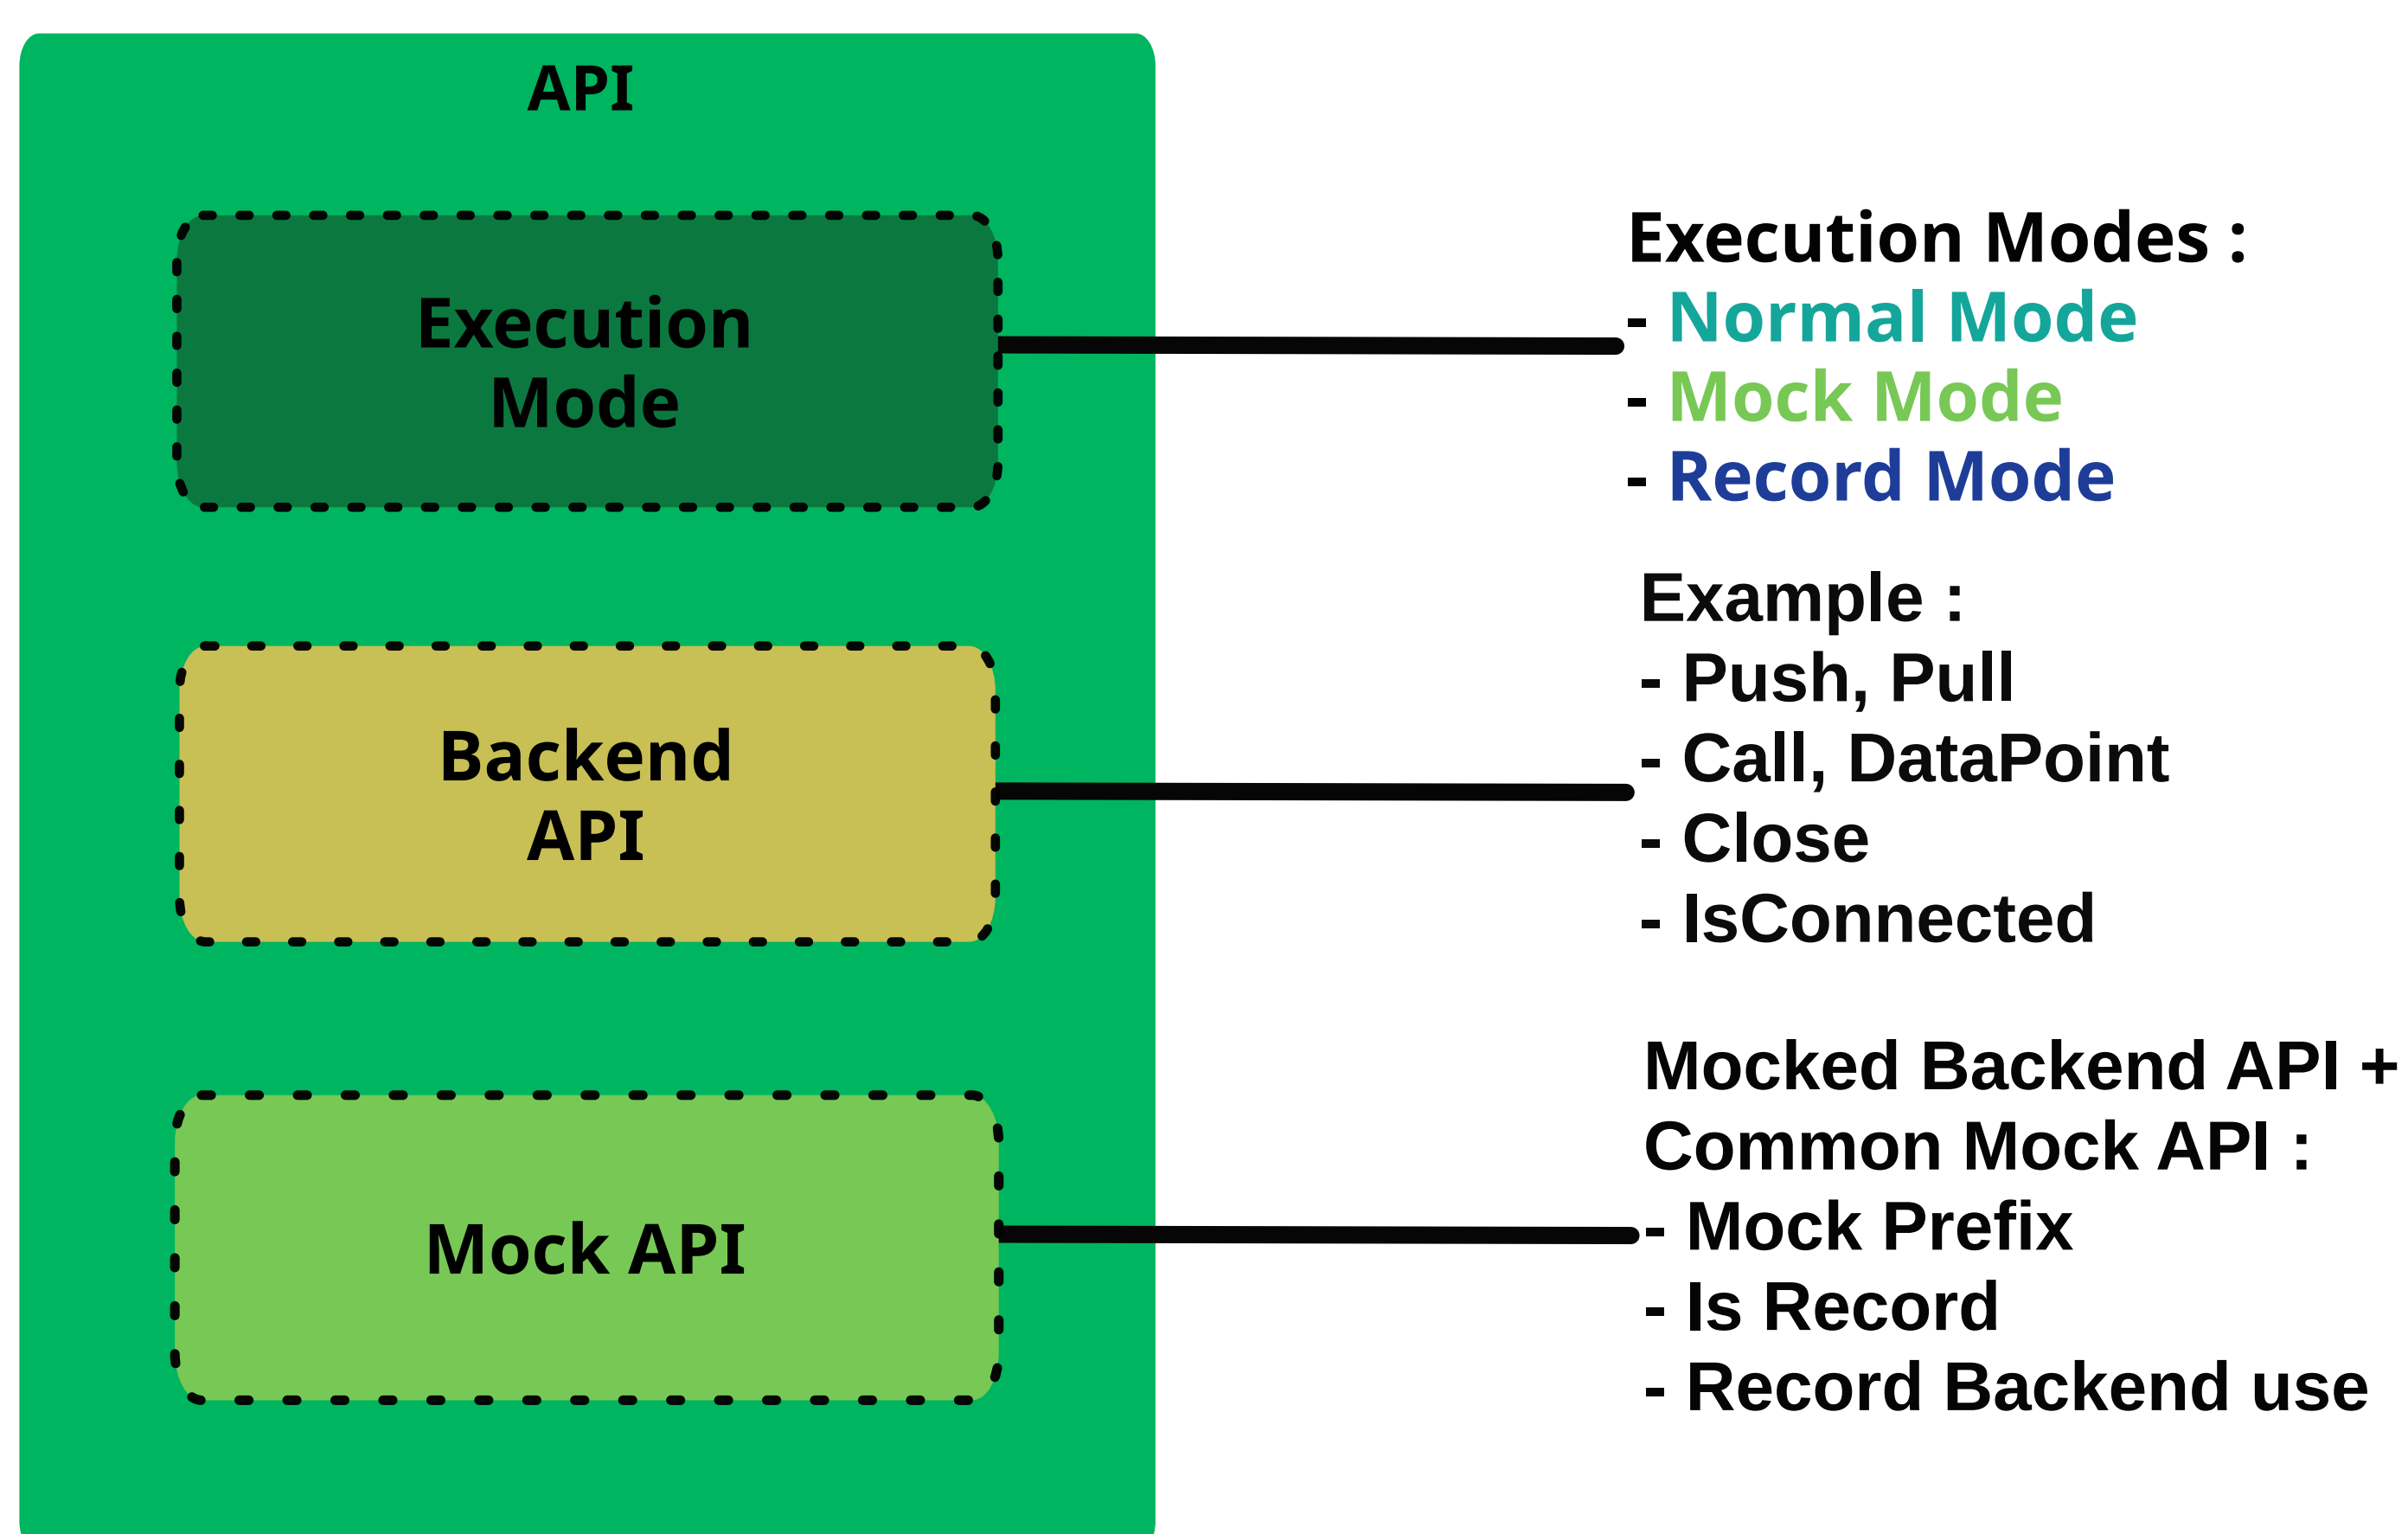

Example using Sockets

