

# Persint


## *Event Display for the ATLAS Muon Spectrometer*

### User's Manual and Tutorial


(Version 4.7 October 14, 2011)

#### Abstract

This document is the User's Guide and a tutorial for a new version of the *Persint* interactive detector and event visualization program developed for the ATLAS collaboration [1]. The program is well suited for event scanning and for analyzing complicated events in their most intricate detail.

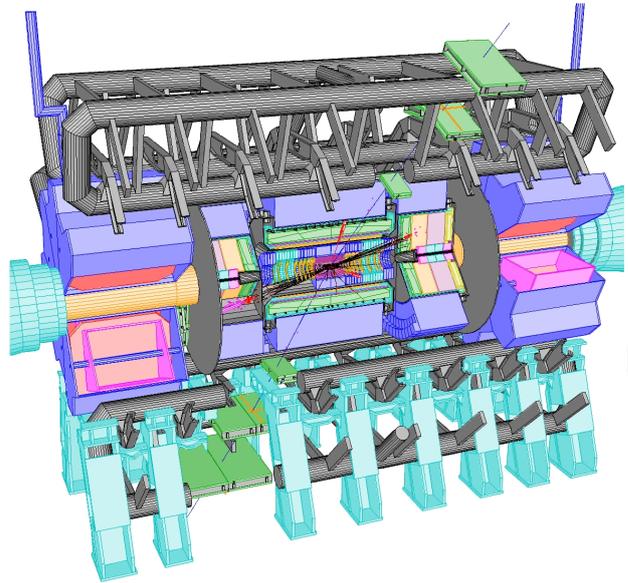

1997

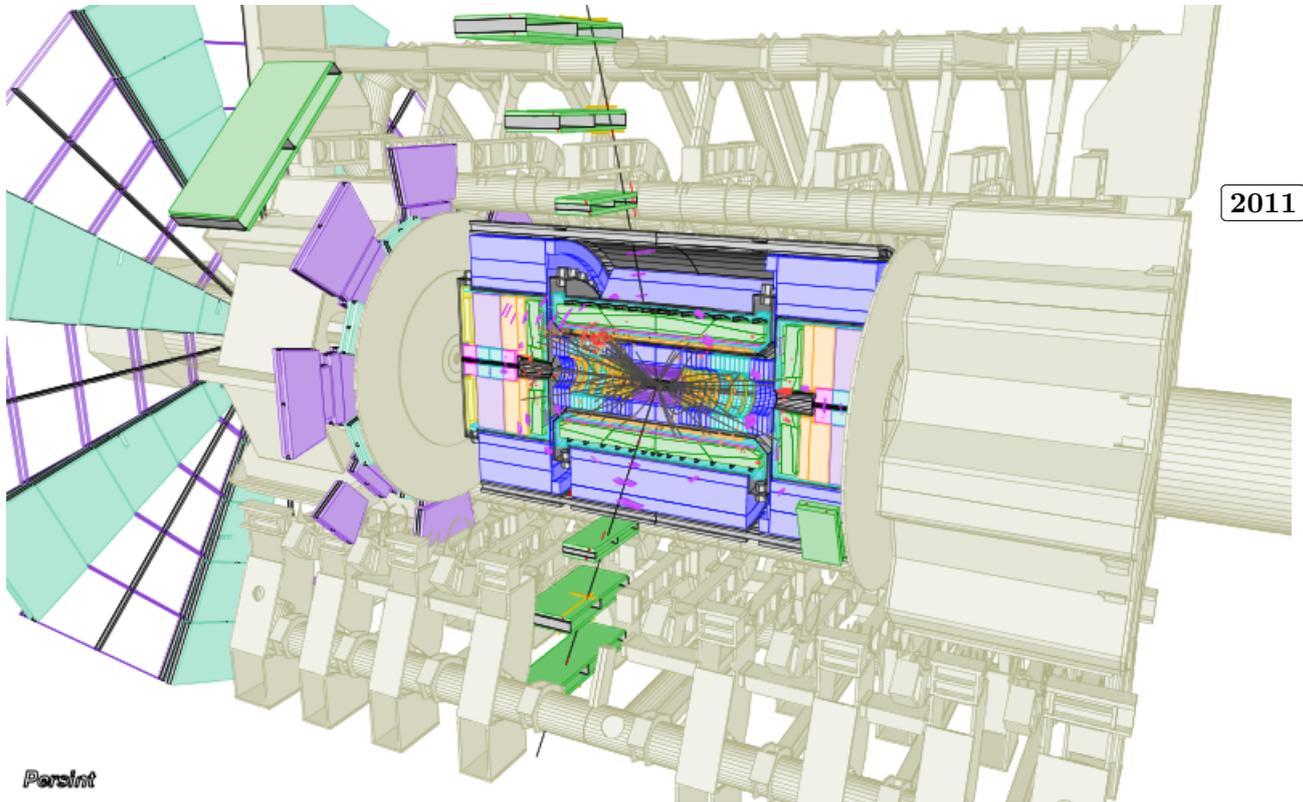

2011

This paper is dedicated to the memory of *Marc Virchaux* (1953-2004), the author of this software.

### **Acknowledgments**

We would like to acknowledge the work of *Daniel Pomarède* with the original *Persint*, and thank *Eric Lançon* for helping implement the use of calorimeter data.

*Jochen Meyer* has written a short guide to the AGDD XML dead material files, and operations on volumes.

*Oliver Kortner* and *Angelo Graziosi* have provided the German and Italian translations for all the windows, dialogue boxes, and help items in the GUI.

Comments to:

laurent.chevalier@cea.fr  
jean.ernwein@cea.fr  
patrick.sizun@cea.fr

## History

<i>Date</i>	<i>Version</i>	<i>Comments</i>	<i>Persint version</i>
30/10/2009	V-4.0.3	Draft version (incomplete)	Persint-00-01-24
20/11/2009	V-4.0.4	Draft version (incomplete)	Persint-00-01-29
17/12/2009	V-4.0.5	Draft version (incomplete)	Persint-00-01-36
15/01/2010	V-4.1	First complete version	Persint-00-01-41
19/03/2010	V-4.2	Computation of invariant masses + minor corrections	Persint-00-01-46
09/04/2010	V-4.3	- Export as <b>.ps</b> and <b>.pdf</b> - New feature: <i>Save Special...</i> : Compare geometries - Improved Captions	Persint-00-01-53
19/06/2010	V-4.3.1	- Study of geometry and material - Improved labels and captions - Display vertices; 2 track shapes: <i>ribbon</i> , <i>cylinder</i> - Display magnetic field map	Persint-00-01-63
19/08/2010	V-4.3.2	- A-lines (alignment) downloaded for each event - Histogram of $d0$ distribution - Spinbox added for easy numerical settings	Persint-00-01-68
22/10/2010	V-4.3.3	- Modified interface with MuonBoy - Fully implement "Preferences" menu - Python script available in <code>/Persint-00-02-00/example</code> for generating an <code>OutMboyView</code> file from ESDs - Updated TRT description - Download magnetic field maps from the Internet	Persint-00-01-75
29/01/2011	V-4.4	Direct access to User Manual Clean up field maps + Display Muonboy error messages Histogram of integral $\int Bdl$ Full-screen mode + Edit color of selected volumes Select particular sectors for display in an event	Persint-00-01-83
09/03/2011	V-4.5	Added 1D plots of magnetic field Redesign track selection user interface Multi-user installation Appendix B rewritten (Installation) Optional disabling of Log console	Persint-00-01-92
15/04/2011	V-4.6	Selection of solenoidal field map Redesign <i>Generate Muons</i> window 1D plots of $\int Bdl$	Persint-00-01-98
14/10/2011	V-4.7	Added German and Italian versions of GUI Map of $X_0$ ; map of "expected number of stations" Export map data as ASCII file; switch to/from Log scale Additional AGDD/XML shapes	Persint-00-02-27

The pdf version of this manual can be found at:

[https://twiki.cern.ch/twiki/pub/Atlas/Persint2Wiki/PERSINT2\\_Manual.pdf](https://twiki.cern.ch/twiki/pub/Atlas/Persint2Wiki/PERSINT2_Manual.pdf)

## Contents

<b>1</b>	<b>Main features of <i>Persint</i></b>	<b>12</b>
<b>2</b>	<b>Architecture</b>	<b>14</b>
<b>3</b>	<b>Installation on supported platforms</b>	<b>14</b>
<b>4</b>	<b>Starting <i>Persint</i></b>	<b>15</b>
<b>5</b>	<b>The Graphic User Interface</b>	<b>17</b>
5.1	Items of the Graphic User Interface . . . . .	17
5.2	Online help . . . . .	17
5.3	Speeding up <i>Persint</i> . . . . .	18
5.4	Toolbars or Menus ? . . . . .	18
<b>6</b>	<b>Exercise 1: Setting the stage</b>	<b>19</b>
6.1	Necessary files . . . . .	19
6.1.1	<i>Detector description and magnetic field</i> . . . . .	19
6.1.2	<i>“Example” files for Event 4023</i> . . . . .	21
6.2	Interfaces to applications . . . . .	21
6.3	Displaying detector layouts and events . . . . .	22
6.4	Save, Export, and Print views . . . . .	24
6.5	Dressing the display with captions, logos, and pictures . . . . .	26
<b>7</b>	<b>Exercise 2: Muon tracks in your own layout</b>	<b>29</b>
7.1	Generate muon tracks at the IP . . . . .	29
7.2	Display the detector using the AMDB interface . . . . .	30
7.2.1	<i>Draw MDT muon chambers</i> . . . . .	30
7.2.2	<i>Draw RPC muon chambers</i> . . . . .	30
7.2.3	<i>Draw Inner Detector</i> . . . . .	31
7.2.4	<i>Optimizing the view: a first try at navigation</i> . . . . .	31
7.2.5	<i>Starting anew</i> . . . . .	32
7.3	Place the calorimeters . . . . .	32
7.4	Save files for future use . . . . .	32
7.5	Place inert material using the AGDD interface . . . . .	33
7.6	The <i>Dead material</i> function . . . . .	33
7.6.1	<i>Preparing the working view</i> . . . . .	34
7.6.2	<i>Use of the <a href="#">Dead material</a> function</i> . . . . .	34
7.7	Look at the event in detail . . . . .	35
7.7.1	<i>Show ATLAS coordinate system</i> . . . . .	35
7.7.2	<i>View the event in the X-projection</i> . . . . .	35
7.7.3	<i>Zoom-in on muon chambers</i> . . . . .	36
<b>8</b>	<b>Exercise 3: Practicing Navigation</b>	<b>37</b>
8.1	Preparing the working view . . . . .	37
8.2	The <i>Default mode</i> : a magic wand . . . . .	38
8.3	Single functions . . . . .	39
8.4	More functions . . . . .	39

<b>9</b>	<b>Exercise 4: Exploring more features</b>	<b>41</b>
9.1	Volume information labels . . . . .	41
9.1.1	<i>Volume identification with information boxes</i> . . . . .	41
9.1.2	<i>Label maker</i> . . . . .	41
9.2	Hide/Displace volumes or super-volumes . . . . .	43
9.2.1	<i>Hide volumes</i> . . . . .	43
9.2.2	<i>Hiding volumes, the fast way</i> . . . . .	44
9.2.3	<i>Displacements of volumes</i> . . . . .	44
9.3	Compare geometries . . . . .	45
9.4	Detect volume clashes . . . . .	46
9.5	Animation . . . . .	48
9.6	Wire mode . . . . .	49
9.7	Magnetic Field Interface . . . . .	49
9.7.1	Loading a Magnetic Field file . . . . .	49
9.7.2	Display B-field lines . . . . .	50
9.7.3	Display B-field maps . . . . .	51
9.8	$X_0$ map: Distribution of material . . . . .	54
9.9	Map of the expected number of crossed muon stations . . . . .	55
<b>10</b>	<b>Exercise 5: ATLAS Physics Events (1)</b>	<b>56</b>
10.1	Input files . . . . .	56
10.1.1	Files loaded by the user . . . . .	56
10.1.2	Event dependent files . . . . .	56
10.2	Display physics events . . . . .	56
10.3	Select Sectors to be displayed . . . . .	58
10.4	Dressing the event . . . . .	59
10.5	Save the view . . . . .	61
10.6	Changing the event file . . . . .	61
10.7	Scanning events . . . . .	61
10.7.1	<i>Manual scanning</i> . . . . .	62
10.7.2	<i>Automatic scanning</i> . . . . .	62
10.7.3	<i>Visualization properties</i> . . . . .	62
10.7.4	<i>Using 2D projections</i> . . . . .	64
<b>11</b>	<b>Exercise 6: ATLAS Physics events (2)</b>	<b>65</b>
11.1	Muon spectrometer data . . . . .	65
11.1.1	Map $(\eta, \varphi)$ of expected number of stations . . . . .	65
11.1.2	<i>ATHENA</i> reconstructed segments and tracks . . . . .	66
11.1.3	<i>Simulated muon tracks</i> . . . . .	70
11.1.4	<i>Interactive reconstruction with Muonboy</i> . . . . .	70
11.1.5	<i>Color code for MDT hits</i> . . . . .	73
11.2	Vertex display and Inner Detector data . . . . .	75
11.2.1	Vertex display . . . . .	75
11.2.2	Histogram of $d_0$ (primary vertex) . . . . .	76
11.3	Calorimeter data . . . . .	77
11.3.1	<i>Display calorimeter hits</i> . . . . .	77
11.3.2	<i>Display calorimeter hits with increased thresholds</i> . . . . .	78
11.3.3	<i>Histogram of calorimeter hits</i> . . . . .	81
<b>12</b>	<b>Persint: a versatile tool</b>	<b>83</b>
12.1	An analysis tool . . . . .	83
12.2	Study of the geometry and dead material . . . . .	85

<b>13 Selected event displays</b>	<b>86</b>
<b>14 Useful hints</b>	<b>96</b>

<b>15 APPENDICES</b>	<b>97</b>
<b>A Architecture</b>	<b>97</b>
<b>B Installation and dependencies</b>	<b>99</b>
B.1 Installation . . . . .	99
B.1.1 Tarball ( <i>default procedure</i> ) . . . . .	99
B.1.2 SVN . . . . .	99
B.1.3 Ubuntu . . . . .	100
B.1.4 lxplus . . . . .	101
B.1.5 CernVM . . . . .	101
B.2 Dependencies . . . . .	102
B.2.1 Ubuntu . . . . .	102
B.2.2 Debian . . . . .	104
B.2.3 Fedora . . . . .	104
B.2.4 Scientific Linux Cern . . . . .	104
B.2.5 Mac OS X . . . . .	105
B.2.6 Cygwin . . . . .	107
<b>C ATLAS coordinate system</b>	<b>108</b>
<b>D Files used in <i>Persint</i></b>	<b>109</b>
D.1 File formats . . . . .	109
D.2 Directories for <i>Persint</i> files . . . . .	111
D.3 File description . . . . .	111
D.3.1 .p2vf . . . . .	112
D.3.2 .p2ts . . . . .	113
D.3.3 .p2gm . . . . .	113
D.3.4 amdb_simrec.xxx . . . . .	114
D.3.5 Bmagatlas . . . . .	118
D.3.6 Description of the <i>Out.MboyView</i> ASCII event file readable by PERSINT . . . . .	119
D.3.7 <i>Out.MboyView_Zmumu4023</i> . . . . .	121
<b>E Menu items</b>	<b>123</b>
E.1 <i>File</i> menu . . . . .	123
E.2 <i>Image</i> menu . . . . .	124
E.3 <i>Navigation</i> menu . . . . .	125
E.4 <i>Volumes</i> menu . . . . .	127
E.4.1 xml description of AGDD files . . . . .	129
E.4.2 Subroutine used for creating volumes . . . . .	131
E.5 <i>Events</i> menu . . . . .	137
E.5.1 <i>Set track parameters</i> window . . . . .	139
E.6 <i>Tools</i> menu . . . . .	142
E.7 <i>Window</i> menu . . . . .	144
E.8 <i>Help</i> menu . . . . .	145
E.9 <i>persint</i> menu (Mac OS only) . . . . .	146
E.10 <i>Warning messages</i> . . . . .	147
<b>F Right-click</b>	<b>148</b>

---

<b>G Producing <i>Event files</i> for <i>Persint</i> in <i>ATHENA</i></b>	<b>149</b>
G.1 Event files from raw data . . . . .	149
G.2 Event files from ESDs or dESDs . . . . .	150
G.2.1 <i>Procedure</i> . . . . .	150
G.2.2 <i>Limitations</i> . . . . .	150
G.2.3 <i>ATHENA job options</i> file, an example: <code>MboyViewESD.py</code> . . . . .	150

## List of Figures

1	Various views of a <i>Persint</i> display . . . . .	13
2	Layout of the <i>Persint</i> display window . . . . .	16
3	Online information boxes . . . . .	18
4	Using the <i>Data manager</i> window for loading the necessary files. . . . .	20
5	Warning issued by <i>Persint</i> . . . . .	22
6	<i>Set track parameters</i> window . . . . .	23
7	Resulting display of the exercise in section 6.3 . . . . .	24
8	The <i>Specific edge color</i> function and <i>Persint logo</i> of the <i>Image</i> menu. . . . .	25
9	The <i>Anti-aliasing</i> function of the <i>Image</i> menu . . . . .	25
10	Warning issued when using the <i>Save special. . .</i> function . . . . .	26
11	<i>Add caption</i> window . . . . .	27
12	<i>Add picture</i> window . . . . .	28
13	The four flavors of the ATLAS logos. . . . .	28
14	Spinbox navigation scale . . . . .	28
15	Pop-up window for muon track generation . . . . .	29
16	Using the Octant and Z-half selectors of the AMDB interface . . . . .	30
17	Illustration for exercise 2 (1) . . . . .	31
18	Illustration for exercise 2 (2) . . . . .	32
19	Illustration for exercise 2 (3) . . . . .	33
20	The function: <i>Use all dead matter/Use displayed dead matter only</i> . . . . .	34
21	Projected 2D view for exercise 2 . . . . .	35
22	Selections made in the <i>Option tabs</i> in the <i>Selector window</i> . . . . .	36
23	Resulting X-view from manipulations in section 7.7.3. . . . .	36
24	Spinbox navigation scale . . . . .	37
25	Additional selections made in the <i>Selector window</i> . . . . .	37
26	Detector layout resulting from the additional selections made in Exercise 3. . . . .	38
27	Defining the viewing perspective . . . . .	40
28	Making a <i>Default label</i> . . . . .	41
29	Making a <i>Customised label</i> . . . . .	42
30	Custom label for an endcap MDT chamber . . . . .	42
31	Hiding volumes and super volumes . . . . .	43
32	Pop-up window showing displaced volumes . . . . .	43
33	<i>Selected volumes</i> window . . . . .	44
34	<i>Modify volume</i> window . . . . .	44
35	Two "feet geometries" to be compared. . . . .	45
36	Displays used for detecting clashes . . . . .	46
37	Rotate EOL chamber by 6° . . . . .	47
38	Compare clashes for two geometries . . . . .	47
39	<i>Generating animation</i> window . . . . .	48
40	Partial <i>Wire Mode</i> switched on. . . . .	49
41	Displaying the magnetic field lines . . . . .	50
42	Displaying the magnetic field map (1) . . . . .	51
43	Displaying the magnetic field map (2) . . . . .	51
44	Displaying the magnetic field map (3) . . . . .	52
45	Displaying the magnetic field map (4) . . . . .	52
46	Displaying the magnetic field map (5) . . . . .	52
47	Displaying the map of the field integral $\int Bdl$ (1) . . . . .	53
48	Displaying the map of the field integral $\int Bdl$ (2) . . . . .	53
49	Displaying the map of $X_0$ . . . . .	54
50	Displaying the map of the Number of expected stations . . . . .	55

51	Event 4023, display (1) . . . . .	57
52	How to select the sectors to be displayed in an event. . . . .	58
53	Event 4023, display (2), resulting from the selection of two sectors. . . . .	58
54	Event 4023, display (3) . . . . .	59
55	Modifications made in the <i>Selector window</i> . . . . .	60
56	Final display of Event 4023 . . . . .	60
57	Warnings issued by <i>Persint</i> about loading the proper files. . . . .	61
58	”Default” files and ”Current” files being used by <i>Persint</i> . . . . .	62
59	Various views of Event 3998 . . . . .	63
60	Events 3998 & 4000 . . . . .	63
61	X-projection of scanned events . . . . .	64
62	Map of expected number of stations . . . . .	66
63	Event 4023 (first pass) . . . . .	66
64	Event 4023 (second pass) . . . . .	67
65	Event 4023 (third pass) . . . . .	67
66	Event 4023 (fourth pass) . . . . .	68
67	Event 4023 (fifth pass) . . . . .	68
68	Event 4023: Zoomed X-projection with reconstructed tracks . . . . .	69
69	Event 4023: Zoomed X-projection with reconstructed segments . . . . .	69
70	Event 4023 (sixth pass) . . . . .	70
71	Display of two candidate tracks . . . . .	71
72	The <i>Muonboy</i> pane . . . . .	71
73	The <i>Muonboy</i> pane (Magnetic field at half strength) . . . . .	72
74	The <i>Muonboy</i> window, with all reconstructed muons . . . . .	72
75	Event 4023 without reconstruction . . . . .	73
76	Event 4023: Detail of BIL chamber in the X-projection . . . . .	73
77	MDT hits after reconstruction (black) . . . . .	74
78	<i>Set track parameters</i> window for displaying ID tracks. . . . .	75
79	Display primary vertex. . . . .	76
80	Histogram of primary vertex candidates . . . . .	76
81	Selection made to obtain the display of figure 82 . . . . .	77
82	Display with calorimeter hits (low thresholds) . . . . .	78
83	Selection made to obtain the display of figure 84 . . . . .	79
84	Display with calorimeter hits (high thresholds) . . . . .	79
85	Selection of thresholds and cell envelopes to obtain the display of figure 86 . . . . .	80
86	Display with calorimeter hits (high thresholds) within cell envelopes . . . . .	80
87	Histogram of hit calorimeter cells (low thresholds) . . . . .	81
88	Selection of high thresholds in the <i>Set track parameters</i> window . . . . .	81
89	Histogram of hit calorimeter cells (high thresholds) . . . . .	82
90	File formats proposed when saving the <i>Histogram of hit calorimeter cells</i> . . . . .	82
91	Charge asymmetry of forward low energy muons in 900 <i>GeV</i> collision data . . . . .	83
92	Charge asymmetry: an acceptance effect . . . . .	83
93	List of muon tracks generated in figure 92 . . . . .	84
94	Using <i>Persint</i> for the geometry description . . . . .	85
95	<i>Min Bias</i> event in 900 <i>GeV</i> data: Run 141749, Event 113661. (December, 2009) . . . . .	86
96	<i>Min Bias</i> event in 900 <i>GeV</i> data: Run 141749, Event 171059. (December, 2009) . . . . .	86
97	A $J/\Psi \rightarrow \mu\mu$ candidate in the 7 TeV collision data of 2010. . . . .	87
98	The same $J/\Psi \rightarrow \mu\mu$ : in 2D projections and details of track reconstruction. . . . .	87
99	A $W \rightarrow \mu\nu$ candidate in the 7 TeV collision data of 2010. . . . .	88
100	The same $W \rightarrow \mu\nu$ candidate: in 2D projections and details of track reconstruction. . . . .	88
101	A $Z \rightarrow \mu\mu$ candidate in the 7 TeV collision data of 2010. . . . .	89
102	The same $Z \rightarrow \mu\mu$ : in 2D projections and details of track reconstruction. . . . .	90

---

103	Candidate event $Z \rightarrow \mu\mu + Et_{miss}$ . . . . .	91
104	$t\bar{t} \rightarrow eejj$ Run# 155678; Event# 13304729. . . . .	92
105	Candidate event $Z' \rightarrow ee$ . . . . .	93
106	Candidate event $Z \rightarrow \mu\mu$ . . . . .	94
107	Candidate $J/\psi \rightarrow \mu\mu$ in HI collisions . . . . .	95
108	Architecture of the <i>Persint</i> source code . . . . .	97
109	ATLAS coordinate system. . . . .	108
110	Details of some files used by <i>Persint</i> . . . . .	111
111	The <i>Displaced volumes</i> window . . . . .	127
112	The <i>Create volume</i> window . . . . .	127
113	The <i>Set track parameters</i> window . . . . .	139
114	Edit color palette and start Animation in the <i>Tools</i> menu . . . . .	142
115	The setting of <i>Preferences</i> . . . . .	143
116	Special menus available through various <b>Right-clicks</b> . . . . .	148
117	The <i>Edit track</i> window . . . . .	148

## Introduction

*Persint*<sup>1</sup> is an interactive visualization program developed for ATLAS. The program has been operational for many years and was used for:

- Designing the muon spectrometer
- Debugging the successive detector layouts, in particular resolving volume clashes in the GeoModel
- Optimizing the reconstruction software
- Analysing cosmic ray data in the commissioning phase
- Analysing collision events (data and Monte Carlo)

The new version described in this manual retains all the functionalities of the original package [2],[3] and features a modern graphic user interface (GUI) and an easy to use file management system. The new interface, which uses the *Qt* library from *Trolltech*, makes it easy to interact with objects or applications.

*Persint* has many remarkable features, which can be used to visualize events in their most intricate detail. It is currently running on Linux, Mac OS and Windows operating systems and is interfaced with *ATHENA*, the general framework for data analysis in ATLAS. The package is being used with simulated events and with real data: cosmic ray events and events from collisions.

*Persint* is particularly well suited for understanding complicated events, when the visual representation of the detector's response becomes crucial.

## 1 Main features of *Persint*

The *Persint* program is designed for the three-dimensional representation of objects. It visualizes detector geometries using an interface with AMDB<sup>2</sup>, an ASCII file containing the primary numbers used to build the muon spectrometer geometry. It also accesses AGDD<sup>3</sup>, an XML-based geometry description language for the Atlas generic detector, mainly concerned with the inert material in the spectrometer. *Persint* interfaces with a variety of independent applications, in a fully interactive way. These applications include visualization of active detectors, inactive material, and the magnetic field map, as well as the detection of volume clashes, the display of event hits from files of physics events (simulated or data). It is possible to display events reconstructed with any reconstruction program active in *ATHENA*. Furthermore it is also possible to interactively run the embedded muon reconstruction program *MuonBoy*, and display the results.

For spatial navigation, one can set the desired perspective for the 3D-view and display 2D-projections along various axes (Fig. 1). It is possible to change the viewpoint in order to best visualize the desired region, to displace the viewed objects with operations like translation, rotation and zoom.

The remarkable features offered by *Persint* are:

- 3-dimensional representation of objects in full volumes or "wire mode" using the computation of hidden faces
- Spatial navigation with real time displacements
- Focal length adjustment, from isometry to wide angle


---

<sup>1</sup>*Persint*: PERSpectively INTeractive


<sup>2</sup>Atlas Muon Data Base

<sup>3</sup>Atlas Generic Detector Description


- Interfaces with numerous applications
- Display of magnetic field map; tracking in magnetic field of generated muons
- Displays can be exported as .png, .jpg, .bmp, or .svg files.
- Highlight of volume edges; adjustable light intensity on volume faces
- Detection of clashing volumes and highlight of intersections
- Boolean volume operations (addition, subtraction, intersection).

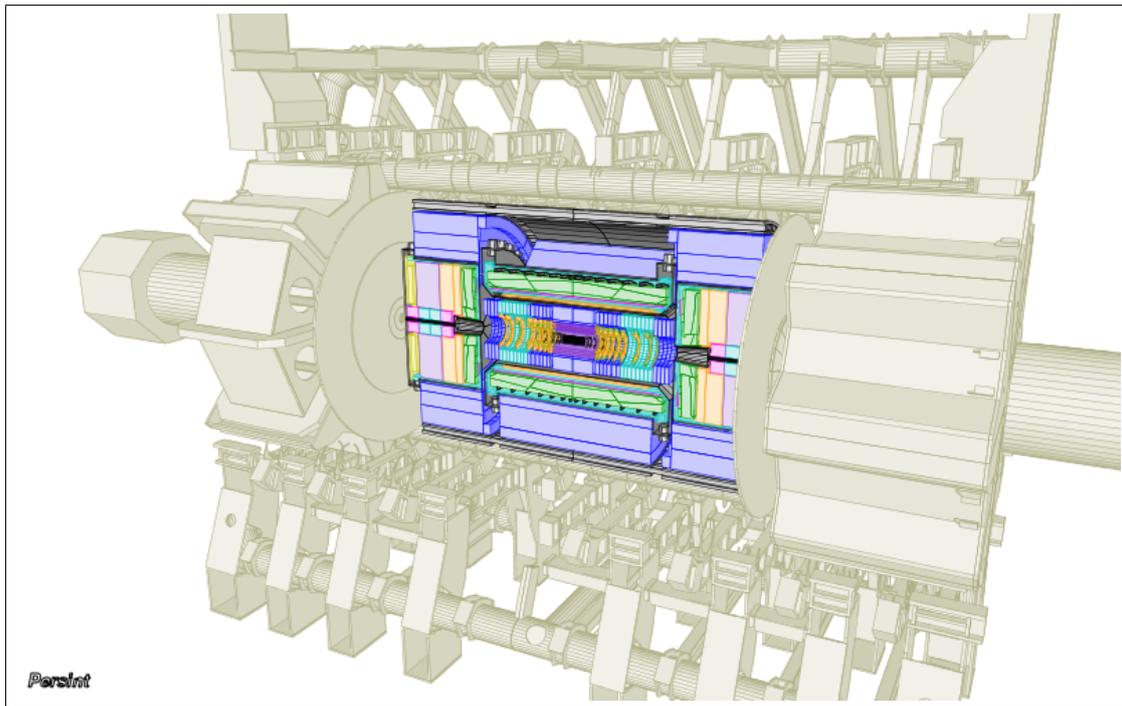

(a) 3D View

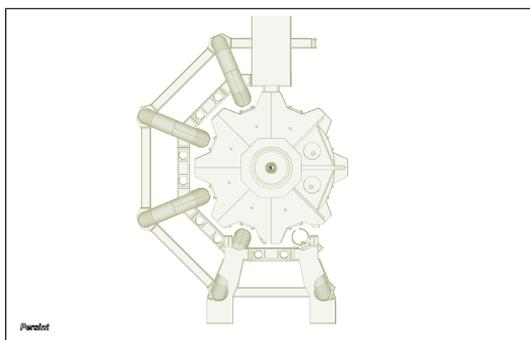

(b) 2D Z-View

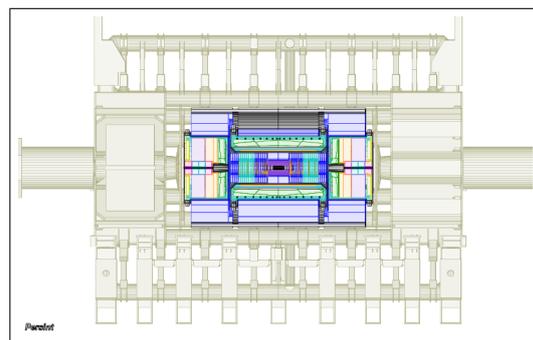

(c) 2D X-View

Figure 1: Various views of a *Persint* display

## 2 Architecture

*Persint* has been in use since 1995 and is written in Fortran90 . The core code contains everything needed to parse, store transiently and generate volumes from standard XML files. Analytic calculations determine volumes with hidden faces, provide the detection of clashes, can highlight volume intersections and supports boolean volume operations.

A second layer of C++ wrapping classes provides the liaison between the core program and the graphic interface. This layer is made of classes encapsulating the calls to Fortran routines.

The third component is the Qt/C++ Graphic User Interface (GUI) .

*Persint* is a stand-alone package which uses ASCII event files as input:

1. The ASCII event files can be produced by *ATHENA* from raw data, with proper setting of the “properties”. In this case, the full potential of *Persint* can be used, including the interactive reconstruction of tracks with the embedded *Muonboy* reconstruction package. However, results from any *ATHENA* reconstruction package can be chosen for display (*Muonboy*, *Staco*, *Moore*, *Muid*, ...) <sup>1</sup>.
2. These ASCII files may also be produced from ESDs, using a “procedure” in *ATHENA* (Appendix G.2). In this case, events can be displayed but the interactive reconstruction of tracks cannot be performed.

Details of the design architecture can be found in Appendix A and in [6].

## 3 Installation on supported platforms

The necessary total disk space for installing *Persint* is less than 200 Mbytes. The following platforms may be used:

- *Persint* is developed under **Ubuntu** Natty (11.04)/Maverick (10.10)/Lucid (10.04)/Karmic (9.10)/Jaunty (9.04)/Intrepid (8.10)/Hardy (8.04 LTS) on 32- and 64-bit platforms
- *Persint* runs under **Scientific Linux 4/5**, in particular on **lxplus** at CERN
- *Persint* runs with **Mac OS**: version  $\geq 10.5.6$
- *Persint* runs under **Fedora** 11 (Leonidas), 13 (Goddard) and 14 (Laughlin)
- *Persint* has been tested on **Debian** 5 (Lenny)
- *Persint* was successfully installed under **Cygwin 1.7**, the Linux-like environment for **Windows 7**

Detailed instructions for installation and requirements for dependencies are given in Appendix B. An abridged HTML version of this user’s manual is available at:

<https://twiki.cern.ch/twiki/bin/view/Atlas/Persint2Wiki>

**Up to date information** on releases, installation and dependencies can be found there.

---

<sup>1</sup>*Muonboy*, *Staco*, *Moore*, *Muid* are computer programs for muon track reconstruction in Atlas.

## 4 Starting *Persint*


- To start *Persint* under Linux, launch the program with the *Persint* icon on the desktop <sup>1</sup>.
- Under Mac OS, launch the *Persint.app* application placed in the *Application* folder at installation time <sup>2</sup>.

In the pop-up window, choose the language: *English*, *French*, *German*, or *Italian*.

Upon launching *Persint*, the default AMDB geometry file is loaded automatically. It is located in the directory *Persint-00-02-●●/AmdcData/share*, where *Persint-00-02-●●* is the *persint* working directory <sup>3</sup>

Then a window is displayed which prompts you to restore (or not) the view which is automatically saved when closing the previous session (answer *Yes* or *No*).

When launching *Persint* for the very first time (there is no “previous session”), answer *Yes* in order to display the default view (*Zmumu4023.p2vf*) which is created at installation time in the directory *Persint-00-02-●●/example*. <sup>a</sup>

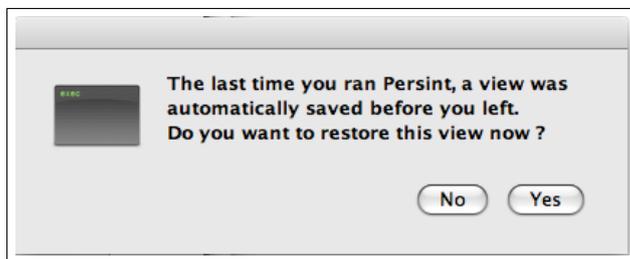

<sup>a</sup>When running the preloaded *Persint* on lxplus at CERN for the first time, there is no default view available.

Figure 2 shows this default display in which labels have been added to indicate the location of the various tool bars and windows. The display also contains a simulated di-muon event which has been superimposed. How this is done is explained in section 6.3.

It is always possible to retrieve the original view (or any view which was saved as a .p2vf file). This is done in the following way:

Click on the *Open view* icon of the *File* tool bar. Select and open either the default file *Zmumu4023.p2vf* <sup>4</sup>, or any saved .p2vf file.



- The program’s version number can be seen in the *About* item in the *Help* menu (or in the *persint* menu in Mac OS). The latest version is *Persint-00-02-27* <sup>5</sup>

<sup>1</sup>Under Linux, this icon is created on the desktop at installation time.

<sup>2</sup>Under Mac OS, an alias can be conveniently placed e.g. on the *Desktop* or in the *Dock*. It can also be launched from the *Terminal* by typing `./start_persint.sh` in the *persint* working directory: *Persint-00-02-●●*.

<sup>3</sup>*Persint-00-02-●●* is the evolving version number of *Persint*, e.g. *Persint-00-02-27*.

<sup>4</sup>*Zmumu4023.p2vf* is located in the *Persint-00-02-●●/example* directory.

<sup>5</sup>Check for the latest version at: <https://twiki.cern.ch/twiki/bin/view/Atlas/Persint2Wiki>. As the version will evolve with time, the version number is given as *Persint-00-02-●●* in this document.

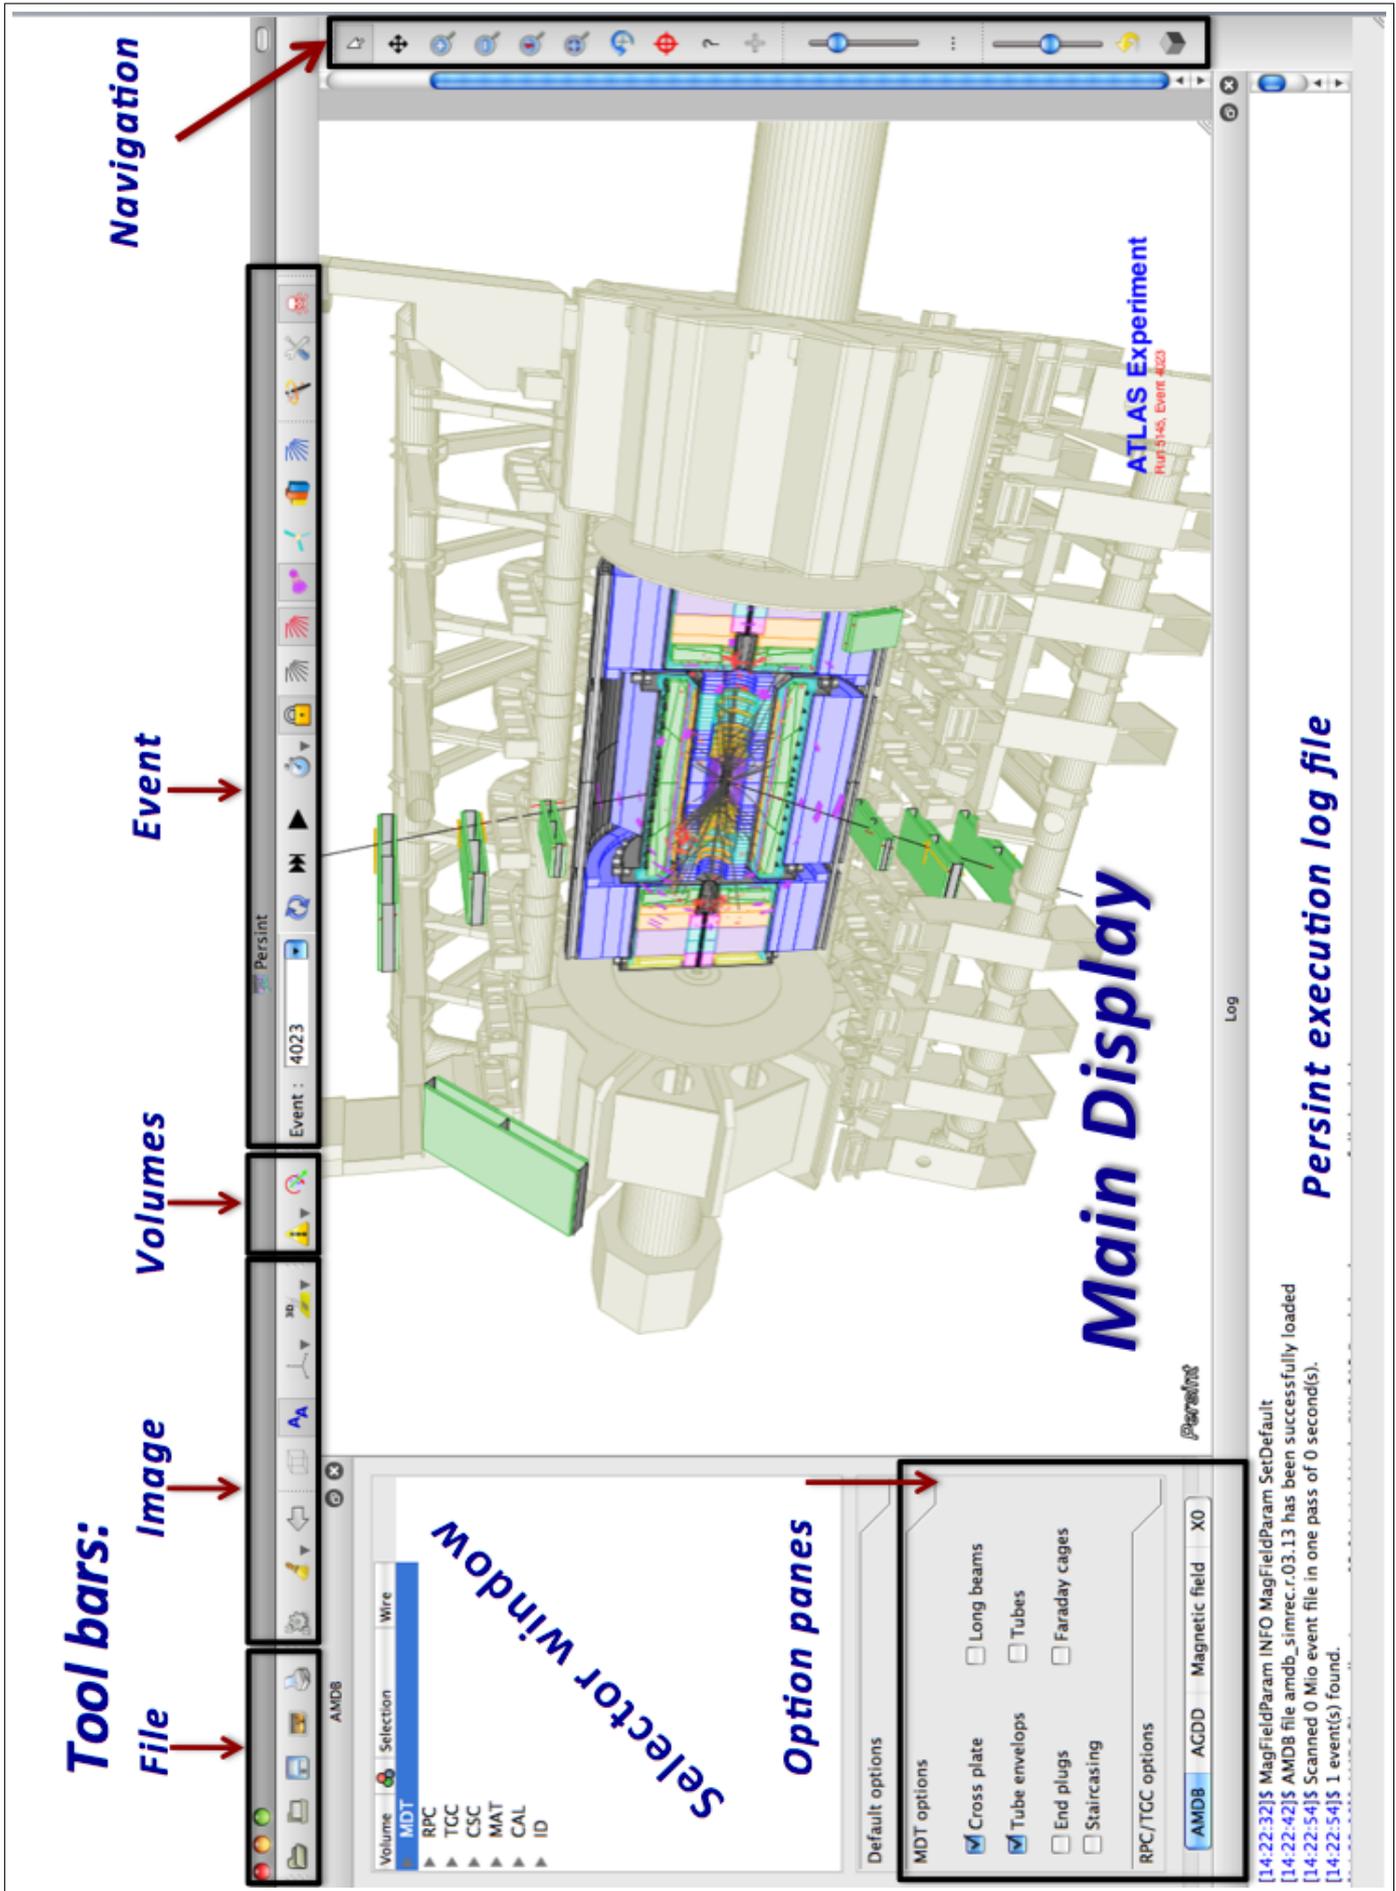


Figure 2: Layout of the Persint display window

## 5 The Graphic User Interface

Figure 2 shows the *Persint* window once the program has been launched.

### 5.1 Items of the Graphic User Interface

A detailed description of menus and tool bars available in the Graphic User Interface is given in Appendix E.

- At the top are the menus: `File`, `Image`, `Navigation`, `Volumes`, `Events`, `Tools`, `Window` and `Help`. The `persint` menu is specific to Mac OS).

These menus give access to the various operations one can perform.

- The most common operations (but not all) are also available through **Tool bars** which appear just below the menus, as repeatedly shown in Appendix E.

The user can choose which tool bars to display. A **right-click** on any displayed tool bar will produce a pop-up list from which items can be enabled or disabled.

The **Navigation tool bar** has been placed on the right hand side by the user.<sup>1</sup> It has a number of functions (represented by icons) which allow changing the aspect of the main display in many ways.

- The large window at the left, the **Selector window**, is used for selecting detector volumes.


1. The **AMDB** interface allows interactive access to the geometrical data bases of the *amdb\_simrec* type [4] and concerns not only detector volumes like muon chambers, calorimeters and trackers, but also magnets, feet, and shielding.
2. The **AGDD** interface allows interactive access to data bases of the ATLAS Generic Detector Description type [5] [9]. The AGDD interface is used to display the inert material in ATLAS.
3. The **Magnetic Field Interface** provides a fully interactive 3D visualization of the Magnetic Field. The use of this interface will be described in section 9.7.

- The detector and event **Main display** window occupies the largest area of the display. When saving or exporting a view, it is the content of this main display window which is saved.


The **Main display** can be modified in size by dragging the lower right corner. Also, by **right-clicking** on the title bar of the window, a number of functions appear in a pop-up window, which you are invited to test.<sup>2</sup>

This **Main display** window can be made "Full screen" by using the appropriate item in the **Window** menu, or the short cut by typing the letter *F* (lower case). To exit the full screen mode, type *F* again.

- Finally, the **Log** window can be opened in the **Window** menu (Appendix E.7) and shows comments about the successive operations when running *Persint*.



List of tool bars



Actions on Main display

### 5.2 Online help

The location on the screen and the size of all these windows may be changed by the user. Online information about the functions of the icons is provided in an information box which appears when the cursor is positioned on any icon. Some examples are shown in figure 3.

<sup>1</sup>Any tool bar can be placed to a preferred location by the user.

<sup>2</sup>This pop-up menu also appears when **right-clicking** on the title bar of the *Histogram of hit calorimeter cells* window (section 11.3.3).

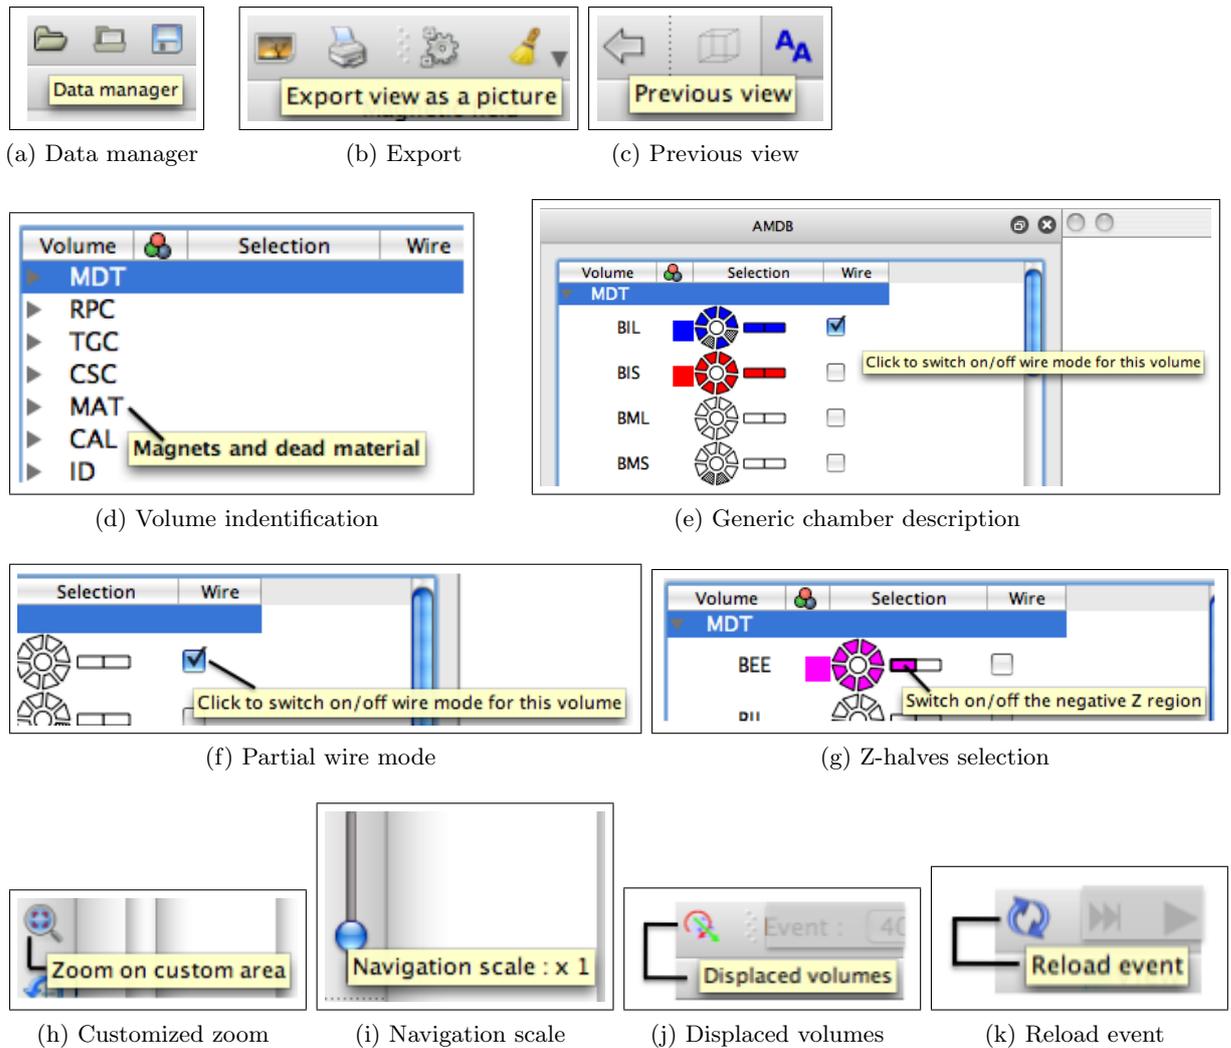



Figure 3: Examples of online information boxes, when positioning the cursor over an icon.

### 5.3 Speeding up *Persint*

When handling complicated event displays, the execution time of *Persint* can be significantly reduced by disabling the *Log console*. This is achieved by checking the appropriate box in the *Preference* pane of the *Tools* menu (Appendix E.6, page 143). For Mac OS, the *Preference* pane is in the *Persint* menu (Appendix E.9, page 146).

### 5.4 Toolbars or Menus ?

In the following tutorial, we will mostly use the tool bars, although using actions in the menus may be preferred by some users.



## 6 Exercise 1: Setting the stage

In this section, we will start using *Persint* and explore its most basic features as well as the main functions proposed by the interface. It is assumed that the installation was successful and that the necessary dependencies are satisfied (see Appendix B).

### 6.1 Necessary files

For proper initialization of certain applications, the program loads several databases and input files. It is possible to load any database during running time, but it is of interest to load default files, so that the program can initialize its applications when they are launched for the first time. Default files are stored, at installation time, in the `Persint-00-02-●●` directory .

This section (6.1) provides information about the files needed for running *Persint*, and no action is needed at this time. You may however want to create two directories for storing various files generated when operating *Persint*, for example:

The `persint.export.files` directory (or any other name) for storing files generated by the *Export view* function of the *File* tool bar (see section 6.4, item 2). These are files for presentations and publications.

The `persint.working.files` directory (or any other name) for saving *Persint*-specific files. These are files which you may want to save when interrupting your work until your next session with *Persint*.

#### 6.1.1 Detector description and magnetic field

*Persint* uses several files which concern the detector description and the magnetic field map . At installation time, they are placed in the directory `Persint-00-02-●●`<sup>1</sup> and can be loaded by clicking on the *Data manager* icon of the *File* tool bar. In the pop-up window (Fig. 4) load the necessary files as follows<sup>2</sup>:

1. The *AMDB* file (of the `amdb.simrec.xxx` type) from which the detector volume can be displayed is loaded from the **Volume** tab (Fig. 4a). When clicking on  , the files in the directory `Persint-00-02-●●/amdcData/share` are made available.<sup>3</sup> For this tutorial, we will load the *Default file* by clicking on  <sup>4</sup> and checking the box: "Load AGDD Volumes from the AMDB file". The two other buttons are used to  the current *AMDB* file or  the *Current file*.
2. The magnetic field files are loaded from the **Magnetic Field** tab (Fig. 4b). Select the *Current map* for both the muon spectrometer and the solenoid. When clicking on  , the files in the directory `Persint-00-02-●●/BFieldData/share` are made available. There are additional field maps, located in a CERN repository, available through the  button. Select the desired file in the *Download extra field maps...* window and click on  to transfer them into the `Persint-00-02-●●/BFieldData/share` directory.

For this tutorial, we will select the *Default map* for the muon spectrometer by clicking on  <sup>4</sup> Finally, click on  .




The current map can be made the default map by clicking on  .

<sup>1</sup>Created at installation time and named according to the *Persint* version in use. Check for the latest version at: <https://twiki.cern.ch/twiki/bin/view/Atlas/Persint2Wiki>

<sup>2</sup>When all the files are chosen, click on  .

<sup>3</sup>The content of this directory is shown in Appendix D.2, Figure 110a.

<sup>4</sup>When running *Persint* on lxplus at CERN for the first time, there is no default map available.

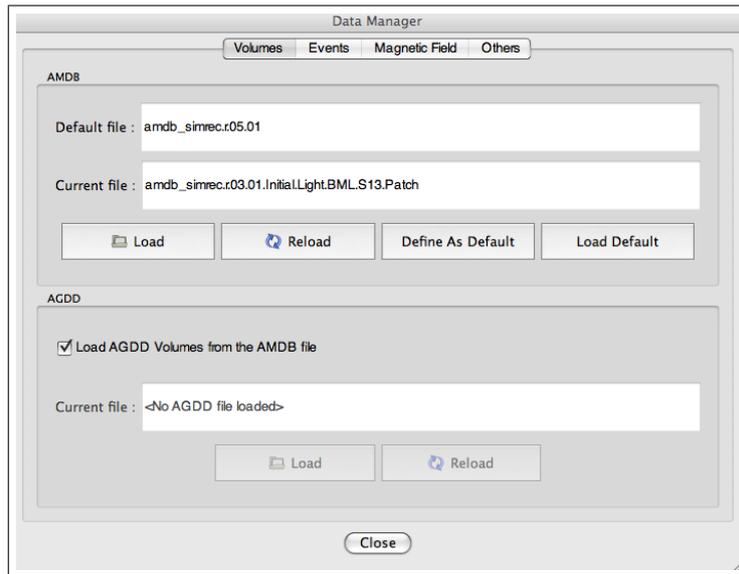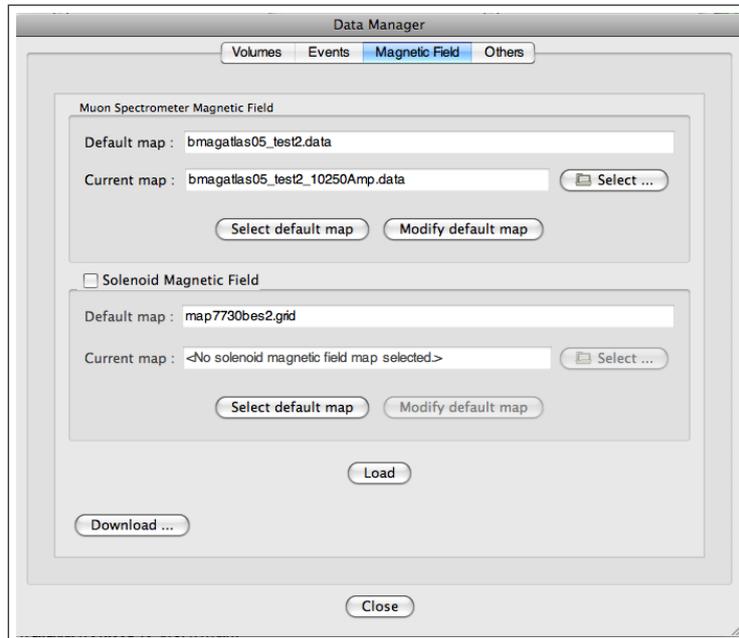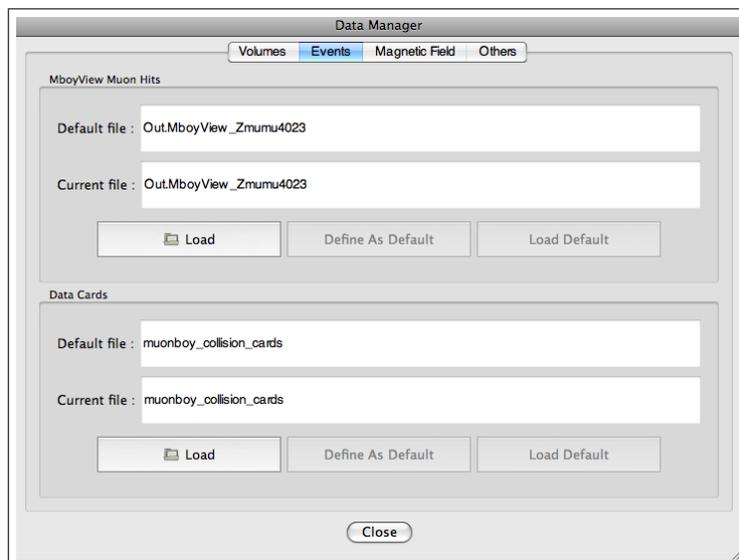(a) Choosing *AMDB* and *AGDD* files(b) Choosing the *Magnetic Field* file(c) Choosing the *Event* fileFigure 4: Using the *Data manager* window for loading the necessary files.

- Event files are loaded from the **Events** tab (Fig. 4c). When clicking on **Load**, the files in the directory `Persint-00-02-●●/example` are made available. Event files can be loaded from other directories.

The bottom part of the window shows the `Muonboy_collision_cards` file, which is used for the interactive reconstruction of tracks within *Persint*. Here again, the *Default file* was chosen with **Load Default**.

### 6.1.2 “Example” files for Event 4023

For the purpose of this exercise (Exercise 1), three more working files are placed in the directory `Persint-00-02-●●/example`<sup>1</sup> during installation of *Persint*. They concern Event 4023 of a  $Z \rightarrow \mu^+ \mu^-$  simulation:

- `Zmumu4023.p2vf`: **Detector description** file.

This file was produced to embed Event 4023 in a detector layout, and is only an example. You may want to build and display your own “visible” detector, save it as a `.p2vf` file and use it as a template for displaying events.

- `Out.MboyView_Zmumu4023`: **Event file**.

This *Event file* is an ASCII file produced by *ATHENA* when the “properties” are properly set. It contains the event `Zmumu4023` with all information necessary for viewing in *Persint*: parameters for hits, tracks, calorimeter clusters, reconstruction, and simulation of this Monte Carlo event.

*Persint* can also use event files produced from ESDs, as explained in Appendix G.2.

- `Zmumu4023.p2ts`: **Track parameter** file.

This file contains the track parameters applied to the event to be displayed. The file is produced within the *Set track parameters* window where parameters such as momentum and energy thresholds, as well as the color code are set (see section 6.3, item 6, and figure 6).

No action is required at this stage, except to check that these files are present in the proper directory. All these files will be used in this tutorial as “Default files” .

## 6.2 Interfaces to applications

The *Persint* display window gives direct access to a series of applications through dedicated interfaces. They will be described and used throughout this tutorial.

- the AMDB Interface
- the AGDD Interface
- the reconstruction and Event display Interface
- the Track parameters interface
- the Muon Track Generation Interface
- the Magnetic Field Interface


---

<sup>1</sup>The way to access these files will be explained as we go along.

### 6.3 Displaying detector layouts and events (Exercise 1 starts here).

1. Start *Persint* (see section 4).
2. Clear the view in the main display.

Use the [Clear](#) icon in the [Image](#) tool bar and choose *Clear view* in the proposed menu (or click directly on the “brush” in the icon). With this scrolling menu one can make a selective clearing of AMDB or AGDD volumes, labels<sup>1</sup> captions or pictures<sup>2</sup>, event hits<sup>3</sup>.



Clear

3. Display detector volumes.

The desired detector volumes can be displayed using the [Selector window](#), the operation of which will be detailed in sections 7.2. For the present exercise, we will load the “Default file” which was prepared when studying the Zmumu4023 event:

Click on the [Open view](#) icon of the [File](#) tool bar. Choose and open the file Zmumu4023.p2vf in Persint-00-02-●●/example of your working directory. The detector volumes are displayed<sup>4</sup>, as shown in figure 2.



Open view...

4. Load a  $Z \rightarrow \mu^+ \mu^-$  event in the following way.

Click on the [Data manager](#) icon in the [File](#) tool bar. In the pop-up window, go to the [Events](#) tab (Fig. 4c) and click on [Load Default](#) to load the “Default file” Out.MboyView\_Zmumu4023 which becomes the “Current file”. Close the [Data manager](#) window.

The *Event* file contains information concerning the geometry to be used. In case the current AMDB geometry file does not match the geometry used for the current event, a warning is issued, which prompts you to load the expected geometry file, as shown in figure 5. Answer [Yes](#) to load the expected geometry file. It is possible to answer [No](#), in case one wants to impose a different geometry (e.g. a misaligned geometry). Furthermore, any given file available in the Persint-00-02-●●/AmdcData/share directory (see Appendix D.2, figure 110a) can be loaded from within the [Volumes](#) tab of the [Data manager](#) window.

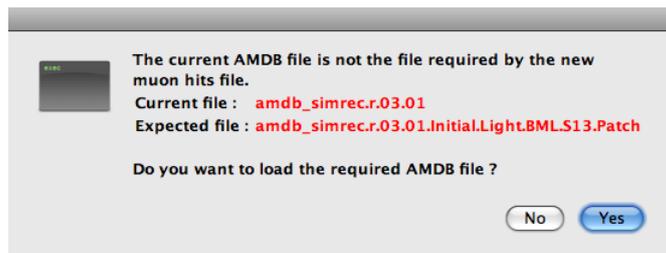


Figure 5: Warning issued by *Persint* when the event file expects a geometry file different from the current file.

Click on the [Next event](#) icon of the [Event](#) tool bar: the muon chambers which are hit by reconstructed tracks are displayed.



Next event

<sup>1</sup>Labels are treated in section 9.1.2.

<sup>2</sup>See section 6.5.

<sup>3</sup>See section 10.2.

<sup>4</sup>The selected detector volumes can be identified by looking at the AMDB and AGDD panes in the [Selector window](#).

5. Display the event.<sup>1</sup>


Click on the *Simulation tracks* icon of the *Event* tool bar: the muon tracks from the simulation are displayed. The tracks can be erased by clicking again on that icon.



Click on the *Athena reconstruction* icon of the *Event* tool bar: only reconstructed tracks are displayed along with the associated segments in the chambers. The segments and tracks can be erased by clicking again on that icon.



Click on the *Hit calorimeter cells* icon of the *Event* tool bar: the calorimeter hits of the event are displayed. The hits can be erased by clicking again on that icon.



## 6. Make track and cluster selection.

Click on the *Set track parameters* icon of the *Event* tool bar. In the pop-up window (Fig. 6) one can choose physics objects, and define some of their parameters. The usage of this facility is straightforward: items can be selected and momentum ( $p_T$ ) or energy ( $E$  or  $E_T$ ) thresholds can be set. It is possible to choose the *color*, the track *shape* (ribbon or cylinder), the track *width*, display the scattering centers used by the reconstruction program, and define cuts on the impact parameters ( $d_0$ ,  $z_0$ ) of tracks.



A detailed description of the *Set track parameters* window is given in Appendix E.5.1, where all the parameters are shown, in each of the five tabs.

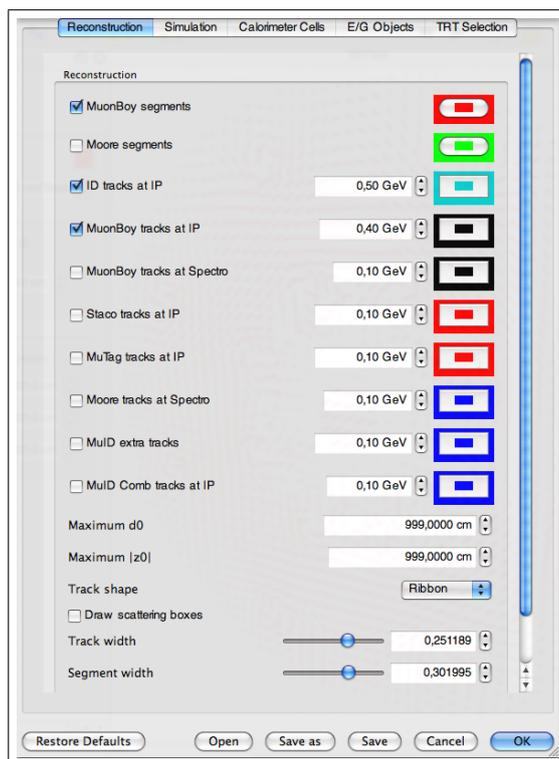


Figure 6: *Set track parameters* window. The parameters shown here - for the *Reconstruction* tab - are those of the predefined parameters of file `Zmumu4023.p2ts` mentioned below. See Appendix E.5.1 for the content of all 5 tabs.

<sup>1</sup>The result of the actions described below depend on the status of the *Set track parameters* window (see item 6).

For this exercise, we will use a pre-defined set of parameters by loading a file prepared beforehand, which is relevant to the event under study: in the pop-up window, click on the **Open** box, and in the `Persint-00-02-●●/example` directory choose the file `Zmumu4023.p2ts`. Close the window by clicking on **OK**. To complete the loading of this “track parameter” file (`Zmumu4023.p2ts`), click on the *Compute* icon<sup>1</sup> of the *File* tool bar. The parameters from this file are then displayed in the *Set track parameters* window (Fig. 6). The resulting view is shown in figure 7.



Compute

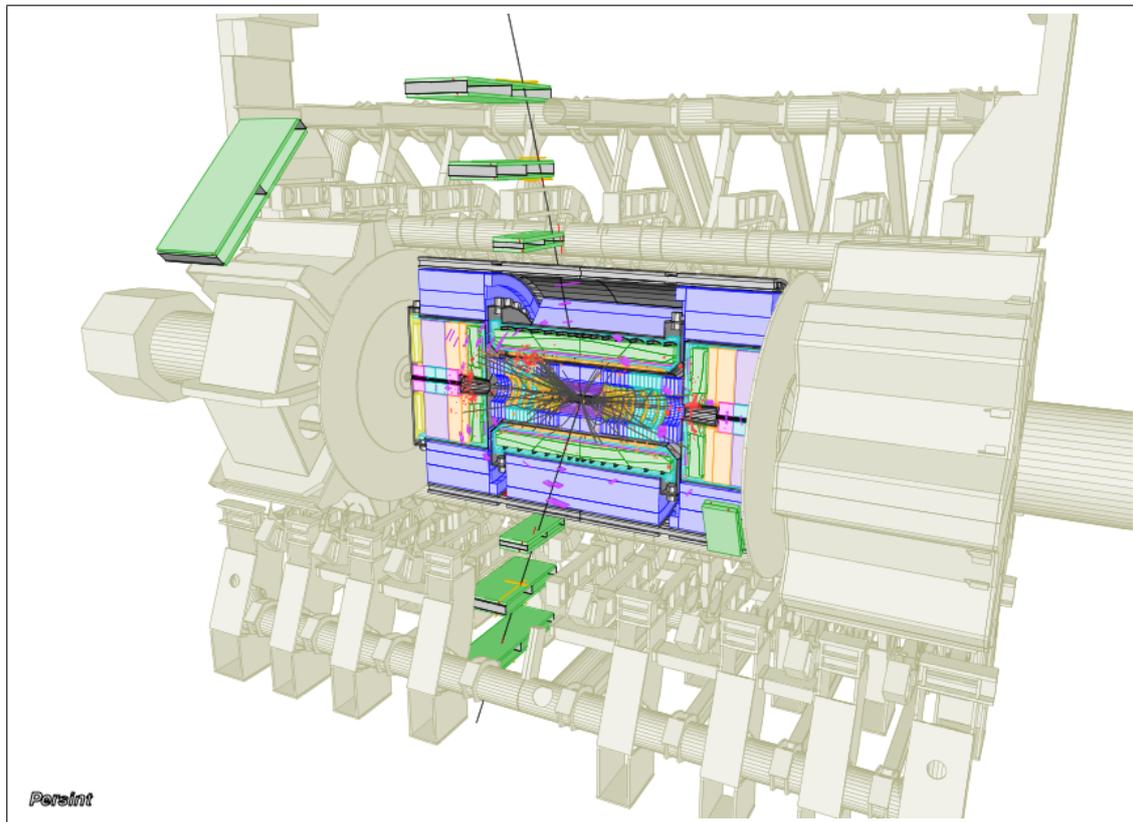


Figure 7: Resulting display of the exercise in section 6.3

## 6.4 Save, Export, and Print views

### 1. Save.

By clicking on the *Save view as* icon in the *File* tool bar the view displayed in the main display can be saved as a `.p2vf` file to the directory of your choice, e.g. `Persint_working_files`. This file (e.g. `exercise1.p2vf`) can be retrieved for later use in *Persint* via the *Open view* icon.



Save view as...

### 2. Export.

By clicking on the *Export...* icon in the *File* tool bar the view displayed in the main display can be exported to the directory of your choice, e.g. `persint_export_files`. There is a choice among several formats: `.png`, `.jpg`, `.bmp` for matrix graphics or `.svg`, `.ps`, `.pdf` for vector graphics. These files can be used in publications



Open view...



Export...



<sup>1</sup>The *Compute* icon is one of the most used functions. Whenever in doubt about the status of a display, clicking on this icon will compute the most recent requests for viewing.

and presentations<sup>1</sup>.

Note that the background color of the display can be chosen with the *Background color* function of the *Image* menu. The grey background in figure 17d illustrates this feature.


The edges of volumes can be highlighted with the *Specific edge color* function of the same menu. Figure 8 shows a display without (a) and with (b) the *Specific edge color* being enabled (with the "red color").

The effect of the *Anti-aliasing* function is shown in figure 9.

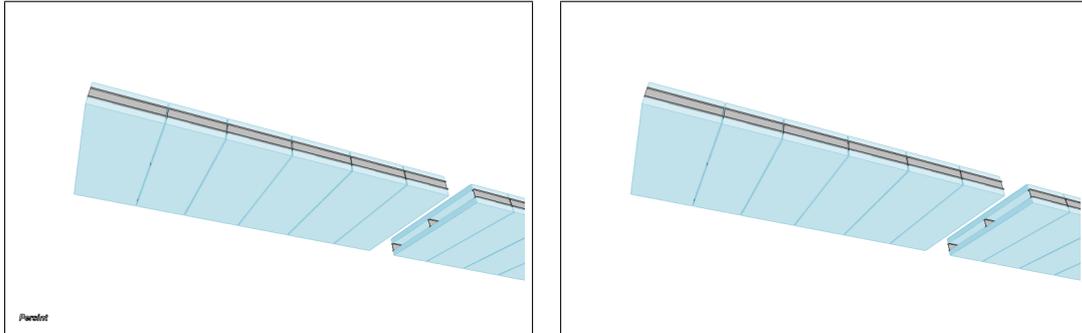

(a) Without specific edge color; with *Persint* logo (b) With specific edge color (red); without *Persint* logo

Figure 8: The *Specific edge color* function and *Persint* logo of the *Image* menu.

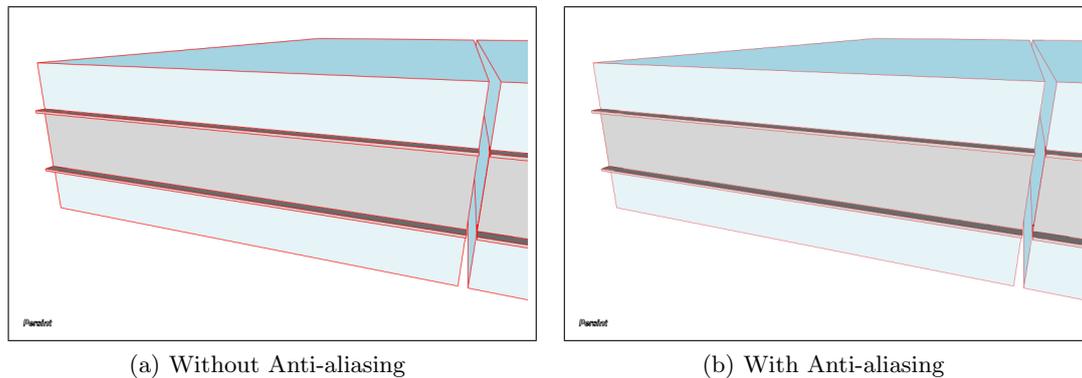

(a) Without Anti-aliasing

(b) With Anti-aliasing

Figure 9: The *Anti-aliasing* function of the *Image* menu.

Because the printer performs its own optimization, the effect of *Anti-aliasing* shown here is less apparent than on a computer screen.

### 3. Print.

It is straightforward to use the *Print* icon in the *File* tool bar for printing the view of the main display.



Print

### 4. Save special. . .

This function allows for comparison between two geometries. In particular, it makes it possible to use a geometry from a file `amdb_simrec` different from the file expected from an event file. Invoking the *Save special. . .* function produces the following action:

<sup>1</sup>The inserted *Captions*, *Labels*, and *Pictures* are saved with the display.

- The current view is saved as a `.p2vf` macro file named `compare_persint_views.p2vf` into the `$HOME/.persint` directory.
- The current view is also saved as a `.png` image file named `persint-view-000.png` into the same directory.

If a `compare_persint_views.p2vf` file already exists because of a previous use of the `Save special...` function, a warning is issued which asks you if the existing file should be loaded.

- If the answer is , the `compare_persint_views.p2vf` file is overwritten and the active display remains unchanged.
- If the answer is , the existing `compare_persint_views.p2vf` file is loaded and displayed, and stays unchanged in the `$HOME/.persint` directory.

In both cases, the view is saved as an image in the same directory with the name `persint-view-001.png`<sup>1</sup>.

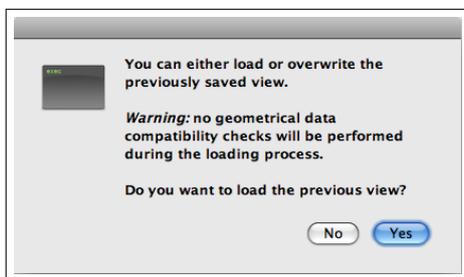


Figure 10: Warning issued when using the `Save special...` function

The use of the `Save special...` function is illustrated in section 9.3.

## 6.5 Dressing the display with captions, logos, and pictures

The `Export` function in the `Image` menu is used to make displays available for presentations and publications. It is possible to insert captions, logos, and figures in the displays, as described below.


1. The `Persint` logo.

The `Persint` logo can be shown/hidden by checking/un-checking the function `Logo` in the `Image` menu. The result can be seen in figure 8a (with the `Persint` logo) and figure 8b (without the `Persint` logo), and also in figure 27a.

2. `Add Caption`.

A caption can be inserted in the following way: position the cursor at a chosen location in the display window and `right-click`. In the pop-up list choose `Add caption` and edit the lines of text as for example in figure 11.

The text format can be chosen, `line by line`, with the options provided:



Caption/picture

**Insert special character:** the special character palette appears when clicking on the  box; characters are inserted in the text bar at the bottom with a "double-click"; when the text is composed, click on  to make it appear in the caption. Special characters include the greek alphabet, arrows, etc.

<sup>1</sup>The view number is incremented for each subsequent use of the `Save special...` function. If needed, the files can be deleted from the directory.

Other available functions (icons, from left to right):

- Load caption from...; Save caption as...;
- Add event information (Run#, Event#, Time stamp)
- Clear the entire text of the caption



Add caption icons

**Font:** By clicking on the *Font* box, the font and font size can be chosen.

**Vertical alignment:** text can be normal, *superscript* or *subscript*.

**Foreground:** The *Foreground* box lets you choose the color of the font.

**Background:** Checking the *Background* box provides the background color of selected text in the caption.


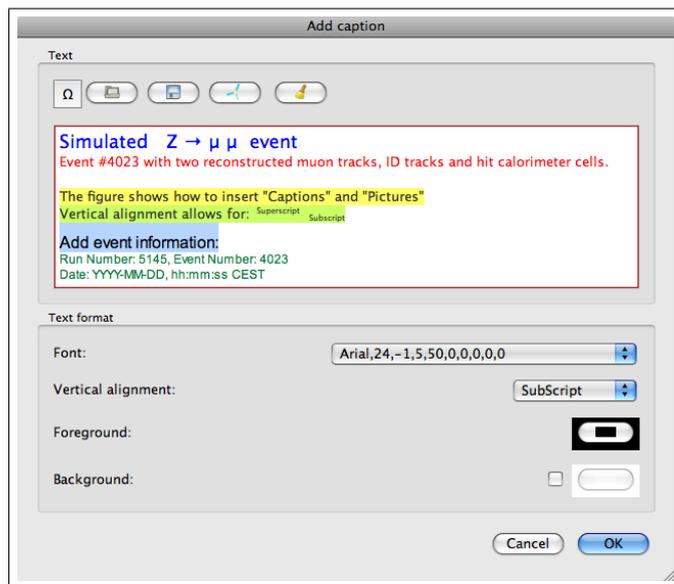



Figure 11: *Add caption* window

When opening a new *Add Caption* window, the previously entered text is displayed, ready for modifications. The following actions can be taken:

- *Remove caption:*  
Use the *Clear captions* function of the *Clear* icon;  
or **Right-click** on the caption and choose *Remove caption* from the list.
- *Export*  
Captions are saved when using the function *Export view as a picture*.
- *Save view as a .p2vf file:* the captions are saved with this function, and can be retrieved with the .p2vf file.
- *Edit caption*  
Captions can be edited by **Right-clicking** on the caption and choosing *Edit caption* from the menu.



Clear captions




Actions on captions



The location of captions cannot be changed; if their location is not adequate, they need to be removed and redone.

### 3. *Add picture.*

Various logos or ad-hoc pictures can be inserted in a *Persint* display: position the cursor at a chosen location in the display window and **right-click**. In the pop-up list choose *Add picture* and choose from the proposed list (Fig. 12).



Caption/picture

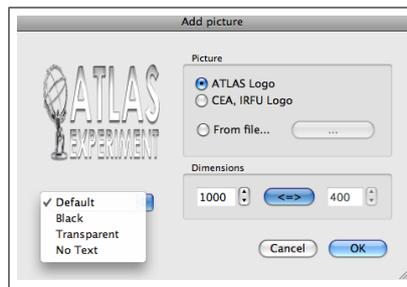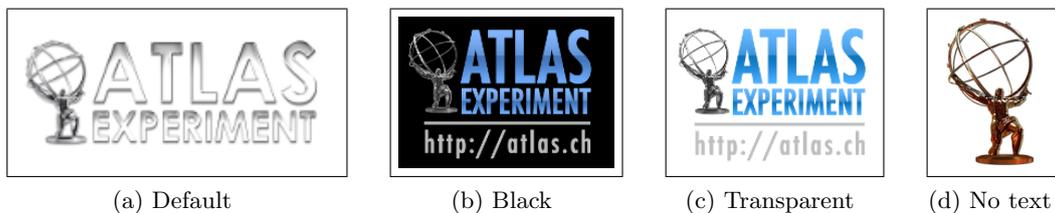Figure 12: *Add picture* window

(a) Default

(b) Black

(c) Transparent

(d) No text


Figure 13: The four flavors of the ATLAS logos.

The *ATLAS* logo exists in four flavors: `default`, `black`, `transparent`, and `without text`. They are shown in figure 13. It is also possible to load any picture from an existing file with *From file . . .*


Finally, the size of the inserted picture can be adjusted with the *Dimensions* parameters in two ways: keeping the original aspect ratio  or with independent x,y dimensions .

Note two features of the *Add Caption* and *Add picture* functions:

- The location of pictures (logos) cannot be changed; if their location is not adequate, they need to be removed and redone.
- The *Clear captions* or *Clear pictures* functions of the *Clear* menu offer two options: erase all the captions or pictures or erase only the last. Another way of removing one particular caption or picture, is to use the *Remove caption* or *Remove picture* in the menu which appears when right-clicking on the item to be removed.




Clear captions



Remove picture

Figure 14: summarizes the various possibilities for inserting captions, logos and pictures in the display constructed in section 6.3 for figure 7. The caption reproduces the text composed in figure 11.

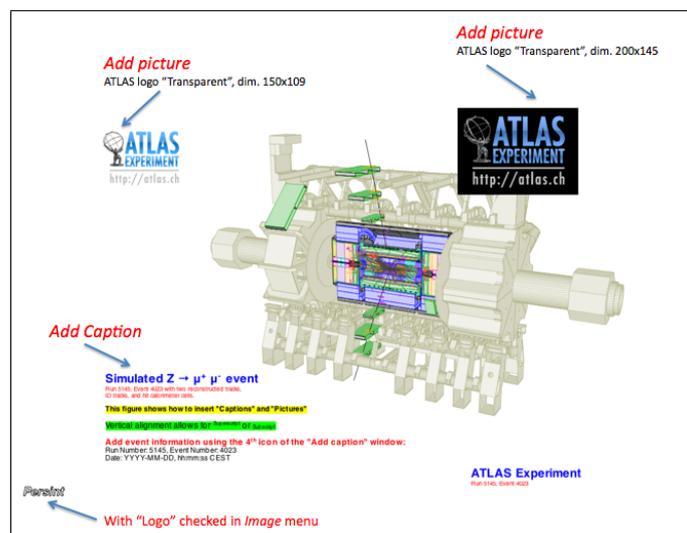

## 7 Exercise 2: Muon tracks in your own layout

In this exercise, we will create a custom made event from scratch. By following the instructions, you should obtain the displays shown in figures 17d and 18b with possible minor differences due to your choice of colors or navigation.

We want to start with an empty main display window: Start *Persint* and do not load the saved file, by answering **No** to the question in the pop-up window (page 15). If you answered **Yes**, use the *Clear* icon in the *Image* tool bar to clear the view in the main display.

### 7.1 Generate muon tracks at the IP

In the *Event* tool bar, click on the *Generate muon tracks* icon. In the pop-up window (Fig. 15), click on the **+ Add muon** box four times. Fill in the parameters of the generated four muons, for example:



1.  $\eta = 0.30$ ;  $\varphi = 90^\circ$ ;  $P_t = 1000 \text{ GeV}$ ;  $Xv = Yv = Zv = 0$
2.  $\eta = 0.30$ ;  $\varphi = 90^\circ$ ;  $P_t = 100 \text{ GeV}$ ;  $Xv = Yv = Zv = 0$
3.  $\eta = 0.30$ ;  $\varphi = 90^\circ$ ;  $P_t = 4 \text{ GeV}$ ;  $Xv = Yv = Zv = 0$
4.  $\eta = 0.30$ ;  $\varphi = 90^\circ$ ;  $P_t = -4 \text{ GeV}$ ;  $Xv = Yv = Zv = 0$

This is done by double-clicking on the value to be edited and using the spinbox which opens. Values can also be entered via the keyboard.

The muon momentum can be set either with  $P_t$  or  $P$ . The **->** box is used in the following way:

- $P_t$  **->**  $P$  means that only  $P_t$  can be edited,  $P$  being calculated accordingly. Furthermore if one changes the value of  $\eta$ ,  $P_t$  is kept fixed and  $P$  is recalculated.
- $P_t$  **<-**  $P$  means that only  $P$  can be edited,  $P_t$  being calculated accordingly. Furthermore if one changes the value of  $\eta$ ,  $P$  is kept fixed and  $P_t$  is recalculated.

The electric charge of a generated muon is determined by the sign of the  $P_t$  or  $P$  momentum: e.g. track # 4 has negative charge.

Click on **OK**. The four tracks originating from the interaction point (IP) are displayed: whereas the 100 GeV and 1000 GeV tracks appear as straight and superposed, the two 4 GeV tracks show clear opposite curvatures in the magnetic field.

Let's delete the 1000 GeV track by selection the appropriate line number and clicking on the **- Remove muon** box. The pop-up window now looks like figure 15. You may want to choose specific colors for the tracks.

For future use, save the *generated muon* parameters as a .p2gm file by clicking on the **Save** box inside the *Generate muon tracks* window. You may want to use your *persint\_working\_files* directory as a destination.


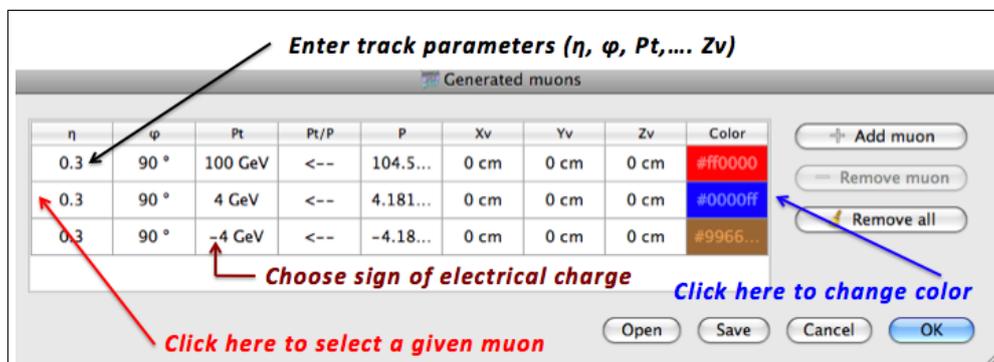


Figure 15: Pop-up window for muon track generation

## 7.2 Display the detector using the AMDB interface

The *Selector window* (Figs. 2, 17, and 18) gives access to the *AMDB* interface to select the detector volumes to be displayed by clicking on the relevant pictogram.<sup>1</sup> The layout of this window is determined by the two approximate symmetries of the muon spectrometer:

- The 8-fold symmetry with respect to  $\varphi$  of the toroids and the muon chambers in terms of *Large* and *Small* sectors. Thus the octant wheel selector.
- The symmetry between  $Z \geq 0$  and  $Z \leq 0$  regions. Thus the Z-halves selector.



Clicking in the center of a “wheel” selects all sectors of a given detector. Clicking again in the center erases that selection. Sectors can be selected individually by clicking in the corresponding box, but only adjacent sectors can be displayed in this way. Figure 16 shows the functioning of the selector.

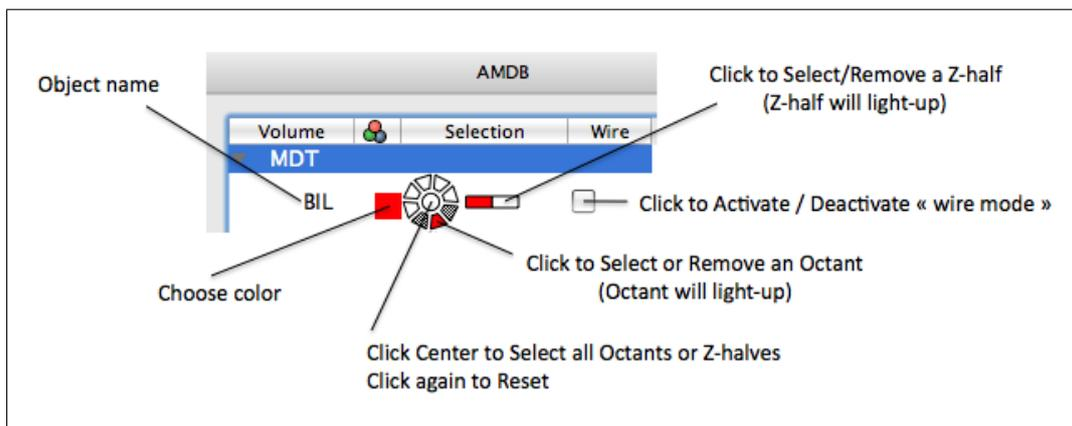


Figure 16: Illustration of the working of the Octant and Z-half selectors

### 7.2.1 Draw MDT muon chambers

In the *Selector window*, click on the MDT triangle and then in the center of each of the BIL, BML and BOL “wheels”. Click on the *Compute* icon in the *Image* tool bar to display the view.



Compute

To simplify the view, choose the BIL, BML and BOL chambers of the upper ( $\Phi=90^\circ$ ) sector:

Click on the center of each wheel (followed by a click on *Compute*) to erase the view

Click in the corresponding sector of each “wheel”, as shown in figure 17a

Click again on the *Compute* icon to display the modified view

The box at the left of the wheel allows you to choose your preferred color, if the default color is not suitable. You may want to try a “pastel” color and click again on the *Compute* icon to display the modified view.

The “Wire” box lets you choose between the *full* or *wire* modes. (sections 7.7.3 and 9.6).

### 7.2.2 Draw RPC muon chambers

Click on the RPC triangle and choose the BML and BOL chambers of the upper ( $\Phi=90^\circ$ ) sector by clicking on the corresponding sector of each “wheel”, as shown in figure 17b. Click on the *Compute* icon to display the modified view. Again, you may want to choose a color.

<sup>1</sup>The *AGDD* interface is described in section 7.5.

### 7.2.3 Draw Inner Detector

In the *Selector window*, click on the ID triangle. Click in the left-most third of the horizontal box, as shown in figure 17c, to select all sectors located at  $Z < 0$ <sup>(1)</sup>. Here we have kept the default color. The view which has been composed appears in the *Main Display* window and resembles figure 17d. Note that it is possible to click the *Compute* icon only once, after having made all selections in succession.

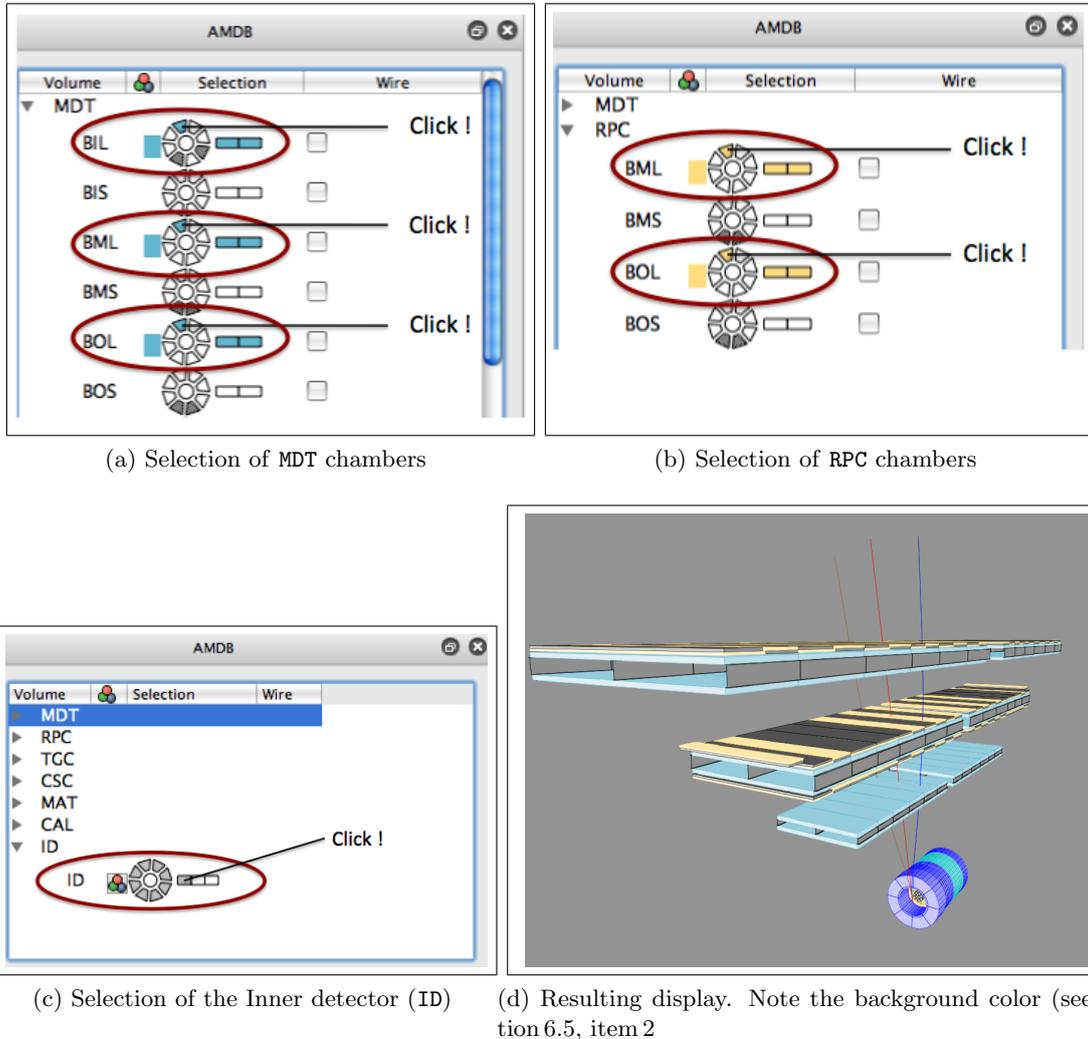


Figure 17: Illustration of the operations (a,b,c) resulting in the display shown in (d). The selections are highlighted inside a red ellipse.

### 7.2.4 Optimizing the view: a first try at navigation

It is appropriate, at this time, to have a preview of the *Navigation* tool (Fig. 2) in order to place the view at the center of the display, with the proper magnification. To do this, we use the *Navigation* tool bar, in particular the *Default mode* which is the ‘magic wand’ used most often.

Click on the *Default mode* icon of the *Navigation* tool bar.



Default mode

<sup>1</sup>To check if this horizontal box corresponds indeed to  $Z < 0$ , display the axes of the ATLAS coordinate system by clicking on the *Axes* icon of the *Image* tool bar and choose e.g. *Huge axes* in the menu. When done, erase the axes by choosing *No axes*. The coordinate axes are shown in figures 21, 59b, 60, and 61a.

1. Drag the view to the middle of the display with the right button of the mouse pushed down. The displacements can be in any direction in the display.
2. Rotate the central wheel of the mouse to zoom-in or zoom-out, so that the view occupies the whole display.
3. The left button of the mouse is used to rotate the view in 3-dimensional space.

The detailed description of the [Navigation](#) tool bar is in section 8 and Appendix E.3.

### 7.2.5 Starting anew


In case the result of an operation (navigation, addition of volumes, etc.) is not satisfactory, the [Previous view](#) icon allows you to retrieve the view which was displayed before the latest [Compute](#) step. Up to  $\sim 100$  previous steps can be retrieved.



Previous view

## 7.3 Place the calorimeters

In the [Selector window](#), click on the CAL triangle and click successively on items in the ECAL and HCAL lines. Make the selections shown in figure 18a: select the left-most rectangle to display the  $Z < 0$  part of the calorimeters and choose the colors. The resulting display is shown in figure 18b.

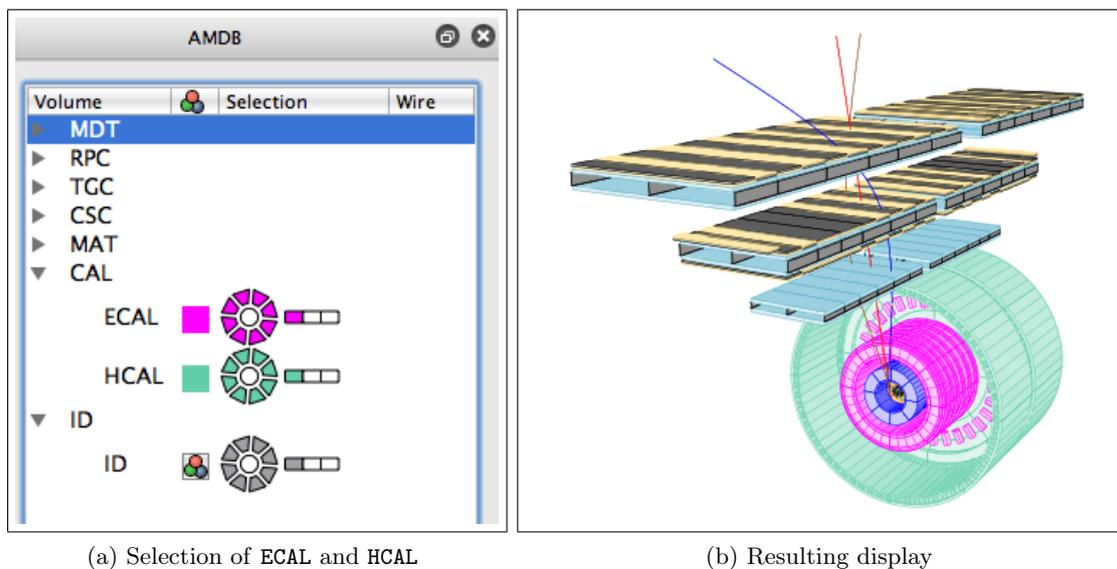

(a) Selection of ECAL and HCAL

(b) Resulting display

Figure 18: Additional selections (a) resulting in the display shown in (b).

Comparing figure 17d and figure 18b, one notices that when the material of the calorimeters is included (Fig. 18b), the two low momentum tracks, generated with 4 GeV at the IP, are bent more by the magnetic field, because of the energy loss in the calorimeters ( $\simeq 3$  GeV on average) is now taken into account.<sup>1</sup>

## 7.4 Save files for future use

Let us suppose you must now interrupt your work.

In order to be able to retrieve, at any time, the view displayed in figure 18b, save it

<sup>1</sup>The energy loss is taken into account as soon as one element of the calorimeter is chosen in the [Selector window](#) even if the track does not cross the element which is displayed, as in figure 18b.

as a .p2vf file to a directory of your choice (e.g. *persint-working-files*, as suggested in section 6.1). This is done with the *Save view as* icon of the *File* tool bar.



Save view as...

The saved view, e.g. *exercise2.p2vf*, only contains the detector volumes. It is necessary to also save the generated muons as a .p2gm file from within the pop-up menu of figure 15. If not already done, open the *Muon generation* pop-up window and save the parameters by clicking on the **Save** box. You may again choose the *persint-working-files* directory to store the saved *exercise2.p2gm* file.

You may also want to export the view in order to use it for a presentation: use the *Export* icon of the *File* tool bar to save it, e.g., as *my-presentation.png* to the *persint-export-files* directory.



Export...

## 7.5 Place inert material using the AGDD interface

With the AGDD pane in the *Selector* window, one selects the inert material to be displayed<sup>1</sup>. In figure 19, we have displayed one of the two endcap toroids, the rail assembly, and the saddle for the barrel calorimeters.

Selections in the AGDD pane can be made at several levels of detail, according to the tree structure which is provided.

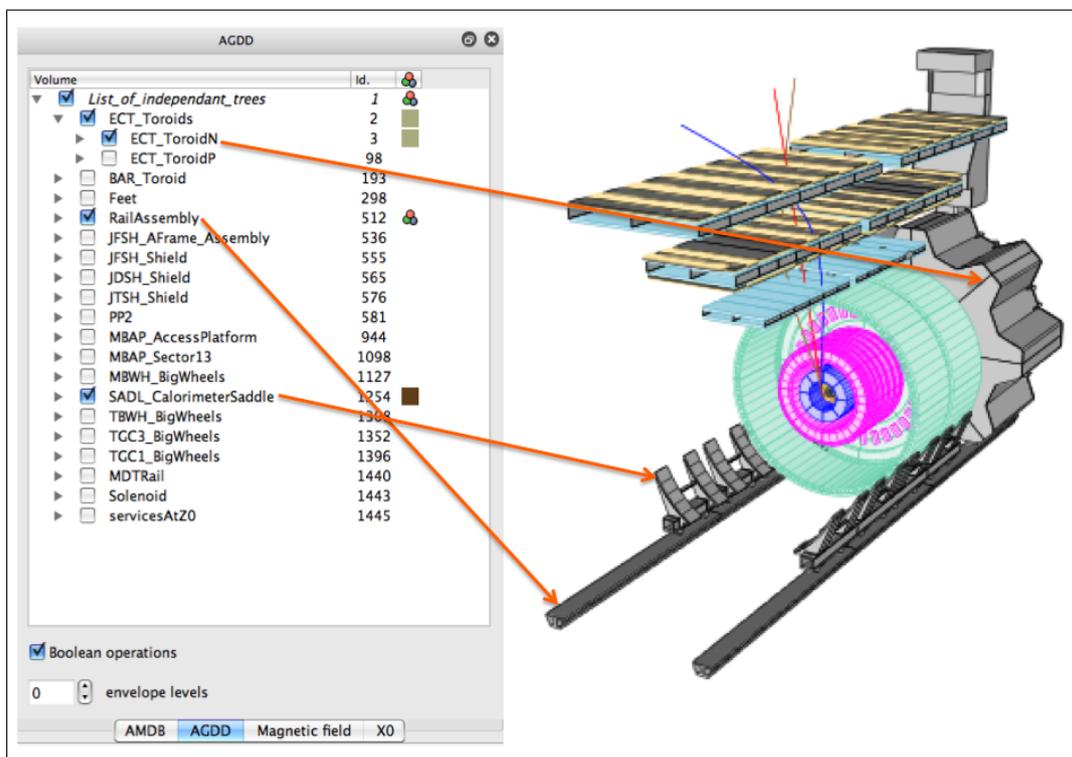


Figure 19: Selections made in the AGDD pane to obtain the modified display.

## 7.6 The *Dead material* function

The *Dead material* function is used for taking into account dead material traversed by tracks, even when the material is not selected for display.

<sup>1</sup>Calorimeters (ECAL, HCAL) and the inner detector (ID) are accessed with the *AMDB* pane.

### 7.6.1 Preparing the working view

If you resume work with a new session of *Persint*, you want to display the view of figure 18b. When starting *Persint* anew, the view which was in use in the previous session is reloaded, provided you answer **Yes** in the initial pop-up window (Figure on page 15). This is because the current view is automatically saved when quitting *Persint*. In any case, the view may be retrieved since it was saved as `exercise2.p2vf` in section 7.4 by clicking on the *Open view* icon. Using the window which opens, choose the file `exercise2.p2vf` in the *persint-working-files* directory and click on **Open**.



You must also load the file containing the generated muon tracks which was saved as `exercise2.p2gm`.

Click on the *Generate muon tracks* icon and, in the *Muon generation* window, click on the **open** box to retrieve the `exercise2.p2gm` file saved in your *persint-export-files* directory.<sup>1</sup>



Generate muon tracks

If necessary, click on the *Compute* icon. Figure 18b should now be displayed.



Compute

### 7.6.2 Use of the *Dead material* function


We now have figure 18b as working display, with the detectors and the 3 generated muon tracks. Note the visible curvature of the 4 GeV tracks, as they lose energy in crossing the calorimeters.

We will now remove the calorimeters from the display: in the *AMDB* pane of the *Selector* window, in the *CAL* arborescence deselect *ECAL* and *HCAL* by clicking in the center of the two wheels (see Fig. 18a). When hitting the *Compute* icon of the *Image* menu, the tracks now appear less curved, *i.e.* without the energy loss.

The energy loss can however be restored by clicking on the *Use all dead matter* icon of the *Events* menu. With this icon one can switch to displaying the muons with or without energy loss, even though the calorimeters are not shown in the display. This feature comes in handy for showing realistic muon tracks when material must be omitted for clarity of the view.



Use all dead matter

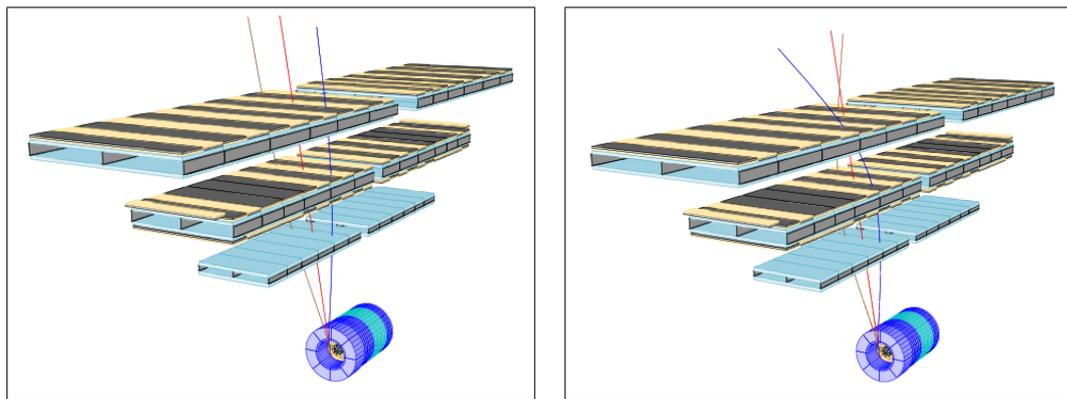

(a) Muon tracks without energy loss in dead matter (b) Muon tracks with energy loss in dead matter

Figure 20: Display of figure 18b, but where the calorimeters are not selected for display. *Use displayed dead matter only* has been selected in a), *Use all dead matter* in b).

<sup>1</sup>If this file was not saved, it is easy to generate the muon tracks again, as indicated in section 7.1.


## 7.7 Look at the event in detail

In this section, we will continue work with figure 18b. If needed, restore that view as shown in section 7.6.1. We will look at the ATLAS coordinate system, produce a projected view, and finally zoom-in to look at the MDT tubes in detail.

### 7.7.1 Show ATLAS coordinate system

The ATLAS coordinate system is shown in Appendix C (Fig. 109).


1. Click on the arrow of the *Axes* icon and choose *Huge axes*.
2. Click on the arrow of the *Projection* icon and choose *Invert*.  
The view is inverted with respect to the Z axis.  
Go back to the original orientation by repeating the *Invert* operation.
3. Erase the axes by clicking on the *Axes* icon again and choose *No axes*.



### 7.7.2 View the event in the X-projection

Click on the arrow in the *Projection* icon and choose *X*.

A projection perpendicular to the X-axis is displayed, in the (Y, Z) plane (Fig. 21).



Projection

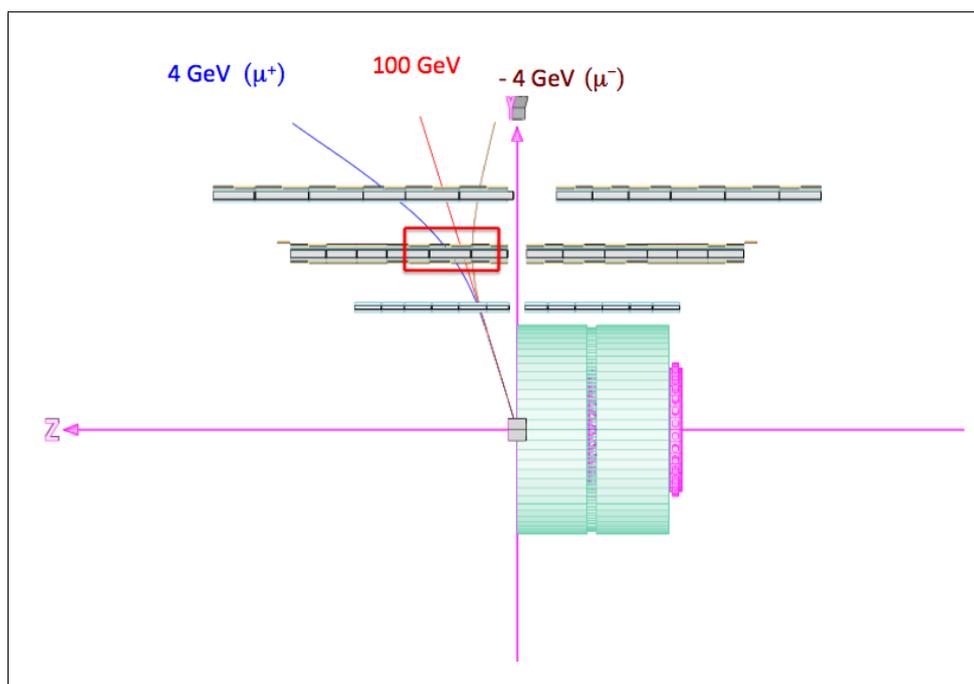


Figure 21: Resulting X-view from manipulations in section 7.7.2. The energy labels have been added by hand. See section 9.1.2 for labels generated by *Persint*.

### 7.7.3 Zoom-in on muon chambers

1. Select the *Default mode* in the *Navigation* tool bar and, with the “wheel” (“central button”) of the mouse pushed down, select a region in the BML chamber including the two tracks as shown by the red rectangle in figure 21.
2. In the *Selector window*, choose the “MDT options” tab and check the boxes as shown in figure 22a.  
Choose the “RPC options” tab and check the boxes as shown in figure 22b.
3. Click on the *Compute* icon.
4. Note that the selections can be made to produce displays in the *solid* or *wire* modes.



Default mode



means: item displayed in solid mode




means: item displayed in wire mode



means: item not displayed



(a) Selected MDT options

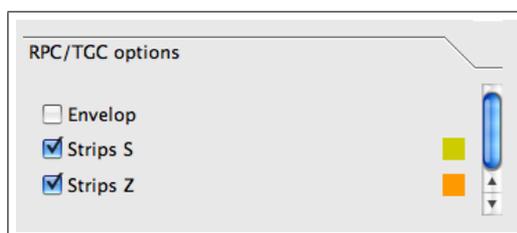

(b) Selected RPC options

Figure 22: Selections made in the *Option tabs* in the *Selector window*

A view similar to figure 23 should be displayed. It shows the three generated muon tracks crossing the two layers of MDT tubes and RPC Z-strips, in the BML station <sup>1</sup>. The two colors of the tubes alternate every 8 tubes (for easier tube identification) and can be chosen in the “MDT options” of the *Selector window* (Fig. 22a.). The red squares represent the centers of multiple scattering used by the program.

The display in figure 23 can again be saved as a `.p2vf` file into one of your working directories (use the *Save view* icon). It can be retrieved with the *Open view* icon. The same is true for the generated tracks: they can be saved as a `.p2gm` file and retrieved by opening this file inside the *Muon generation* window opened with the *Generate muon tracks* icon (see section 7.6.1).

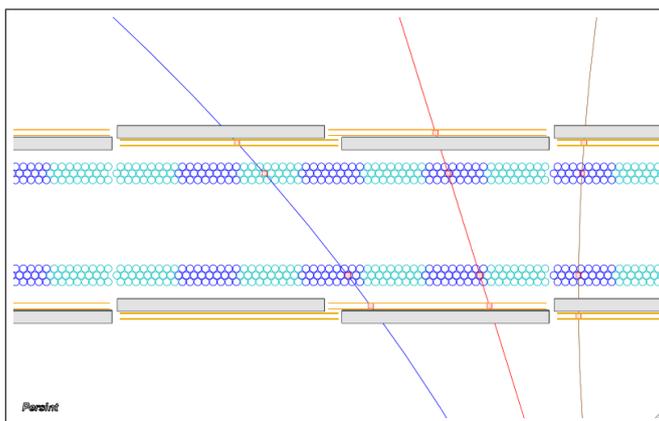


Figure 23: Resulting X-view from manipulations in section 7.7.3.


<sup>1</sup>A detector station is the mechanical entity holding several layers of detector planes. For example, a BML MDT station is made of two triplets of drift tubes (see fig. 23).

## 8 Exercise 3: Practicing Navigation

The interface to the various graphics applications of *Persint* is provided by the *Navigation toolbar* on the right hand side of the display (Fig. 2 and Appendix E.3). Its functions allow spatial navigation and modifications of the visualization properties.

The desired perspective is obtained by changing the viewing point and the viewed point, by changing the focal length of the observer eye. The view may be rotated, displaced, enlarged or made smaller (Zoom). For *Zoom in/out* and *Rotation*, the amplitude of movements can be chosen with the *Navigation scale* gauge.

Figure 24: The scale can be changed by moving the cursor or by opening the *spinbox* with a click on the three dots , and setting the scale with the keyboard. The default value of 1.0000 is displayed.



### 8.1 Preparing the working view

In this section, we will learn to use the spatial navigation tools and start with the view which was saved as `exercise2.p2vf` in the previous exercise (section 7.4, Fig. 18b).

Start the *Persint* application and click on the *Open view* icon of the *File* tool bar. Load the `exercise2.p2vf` file, from the `persint_working_files` directory. The view of figure 18b is now displayed.

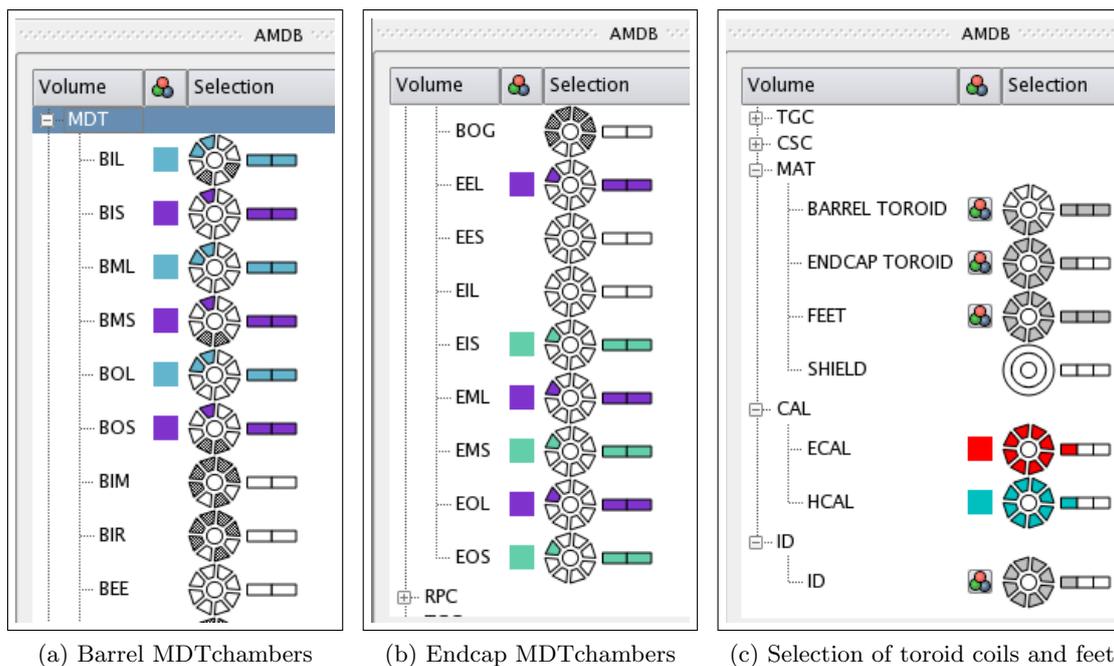


Figure 25: Additional choices made in the *Selector* window to display the muon spectrometer

From the *Selector window*, add a second adjacent large sector and one adjacent sector of small MDT chambers (fig. 25a) and a few endcap MDT chambers (Fig. 25b). Check the result by clicking on the *Compute* icon. Three barrel toroid coils<sup>1</sup>, one of the endcap toroids, as well as the detector feet are added when the selection shown in figure 25c are made<sup>2</sup>. When clicking on the *Compute* icon, the view of figure 26 is displayed.

<sup>1</sup>The toroids can be displayed in much more detail using the AGDD pane of the *Selector window*.

<sup>2</sup>Note the selections of HCAL, ECAL, and ID associated with the selections already made in exercise 2.

Before starting with the navigation, save the view for future use: click on the *Save view as* icon and save the view as *Exercise3.p2vf* into the *Persint\_working\_files* directory.

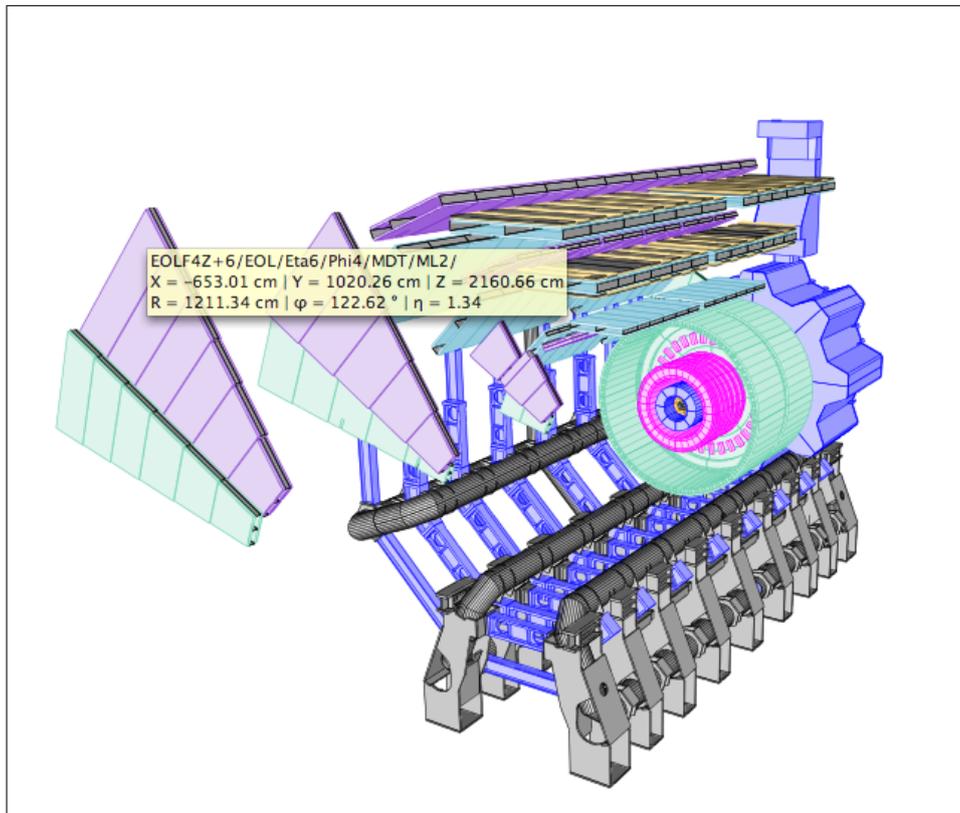


Figure 26: Detector layout resulting from the additional selections made in Exercise 3. The information box is obtained by positioning the cursor on the chosen volume EOLF4Z+6 (see section 9.1.1).

## 8.2 The *Default mode*: a magic wand

The *Default mode* is the most powerful function of the *Navigation tool bar*. With this icon selected, all three buttons of the mouse can be used to perform the most frequent navigation actions, as we have already seen in section 7.2.4.



*Default mode*

1. The **left button** of the mouse is used to rotate the view in 3-dimensional space. Keep the left button pushed down and move the cursor anywhere inside the display. Start with simple movements, e.g. horizontal, vertical, and then use more complex movements. The actions and results are very much intuitive.
2. Rotate the **central wheel** of the mouse to zoom-in or zoom-out. Practice by making successive reverse zooms to the view.
3. With the **right button** of the mouse pushed down, the view can be translated in any direction inside the display.
4. By pushing the **central wheel** down (without rotating it), one selects a rectangular zone to be zoomed, as already exercised in section 7.7.3 (Fig. 21). This action is called *Zoom on custom area*.
5. By pushing and releasing the right button of the mouse on any detector volume, a pop-up menu is displayed from which various operations on the volumes can be performed. These operations include moving volumes, adding labels, captions, or pictures, and are described in section 9.

Note that the amplitude of the first two actions (rotation and Zoom in/out) can be tuned with the *Navigation scale*. Remember that the scale can also be set with the *Spinbox* accessible with a click on the  of the *Navigation scale* icon.



Navigation scale

### 8.3 Single functions

The 5 functions described below can all be performed with the *Default mode* icon (the magic wand) and are in fact redundant. However, when repeating the same action many times, it may be advantageous to use a single function.

1. Translation

Activate the *Translation* icon and use the left button of the mouse to translate the view in any direction.



Translation

2. Zoom-in

Activate the *Zoom-in* icon and click on the left button to zoom-in on the view.



Zoom-in

3. Zoom-out

Activate the *Zoom-out* icon and click on the left button to zoom-out on the view.



Zoom-out

4. Zoom on custom area

Activate this icon and use the left button to select a region (red rectangle). When the button is released, the zoom of the selected rectangle is performed.



Zoom on custom area

5. Rotation

Activate this icon and use the left button to rotate the view around the center point of the display, with the appropriate movements of the cursor.



Rotation

### 8.4 More functions

The remaining functions of the *Navigation* tool bar are:

1. Initial Zoom

Activate the *Initial zoom* icon with the left button to retrieve the original zoom parameters. Note that if this function is used on a projected view (e.g. X-view), the *Initial zoom* action brings back the 3-D view.



Initial zoom

2. Set center

Selecting the *Set center* icon and then clicking on a given volume centers the view on that volume<sup>1</sup>. The point around which a view is rotated is chosen in this way.



Set center

3. Navigation scale

As already mentioned, with this function it is possible to change the amplitude of two navigation actions: *Rotation* and *Zoom in/out*.

4. Focal length

The nominal focal length is 35 mm. It can be changed with the cursor of the *Focal length* icon, and set back to the nominal value with the *Reset focal length* icon.



Focal length and Reset icons

5. Isometric view

By clicking on this icon, one produces an isometric view (infinite focal length). To return to the previous focal length, click on the icon again.



Isometric view

Some results of using these functions are shown in figure 27, where the same volumes are shown with different perspectives.

<sup>1</sup>This action is more efficient (faster) than using the *Translation* function.

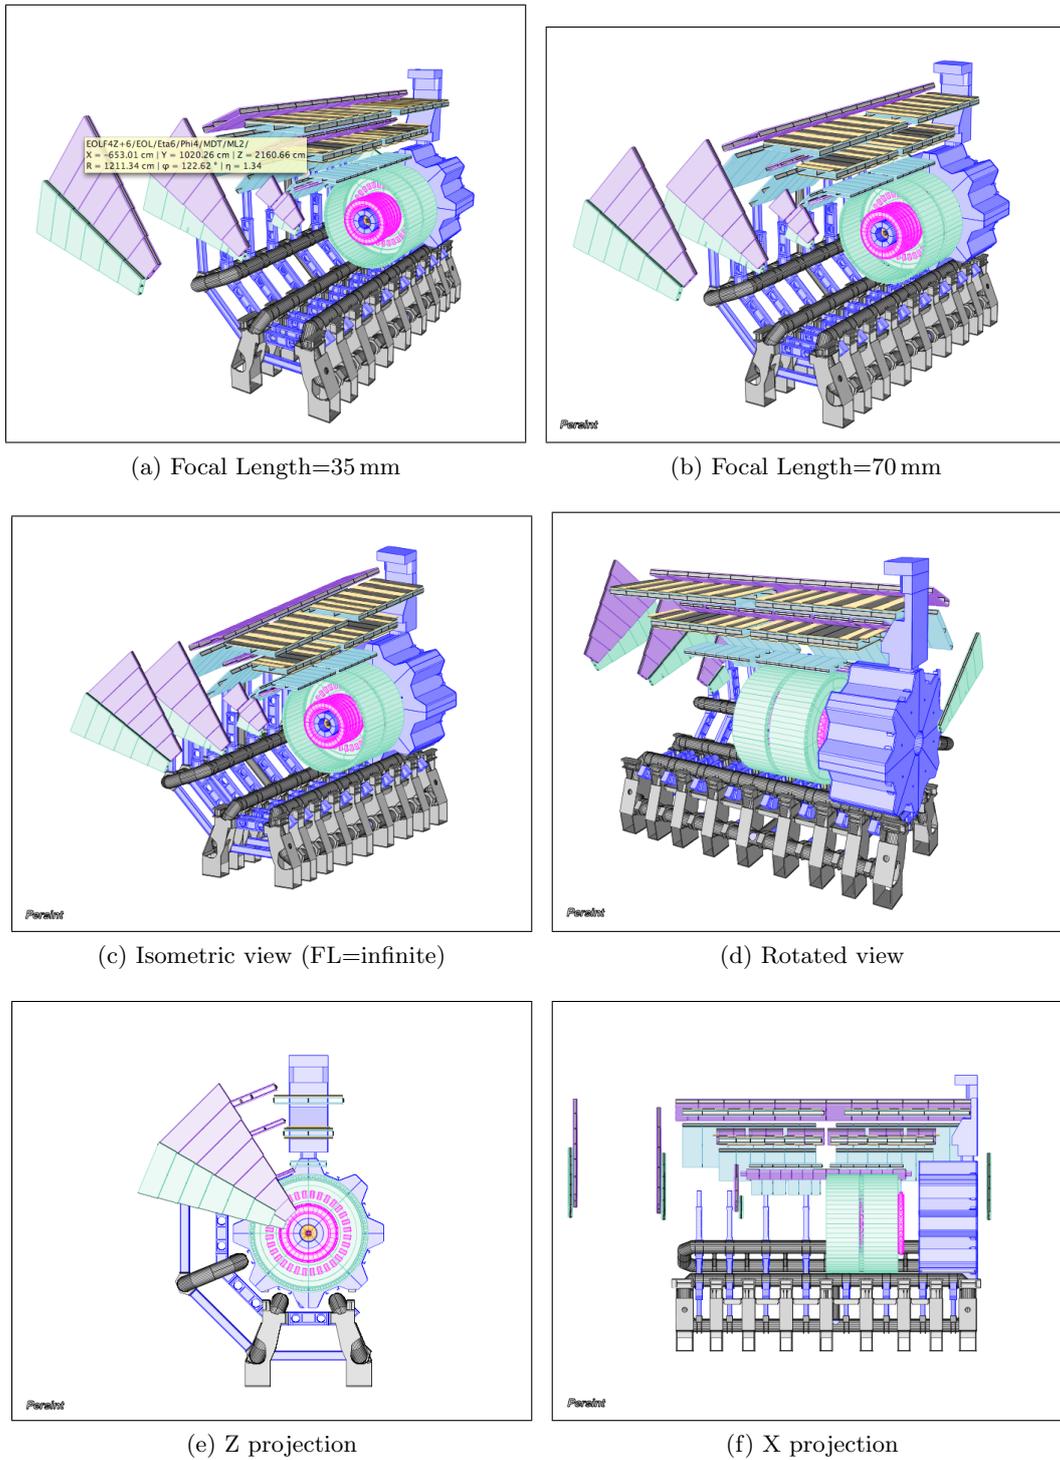


Figure 27: Defining the viewing perspective

The two remaining functions will be explained in the next exercise (Section 9).

1. Volume information
2. Selection mode



Volume information



Selection mode

## 9 Exercise 4: Exploring more features

We start with the view saved at the end of exercise 3. Click on the *Open view* icon and open the file `Exercise3.p2vf` from your *Persint\_working\_files* directory. This should display the view of figure 26.



### 9.1 Volume information labels

#### 9.1.1 Volume identification with information boxes


You will have noticed that by positioning the cursor on a volume, an information box is shown which displays the identity of the volume and its geometrical parameters. It is a convenient feature to identify any volume in the layout.

#### 9.1.2 Label maker


When saving displays to be used for publications or presentations, it is useful to be able to also display the volume parameters (volume identification, position, ...) and an explanatory text. This is achieved with a feature which makes labels, as explained below.<sup>1</sup>

##### 1. Default labels

By **right-clicking** on a volume (in this case a MDT chamber)<sup>2</sup> and releasing the button, one produces the pop-up window of figure 28a. Choose `Add/Remove label` / `Add default label` to obtain the default label which displays the "Hardware name" of the chosen muon chamber (BOL5C05)<sup>3</sup>, as shown in figure 28b. If the geometry file does not provide the "Hardware name" the "Software name" is displayed.

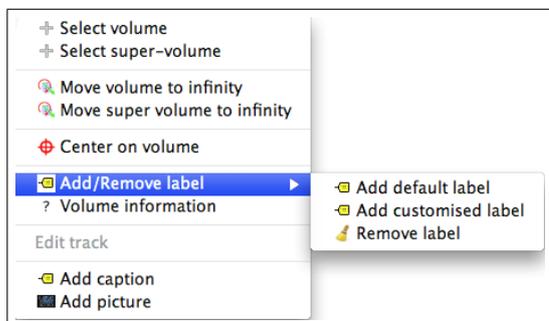

(a) Pop-up window when **right-clicking** on a volume in the *Display window*.

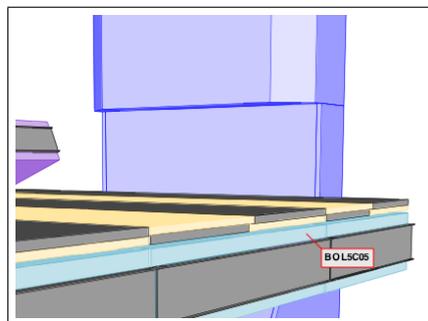


(b) Default label for a MDT chamber

Figure 28: Making a *Default label*

To remove the default label, repeat the operation by **right-clicking** on the same volume and choose `Remove label`. The *Clear labels* function clears all labels present in the display. The *Reload event* function has the same effect.

##### 2. Customized labels

The label can be customized by clicking `Add customised label` (figure 28a). In the window which opens (Fig. 29), the complete *Volume information* appears and room for *Additional text* is provided.



Clear labels



Reload event

<sup>1</sup>Labels are saved when using the *Export View...* and *Save view as .p2vf file...* functions.

<sup>2</sup>Tracks labels are obtained with the same procedure, by clicking on the tracks (Fig 56 in section 10.4).

<sup>3</sup>BOL: **B**arrel **O**uter **L**arge chamber; 5: 5<sup>th</sup> chamber from  $|Z|=0$ ; C side ( $Z < 0$ ) [A side ( $Z > 0$ )]; 05: sector number. See reference [7] for conventions on chamber numbering.

The *Customized label* has 5 lines of information:

- Hardware name of the chamber (EOL6A07)
- Software name of the chamber.
- X,Y,Z coordinates of the cursor.
- R,  $\varphi$ ,  $\eta$  coordinates of the cursor.
- Magnetic field ( $B_x, B_y, B_z$ )

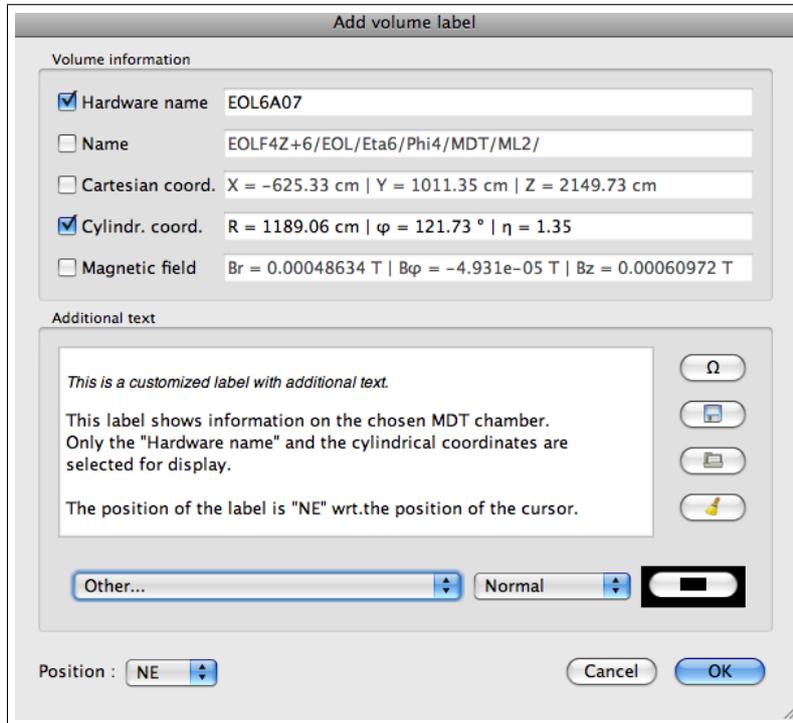


Figure 29: Pop-up window when choosing *Customised label* in the window of figure 28a.

It is possible to place the label at four different positions with respect to the cursor position (SE, SW, NW, NE). Click on **OK**, after having chosen “NE”; the customized label of figure 30 appears in the NE position.


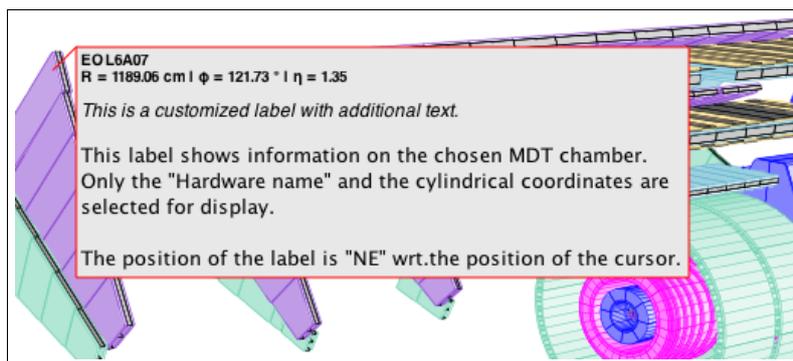


Figure 30: Custom label for an endcap MDT chamber

To remove the customized label, repeat the operation by **right-clicking** on the same volume and choosing **Remove label**. With the *Clear labels* function it is possible to remove the latest label or all labels. clears all labels present in the display. The *Reload event* function has the same effect, if indeed an event is displayed.




Clear labels



Reload event

## 9.2 Hide/Displace volumes or super-volumes

There are several ways to remove a volume or super-volume from the display. Technically this is done by setting the coordinates of a volume to very high values, thus the term “Move to infinity” used in the relevant functions.

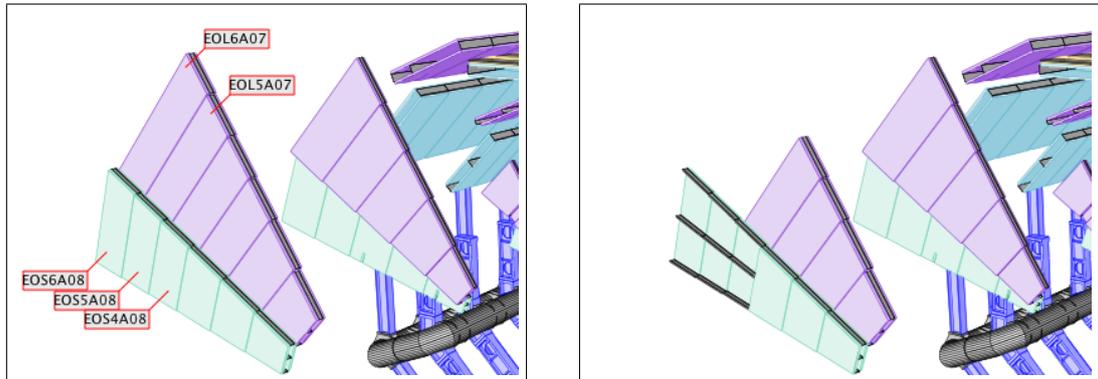

(a) Partial display of the initial layout of endcap chambers

(b) Partial display after the hiding of 3 volumes and 2 super volumes

Figure 31: Hiding volumes and super volumes

### 9.2.1 Hide volumes

The simplest way to hide a volume is to **right-click** on a volume, release the button and choose **Move volume to infinity** or **Move super volume to infinity** in the pop-up window (Fig. 28a). In the following example, we proceed to hide MDT endcap chambers: 3 volumes and 2 super modules in two neighboring sector. The procedure is simply repeated for each chosen volume (5 operations). Figure 31 shows a partial display of the initial layout and the result of the hiding.<sup>1</sup>

In order to restore the initial layout, simply click on **Displaced volumes**. In the pop-up window (Fig. 32), choose **Reset all the displacements** and click on **Close window**: the initial view is restored.



Displaced volumes

It is also possible to individually select the volumes to be returned to the display by selecting each volume in the pop-up window (Fig. 32) and clicking on **Reset volume displacement**.

The action takes place when the **Close window** box is clicked on.

	Volume	X Offset	Y Offset	Z Offset	Ax Angle	Ay Angle	Az Angle
1	EOL_F4_Z+6	19999.00 cm	19999.00 cm	19999.00 cm	0.00 °	0.00 °	0.00 °
2	EOL_F4_Z+5	19999.00 cm	19999.00 cm	19999.00 cm	0.00 °	0.00 °	0.00 °
3	EOS_F4_Z+6/EOS/Eta6/Phi4/MDT/ML2/	19999.00 cm	19999.00 cm	19999.00 cm	0.00 °	0.00 °	0.00 °
4	EOS_F4_Z+5/EOS/Eta5/Phi4/MDT/ML2/	19999.00 cm	19999.00 cm	19999.00 cm	0.00 °	0.00 °	0.00 °
5	EOS_F4_Z+4/EOS/Eta4/Phi4/MDT/ML2/	19999.00 cm	19999.00 cm	19999.00 cm	0.00 °	0.00 °	0.00 °

Refresh list    Reset volume displacement    Reset all the displacements    Close window

Figure 32: Pop-up window showing displaced volumes

<sup>1</sup>The labels in figure 31a are produced as explained in section 9.1.2

### 9.2.2 Hiding volumes, the fast way with Selection mode

If a number of volumes or super volumes must be hidden, there is a fast and efficient way to do so with the *Selection mode* of the Navigation tool bar.

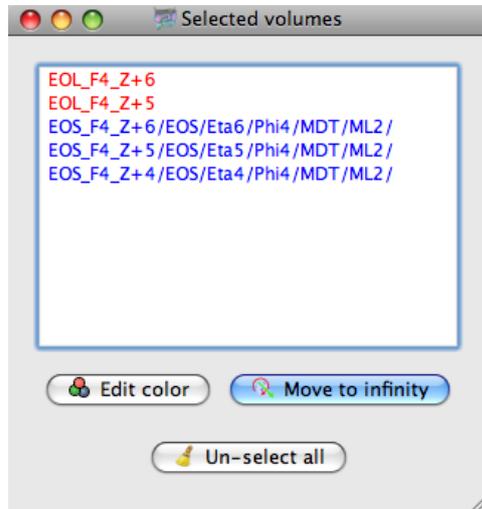



Figure 33: Selected volumes window

Click on the *Selection mode* icon of the Navigation tool bar and click on the volumes or super volumes to be displaced. The list of selected items appears in the *Selected volumes* pop-up window, shown in figure 33.

A left-click selects a volume (in blue).

A right-click selects a super volume (in red).

Use the *Move to infinity* button to hide the (super) volumes listed in the window. Note that volumes to be hidden can also be selected using the functions available in the window shown in figure 28a. This window is obtained by right-clicking on a volume, the *Default mode* being selected in the Navigation tool bar. In this case, the list of volumes to be hidden is made by choosing *Select volume* or *Select super volume*.

The color of all selected volumes and super volumes can be changed by using the function which is provided through the *Edit color* button.

The third button, *Un-select all*, can be used to clear the entire list.

### 9.2.3 Displacements of volumes

It is possible to change the display parameters of volumes by selecting the *Volume information* icon in the Navigation tool bar and clicking on the volume to be altered.



This opens the *Modify volume* window shown in figure 34.

The functions used most often are:

1. Selecting a volume or super volume by clicking on the appropriate button.
2. Changing the color of the volume/super volume.
3. Hiding volume/super volume (i.e. “Move to infinity”), a function already performed by other means (section 9.2.1).

Click on *OK* to view the changes made to the selected volume.

The two other features (Translation and Rotation) were used extensively during the design of the muon spectrometer and during the commissioning phase with cosmic rays. The development of the reconstruction software also benefited from this tool.



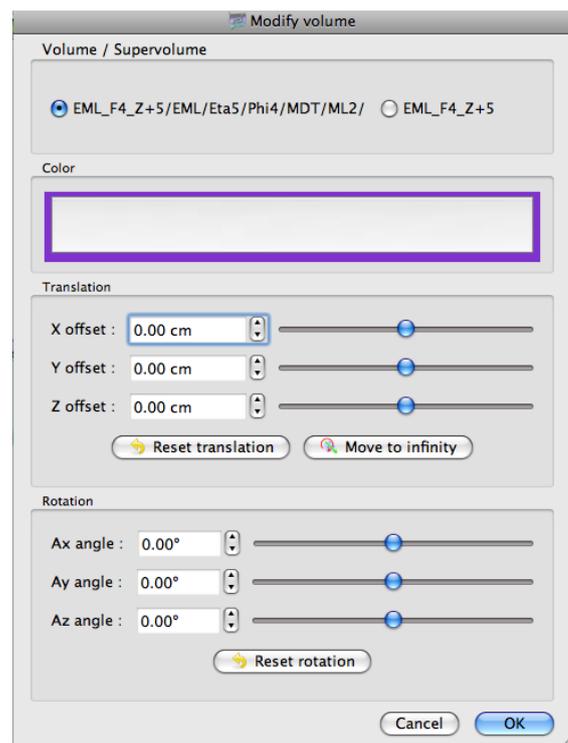


Figure 34: Modify volume window

### 9.3 Compare geometries

The comparison of displays obtained with different geometries can be performed with the *Save special...* function described in section 6.4. Below are two figures which illustrate its use. They were obtained with two different geometries of the supporting structure of ATLAS (the "feet"). The following exercise is done with a pre-loaded .p2vf file located in the directory *Persint-00-02-●●/example*. It can be repeated with any other .p2vf file of your choice.

1. First, using the *Open view* function, we display the feet structure by loading the relevant file *compare\_persint\_views.p2vf*, located in the directory *Persint-00-02-●●/example*. The expected geometry is *amdb\_simrec.r.04.01* and should be loaded by choosing  Yes in the warning box. This geometry file is located in the *Persint-00-02-●●/AmdcData/share* directory. When the ATLAS "feet" are displayed, we perform a zoom to get figure 35a. By using the *Save special...* function of the *File* menu, the .p2vf file is saved into the *\$HOME/.persint* directory and an image file *persint-view-000.png* is written into the same directory.
 
2. We now change the geometry description. Click on the *Data manager* icon of the *File menu* and choose the *Volumes* tab. Click on  Load and choose the new geometry file *amdb\_simrec.r.03.01.Initial.Light.EIL.BML.S13.Patch*.<sup>1</sup> Close the *Data manager* window. We now want to load the *compare\_persint\_views.p2vf* file again to display it with the new geometry. Proceed as above, using the *Open view* function. Answer  No in the warning box in order to use the new geometry, and not the geometry expected by the .p2vf file. Ignore the AGDD warning. Perform a zoom to obtain figure 35b. Use the *Save special...* function again, and the new display is saved as *persint-view-001.png* into the *\$HOME/.persint* directory.
 
3. These two .png images are now available for comparisons. Toggling between the two images, *persint-view-000.png* and *persint-view-001.png* shows the differences: there is less material in the first.

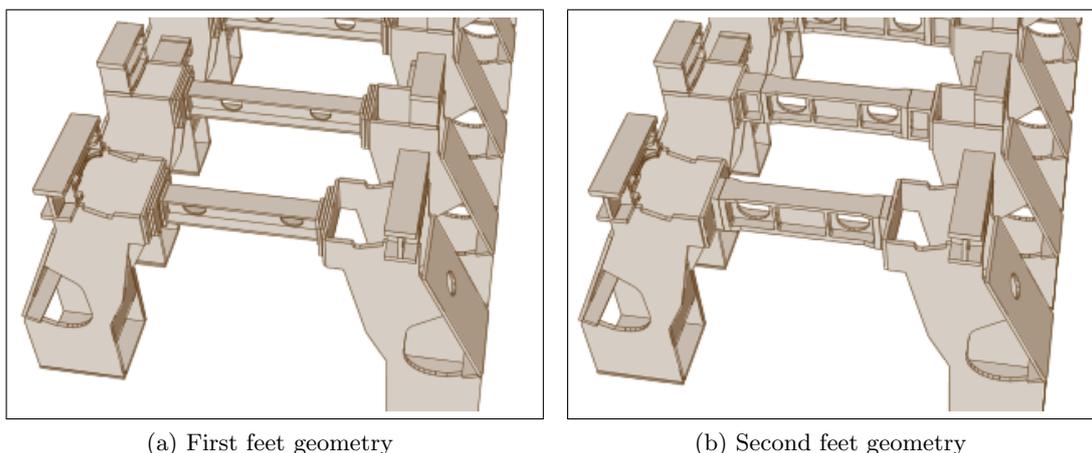

(a) First feet geometry

(b) Second feet geometry

Figure 35: Two "feet geometries" to be compared.

<sup>1</sup>Geometry files of the *amdc\_simrec* type are available in the *Persint-00-02-●●/AmdcData/share* directory.

## 9.4 Detect volume clashes

This feature was used extensively during the building of the geometry files (GeoModel). It is not commonly used, except by developers of geometry data bases. For completeness, its functioning is explained below.

We continue working with the display of figure 31a, which should be the current view. If not, you can use one of the following three methods to get this view back:

- Use the *Previous view* function of the *Image* tool bar once or several times.
- In the pop-up window of *Displaced volumes* (Fig. 32) click on **Reset all the displacements** and then on **Close window**.
- If the view has been saved, as indicated in section 8.1, use the *Open view* function to load the saved *Exercise3.p2vf* file.




Previous view

We now want to displace a volume to produce a clash between two volumes.

In the active display (Fig. 36a), zoom on the area shown in red by using the *Zoom on custom area* of the navigation tool bar. We obtain figure 36b.



Zoom on custom area

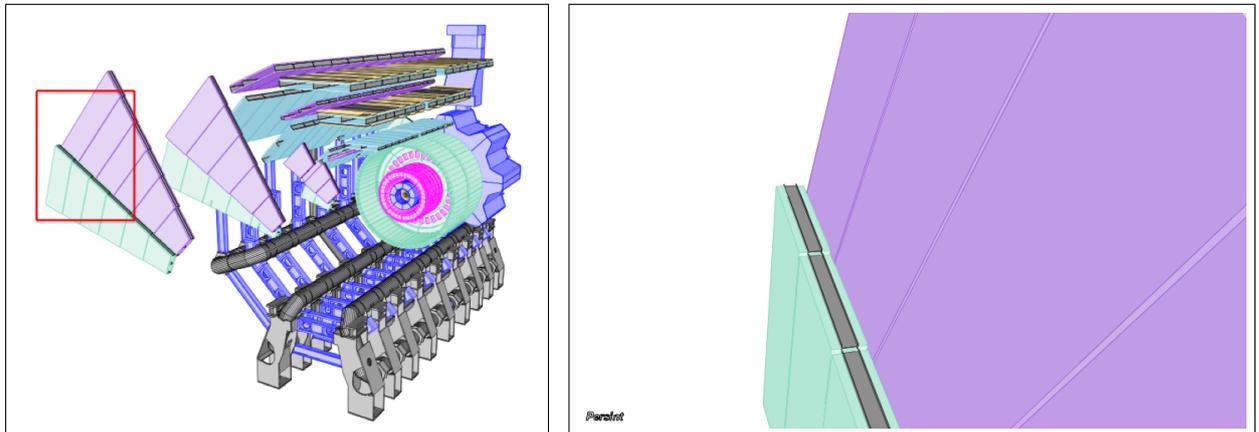

(a) Starting display (same as Fig. 26)

(b) Detailed view of end cap MDT chambers after zoom

Figure 36: Displays used for detecting clashes


1. Right-click on the EOL chamber<sup>1</sup> (the violet volume) and choose *Volume information* in the pop-up window<sup>2</sup>.
2. In the *Modify volume* window, select the *Supervolume* EOL\_F4\_Z+6 and set the *Ax angle* to 6 degrees, as shown in figure 37a. After performing a *Zoom*, we obtain figure 37b.
3. To identify the clashes resulting from the rotation, click on the *Clashes* menu (down arrow) and check *Select all clashes*.

Click on the *Clashes* triangle to open the *Clashes* window which lists the 5 pairs of volumes which present a clash (Fig. 38a).

The list of clashes can be saved as a *.txt* file with **Save as**, or stored for future comparisons within *Persint* with the **Store** box. The default name is "Backup no. 1".



Volume information




Clashes



Clashes

<sup>1</sup>Remember that a volume can be identified by positioning the cursor on it, in order to activate the information box (see section 9.1.1).

<sup>2</sup>Alternatively, you can select *Volume information* in the Navigation tool bar, and click on the volume.

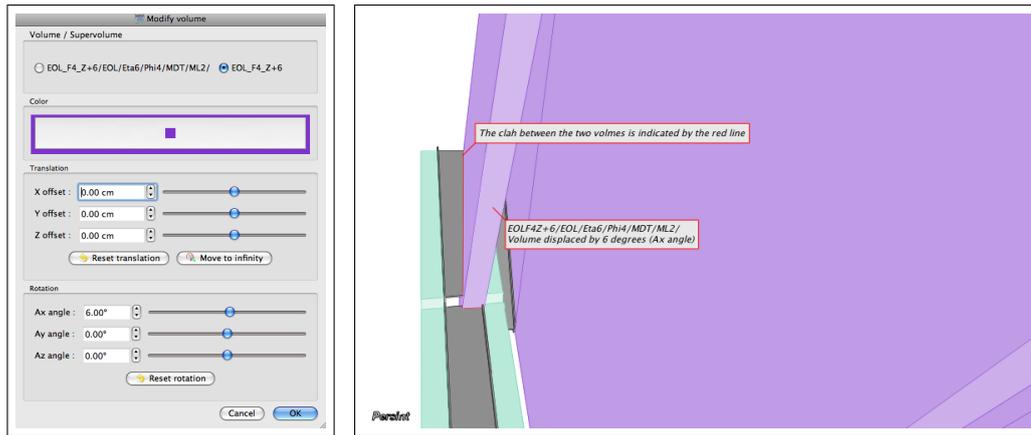

(a) **Modify volume** window for rotating chambers (b) BOL volume displaced by 6°; the clashes are in red

Figure 37: Rotate EOL chamber by 6°

4. We now change the rotation of the same EOL chamber to 3° (instead of 6°) by changing the value in the **Modify volume** window of figure 37a.

After having closed the window with **OK**, click on the **Clashes** triangle to display again the clashing volumes: only two clashes are left.




Again, the list of clashes can be saved as a .txt file with the **Save as** box, or stored for future comparisons within *Persint* with the **Store** box. This time the default name is "Backup no.2".

5. Finally, we can compare the two stored geometries. In the **Clashes** window, click on the **Compare clashes** box. In the window which appears (Fig. 38b), select the two stored files "Backup no.2" and "Backup no.1" and click on **Compare**.

Use the tabs on the left hand side to perform the comparisons:

**Remaining Clashes** **Solved Clashes** **New Clashes**

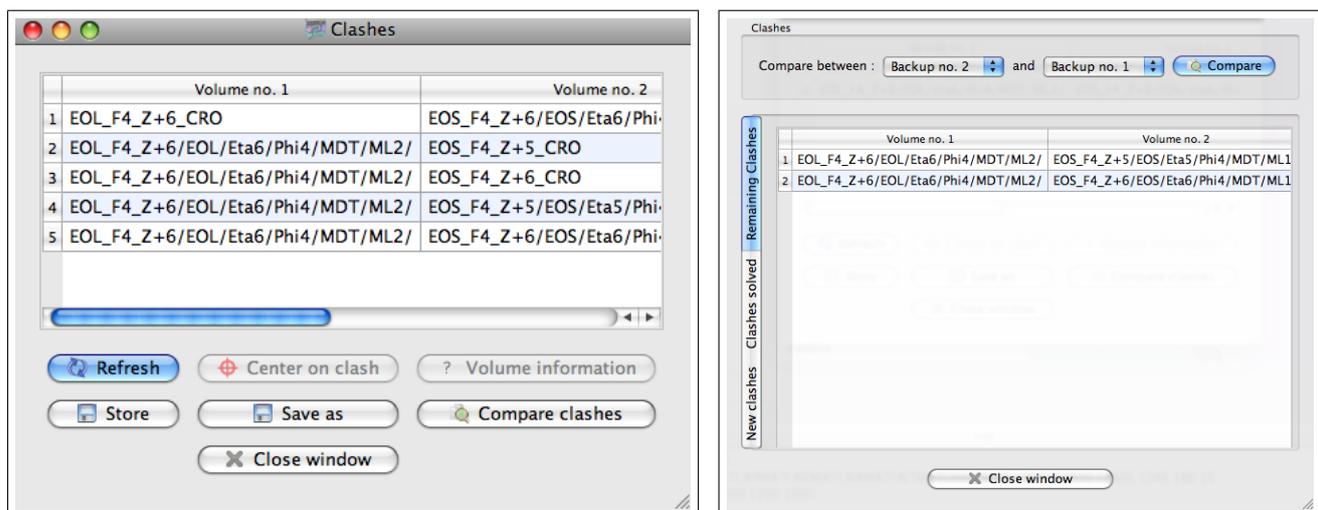

(a) **Clashes** window when EOL is rotated by 6 degrees.

(b) **Compare clashes** window

Figure 38: Compare clashes for two geometries

## 9.5 Animation

It is possible to produce an animation of a displayed view. Parameters such as amplitudes of rotation and zoom, number of iterations can be chosen. The generated frames can be used as input for video software.

You may use any view made with *Persint*, but for simplicity, we start with the view of figure 26. Choose the function *Open view* of the *Image* menu. Open the file *Exercise3.p2v* in the directory *Persint\_working\_files* where it was saved in section 8.1.

Choose *Animation* in the *Tools* menu. In the *Generating animation* window which opens (figure 39), choose the parameters, e.g. those indicated in the caption below.




Figure 39:

The parameters are:


- Number of steps (iterations)
- The parameters of the motion (Direction and angle of rotation; Zoom factor)

Options:

- Save images

If the generated frames are to be saved, check the *Save images* box (the default is "no save"), choose the Directory, the filename and the format (extension *.png*, *.bmp* or *.jpg*)

- Stereoscopic mode

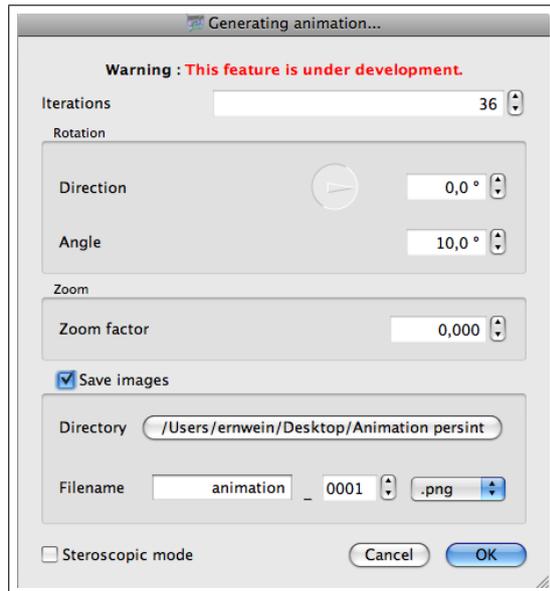

Clicking on the **OK** box will start the animation. With the parameters chosen (Fig. 39), the view rotates in 36 steps of 10 degrees, for a complete revolution.

The *Save images* box having been checked, 36 files are saved in the specified directory for future use by video software. With the *Stereoscopic mode* enabled, the number of saved frames would be doubled.


## 9.6 Wire mode

The wire mode exists in two flavors:

1. Global Wire Mode.

In the *Wire mode*, the program bypasses the time-consuming computation of hidden faces and volume intersections. This results in a much faster processing of the view for display and optimal fluidity in the displacements.

It can therefore be advantageous to switch to the wire mode when making complex navigations, and go back to the full volume display when finished.



2. Partial Wire Mode.

By checking the appropriate box in the “Wire” column in the *Selector window*, groups of volumes can be displayed in the full or in the wire mode. This function is used to make certain volumes “transparent” in order to get a view “inside” the detector.

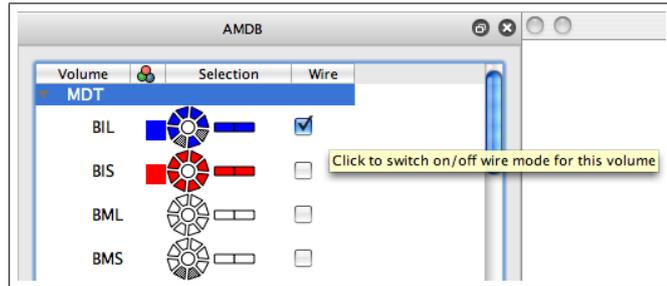


Figure 40: Partial *Wire Mode* switched on.

The partial wire mode can also be chosen in the “MDT options” and “RPC/TGC options” panes (see Fig. 22).

## 9.7 Magnetic Field Interface

The *Magnetic Filed* interface provides a fully interactive 3D visualization of the magnetic field. This application is coupled to a set of subroutines that read the field database and compute the field at any given point.

### 9.7.1 Loading a Magnetic Field file

The muon spectrometer magnetic field map is loaded from the *Magnetic field* tab of the *Data manager* window (Fig. 4b). Several options are available:

- **Select** : opens a different map from the directory `Persint-00-02-●●/amdcData/share`; once the map name is displayed, it must be loaded by pushing **Load** to become the *Current Map*<sup>1</sup>.
- **Select Default Map** : Define the Current map as the Default map. **Load** needs to be pushed for the map to become active.
- **Modify Default Map** : make the *Current map* the *Default map*.
- **Load** : effectively loads the magnetic field map after it was **Select**ed.
- **Close** : closes the *Data manager* window.

All field maps contain a generic description of the solenoid field in the inner detector region. However, one can use more accurate solenoid field maps by checking the *Solenoid Magnetic Field* box and loading the desired map, following the same procedure as above for the toroid map.

<sup>1</sup>Additional field maps can be loaded from a CERN directory into the “`Persint-00-02-●●/BFieldData/share`” directory (see 11.1.4, page 71).

### 9.7.2 Display B-field lines

The magnetic field interface is launched in the following way: in the *Selector window* open the *Magnetic field* pane (Fig. 41a) and check the *Display magnetic field* box.

The field is visualized by means of arrows located at a series of lattice points. The direction and length of the arrow corresponds to the direction and magnitude of the magnetic field. The field display can be customized with the following choices:

- Color of the arrows
- Linear or logarithmic scale
- 3D or projections, at x, y, or z positions
- Lattice for field display

The vector field can be built either in a very localized region or over large distances.

Once all properties of the field visualization are defined, the display is obtained by clicking on the *Compute* icon.



Compute

Finally, elements of the Magnet system can be visualized through the AGDD pane of the *Selector* window. Figure 41 shows an example of a display of the magnetic field where one element of the cold mass of a barrel coil is shown.

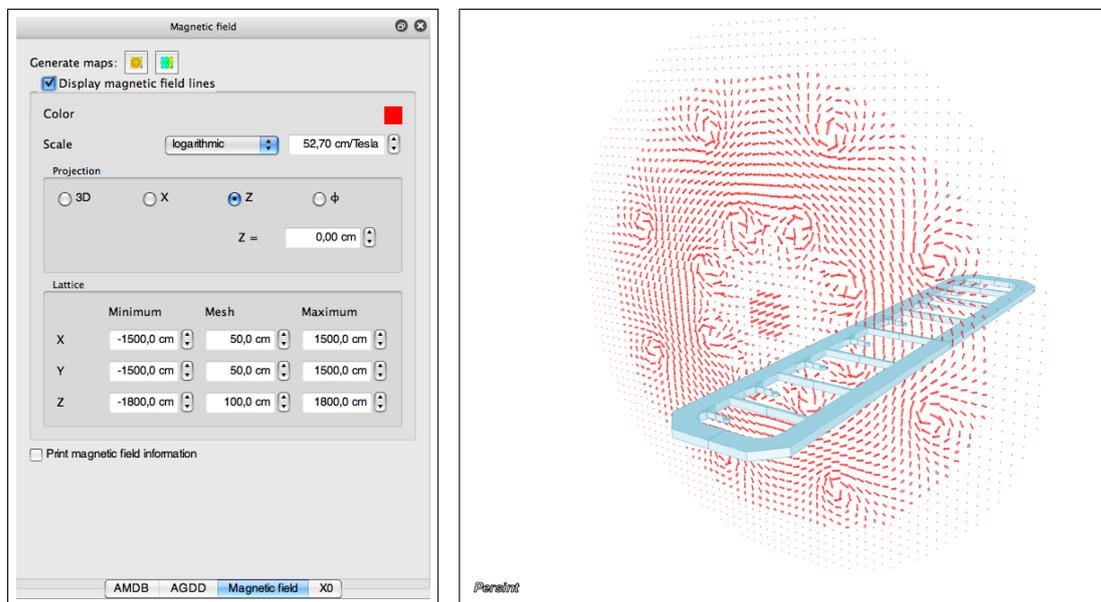


Figure 41: Example of magnetic field lines displayed with a barrel toroid cold mass, selected with the AGDD interface. The parameters in (a) are used to obtain display (b).

### 9.7.3 Display B-field maps

- **B-field map**

The Magnetic field map can be displayed by clicking on the first (left) button of the *Generate maps* box in the *Magnetic Filed* pane of the *Selector window* (Fig. 41a)<sup>1</sup>. The *Select options for map* window opens and the parameters can be chosen in the three available panes (Fig. 42):


- Field **Component** ( $B_r, B_\phi, B_x, B_y, B_z, B_{tot}$ )
- The **Variables** to be displayed in 2D plots ( $X vs. Y, X vs. Z, Y vs. Z$ ) and the value (position) of the 3<sup>rd</sup> coordinate; or 1D plots ( $R, \phi, Z, X, Y$ );
- In the **Lattice** pane one can select the range of the axes and the step (Fig. 42c).

When all the parameters are set, click on one of the **OK** buttons.

Figure 43 shows the 2D field map.

Several other field maps may be added to the display by using **Add map**. Each map can be saved with a choice of formats (.png, .eps, .pdf, etc.)

The magnetic field file used (*bmagatlas05.test2*) is one of the files available<sup>2</sup> in the *Magnetic field* pane of the *Data manager* window (see 6.1.1, and figure 4b).

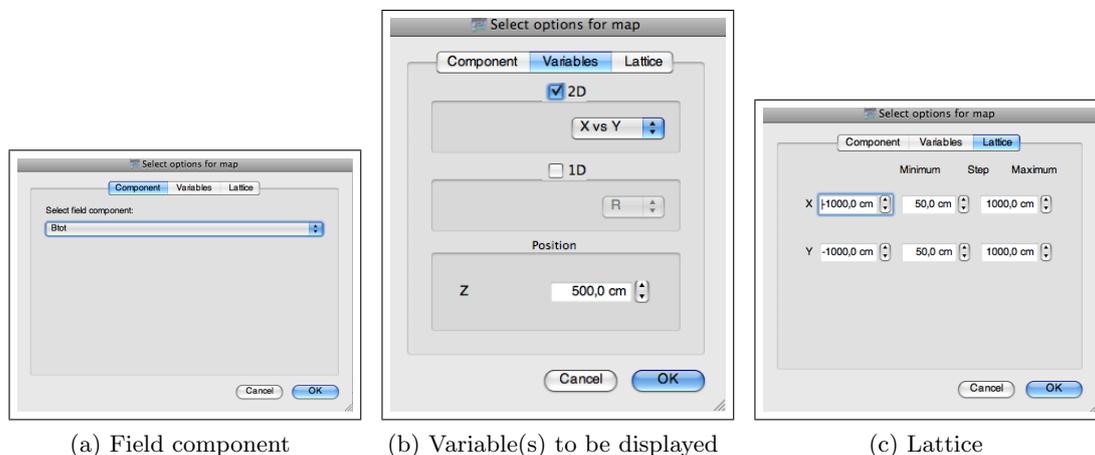

(a) Field component


(b) Variable(s) to be displayed

(c) Lattice

Figure 42: Selecting options and variables for displaying the 2D field map.

Figure 43:

2D display of  $B_{tot}$  in the  $X - Y$  plane at  $Z = 500\text{cm}$ . The corresponding selections are shown in figure 42. Units are *Tesla* and *m*.

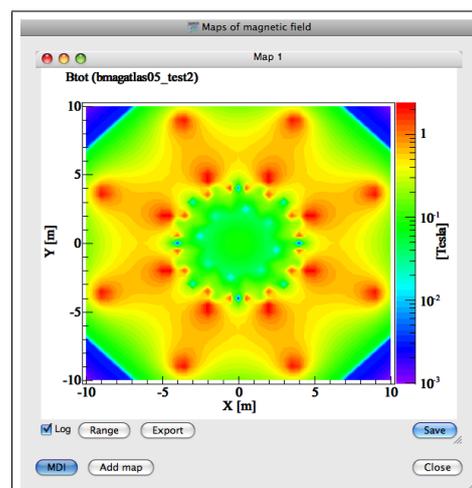

<sup>1</sup>An alternative is to use the *Tools* menu: *Tools/Histograms.../Map of magnetic field* (see Appendix E.6).

<sup>2</sup>Additional field maps can be made available through the *Download...* button in the *Data manager* window (see 6.1.1, item 2, page 19); or by choosing *Download...* in the *File* menu (Appendix E.1).

The magnetic field can also be illustrated as 1D plots. With the selections shown in figure 44, the total field  $B_{tot}$  is shown as a function of  $R$  in figure 45 (Map 1).


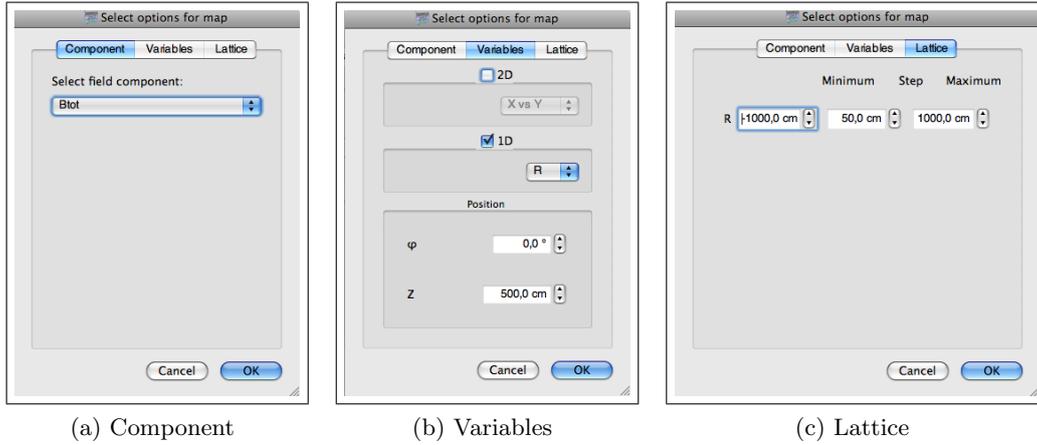


Figure 44: Selections for 1D plot of the magnetic field.

The field of the central solenoid magnet can be added, as shown in figure 45 (Map 2), with the following selections (made in the panes of figure 44):


**Component**=  $B_z$ ; **Variable**=  $Z$ , at  $\varphi = R = 0$ ; **Lattice**:  $Z \in [-300, 300]$ cm.

Figure 45: Units are *Tesla* and *m*.  
Map 1: 1D display of  $B_{tot}$  as a function of  $R$  at  $Z = 5$  m,  $\varphi = 0$ .  
Map 2: display of  $B_z$  as a function of  $Z$  at  $R = 0$ ,  $\varphi = 0$ .

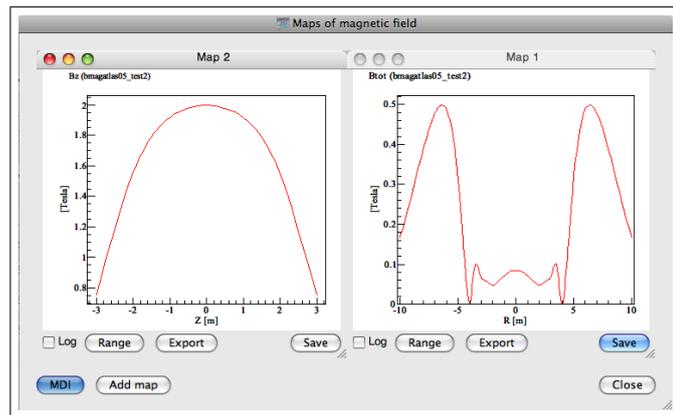

With the **MDI**<sup>1</sup> button, the display can be arranged to show each map separately, using the tabs, as shown in figure 46.

Figure 46: Same as figure 45, but in MDI mode, showing one plot at a time in separate tabs.

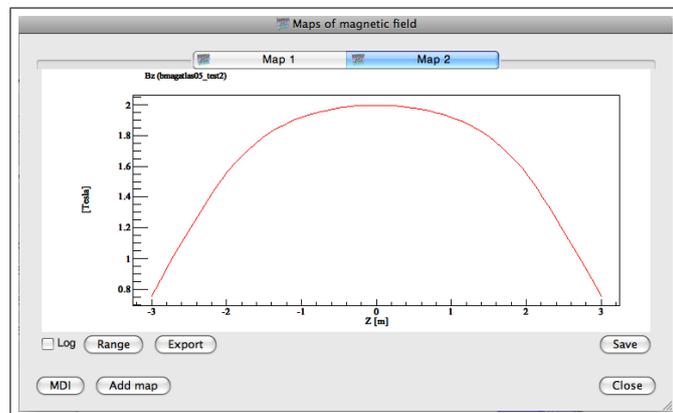

<sup>1</sup>Multiple Document Interface

- **Integral B-field map ( $\int Bdl$ )**

The integral field can be displayed by clicking on the second (right) button of the *Generate maps* box in the *Magnetic Filed* pane, after having chosen the lattice in the pop-up window (Fig. 47a)<sup>1</sup>. The field integral is shown in Fig. 47b. A 1D plot of  $\int Bdl$  is shown in figure 48.

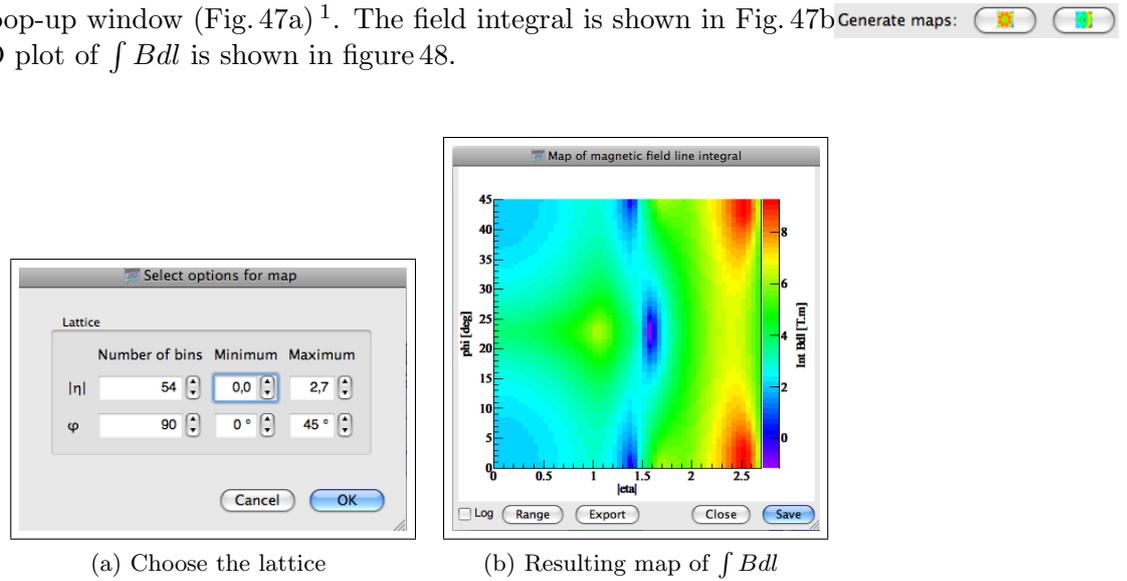


Figure 47: Map of the field integral  $\int Bdl$ . The unit is *Tesla.m*

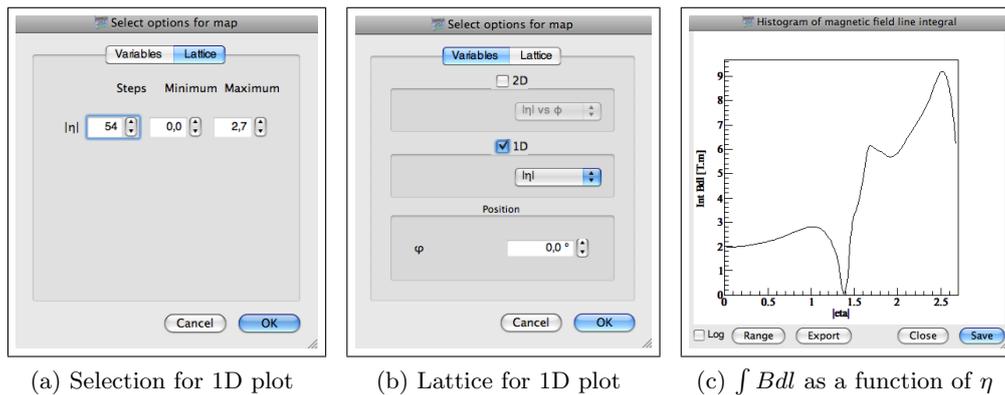


Figure 48: 1D display of  $\int Bdl$


<sup>1</sup>OR: Use the *Tools* menu: *Tools/Histograms... Map of field line integral*.

## 9.8 $X_0$ map: Distribution of material

The amount of material (in units of radiation length  $X_0$ ) along any chosen direction from the interaction point can be displayed in the following way.

In the *Option pane* of the *Selector window* (Fig. 2), choose the  $X_0$  tab, and hit the *Generate  $X_0$  Map* button<sup>1</sup>.

In the *Select options for Map* window (Fig. 49a), the lattice ( $\eta, \varphi$ ) and the integration range ( $R, Z$ ) can be chosen. The resulting map is shown in figure 49b. The regions with high quantities of material because of the magnet coils are clearly visible (in warm colors): at  $\varphi = 22.5^\circ$  for the barrel region and at  $\varphi = 0^\circ$  and  $22.5^\circ$  in the forward region.

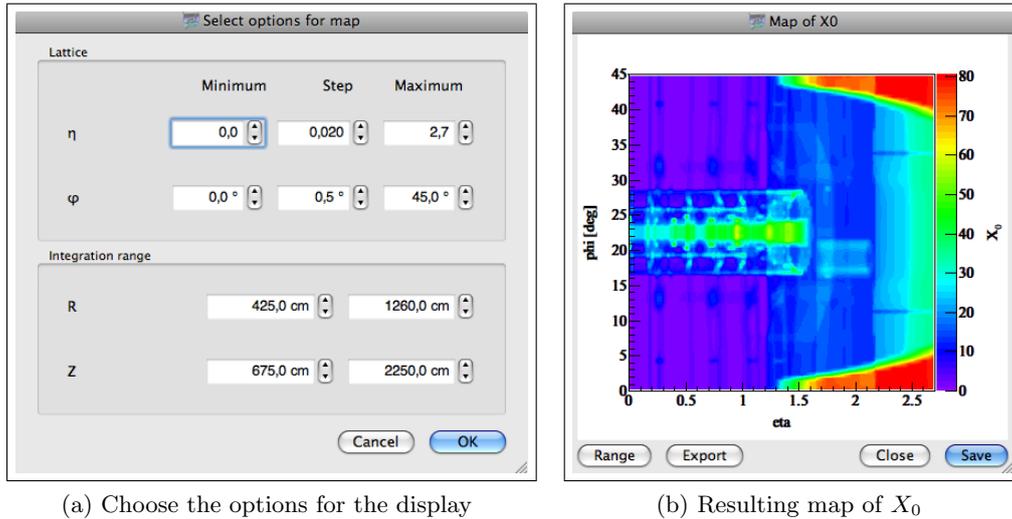

(a) Choose the options for the display

(b) Resulting map of  $X_0$

Figure 49: Map of  $X_0$ .

a) The window *Select options for Map* allows to choose the direction ( $\eta, \varphi$ ) along which the amount of material - expressed in units of  $X_0$  - is calculated, as well as the integration range ( $R, Z$ ).

b) Two dimensional ( $\eta, \varphi$ ) Map of  $X_0$ . At the right, the color scale for the amount of material is expressed in units of radiation lengths ( $X_0$ ).

<sup>1</sup>OR: Use the *Tools* menu: *Tools/Histograms... Map of  $X_0$* .

## 9.9 Map of the expected number of crossed muon stations


Ideally, the number of detector stations crossed by a muon is at least 3. There are regions in the spectrometer where this is not the case: e.g. in the transition region between barrel and endcap (around  $|\eta| \simeq 1.2$ ), where a muon crosses fewer stations; and also at various regular azimuthal angles. The tool described below makes it possible to determine the number of stations at any given  $\eta$  and  $\varphi$ .

The map is obtained by generating straight tracks from the *IP* and propagating them through the spectrometer, counting the number of chambers on the trajectory.

In the *Tools* menu, choose *Histograms.../ Map of expected stations*. In the pop-up window, make the desired choices for the  $\eta$  and  $\varphi$  ranges; select the *Type* of chambers (Precision or Trigger) and select *Use all chambers*, as shown in figure 50a.

Clicking on **OK**, produces the map of figure 50b. The regions where only one station or none are crossed can be clearly identified (blue resp. purple).

There are also a few rare regions where the number of expected stations exceeds 3, as indicated by the regions in yellow.

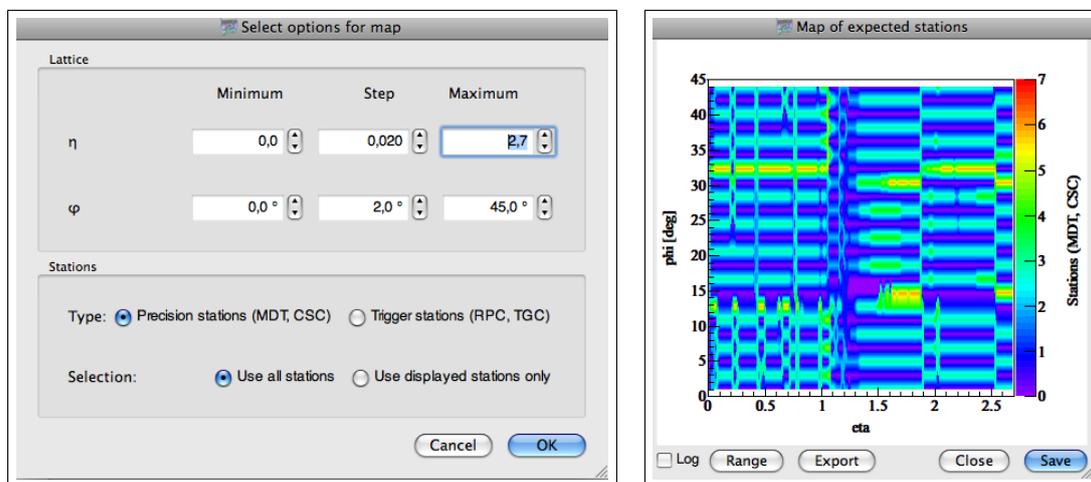

(a) Choose the options for the display

(b) Map of *Number of expected stations*

Figure 50: Number of expected stations.

a) Options for displaying the map:  $\eta$  and  $\varphi$  ranges, type of chambers, selection of chambers.

b) Two dimensional ( $\eta, \varphi$ ) map of *Number of expected stations*. At the right, the color scale for the number of stations.

By using the selection *Use displayed stations only* in figure 50a, it is possible to restrict the map to the stations displayed in an event.

In any of the resulting maps (Figs. 43, 45, 46, 47b, 48c, 49b, 50b, ), several actions are possible with the tabs at the bottom of the display:

- **Range** : Set the range of the color scale for the plotted quantity .
- **Export** : Saves the map as an ASCII file (.dat format).
- **Save** : Saves the map as a picture with a choice of formats (.png, .eps, .pdf, etc.).
- **Close** window without saving or exporting.

## 10 Exercise 5: ATLAS Physics Events (1)

### 10.1 Input files

#### 10.1.1 Files loaded by the user

*Persint* allows the reading of event hit files and the visualization of these hits. It is also possible to reconstruct the event interactively<sup>1</sup>. All this is done with the help of the [Events](#) menu (Appendix E.5).

To display event hits, the following files must be loaded:

1. A geometrical data base of the "amdb\_simrec.xxx" type.
2. An input Event file containing the hits of the "OutMboyView.yyy" type. The structure of this ASCII file is given in Appendix D.3.6, and an example Event file in Appendix D.3.7.

The interactive reconstruction of events requires the loading of two additional files.

1. The *Magnetic field* file
2. The user's directives in the form of "Data cards"

All these files are available through the [Data manager](#) icon of the [File](#) tool bar. For details, refer to section 6.1.1, figure 4, and Appendix D, figure 110a. As already mentioned, these files are loaded, if available, in the working directory. The program checks if the correct files are loaded. If there is a discrepancy between the loaded geometry file and the event hit file,<sup>2</sup> a warning is issued and the correct file(s) can be loaded (see section 6.3, item 4, and figure 5 on page 22).

The user may change these input files at any time during the running of *Persint*.<sup>3</sup>

#### 10.1.2 Event dependent files

The geometry file of the "amdb\_simrec.xxx" type which is loaded at the beginning of a session represent the nominal geometry corresponding to the event file in use. The actual geometry, which represents the state of the detector at any given moment, must be used. Using a port<sup>4</sup> to a CERN data base, these files are invoked for each event displayed with *Persint* according to its *time stamp*.

- The "missing" file indicates the detector parts or channels which are inoperative for a given event.
- The "Corr" file provides the alignment parameters (A lines) and deformation parameters (B lines) of the precision chambers.

## 10.2 Display physics events (Exercise 5 starts here)

For this exercise, we start from scratch.

After starting *Persint*, we erase the display window with the [Clear](#) button of the [Image](#)



Clear

<sup>1</sup>The interactive reconstruction is using the interface with the Muonboy reconstruction program.

<sup>2</sup>The event hits file "OutMboyView.yyy" indicates the required geometry file in its header (Appendix D.3.7). The file "Persint-00-02-●●/PersintData/AtlasNode\_AmdcFile\_MagFieldFile.txt" indicates the magnetic field file needed for a given geometry file (Fig. 110b).

<sup>3</sup>For the time being, it necessary to "Quit" and restart *Persint* to change the *Magnetic field* file.

<sup>4</sup>To get automatic access to these files, open the port with the following command:  
ssh -D 3128 lxplus.cern.ch

tool bar.

Then we load the necessary files with the *Data manager* icon of the *File* tool bar, following the indications given in figure 4:

- The (default) `amdb_simrec.xxx` geometry file in the *Volumes* tab (Fig. 4a). Check the box "Load AGDD Volumes from the AMDB file"
- The (default) magnetic field file in the *Magnetic Field* tab (Fig. 4b).
- The (default) Muon hits file in the *Events* tab (Fig. 4c). Load also the (default) Data Cards file.

- To display the event of the default Event file (`Out.MboyView_Zmumu4023`)<sup>1</sup> click on the *Next event* icon of the *Event* tool bar. The muon chambers which contain hits (and only those chambers) are displayed.

- To display the reconstructed tracks, click on the *Athena reconstruction* icon of the *Event* tool bar. A second click will remove the tracks.

- The *Simulated tracks* icon can be used to visualize generated tracks. A second click will remove those tracks.

- The muon chambers belonging to the event can be hidden by un-selecting *Chambers* in the *Event* menu.




Next event



Athena-reconstruction



Simulation-tracks

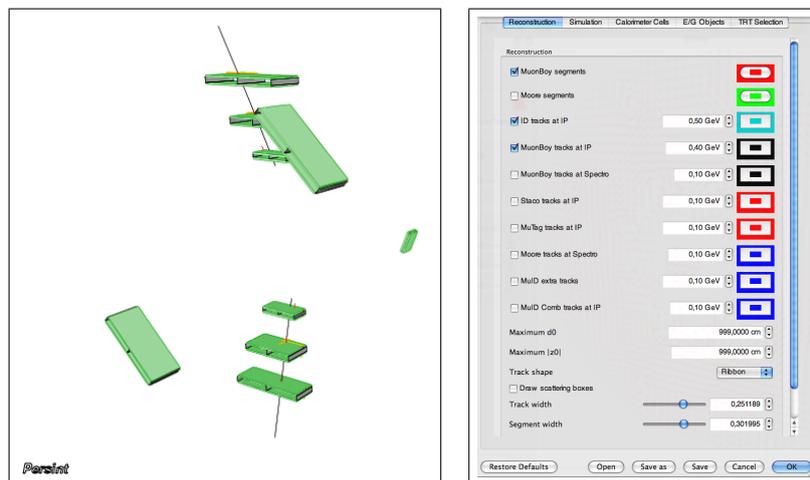

(a) Display of Event 4023 showing tracks and the chambers containing hits (b) The *Set track parameters* window

Figure 51: Display of Event 4023 resulting from the selections made.

After having used some functions of the *Navigation* tool bar to change the aspect of the display, figure 51a shows the event with the two muon tracks and the chambers which contain hits.

Many different reconstructed objects can be displayed; they are selected in the *Set track parameters* window (Fig. 51)<sup>2</sup> available through the corresponding icon.


For instance, one can choose to display tracks reconstructed by Muonboy or Moore, Staco or Muid etc. . .

Besides these objects specific to the muon system, it is possible to visualize objects relevant to the calorimeters (cells) and Inner Detector (tracks). These displays will be discussed in section 11.3.

Note that the *Event* can be erased from the display with the *Clear event* function.



Set track parameters



Clear event

<sup>1</sup>The file "Out.MboyView\_Zmumu4023" used in this tutorial contains only one event.

<sup>2</sup>See also figure ?? in Appendix E.5.1.

### 10.3 Select Sectors to be displayed

Because all chambers with hits are displayed in an event, the display may become crowded. Although this is not the case for the current event 4023, we will nonetheless clear the display of the chambers which do not have a reconstructed track.

First we identify the sectors of interest: by moving the cursor over the 6 chambers which contain the two reconstructed tracks, we find that the two sectors concerned are sectors 3 and 7, as indicated by the chamber labels. The goal is now to only display those sectors 3 and 7.

To do this, we use the function *Select Sectors...* of the *Events* menu. In the window which appears, we choose the sectors we want to display, by using the **Add** button shown in figure 52a. In the pop-up window, make the selections to display sectors 3, as shown in figure 52b; repeat the operation for sector 7. Upon clicking on **OK**, the selection is displayed in the *Select sector(s)* window (Fig.52c). Clicking once more on **OK** will produce the event display of figure 52 where only sectors 3 and 7 are displayed.


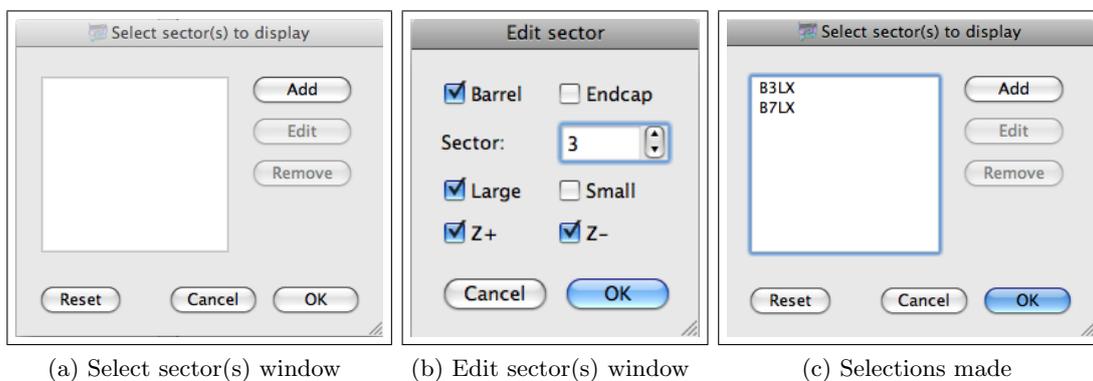


Figure 52: How to select the sectors to be displayed in an event.

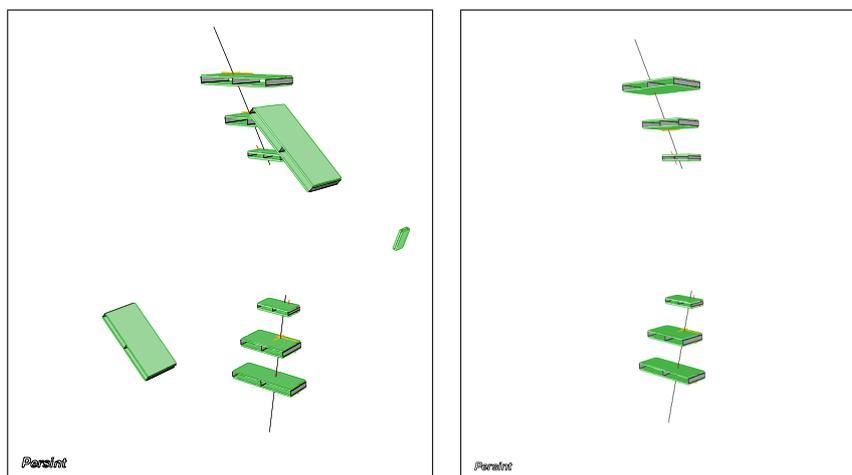

(a) Display of Event 4023 showing all chambers containing hits  
 (b) Display of Event 4023 showing only chambers in sectors 3 and 7

Figure 53: Event 4023, display (2), resulting from the selection of two sectors.

The selection of sectors remains active until another selection is made in the *Select sector(s)* window or until one restores the entire display, using the **Reset** button of that window. Note that figures 53a (default) and 53b correspond to the selections of figures 52a and 52c, respectively.


## 10.4 Dressing the event

It is often convenient to "dress" the event with surrounding detectors in order to get a sense of orientation in ATLAS. This is particularly true for displays destined for presentations or publication. One can add the detector elements useful for orientation and change the aspect of the display at will. To do this, we use the *Selector window* and the *Navigation* tool bar as explained in section 7.

For this exercise, we will again load the predefined detector file for this event: click on the *Open view* icon of the *File* toll bar and select `Zmumu4023.p2vf` in the directory `Persint-00-02-●●/example`. The display now resembles figure 54a.




We want first to change the aspect of the display. In order to ensure fast processing of each action and to get optimal fluidity in the displacements, we turn to the global *Wire mode* (see section 9.6, item 1) by clicking on the relevant icon in the *Image* tool bar. The display of figure 54b is obtained.




We now *Zoom-out* and *Rotate* the view using the navigation tool bar as explained in section 8 to obtain a display resembling figure 54c.


To obtain the display in full volume mode, we click again on the *Wire mode* icon to obtain figure 54d.

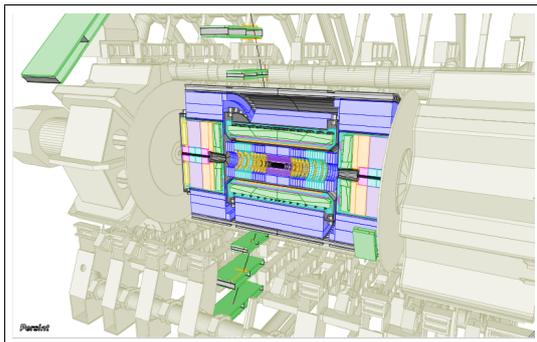


(a) Event 4023 dressed with the default file `Zmumu4023.p2vf`

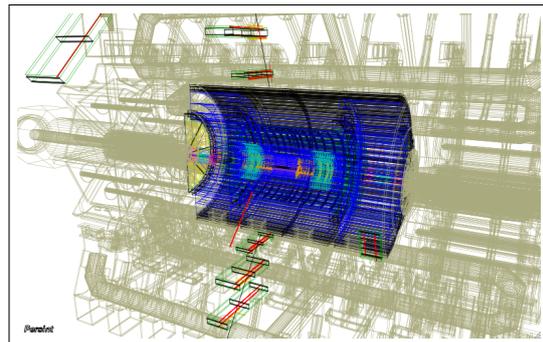

(b) Event 4023 in Wire mode

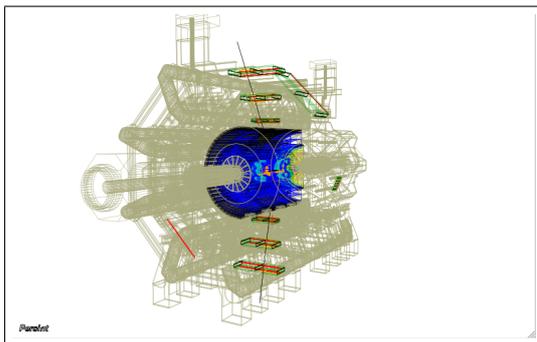

(c) Event 4023 rotated and after Zoom-out

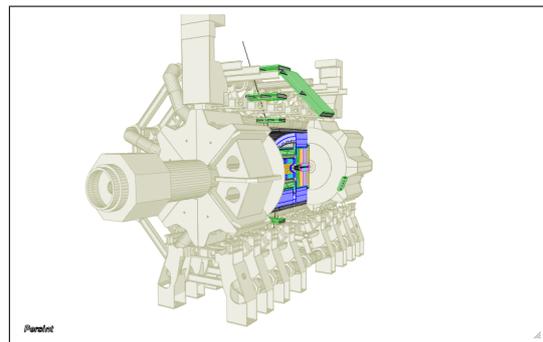

(d) Event 4023 in full display mode

Figure 54: Display of Event 4023 resulting from the selections made.

In this view, the event itself is partially hidden. To remedy this, we will drop some elements of the detector to be displayed. First we remove the endcap toroids by unchecking the relevant item in the AMDB tab of the *Selector window* and we also remove the lower coil of the barrel toroid by selecting the four left-most coils. Remember that

the color of the detector items (e.g. the barrel toroid) can be chosen in this pane. These modifications are indicated in figure 55b.

We now remove the feet and the shielding by making the appropriate selection in the AGDD pane of the *Selector window*, as indicated in figure 55d.

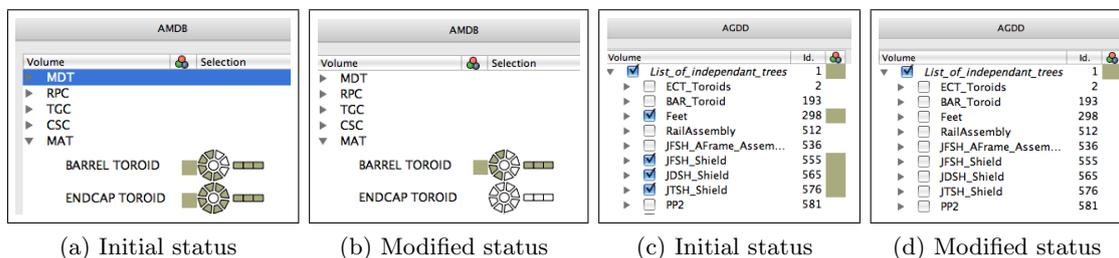


Figure 55: Modifications made in the *Selector window*.

After the selections have been made, click on the *Compute* icon of the *Image* tool bar. A view similar to figure 56 is displayed.

To return to the bare event display (without the "dressing"), use elements of the *Clear view* function to remove AMDB and AGDD volumes.


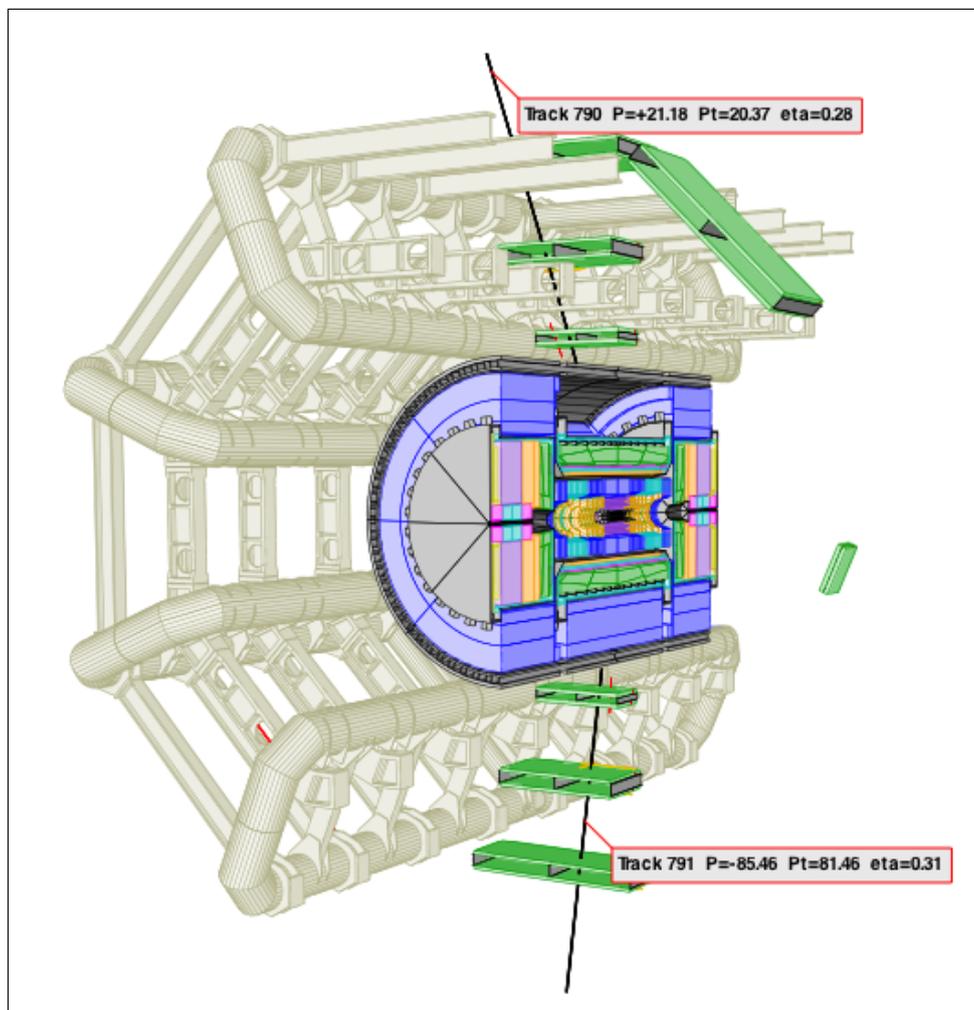


Figure 56: Display resulting from the modifications made to the selected detector elements. Track labels were produced as indicated in section 9.1.2.



Compute



Clear view


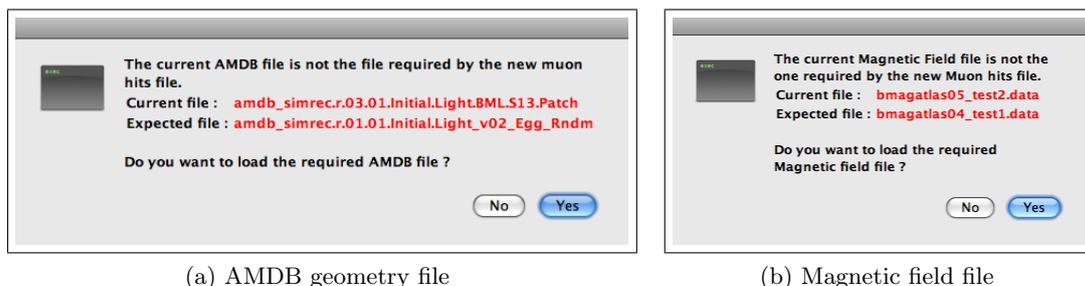


Figure 57: Warnings issued by *Persint* about loading the proper files.

## 10.5 Save the view

By clicking on the [Save view as](#) icon in the *File* tool bar the view displayed in the main display can be saved as a `.p2vf` file to the directory of your choice, e.g. `Persint_working_files`. This file (e.g. `exercise5.p2vf`) can be retrieved for later use in *Persint* via the [Open view](#) icon.



The view can also be exported or printed as explained in section 6.4.

## 10.6 Changing the event file

We now want to use a different event file. In the *File* menu (or tool bar), choose [Data manager](#) and then the [Event](#) tab and click on [Load](#). Choose the file "Out.MboyView\_Top\_evts\_5" of the `Persint-00-02-●●/example` directory. *Persint* issues a warning and invites you to load the appropriate geometry file (Fig. 57a): answer [Yes](#) in order to load the correct file. A second warning is issued (Fig. 57b) which invites you to load the appropriate magnetic field file. Again, answer [Yes](#).<sup>1</sup> The loading of the appropriate files takes several seconds.

The panes [Events](#) and [Magnetic field](#) now display the current files which are used, and also the default files (Fig. 58).<sup>2</sup>


## 10.7 Scanning events

*Persint* is well adapted for scanning events. To illustrate how the scanning works, we shall load a file which contains many events (unlike `Out.MboyView_Zmumu4023` which has only one event).


In the [Event](#) tab of the [Data manager](#) window (Fig. 4c), click on [Load](#) in the *Muon hits file* part. In the pop-up window, choose `Out.MboyView_1` in the `Persint-00-02-●●/example` directory, a file of simulated single muon events. Depending on the previously loaded event file, two consecutive warnings, similar to figure 58, are issued about geometry and magnetic field files. Choose the suggested files by answering [Yes](#). Close the [Data manager](#) window.

<sup>1</sup>It is possible to use geometry and field files different from the recommended files, by answering [No](#). This may be needed in special cases.

<sup>2</sup>Note that the current file can be defined as the default file by clicking on [Define as Default](#).

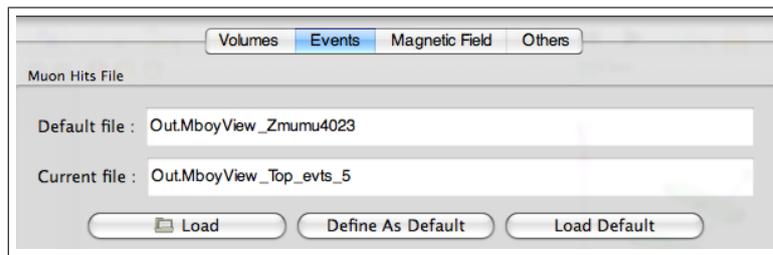

(a) "Current" Event file

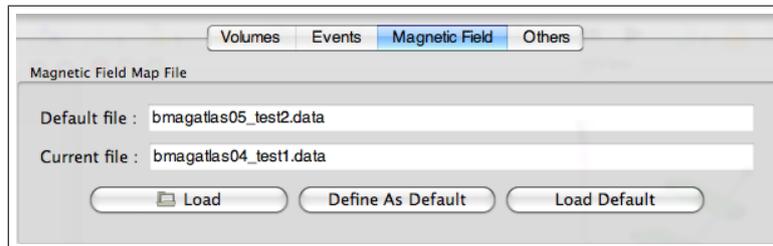


(b) "Current" Magnetic field file

Figure 58: "Default" files and "Current" files being used by *Persint*.

### 10.7.1 Manual scanning

Click on [Next event](#) to display the first event of the file.

The event number is # 3998 and is displayed in the [Event number](#) scale of the [Event](#) tool bar.



Click on [Next event](#) to display the following event.

The details of the event visualization can be defined using a series of functions of the [Events](#) menu (e.g. Athena reconstruction, Hit calorimeter cells, Strips, Tubes etc.)<sup>1</sup>.

Any event can be chosen directly from the [Event number](#) scale. It can also be entered with the keyboard.

The [Reload event](#) icon is used to load the current event again.



Reload event

### 10.7.2 Automatic scanning

The scanning can be performed automatically with the [Start autoscan](#) icon.

The [Autoscan speed](#) icon makes it possible to choose the time between events (1, 2, 5, 10, 20, or 30 seconds). The change of speed can be made "on the fly".

Start autoscan  
Autoscan speed

If one wants to work with a given event, the automatic scanning can be interrupted with the [Start autoscan](#) icon which has now changed aspect ([Stop autoscan](#)).



Stop autoscan

### 10.7.3 Visualization properties

By default, each visualization of a new event is done from a predefined perspective. However, when scanning events, it may be convenient to retain the current (modified from the default) visualization properties. This is done with the [Store visualization properties](#) icon.


Store visualization  
properties

<sup>1</sup>See Appendix E.5

To illustrate this feature, we go back to the first event (#3998) of the loaded event file by choosing the event number in the *Event number* scale. Display the reconstructed tracks using the *Athena reconstruction* icon (Fig. 59a).




Now we use the navigation tools to change the visualization properties. First we zoom-out and display the ATLAS coordinate axes by choosing *Huge axes* in the *Axes* menu (Fig. 59b).

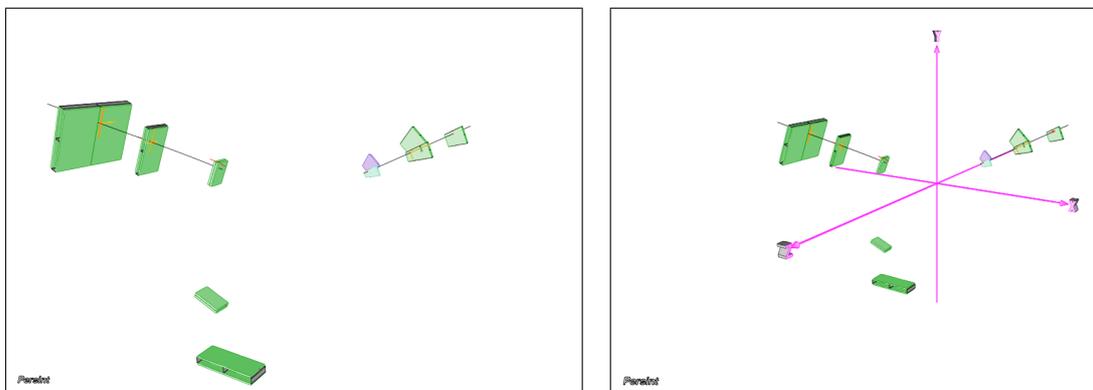

(a) Event 3998: initial default visualization properties (b) Event 3998: after zoom-out and with axes

Figure 59: Various views of Event 3998

Let's rotate the view to obtain figure 60a. We assume that the *Store visualization properties* icon is enabled. Clicking on the *Next event* icon will display event #3999 with the stored visualization properties (i.e. the rotated view). These parameters are used until the *Store visualization properties* icon is disabled and the next event #4000 is displayed (Fig. 60b).

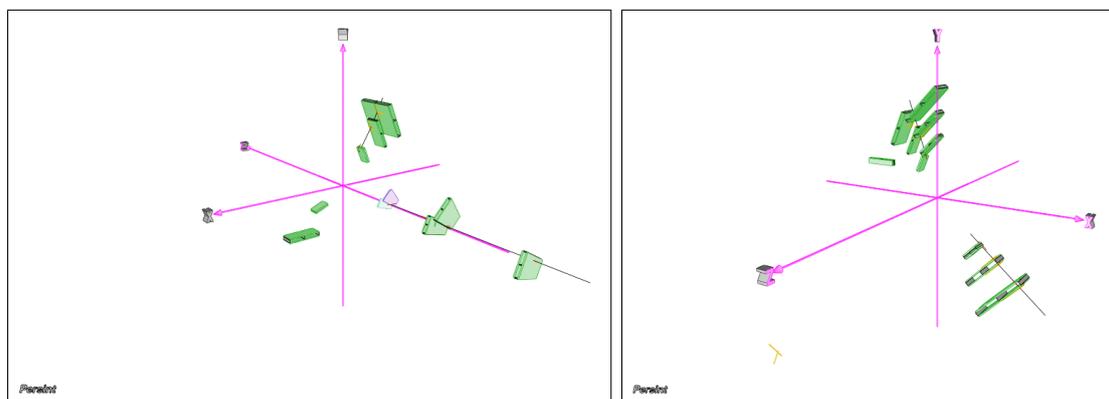

(a) Event 3998: after rotation

(b) Event 4000: Back to initial visualization properties

Figure 60: Events 3998 & 4000

This feature of changing the visualization parameters can be used "on the fly" in the *Autoscan* mode.

### 10.7.4 Using 2D projections

For scanning purposes, it may be useful to use a two-dimensional projected view of the events:

- Stop the autoscan with a click on the *Stop Autoscan* icon.
- Display the X-projection by clicking on the appropriate item of the *Projection* menu.
- Resume the automatic scanning with the *Start autoscan* function. All events are now displayed in the X-projection until the *Store visualization properties* function is disabled to return to the initial 3D view, or the *Stop autoscan* function is used to end the automatic scanning.

Figure 61 shows two events captured during the automatic scanning with the X-projection enabled. Note that the display of the axes can be disabled at any time by choosing *No axes* in the *Axes* menu.

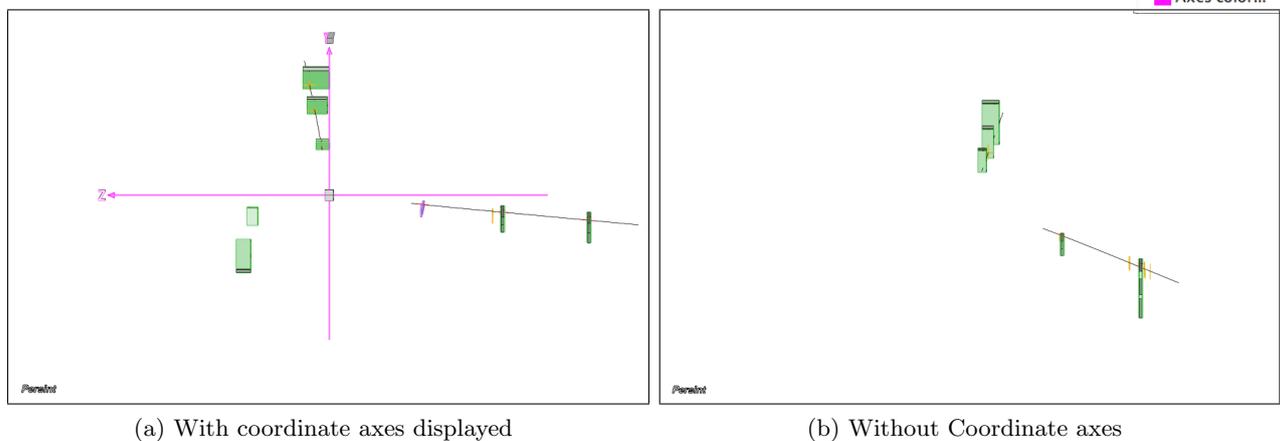


Figure 61: X-projection of scanned events

## 11 Exercise 6: ATLAS Physics events (2)

In this exercise, we will examine more features provided by the [Events](#) menu. They concern the data from the muon spectrometer, the calorimeters, and the Inner Detector. Remember that it may be convenient to save the display as a `.p2vf` file (e.g. in your *Persint\_working\_files* directory) if you must interrupt your work. This is done with the [Save view as](#) function, as explained in section 6.4.



Save view as...

### 11.1 Muon spectrometer data


Again, as in exercise 5, we start from scratch. After starting *Persint*, we erase the display window with the [Clear](#) button of the [Image](#) tool bar.



Clear

Then we load the necessary files with the [Data manager](#) icon of the [File](#) tool bar, following the indications given in figure 4:

- The (default) `amdb.simrec.xxx` geometry file in the [Volumes](#) tab (Fig. 4a). Check the box "Load AGDD Volumes from the AMDB file"
- The (default) magnetic field file in the [Magnetic Field](#) tab (Fig. 4b).
- The (default) Muon hits file in the [Events](#) tab (Fig. 4c). Load also the (default) Data Cards file. This file is needed to enable the interactive muon reconstruction with *Muonboy*.

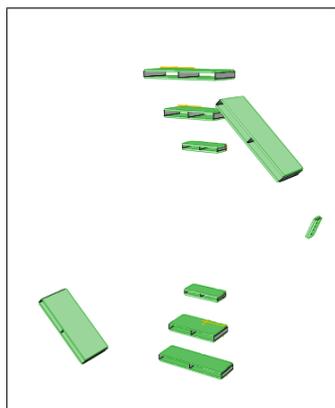

To display the event of the default Event file (`Out.MboyView_Zmumu4023`)<sup>a</sup> click on the [Next event](#) icon of the [Event](#) tool bar. The muon chambers which contain hits (and only those) are displayed in the figure to the left.



Next event

<sup>a</sup>The file "Out.MboyView\_Zmumu4023" used in this tutorial contains only one event.


#### 11.1.1 Map ( $\eta, \varphi$ ) of expected number of stations

The number of detector stations which a particle encounters on its path depends on its initial direction. The number of stations crossed by a track is calculated along a straight line originating at the IP and following the  $\eta, \varphi$  direction. A map ( $\eta, \varphi$ ) of this population can be obtained with the feature described below.

In the [Tools](#) menu, choose [Histograms.../Number of expected stations](#). In the pop-up window "Select options for map", make the following selections :

- **Lattice** in  $\eta, \varphi$
- **Type** : select precision stations (MDT+CSC) or trigger stations (RPC+TGC)
- **Selection** : use *all stations* in the spectrometer or *only the stations being displayed*

A possible selection of parameters is shown in figure 62a; the resulting map of the number of expected stations as a function of  $\eta, \varphi$  is shown in figure 62b.

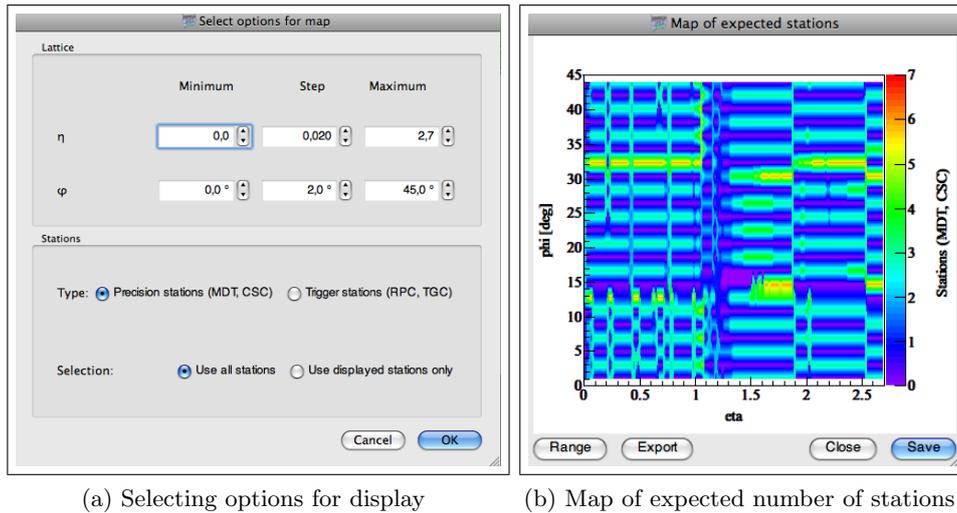

(a) Selecting options for display

(b) Map of expected number of stations

Figure 62: Map of expected number of stations

### 11.1.2 ATHENA reconstructed segments and tracks

Now we want to display the reconstructed tracks in the muon spectrometer.

1. First we choose the parameters of the tracks to be displayed by opening the [Set track parameters](#) window. 

*Set track parameters*

- Ignore "Simulation" and "Calorimeter Cells" for now
- Check "Muonboy segments" (or Moore segments)
- Check "Muonboy tracks at spectro" (or Moore segments)
- Select the "Track shape": *Ribbon, Crossed ribbons, or Cylinder.*
- Set "Track width" to a value around 0.30

The resulting [Set track parameters](#) window is shown in figure 63a.


Close the window by clicking on **OK**, then click on the [Compute](#) icon.

*Compute*

To visualize the reconstructed tracks, click on the [Athena reconstruction](#) icon and obtain figure 63b.




*Athena-reconstruction*

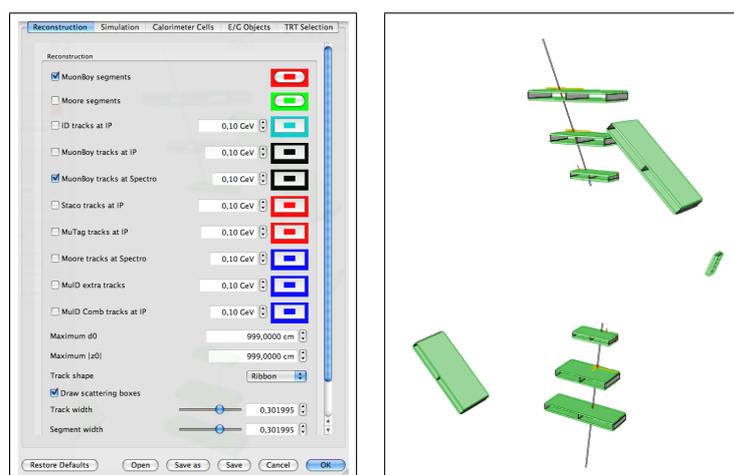(a) Selections made in the [Set track parameters](#) window

(b) Display of reconstructed Muonboy tracks

Figure 63: Event 4023 (first pass)


2. We will now label the tracks. Select the *Default mode* in the *Navigation* tool bar. Move the cursor over the first track, **right-click** and choose *Add customized label*. In the pop-up window, un-check the two coordinate boxes and choose the SW position (Fig. 64a). Click on **OK**.




Default mode

Repeat this operation for the second track to obtain figure 64b.

The labels indicate the charges and momenta (in  $GeV/c$ ) of the reconstructed tracks.

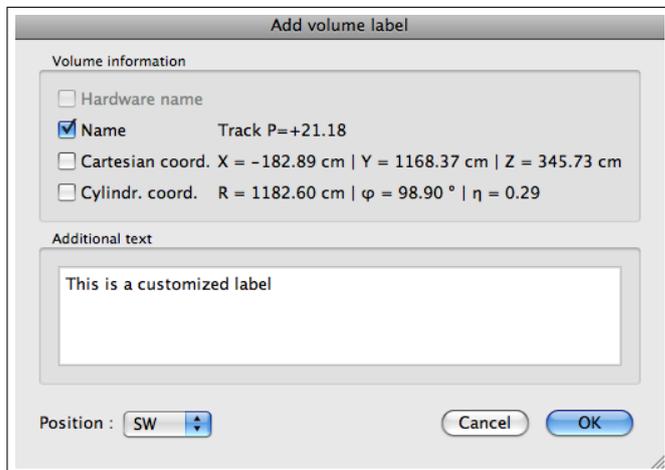


(a) Selections made in the *Set track parameters* window

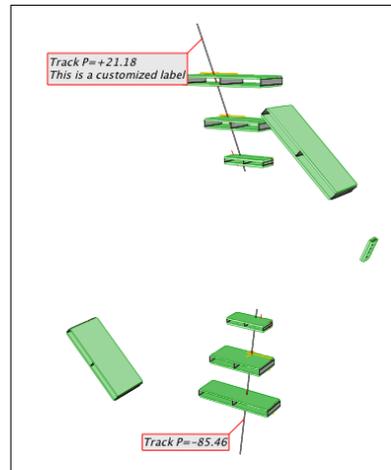

(b) Display of reconstructed tracks with labels


Figure 64: Event 4023 (second pass)

3. We may want to save the display into the directory (*Persint\_working\_files*) as a *.p2vf* file, for future use with *Persint*, using the *Save view as ...* function.




Save view as...

Remember that the *Export view as ...* can be used for saving the display for presentations as a (e.g. *.jpg*) file, with the possibility of adding captions, logos or pictures (see sections 6.4 and 6.5).

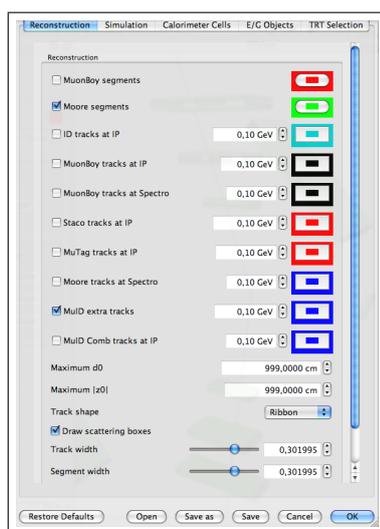

(a) Selections made in the *Set track parameters* window

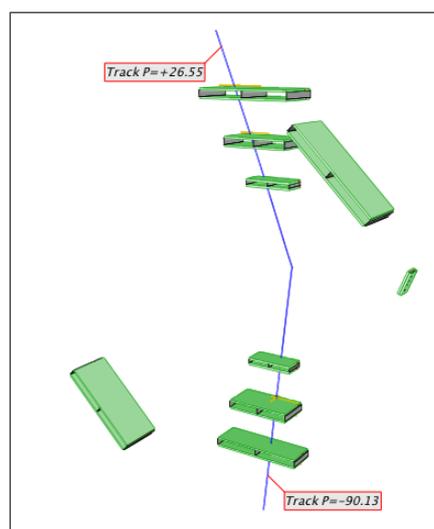

(b) Display of reconstructed MuID tracks

Figure 65: Event 4023 (third pass)

4. As can be seen in the *Set track parameters* window, one can choose other objects to be displayed. For example, the choices: "Moore segments" and "MuID extra tracks" shown in figure 65a result in figure 65b, once the customized labels have been added as before.
5. Instead of showing the tracks, one can choose to display only the segments. To do this, open the *Set track parameters* window and select only the Muonboy or Moore segment box (or both), as shown in figure 66a. We look now at the upper triplet of detector stations. After rotating the display and zooming-in, we obtain figure 66b.

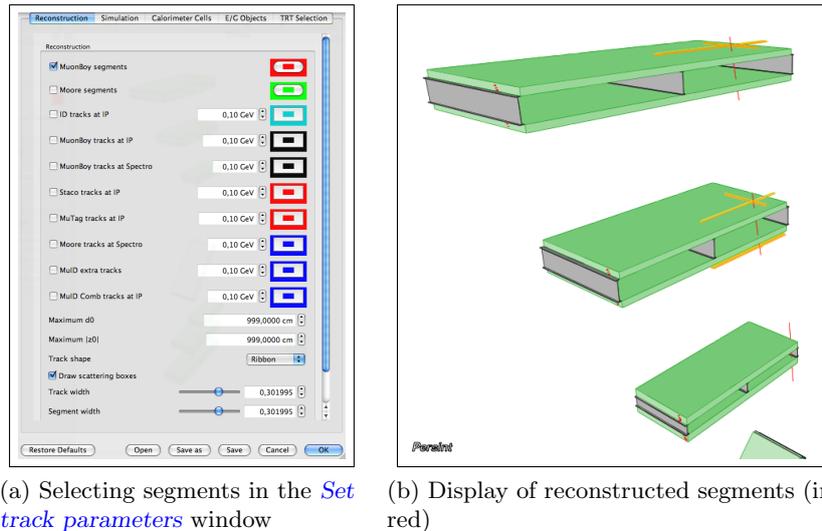


Figure 66: Event 4023 (fourth pass)

6. We now choose different settings of the "MDT options" shown in figure 67a, we rotate the view, and we zoom-in on the BML chambers with the *Zoom on custom area* function discussed in section 8.3, item 4. We obtain figure 67b, where one recognizes the hit MDT tubes (in red), the active RPC strips (in yellow) and the reconstructed segment (in red). The labels have been added as explained in section 9.1.2.


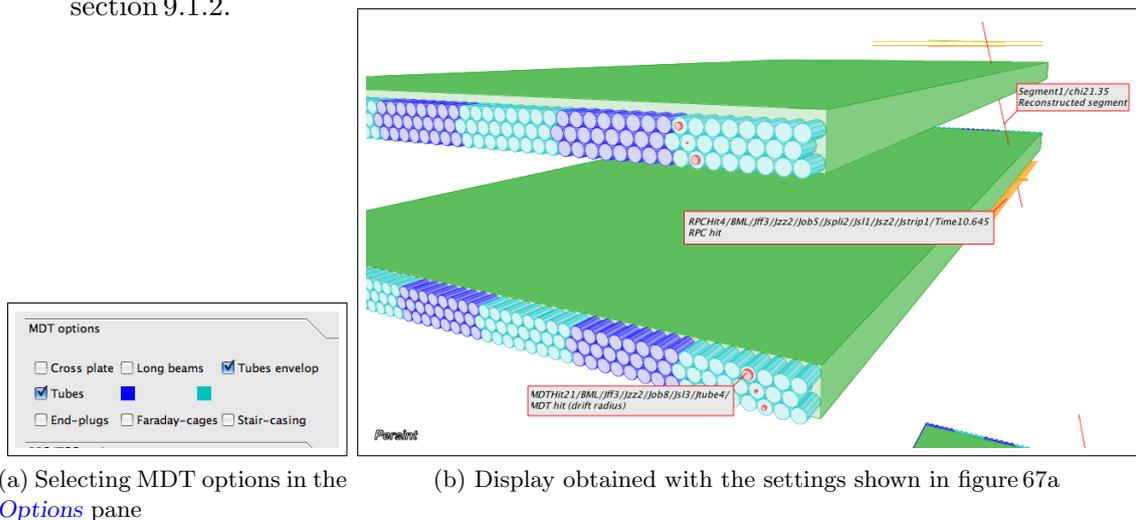


Figure 67: Event 4023 (fifth pass)


7. We choose now the X-projection in the *Image* menu. In the *Set track parameters* window, make the selection shown in figure 63a (Reconstructed segments and tracks). The MDT options are again shown in figure 68a. After zooming, we obtain figure 68b where labels (section 9.1.2) and a caption (section 6.5) have been added. The red square is the location of a scattering center along the reconstructed track. Multiple scattering is computed at that location, using the track momentum and the average amount of surrounding material.

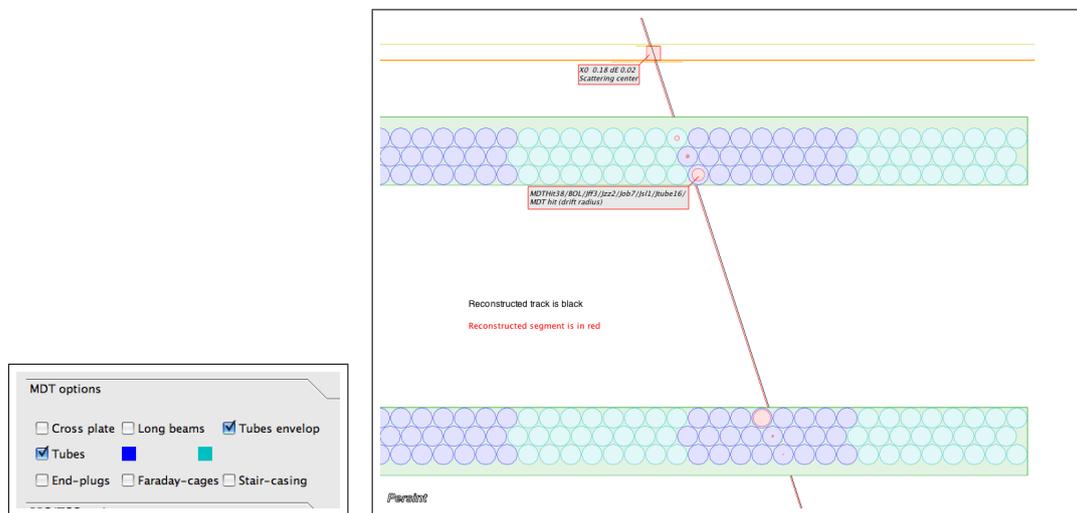

- (a) Selecting MDT options in the *Options* pane
- (b) X-projection of reconstructed tracks with the settings shown in figures 63a and 68a

Figure 68: Event 4023: Zoomed X-projection with reconstructed tracks

8. Finally, selecting segments instead of tracks in the *Set track parameters* window, according to figure 66a, and choosing the MDT options of figure 69a, we obtain the display of figure 69b.

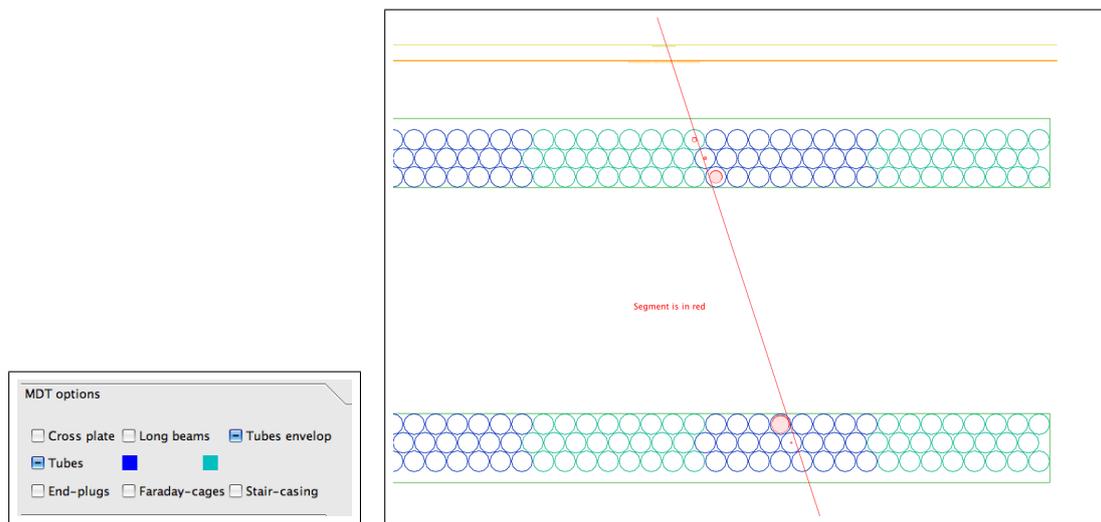

- (a) Selecting MDT options in the *Options* pane
- (b) X-projection of reconstructed segments with the settings shown in figures 66a and 69a

Figure 69: Event 4023: Zoomed X-projection with reconstructed segments

### 11.1.3 Simulated muon tracks

This exercise is only valid for simulated events !

- Start with an empty main display by using the *Clear view* function.
- Load the previous event again (Event 4023) with the *Reload event* function.
- Open the *Set track parameters* window and make the following additional selections: *Generate tracks at IP* and *Only muons* so as to obtain the overall selections of figure 70b.
- Click on  to close the window.
- Validate the selections by clicking on the *Compute* icon.
- To visualize the generated tracks, click on the *Simulation tracks* icon. The simulated tracks appear (from the IP).
- Click on the *Athena reconstruction* icon and the reconstructed tracks appear superimposed on the simulated tracks, as expected for a successful reconstruction (Fig. 70c).



Clear



Reload event



Set track parameters




Compute



Simulation tracks



Athena reconstruction

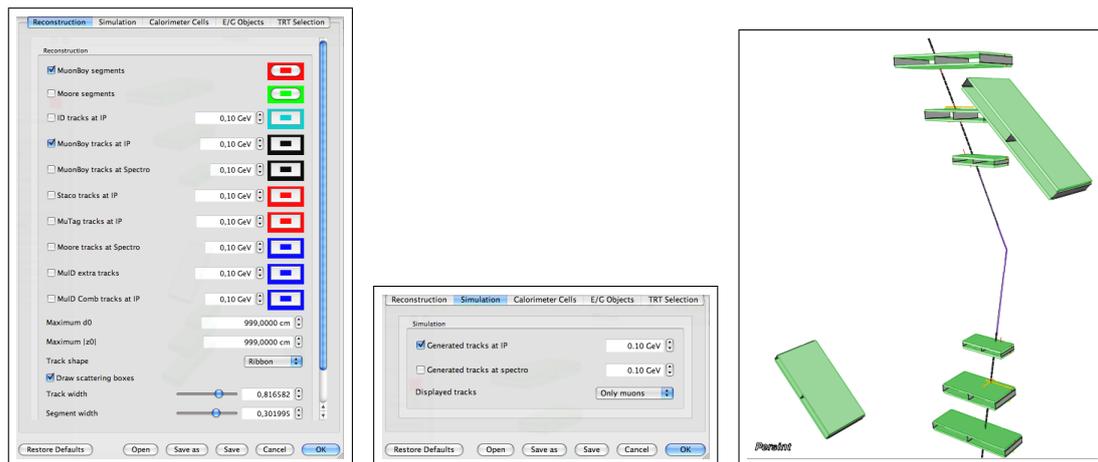

(a) Selections in the *Set track parameters* window (Reconstruction) (b) Selections in the *Set track parameters* window (Simulation) (c) Display of simulated and reconstructed tracks

Figure 70: Event 4023 (sixth pass)

### 11.1.4 Interactive reconstruction with Muonboy


We start again with Event 4023 of the `Out.MboyView_Zmumu4023` file. Make sure all necessary files are loaded by using the *Data manager* windows. In particular the *Data cards* file and *Magnetic field* file need to be loaded as indicated in figures 4b and 4c on page 20. Use the default files for this exercise. Click on the *Muonboy interactive reconstruction* icon. Two reconstructed candidate tracks are displayed.

We now make a customized label for each candidate (see section 9.1.2) and obtain figure 71.




Muonboy interactive reconstruction

Figure 71: Display of two candidate tracks

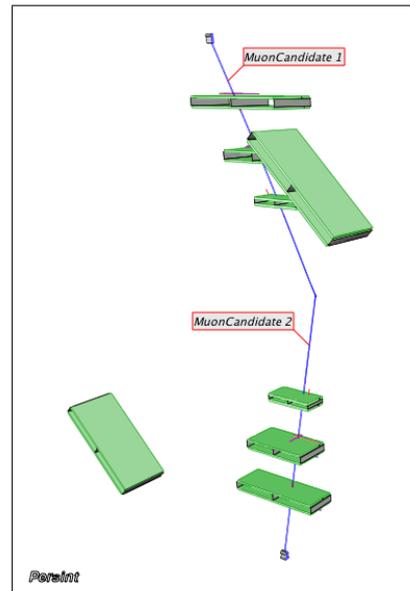

For each candidate track which is displayed, the *Muonboy* pane at the bottom left of the *Persint* display shows the characteristics as seen in figure 72. This pane also shows a warning if no muon could be reconstructed.<sup>1</sup>

Figure 72: The parameters of each muon candidate are shown in the *Muonboy* pane. They include the signed momenta of reconstructed muons, the track fitting parameters, and the invariant mass of a muon pair.

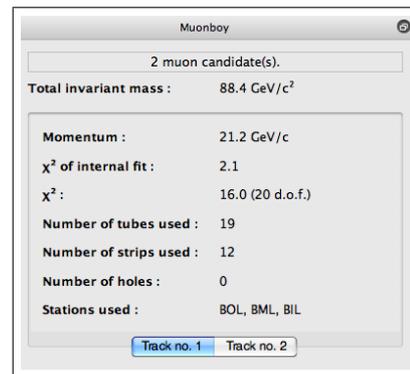

We will now repeat the interactive reconstruction of the muons with a magnetic field of half the intensity of the default file (`bmagatlas05_test2.data`).

Retrieve and load this new magnetic field file in the following way:

- Open the *Data manager* window of the *File* menu and click on the *Magnetic Field* tab. (see figure 4b, page 20).

We must first download the new magnetic field from a location at CERN<sup>2</sup>. This is done by clicking on `Download...`<sup>3</sup>. In the *Download extra field maps ...* window, select the file `bmagatlas05_test2_10250Amp.data.gz` from the list and hit `OK`. This file is automatically decompressed and copied to the local `"Persint-00-02-●●/BFieldData/share"` directory.

Back in the *Data manager* window, select the new file now proposed in the `"Persint-00-02-●●/BFieldData/share"` directory, and hit `Select` so that the file becomes the current file. Finally, hit the `Load` box.

- In the *Events* tab, load the `Out.MboyView_Zmumu4023` default event file and the `muonboy_collision_cards`.
- Hit the `Close window` box.

Click on the *Muonboy interactive reconstruction* icon. Two reconstructed candidate tracks are displayed. Again, the *Muonboy* pane shows the characteristics of the reconstructed candidates. As expected, the momenta are indeed divided by  $\approx 2$ , when the field strength is halved (Fig. 73).




<sup>1</sup>e.g. an explicit message is issued if data such as alignment parameters of the A-lines are missing.

<sup>2</sup>Field maps are stored at: <https://atlas.web.cern.ch/Atlas/GROUPS/MUON/magfield/Fieldmap>.


<sup>3</sup>The new magnetic field can also be downloaded by using the function *Download.../Download extra field maps* of the *File* menu (see Appendix E.1).

Figure 73: The parameters of each muon candidate are shown again in the *Muonboy* pane; with half the magnetic field strength, the momentum is  $\approx 2$  times smaller

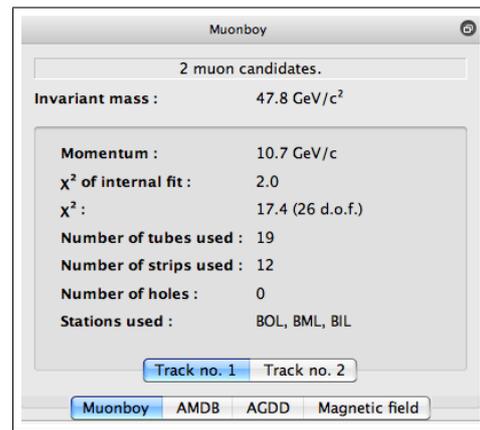

In the *Muonboy* window, the total invariant mass of all reconstructed muons is displayed. A table containing the parameters of all reconstructed muons can be obtained by clicking on the icon at the right hand side of the title bar, which makes it a floating window. When this table (Fig. 74) is displayed, a **right-click** on the content will offer the *Copy to clipboard* function which can be used to save the reconstruction data in a text file.

Figure 74: The *Muonboy* window, with a table of all reconstructed muons. The total invariant mass is given at the top, the invariant mass of the chosen muon(s) at the bottom. The *Copy to clipboard* function is obtained by **right-clicking** on the table.

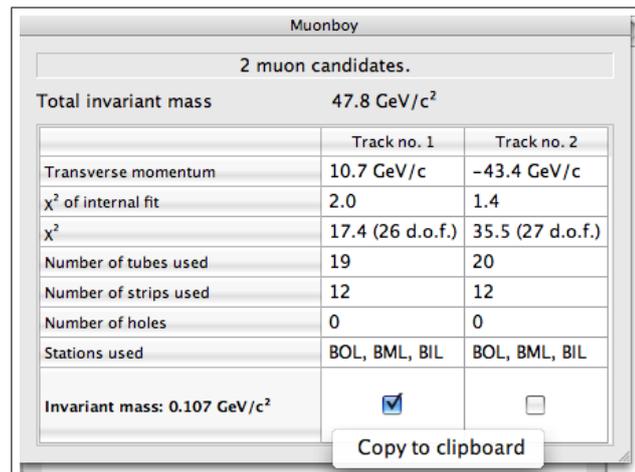

The boxes at the bottom of the window make it possible to calculate the invariant mass of any number of muons by making the appropriate selections. In figure 74 with one box checked, the invariant mass is the muon mass. Again, the table may be copied to the clipboard and saved.

### 11.1.5 Color code for MDT hits

The interactive reconstruction can be used to look at the reconstruction process in detail.

We start again with Event 4023 of the `Out.MboyView_Zmumu4023` file. Make sure all necessary files are loaded by using the *Data manager* windows. In particular the *Data cards* file and *Magnetic field* file need to be loaded as indicated in figures 4b and 4c on page 20. Use the default files for this exercise.

With the nominal MDT options (Fig. 75a), we obtain the display of figure 75b.

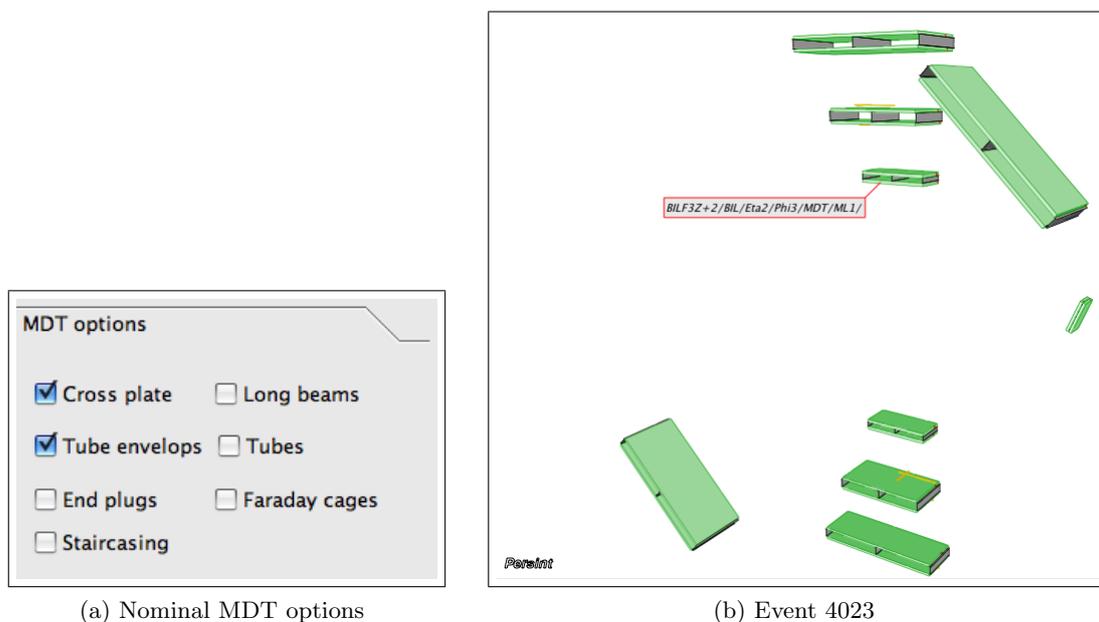


Figure 75: Event 4023 without reconstruction

We now choose the X-projection with the *Projection* menu, and zoom on the BIL chamber indicated by a label to obtain figure 76b which uses the MDT options of figure 76a.

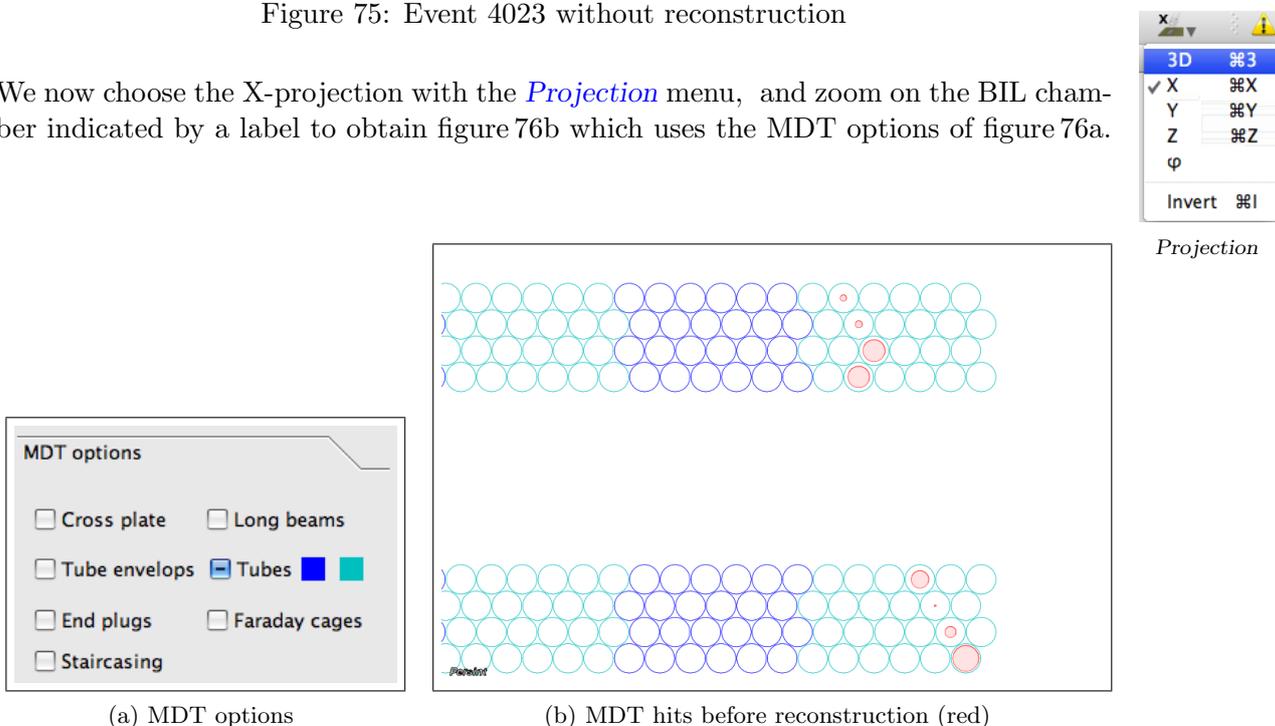


Figure 76: Event 4023: Detail of BIL chamber in the X-projection



The reconstructed track is obtained by clicking on the [Muonboy interactive reconstruction](#) icon (Fig. 77).

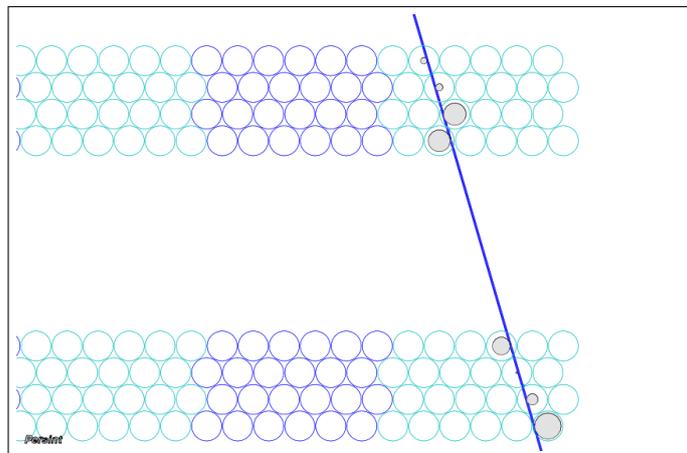


Figure 77: MDT hits after reconstruction (black)

The color code for MDT hits is the following: black hits are those selected by the pattern recognition, red hits do not belong to a track (all hits are selected by the pattern reconstruction in figure 77).

The interactive reconstruction can be used to act on the event characteristics to understand which role they play. For instance, a hit MDT tube or a RPC strip can be removed with the *Move volumes to infinity* (see section 9.2). Then, when re-running the reconstruction algorithm, the removed tube or strip will not be taken into account.

## 11.2 Vertex display and Inner Detector data

The primary vertex as well as secondary vertices are available for display. Histograms of primary vertices can also be produced.

The primary vertex is obtained by a fit of all reconstructed Inner Detector tracks. Likewise, the secondary vertices are obtained from an analysis of the ID tracks.

The default settings in the *ATHENA* job options produce the primary vertex candidate in the *Persint* event file `OUT.MboyView_xxx`, as seen in Appendix D.3.7: the line `VTX` appears seven lines before `END EVT` line.

To obtain the secondary vertices in `OUT.MboyView_xxx`, the proper job options need to be chosen when running the reconstruction programs in *ATHENA*.

### 11.2.1 Vertex display

- Start with an empty main display by using the [Clear view](#) function.
- Load the previous event again (Event 4023) with the [Reload event](#) function.
- To best illustrate this function which displays the vertex, we will first display the Inner Detector tracks:  
Open the [Set track parameters](#) window and make the selections shown in figure 78. In particular, check the “ID tracks at IP” box.<sup>1</sup>



Clear



Reload event



Set track parameters

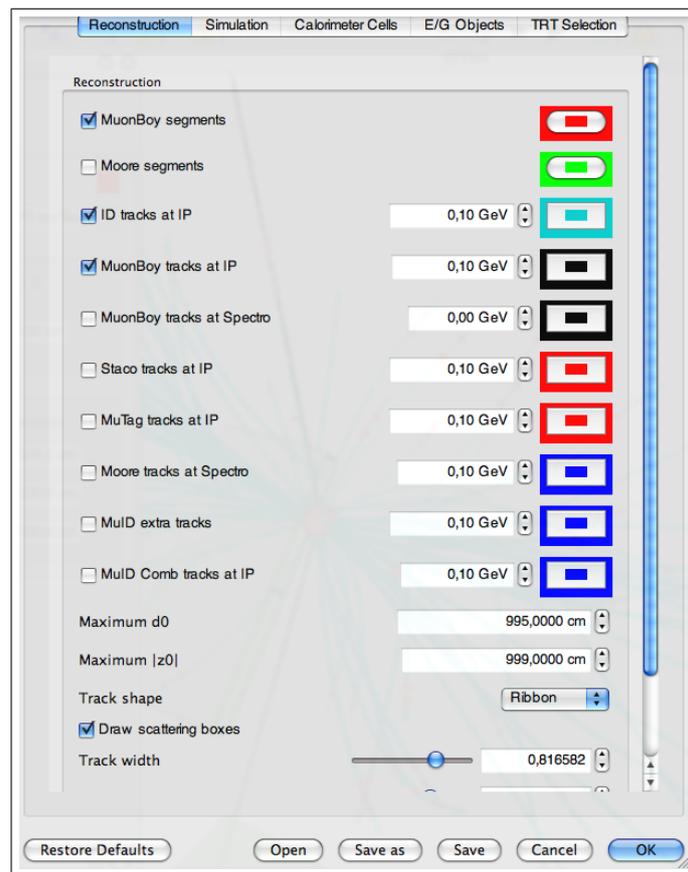


Figure 78: Selection made in the [Set track parameters](#) window to display Inner Detector tracks at the IP.

<sup>1</sup>Note that it is not necessary to display the Inner Detector tracks in order to display the primary vertex.

- Click on  to close the window.
- Validate the selections by clicking on the *Compute* icon.
- Click on the *Display vertex candidates* icon of the event tool bar.  
In the window which opens, choose the Vertex display options: check the *Primary vertex* box and choose the size and color of the sphere which represents the primary vertex.



Compute



Display vertex candidates

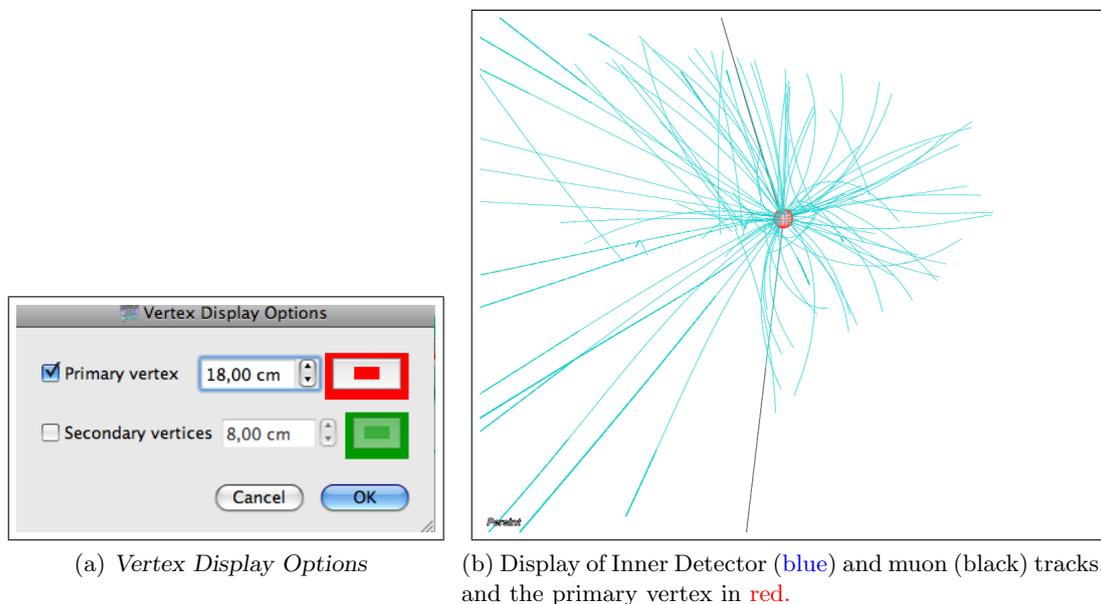



Figure 79: Display primary vertex.

- Click on  to close the window.
- Zoom on the vertex region and obtain figure 79, with the Primary vertex displayed.

### 11.2.2 Histogram of $d_0$ (primary vertex)

A histogram of the primary vertex candidates in an event is obtained by clicking on the item *Histogram of  $d_0$  distribution* in the *Events* menu (See Appendix E.5). The histogram can be saved in various formats [.png, .gif, .ps, .eps, .pdf, .C (ROOT macro)].

Figure 80: Histogram of  $d_0$ : distribution of primary vertex candidates for a 7 TeV collision event. Each Inner Detector track has an associated  $d_0$ . (Run 155678, Event 13304729)

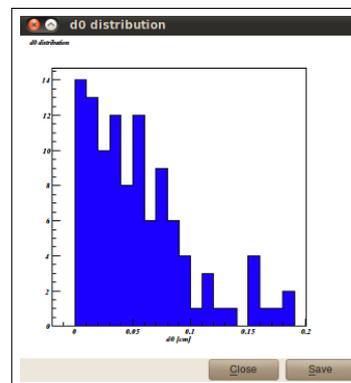

## 11.3 Calorimeter data

### 11.3.1 Display calorimeter hits

- Start with an empty main display by using the [Clear view](#) function.
- Load the previous event again (Event 4023) with the [Reload event](#) function.
- Open the [Set track parameters](#) window and choose the default values by clicking on **Restore defaults**. The selections should be those in figure 81.



Clear



Reload event



Set track parameters





(a) Selections for *Reconstruction*(b) Selections for *Calorimeter cells*(c) Selections for *Simulation*(d) Selections for *E/G objects*

Figure 81: Selection made to obtain the display of figure 82

- Click on **OK** to close the window.
- Validate the selections by clicking on the [Compute](#) icon.
- To visualize the reconstructed muon tracks, click on the [Athena reconstruction](#) icon.
- To visualize the calorimeter cells which have a signal, click on the [Hit calorimeter cells](#) icon.
- To dress the display with some detectors, make the selections in the AMDB pane of the *Selector window*, as shown in figure 82a.



Compute

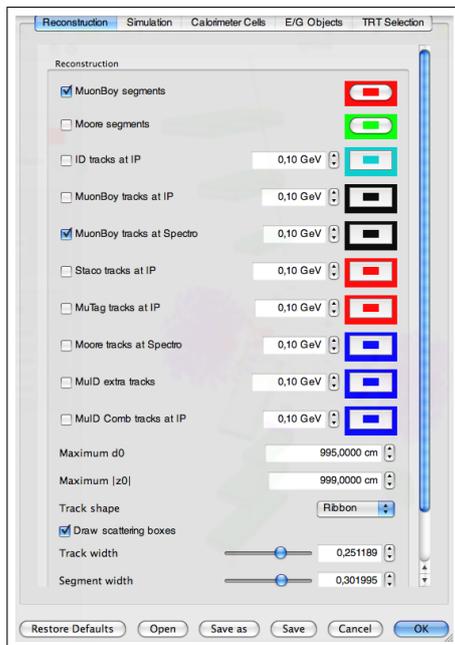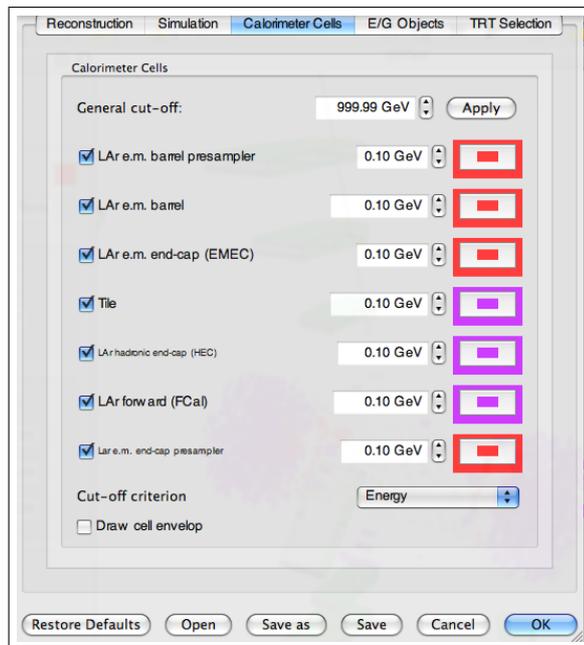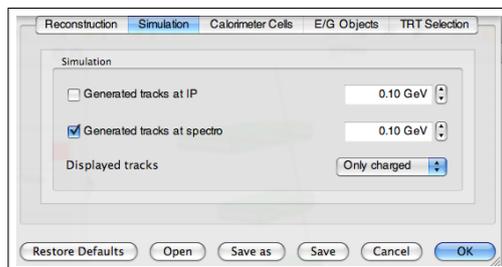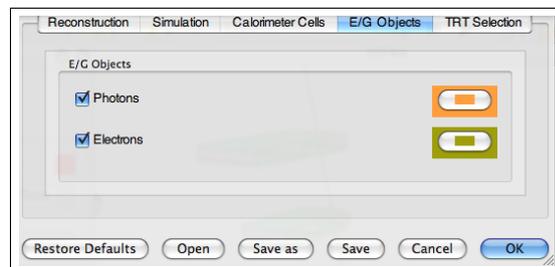

Athena reconstruction



Hit calorimeter cells

Figure 82b is the result of these these selections and shows the reconstructed muon tracks, the calorimeter cells with hits and two sectors of the calorimeters and inner detector.

This display may now be saved for future use: click on the [Save view as...](#) icon and save the file as `exercise6-Calo-low-thresholds.p2vf` in your `Persint_working_files` directory.



Save view as...

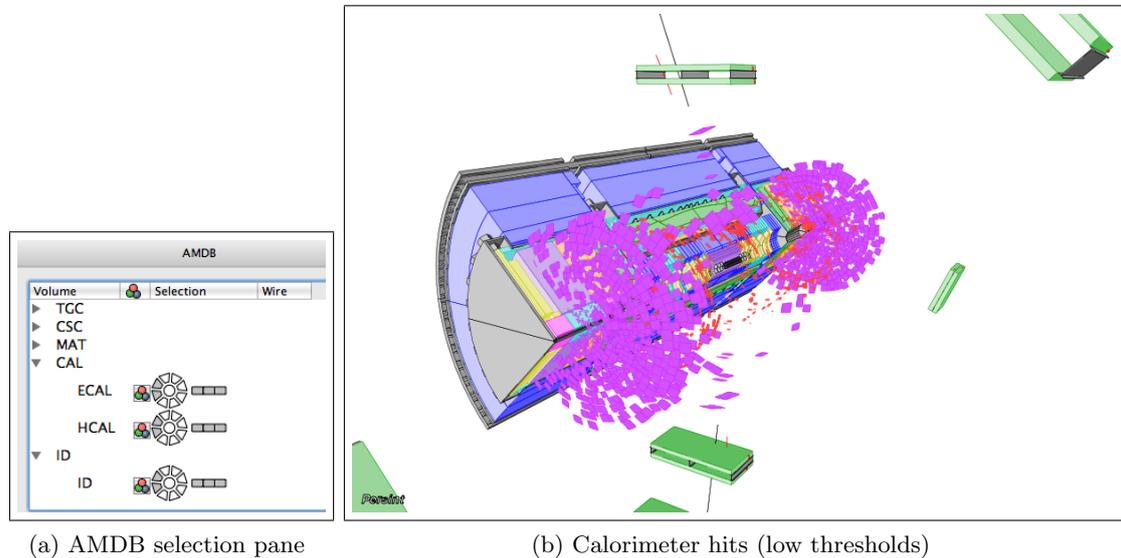


Figure 82: Display of event 4023 with two reconstructed muon tracks, and hit calorimeter cells: electromagnetic liquid argon in red, [hadronic Tile, endcap, and forward calorimeters] in purple

### 11.3.2 Display calorimeter hits with increased thresholds

#### 1. Display bare calorimeter hits

Starting with the display of figure 82b<sup>1</sup>, we now change the thresholds for displaying calorimeter hits, as they were set very low in the default settings.

Open the [Set track parameters](#) window and change the values according to figure 83.

Instead of setting the parameters by hand, you may load the prepared [Track parameter](#) file which we already used in section 6.1.2, item 3. Click on  and select `Zmumu4023.p2ts` in the `Persint-00-02-●●/example` directory. Click on  and then on the [Compute](#) icon. Activate the [Athena reconstruction](#) and [Hit calorimeter cells](#) icons to obtain the display of figure 84.



Set track parameters



Compute



Athena reconstruction



Hit calorimeter cells

Note that the dressing with calorimeter and Inner detector sectors has been removed by clicking in the center of the three wheels of figure 82a.

Note also that since the `"ID tracks at IP"` box is checked with a  $0.5 \text{ GeV}/c$  threshold (Fig. 83), Inner detector tracks are displayed as well.

<sup>1</sup>In case the work was interrupted, remember that the display was saved as a `.p2vf` file.



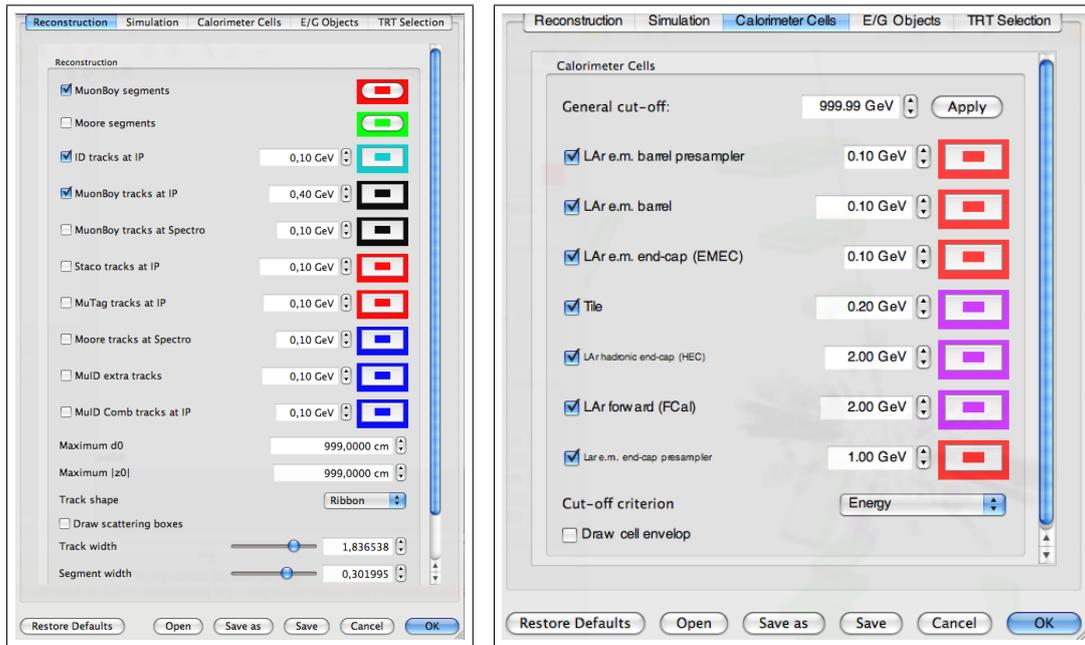
(a) Selections for *Reconstruction*(b) Selections for *Calorimeter cells*(c) Selections for *Simulation*(d) Selections for *E/G objects*

Figure 83: Selection made to obtain the display of figure 84

Figure 84: Display of event 4023 with increased thresholds for calorimeter hits: essentially 2 *GeV* in forward calorimeters. Reconstructed Inner detector tracks are also displayed

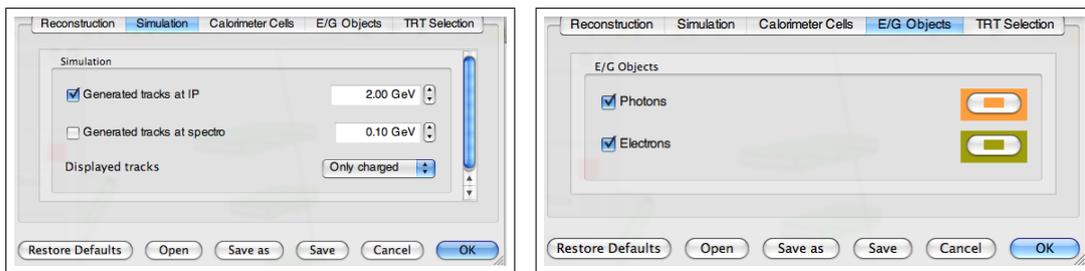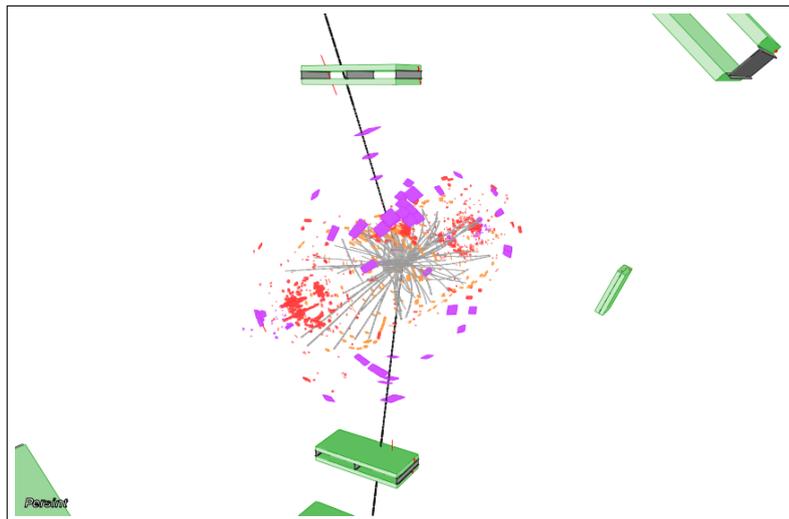

## 2. Display calorimeter hits inside cell envelopes

In the *Set track parameters* window (Calorimeter Cells), check the *Draw cell envelope* box and increase the threshold of "LAr e.m. end-cap (EMEC)" to 0.5 *GeV*, and to 2 *GeV* for "HEC" and "FCal" (Fig. 85). Save the selections as a *.p2ts* file

with the Save box of the *Set track parameters* window.


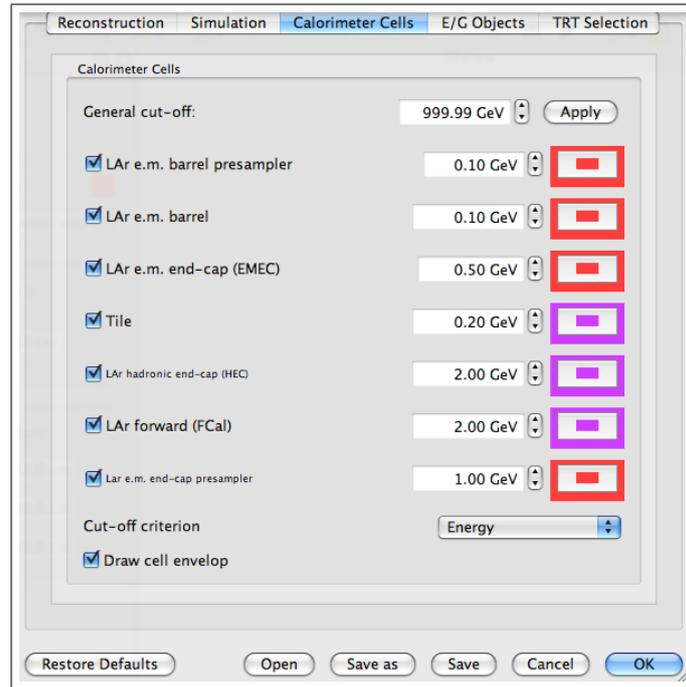


Figure 85: Selection of thresholds and cell envelopes to obtain the display of figure 86

After making an X-projection and after some zooming, we obtain the display of figure 86.

Figure 86: Display of event 4023 (X-projection) with increased thresholds for calorimeter hits shown within cell envelopes

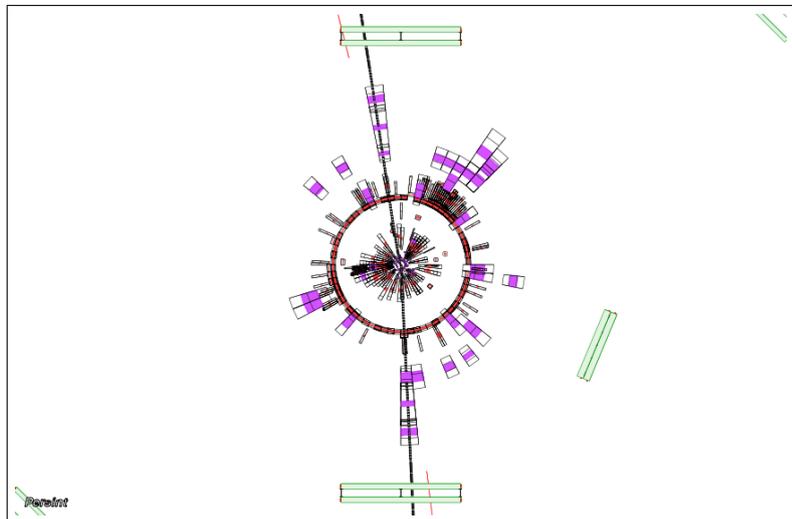

### 11.3.3 Histogram of calorimeter hits

Note that the use of the *Histogram* facility requires that the dependency for *QtROOT* be satisfied (see Appendix B).

We start again with Event 4023 of the `Out.MboyView_Zmumu4023` file.

Open the *Set track parameters* window and choose `Restore defaults`. Once the event is displayed, click on the *Histogram of hit calorimeter cells* (also available in the *Tools* menu). The histogram is displayed in figure 87 and shows the cell energy as a function of *Eta* (Pseudo rapidity  $\eta$ ) and *Phi* (Azimutal angle  $\phi$ ).



Histogram of ...

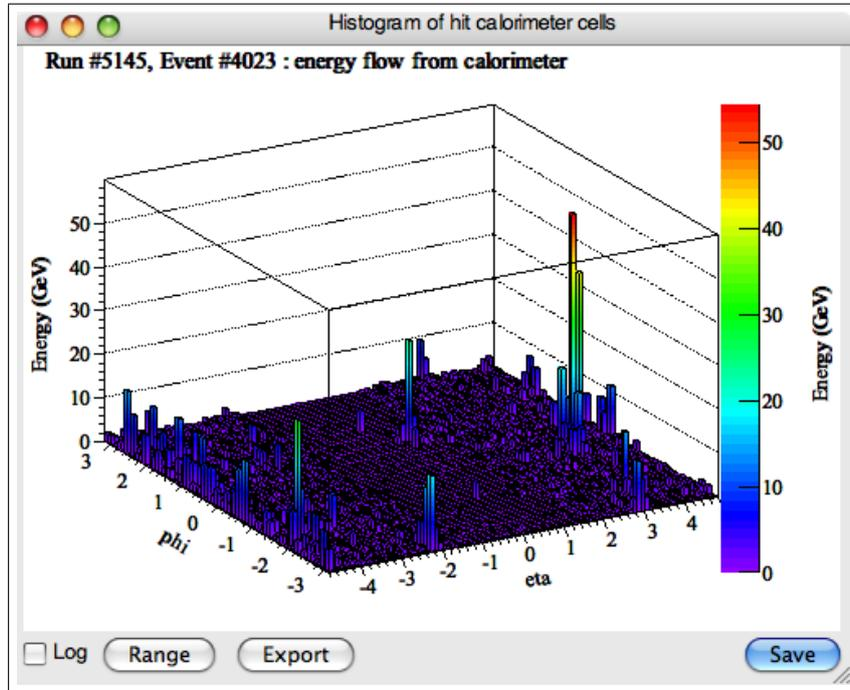


Figure 87: Histogram of hit calorimeter cells (low thresholds)

We now increase the thresholds of the cell energy in the *Set track parameters* window as shown in figure 88.

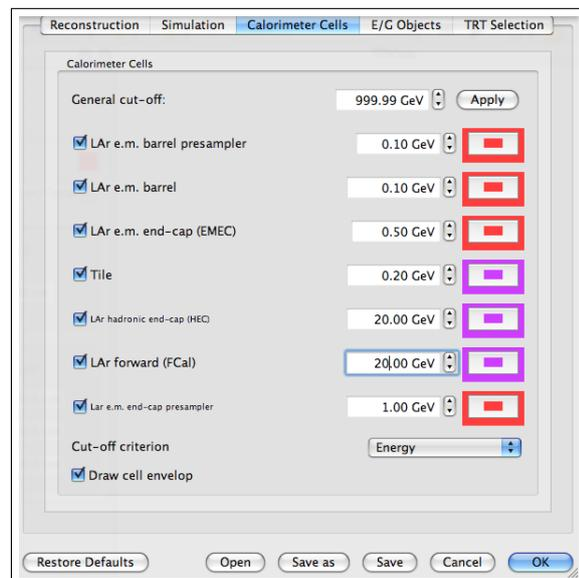


Figure 88: Selection of high thresholds in the *Set track parameters* window: energy thresholds of LAR HEC and FCal have been set to 20 GeV.

To display the modified histogram, close the *Set track parameters* window by clicking on the **OK** box and then on the *Compute* icon.



Compute

Finally, clicking on the *Histogram of hit calorimeter cells* icon two times, displays the modified histogram (Fig. 89).



Histogram of ...


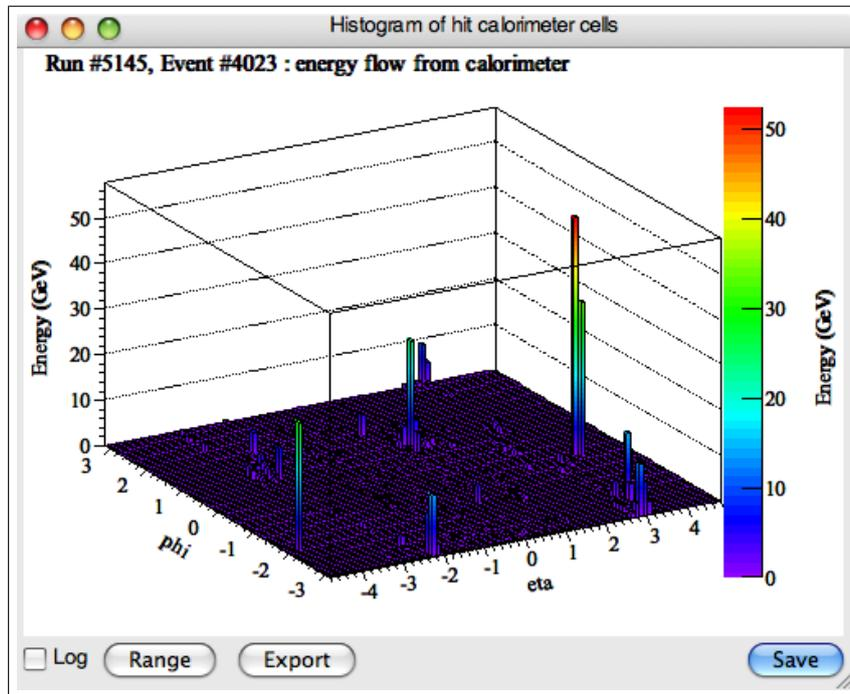


Figure 89: Histogram of hit calorimeter cells (high thresholds)

Note that calorimeter cell thresholds may be set according to *Energy* or *Transverse energy*. The selection is made via the *Cut-off criterion* box in the *Set track parameters* window.



The histogram can be resized or displaced at will by using the pop-up window obtained by **right-clicking** on the title bar of the histogram window.

With *Maximize*, the histogram will occupy the entire area of the Main display.

With *Minimize*, the histogram is reduced to a "tab" at the bottom of the display, and can be retrieved with *Restore*.




Aspect of histogram

Just as with previous maps (9.7.3, 9.8, and 9.9), the histogram can be exported as an ASCII file (.dat format) with the **Export** button.

The histogram can be saved by clicking on the **Save** box. A number of formats are proposed, as shown in figure 90.

Figure 90:

File formats proposed when saving the *Histogram of hit calorimeter cells*

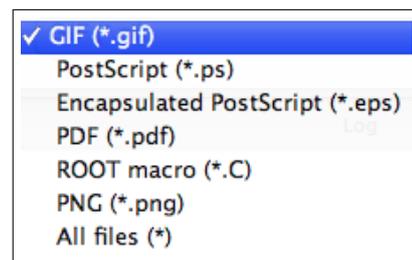


Note that, when scanning events (see section 10.7), the histogram is automatically refreshed when a new event is displayed.

## 12 Persint: a versatile tool

### 12.1 An analysis tool

Many features of *Persint* can be used for illustrating the properties of the muon spectrometer. For example, the *Generate muon tracks* function is a convenient tool for studying the behavior of muons in the spectrometer. In the early collision data of 2009, a charge asymmetry of low energy muons was spotted in the forward regions.

Figure 91: Scatter plot showing the  $\mu^-/\mu^+$  asymmetry:  $\mu^-$  are more numerous in the  $\eta > 0$  region, whereas  $\mu^+$  are more numerous in the  $\eta < 0$  region. This is true for 900 GeV collision data and Monte Carlo events.

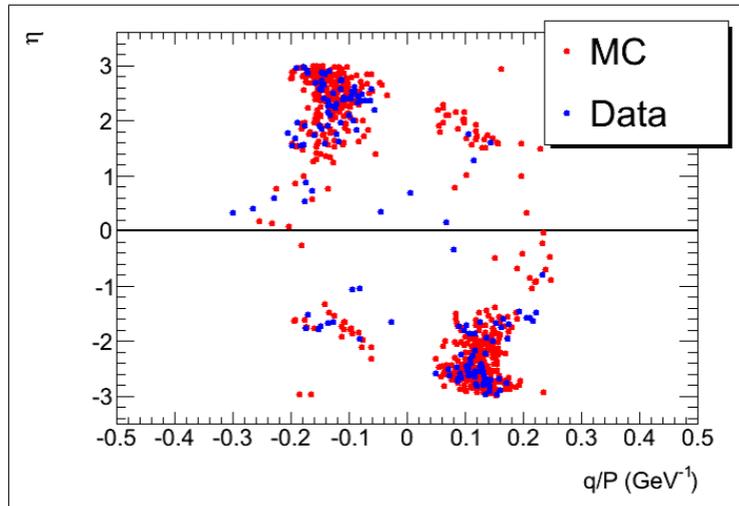

The effect has its explanation in a rather subtle acceptance property of the spectrometer for positively and negatively charged muons. *Persint* was used to illustrate this behavior [8].


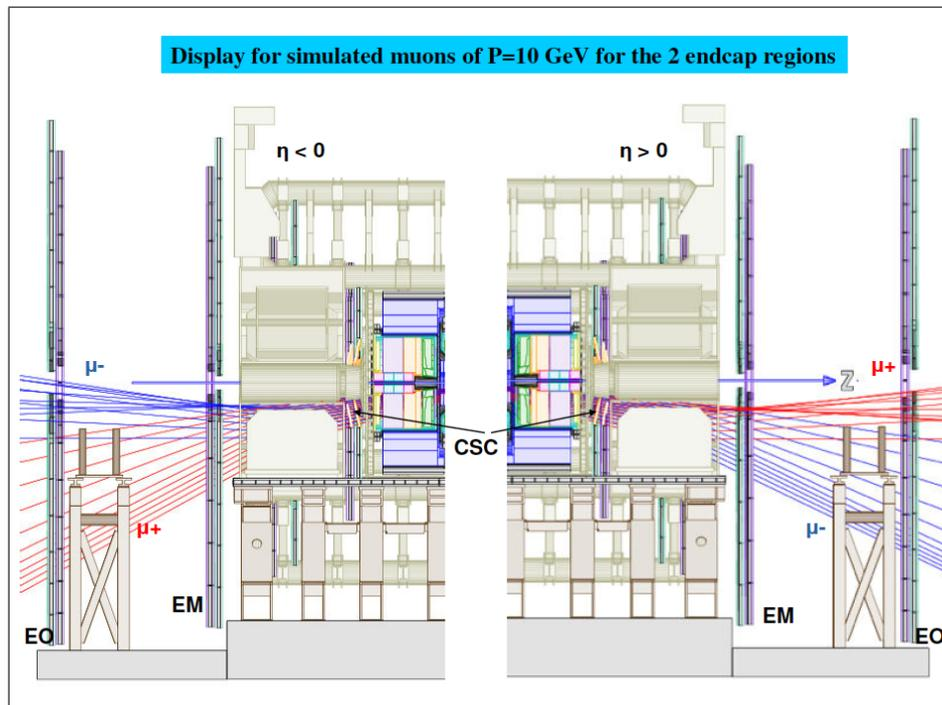


Figure 92: Illustration of the charge asymmetry of forward low energy muons in 900 GeV collision data. The intricate acceptance effect is illustrated with generated positive (red) and negative (blue) muons in the forward regions.

The muons of figure 92 have been generated with the parameters shown in the *Generate muon tracks* window of figure 93:  $P = 10 \text{ GeV}$  and  $|\eta| \in [2.5, 3.0]$

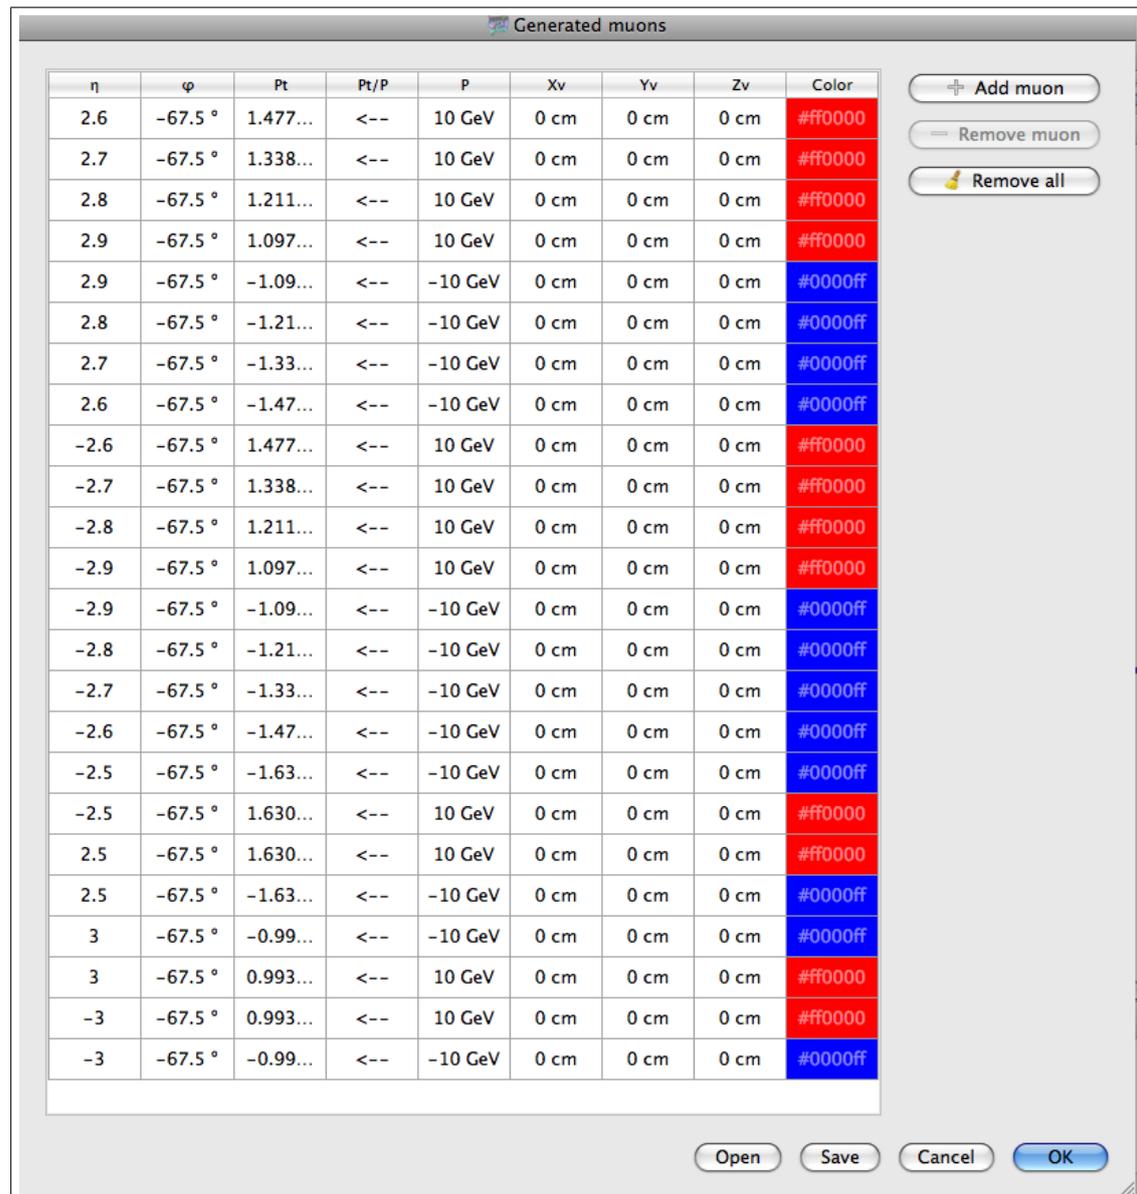

The screenshot shows a window titled "Generated muons" containing a table with 9 columns:  $\eta$ ,  $\varphi$ , Pt, Pt/P, P, Xv, Yv, Zv, and Color. The table lists 20 muon tracks. The first 10 tracks have  $\eta$  values from 2.6 to 2.9 and Pt values from 1.477 to 1.097. The next 10 tracks have  $\eta$  values from -2.6 to -2.9 and Pt values from 1.477 to 1.097. The P column shows 10 GeV for the first 10 tracks and -10 GeV for the last 10 tracks. The Pt/P column shows <-- for all tracks. The Xv, Yv, and Zv columns all show 0 cm. The Color column shows #ff0000 (red) for the first 10 tracks and #0000ff (blue) for the last 10 tracks. To the right of the table are three buttons: "+ Add muon", "- Remove muon", and "Remove all". At the bottom of the window are four buttons: "Open", "Save", "Cancel", and "OK".

$\eta$	$\varphi$	Pt	Pt/P	P	Xv	Yv	Zv	Color
2.6	-67.5 °	1.477...	<--	10 GeV	0 cm	0 cm	0 cm	#ff0000
2.7	-67.5 °	1.338...	<--	10 GeV	0 cm	0 cm	0 cm	#ff0000
2.8	-67.5 °	1.211...	<--	10 GeV	0 cm	0 cm	0 cm	#ff0000
2.9	-67.5 °	1.097...	<--	10 GeV	0 cm	0 cm	0 cm	#ff0000
2.9	-67.5 °	-1.09...	<--	-10 GeV	0 cm	0 cm	0 cm	#0000ff
2.8	-67.5 °	-1.21...	<--	-10 GeV	0 cm	0 cm	0 cm	#0000ff
2.7	-67.5 °	-1.33...	<--	-10 GeV	0 cm	0 cm	0 cm	#0000ff
2.6	-67.5 °	-1.47...	<--	-10 GeV	0 cm	0 cm	0 cm	#0000ff
-2.6	-67.5 °	1.477...	<--	10 GeV	0 cm	0 cm	0 cm	#ff0000
-2.7	-67.5 °	1.338...	<--	10 GeV	0 cm	0 cm	0 cm	#ff0000
-2.8	-67.5 °	1.211...	<--	10 GeV	0 cm	0 cm	0 cm	#ff0000
-2.9	-67.5 °	1.097...	<--	10 GeV	0 cm	0 cm	0 cm	#ff0000
-2.9	-67.5 °	-1.09...	<--	-10 GeV	0 cm	0 cm	0 cm	#0000ff
-2.8	-67.5 °	-1.21...	<--	-10 GeV	0 cm	0 cm	0 cm	#0000ff
-2.7	-67.5 °	-1.33...	<--	-10 GeV	0 cm	0 cm	0 cm	#0000ff
-2.6	-67.5 °	-1.47...	<--	-10 GeV	0 cm	0 cm	0 cm	#0000ff
-2.5	-67.5 °	-1.63...	<--	-10 GeV	0 cm	0 cm	0 cm	#0000ff
-2.5	-67.5 °	1.630...	<--	10 GeV	0 cm	0 cm	0 cm	#ff0000
2.5	-67.5 °	1.630...	<--	10 GeV	0 cm	0 cm	0 cm	#ff0000
2.5	-67.5 °	-1.63...	<--	-10 GeV	0 cm	0 cm	0 cm	#0000ff
3	-67.5 °	-0.99...	<--	-10 GeV	0 cm	0 cm	0 cm	#0000ff
3	-67.5 °	0.993...	<--	10 GeV	0 cm	0 cm	0 cm	#ff0000
-3	-67.5 °	0.993...	<--	10 GeV	0 cm	0 cm	0 cm	#ff0000
-3	-67.5 °	-0.99...	<--	-10 GeV	0 cm	0 cm	0 cm	#0000ff

Figure 93: List of muon tracks generated in figure 92. Muons of momentum  $P = 10 \text{ GeV}$  have been generated at the IP and propagated through the calorimeters, using the *Generate muon tracks* function (section 7.1)



### 13 Selected event displays

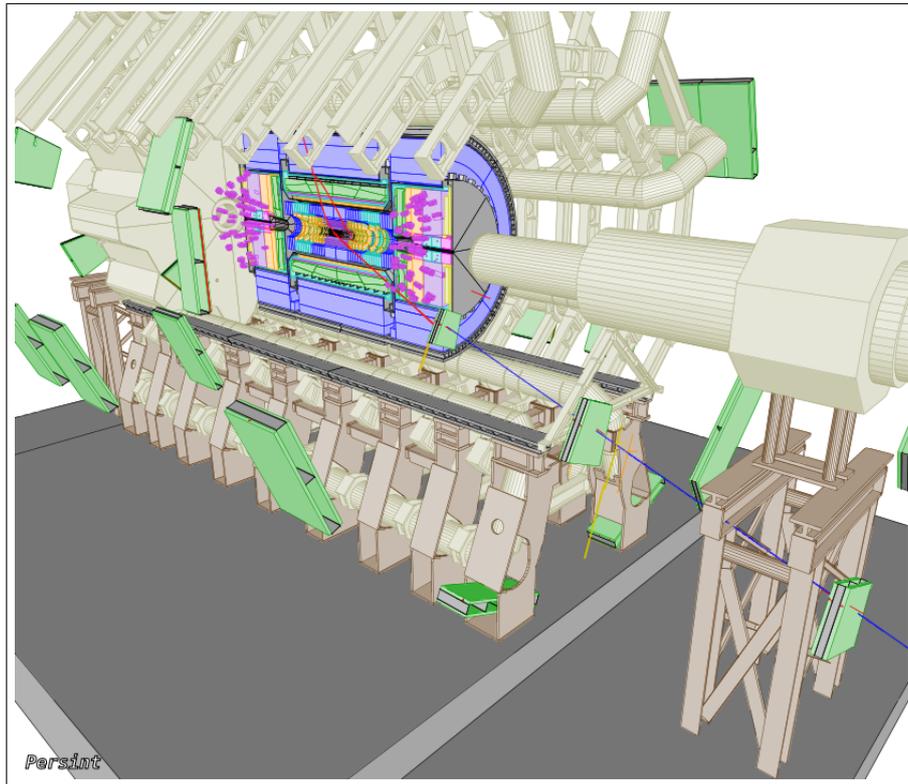


Figure 95: *Min Bias* event in 900 GeV data: Run 141749, Event 113661. (December, 2009)

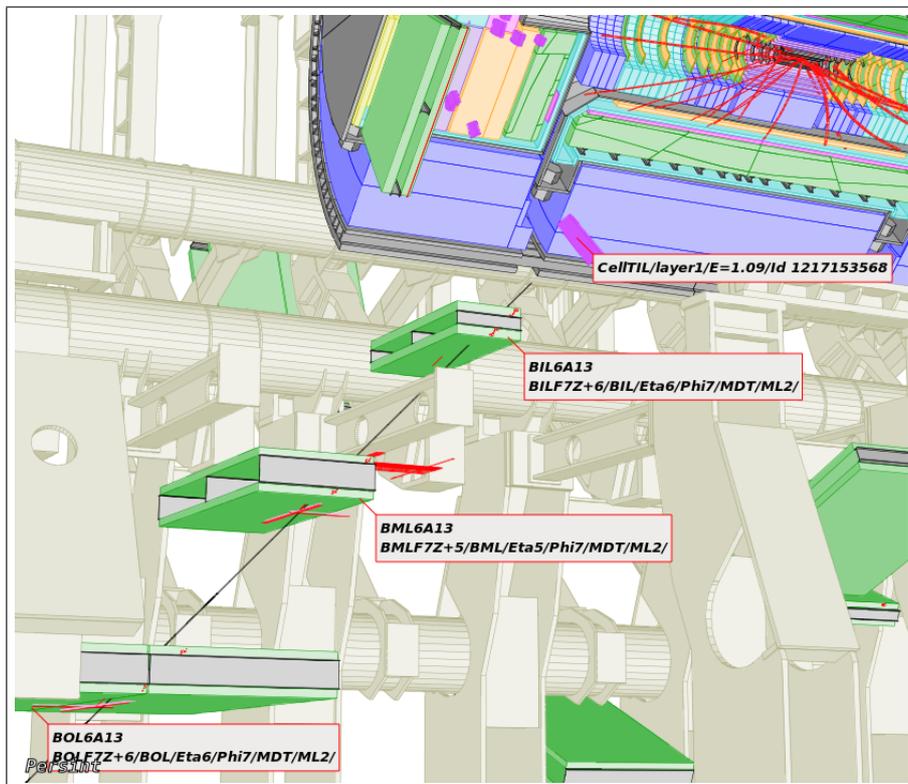


Figure 96: *Min Bias* event in 900 GeV data: Run 141749, Event 171059. (December, 2009)

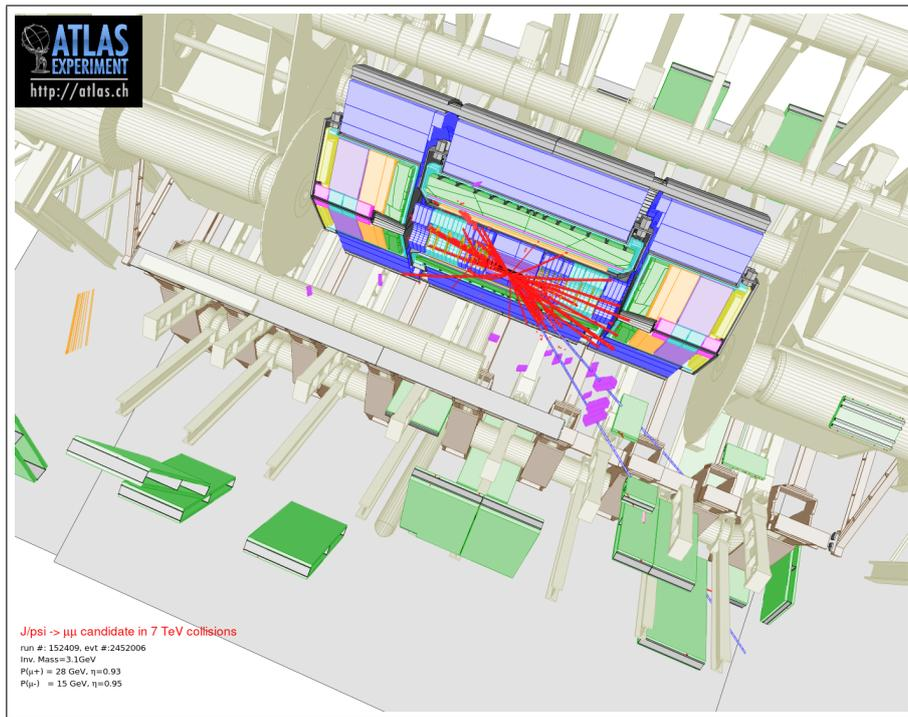


Figure 97: A  $J/\Psi \rightarrow \mu\mu$  candidate in the 7 TeV collision data of 2010.

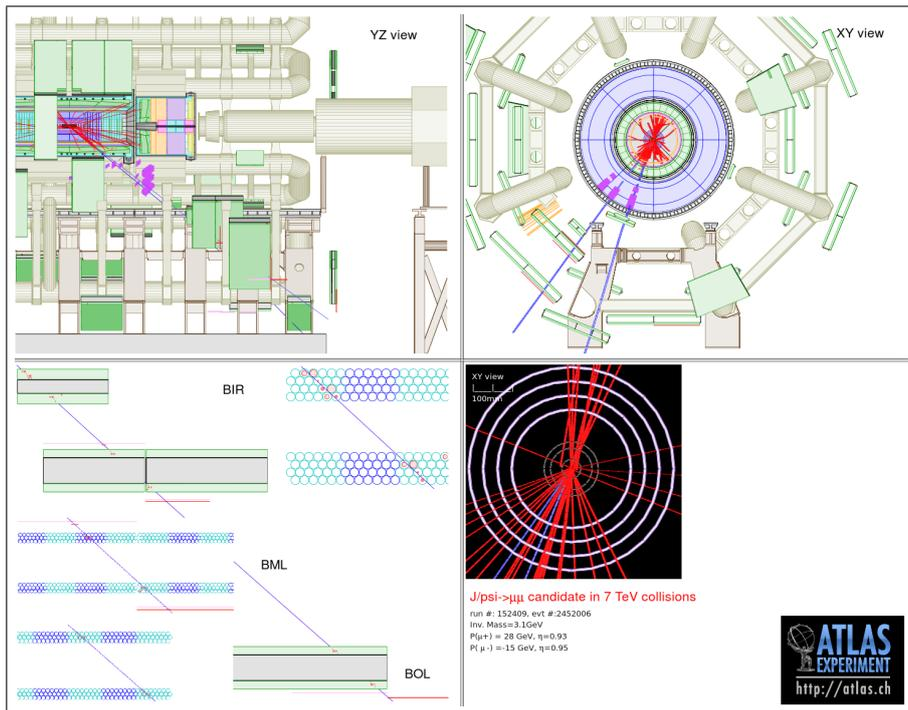


Figure 98: The same  $J/\Psi \rightarrow \mu\mu$ : in 2D projections and details of track reconstruction.

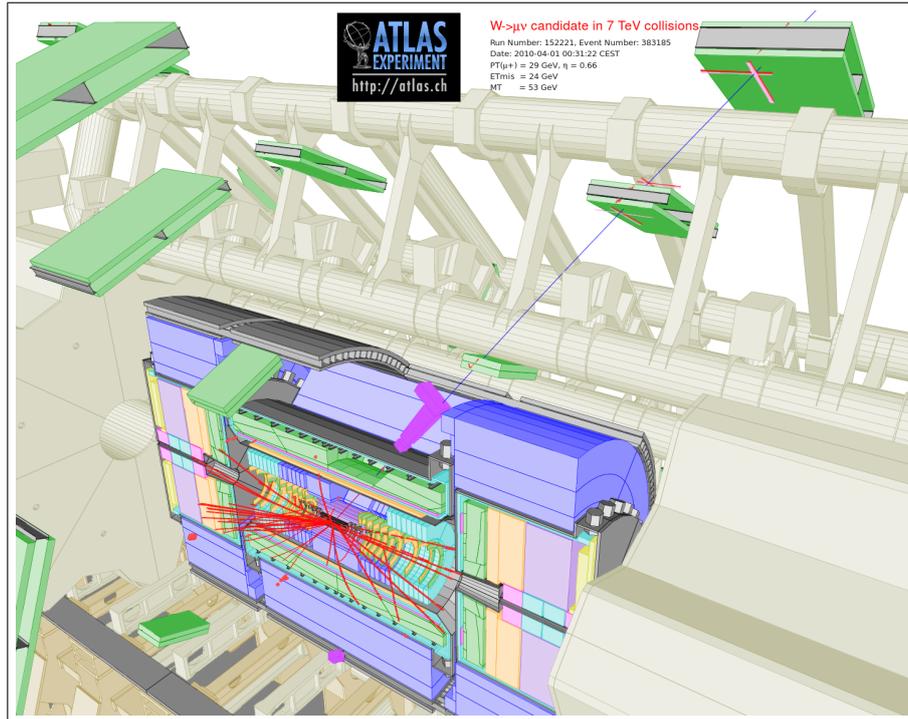


Figure 99: A  $W \rightarrow \mu\nu$  candidate in the 7 TeV collision data of 2010.

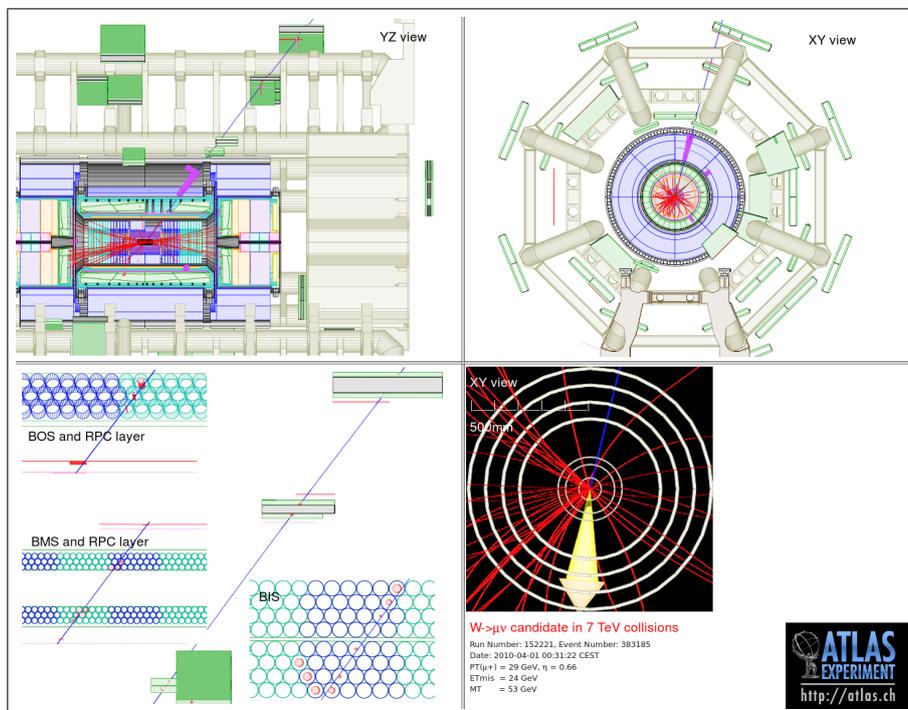
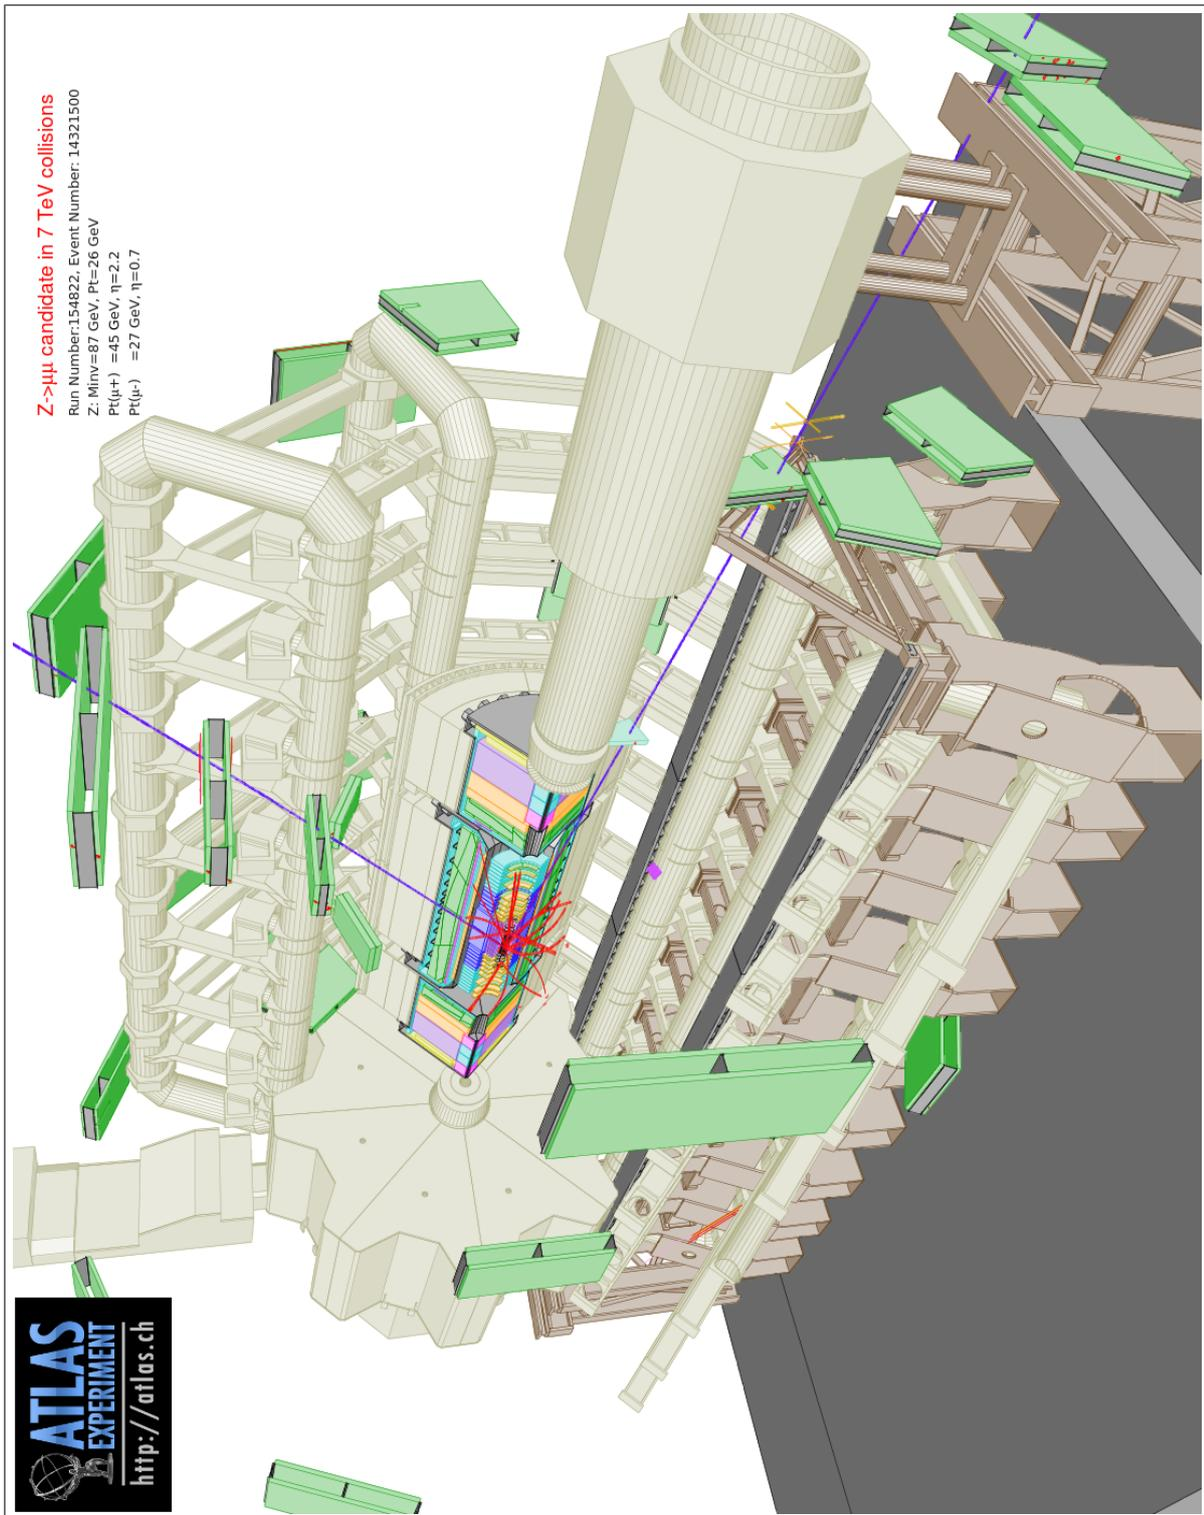


Figure 100: The same  $W \rightarrow \mu\nu$  candidate: in 2D projections and details of track reconstruction.

Figure 101: A  $Z \rightarrow \mu\mu$  candidate in the 7 TeV collision data of 2010.

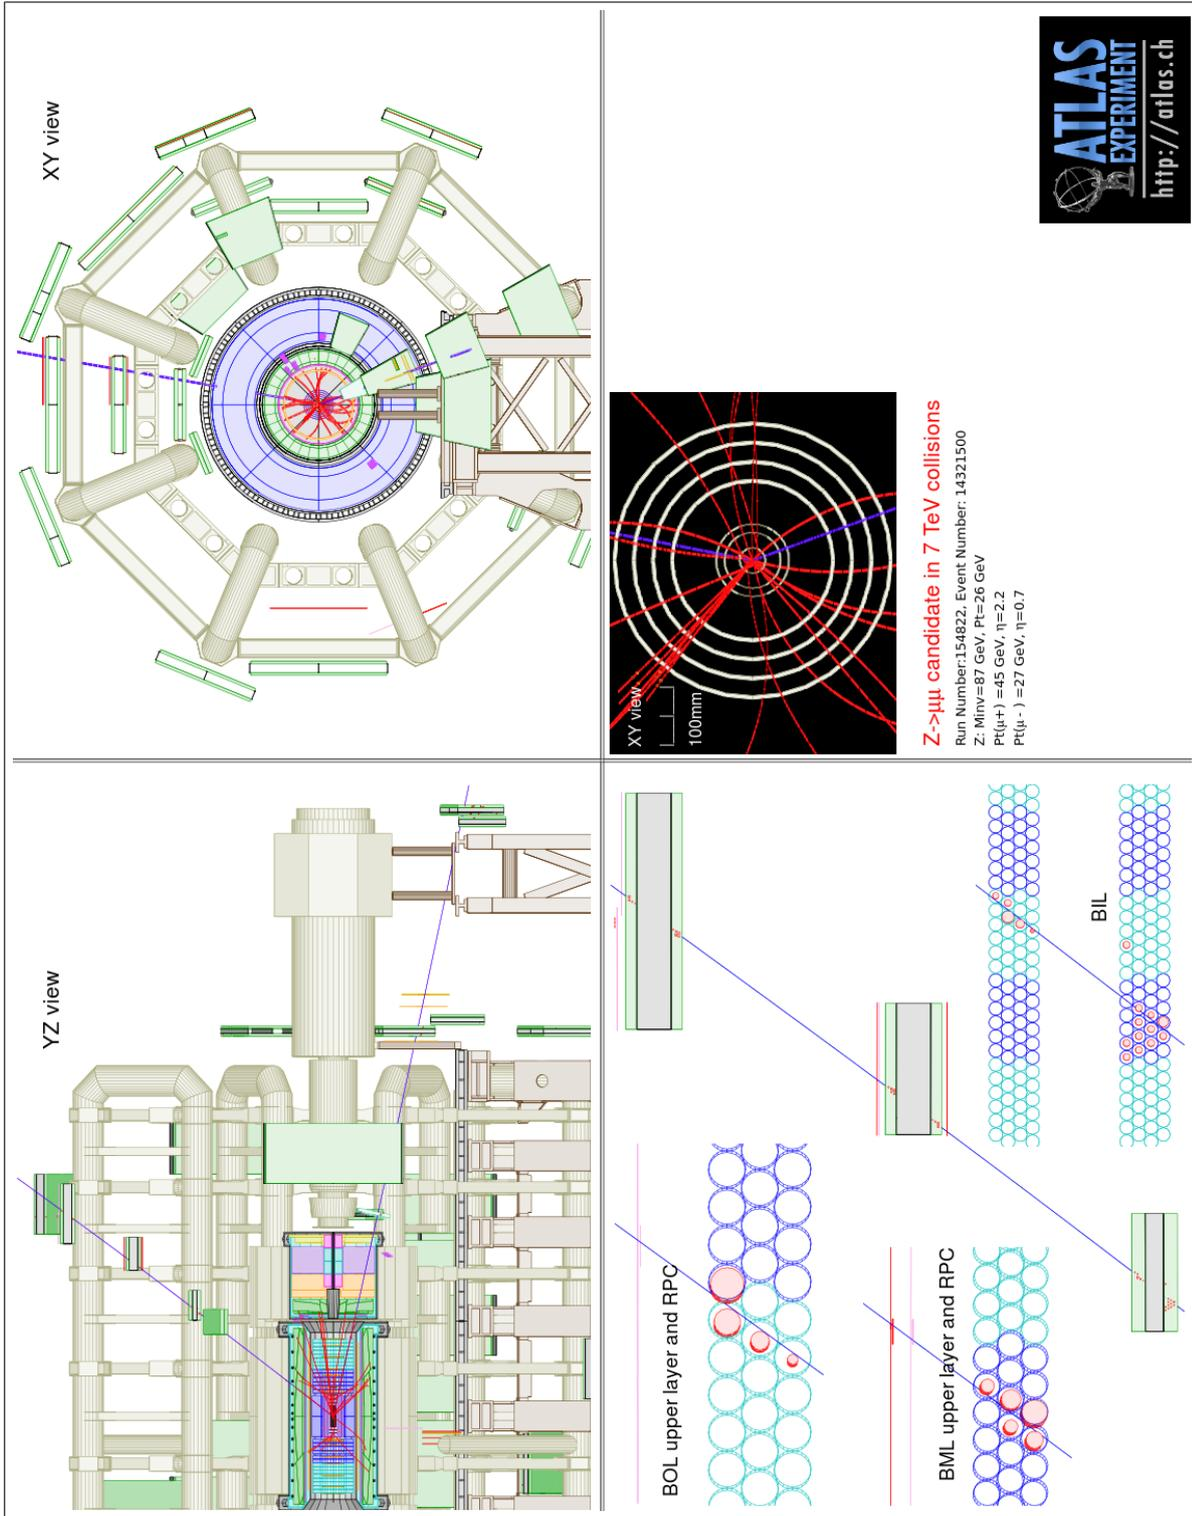


Figure 102: The same  $Z \rightarrow \mu\mu$ : in 2D projections and details of track reconstruction.

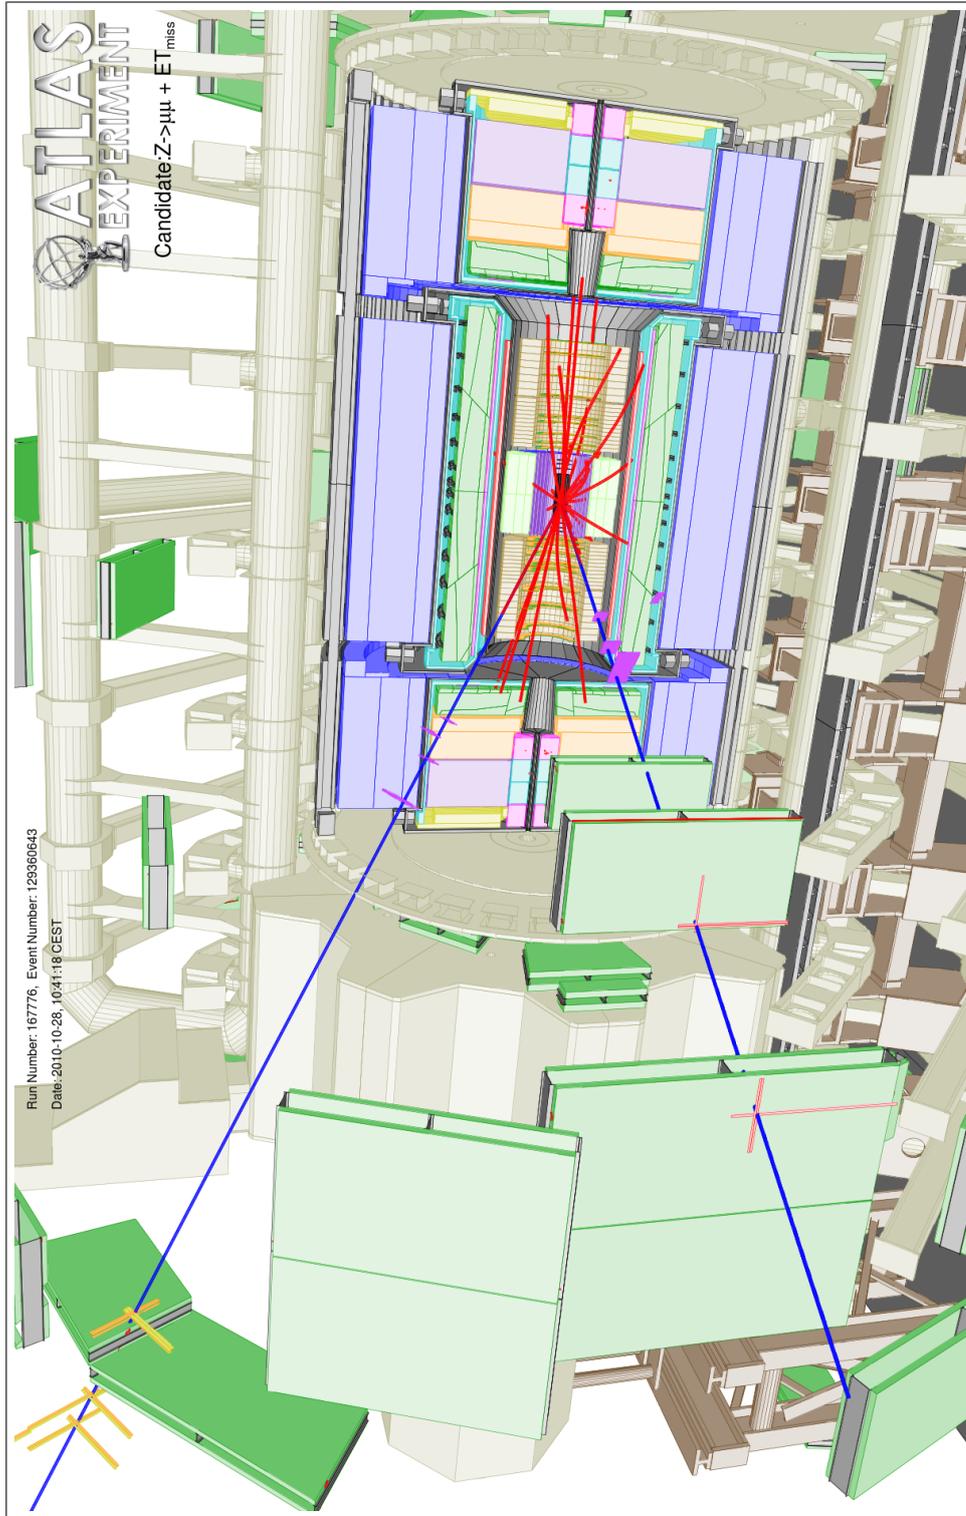
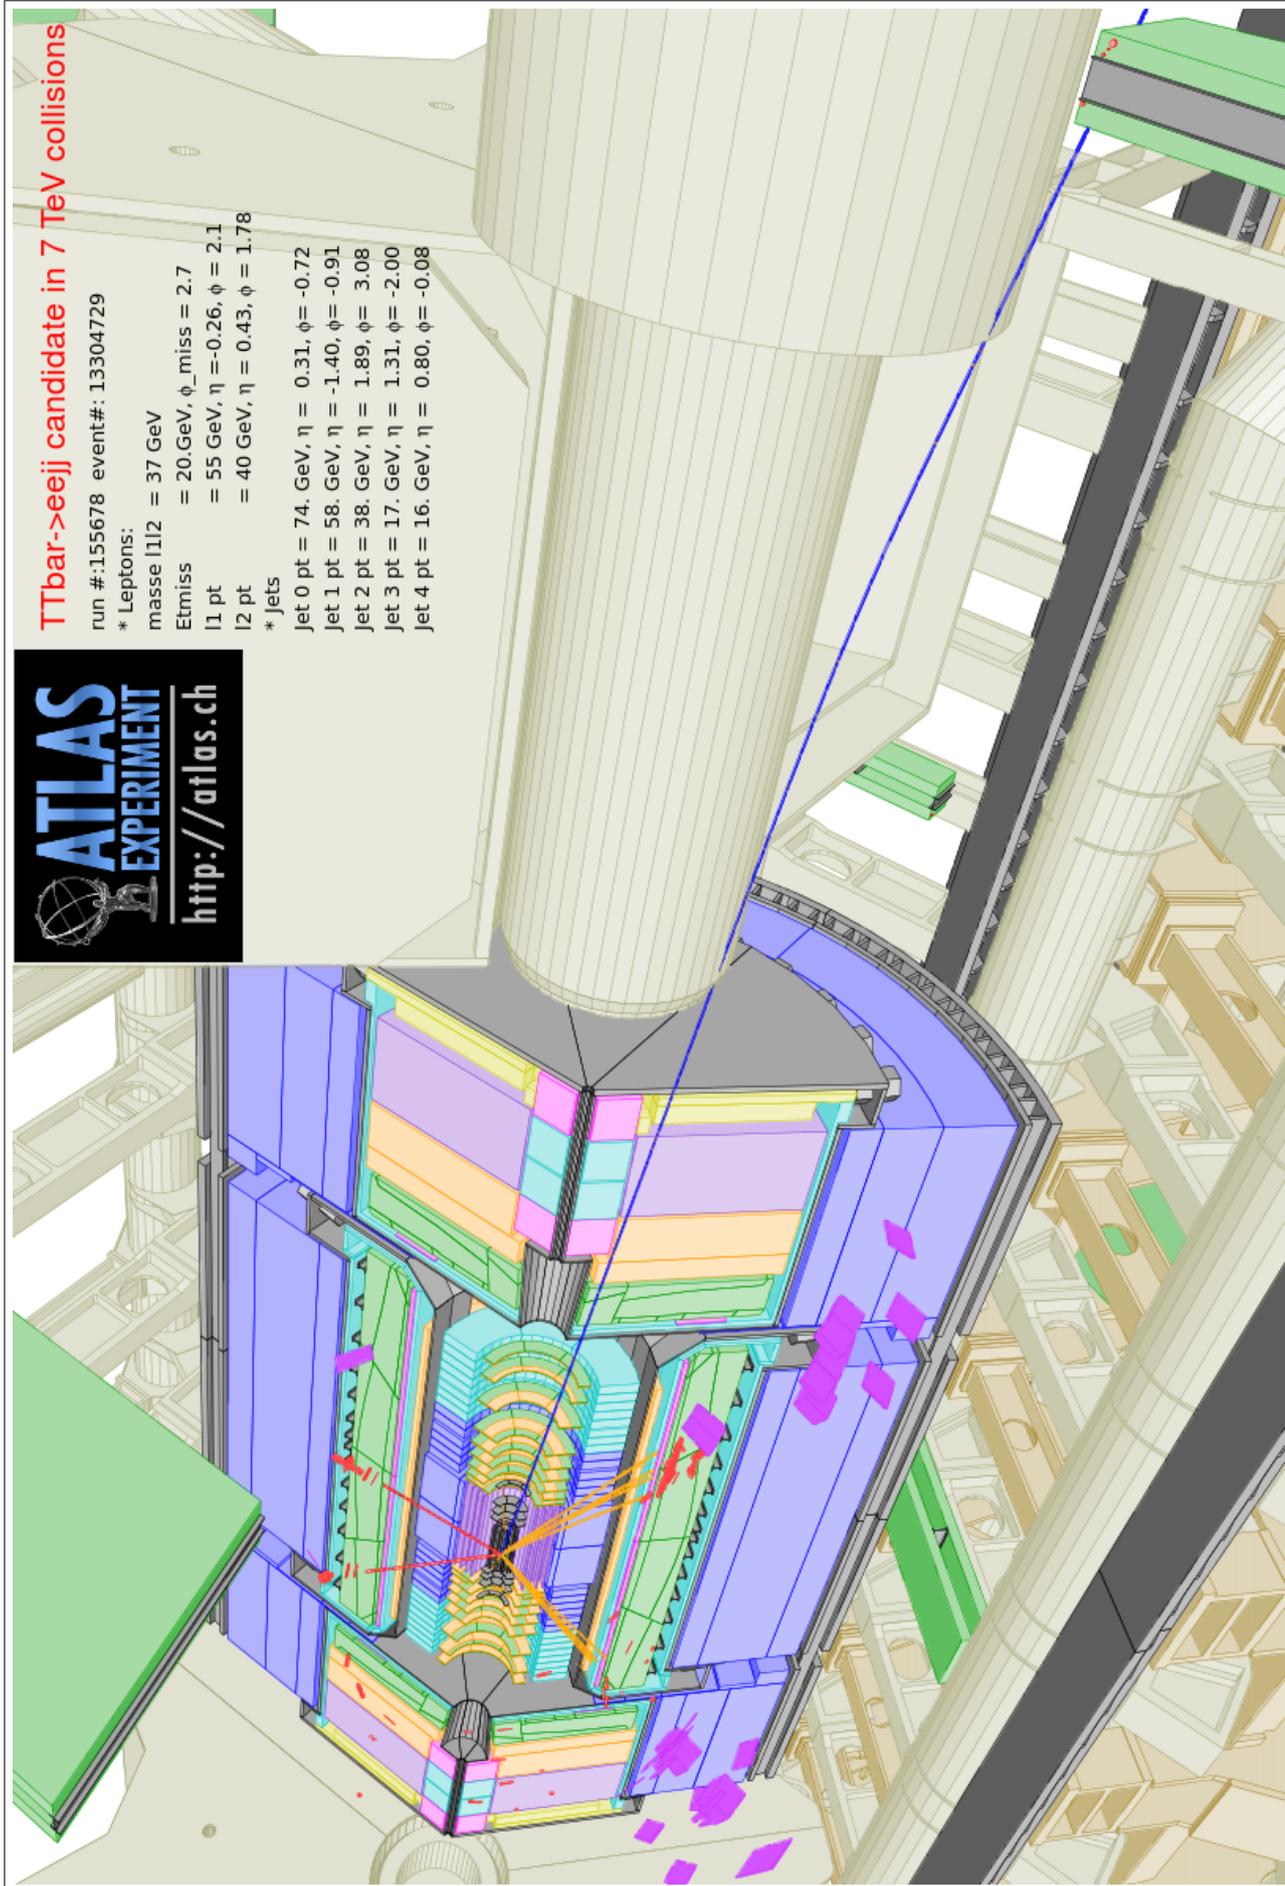


Figure 103: Candidate event  $Z \rightarrow \mu\mu + E_{T,miss}$ . Run # 167776; Event # 129360643. (28-10-2010)

Figure 104:  $t\bar{t} \rightarrow eejj$  Run# 155678; Event# 13304729.

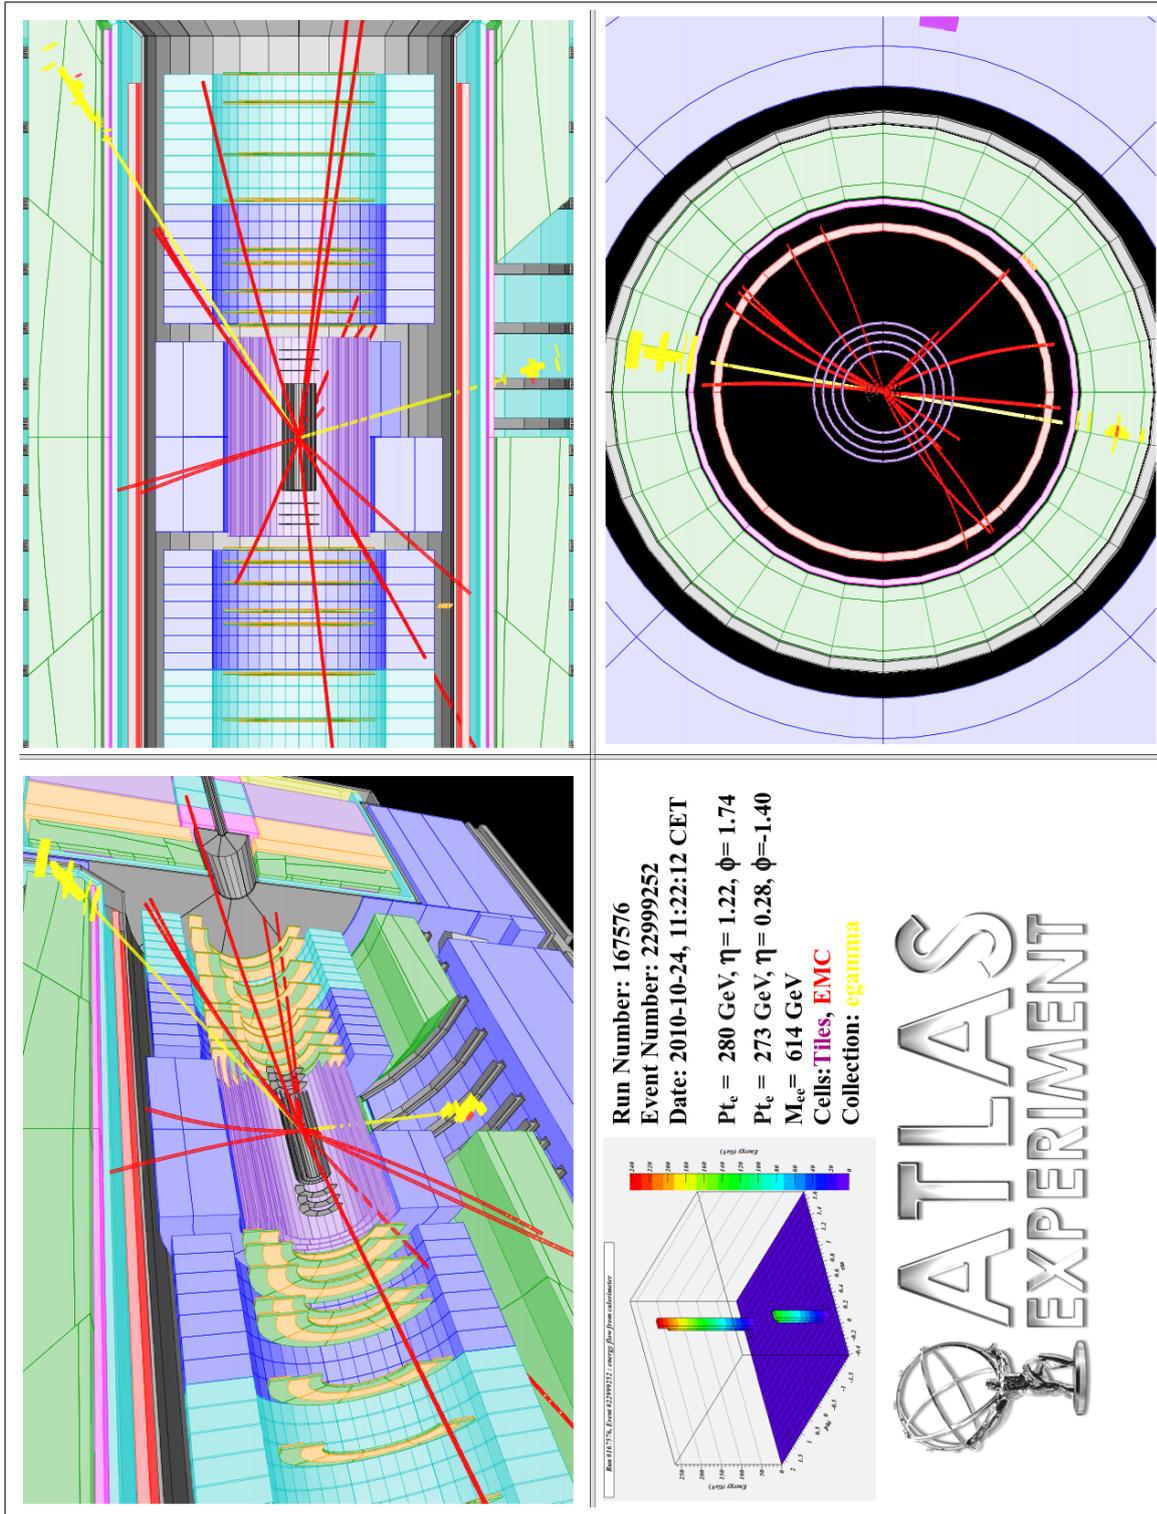


Figure 105: Candidate event  $Z' \rightarrow ee$ . Run # 167576; Event # 22999252.

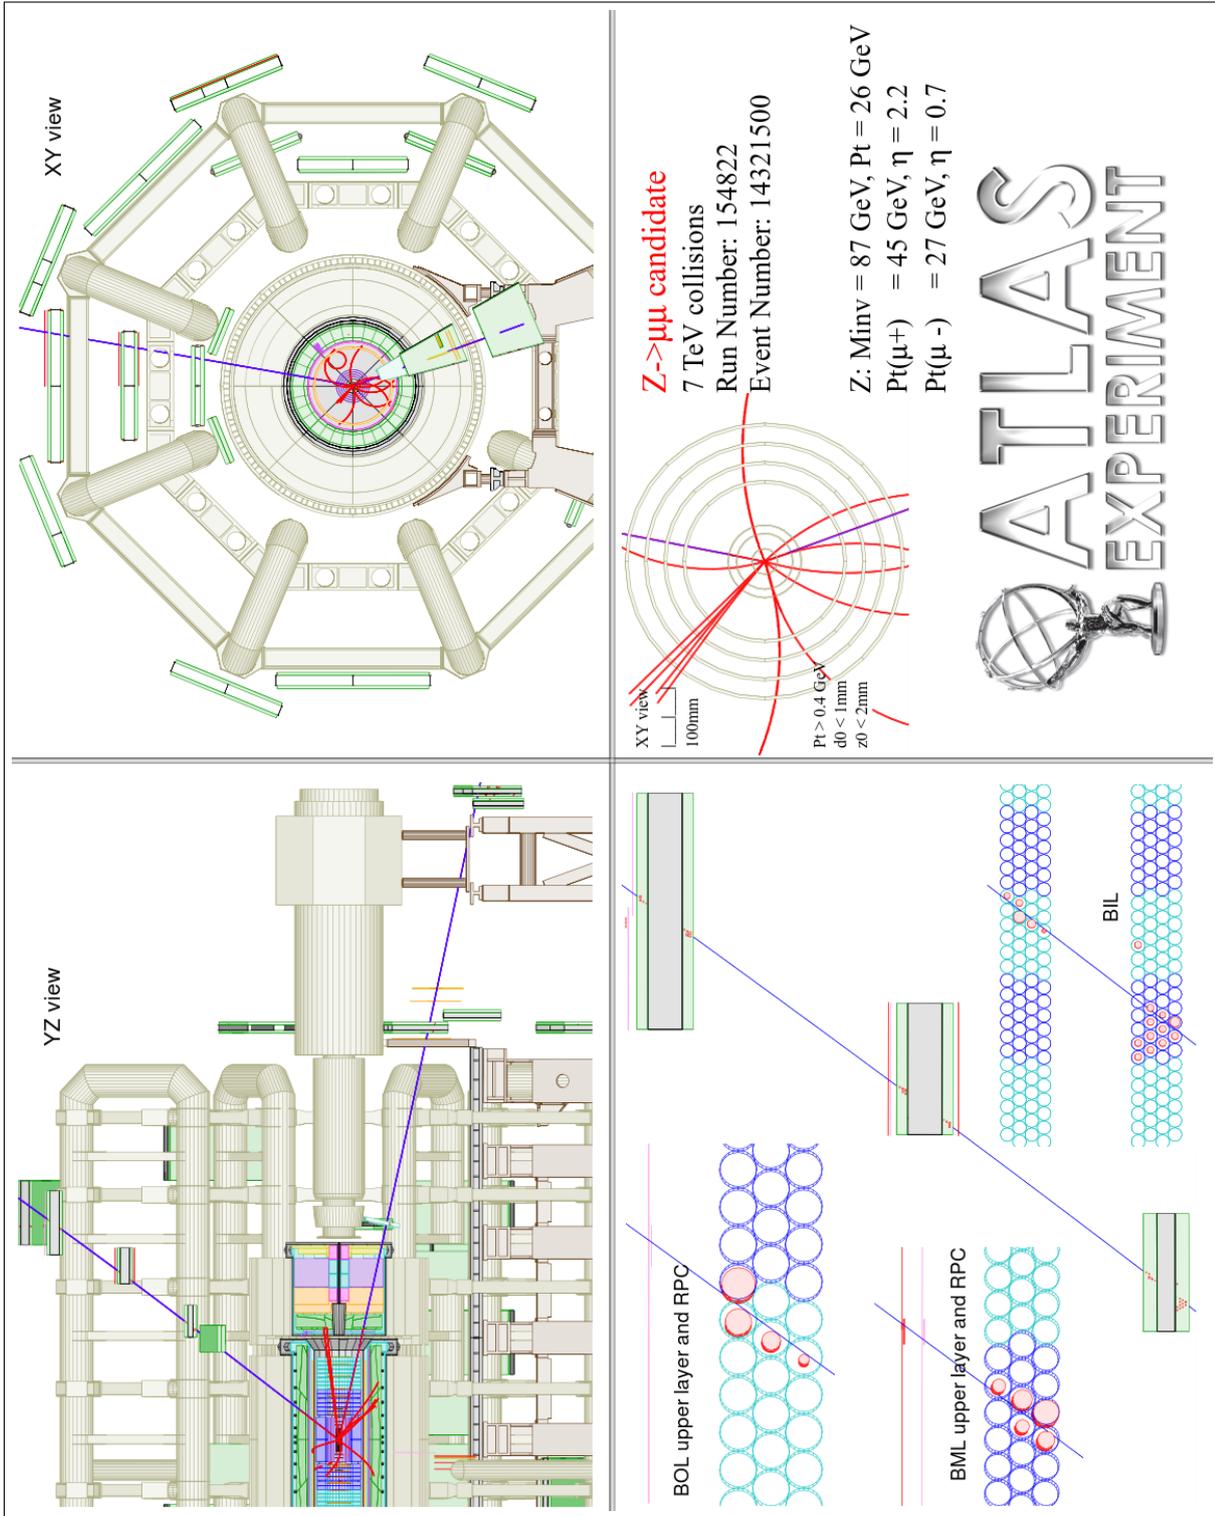


Figure 106: Candidate event  $Z \rightarrow \mu\mu$ . Run # 154822; Event # 14121500.

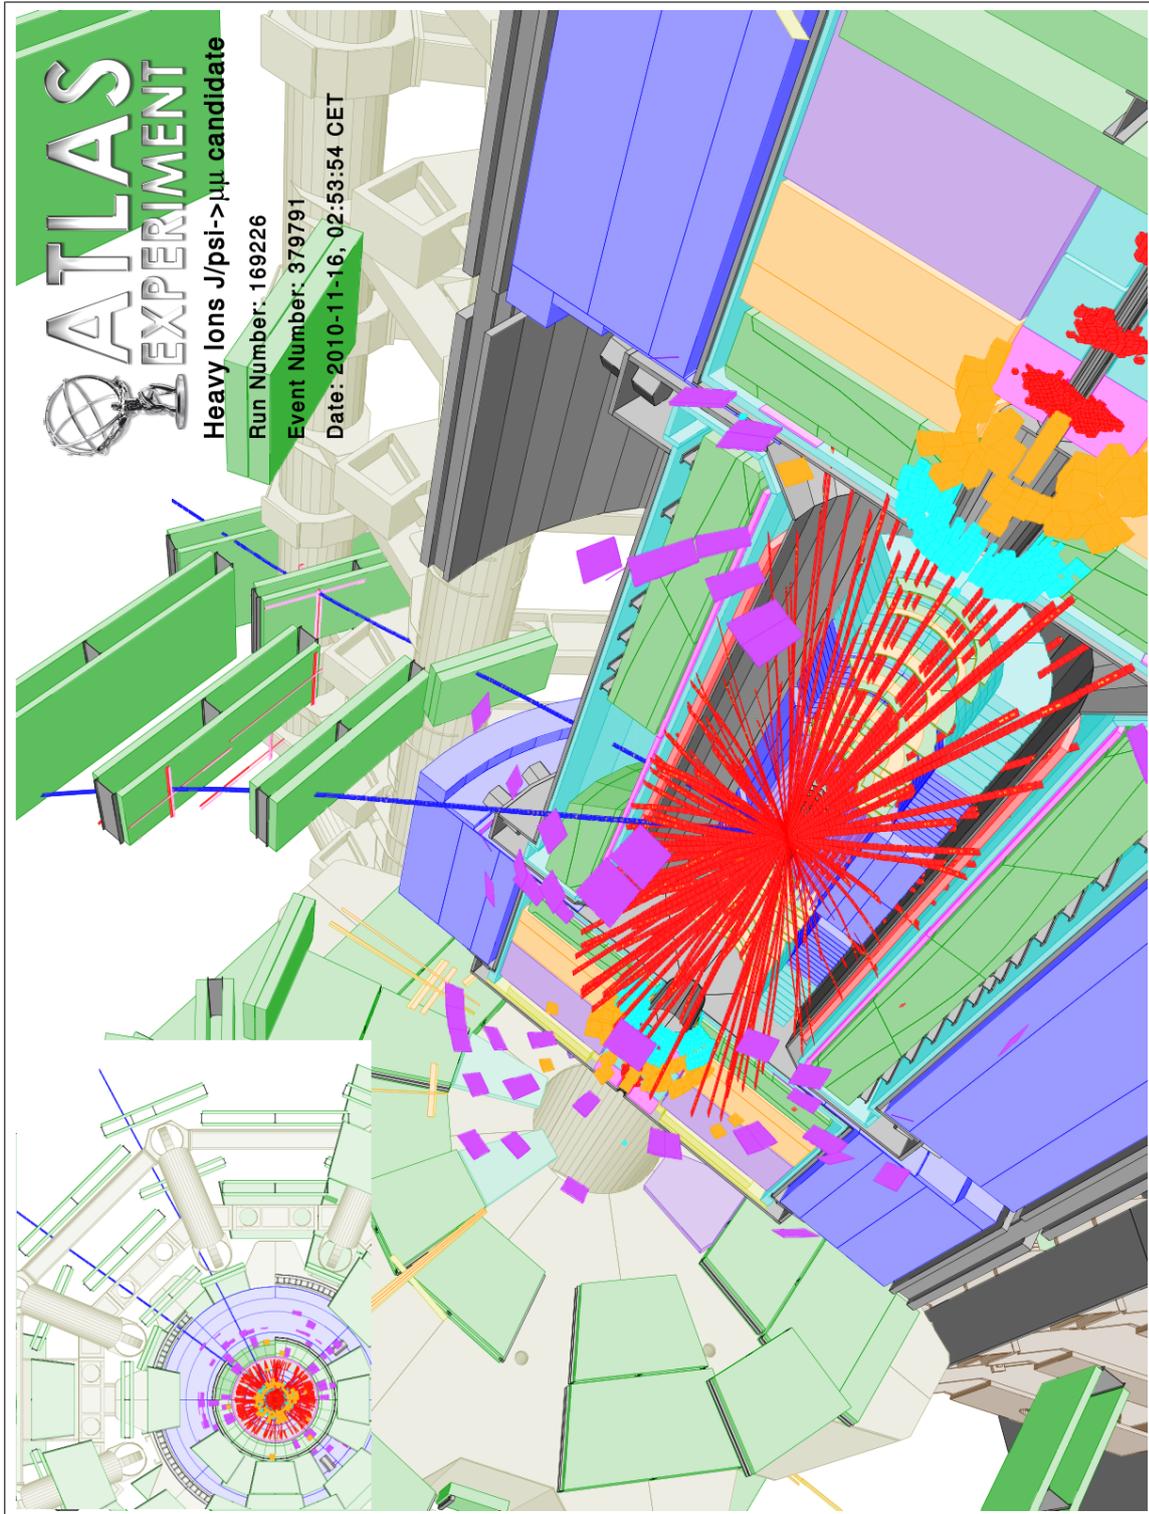


Figure 107: Candidate  $J/\psi \rightarrow \mu\mu$  in HI collisions. Run # 169226; Event # 379791.

## 14 Useful hints

### 1. *Compute*

The effect of the *Compute* icon is to make all computations necessary to display an event, after changes have been made to the parameters.

Actioning *Compute* is not always necessary:

For example, after closing the *Set track parameters* window by clicking on , it is necessary to validate further with *Compute*. On the contrary, after closing the *Generate muon tracks* window with , it is not necessary to use *Compute*.

There is no general rule for using the *Compute* action. When in doubt, it is always prudent to use it.

### 2. Interrupt/resume your work

It is important to realize that it is possible to interrupt and resume your work at any time. In case *Persint* cannot be left idle during the pause, you can save the files used by the program as specific ASCII files. The relevant files (described in Appendix D) are:

- The `.p2vf` file

It contains everything necessary<sup>1</sup> for displaying the current view of the *Main display* (see section 6.4, item 1). The file is saved with the *Save view as...* icon, and retrieved with the *Open view* icon.



Save view as...




Open view

- The `.p2gm` file

This file contains the parameters of the tracks generated with the *Generate muon tracks* icon (section 7.1). The file is saved from within the *Generate muon tracks* window by clicking on the  box.

- The `.p2ts` file

This file contains the parameters of the *Set track parameters* window (Appendix E.5.1). These parameters define the objects chosen for display in an event (Tracks, segments, MDT, RPC, ID hits, calorimeter hits, electrons, photons, etc.), as well as their energy or momentum thresholds. The file is saved from within the *Set track parameters* window by clicking on the  box<sup>2</sup>.

### 3. *Previous view*

When modifying the aspect of a view with the navigation tools, it is sometimes difficult and time consuming to go back to a previous display which seemed satisfactory. The *Previous view* icon makes it possible to retrieve up to  $\sim 100$  displays backwards.



Previous view

<sup>1</sup>Labels and captions are saved but pictures (e.g. the ATLAS logo) are not.

<sup>2</sup>The  box saves the file and makes it the default file.

## 15 APPENDICES

### A Architecture

*Persint*, the detector and event display for the ATLAS muon spectrometer originally conceived by Marc Virchaux, now has a new Graphical User Interface developed with *Qt*. This appendix gives a short description on how the software source code is organized.

- **Software development philosophy**

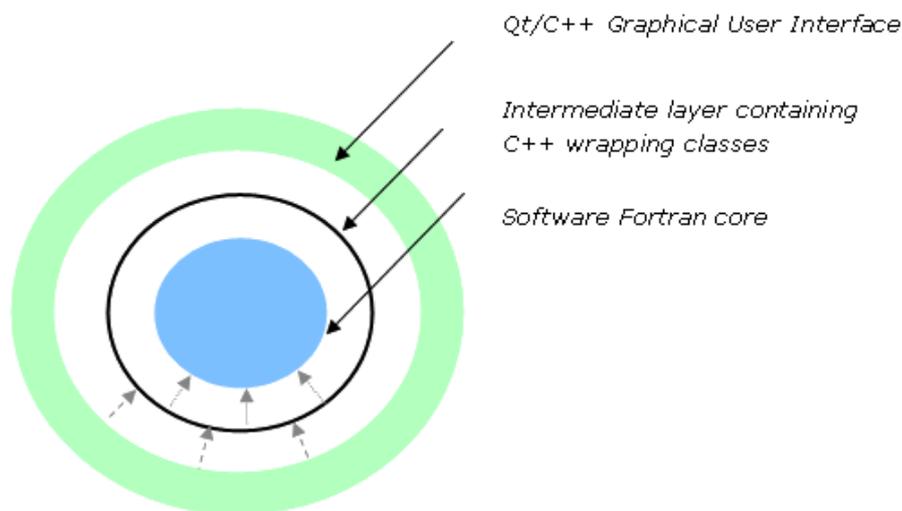


Figure 108: Architecture of the *Persint* source code

As shown in figure 108, the source code is divided into 3 distinct parts :

1. The core corresponds to Fortran code, e.g. algorithms for computing hidden faces, routines for reading input files, and so forth...
2. The "wrapping" layer, written in  $C^{++}$ , is a communication layer between the program core and the graphical interface. It is made of classes encapsulating the calls to Fortran routines.
3. The  $C^{++}$  code for the Graphical User Interface (GUI).

Thus, there is no direct call to Fortran core routines from the GUI as they are only called by the wrapping layer. Wrapper classes are organized by topics, e.g. one for views, one for AMDB volumes, etc...

- **File organization**

Most source files created for the new interface are located in one of the following three directories :

1. *PersintCore/persint2\_core*  
This directory contains all Fortran routines called by the "wrapping" layer. Most of these routines have been written specifically for the new GUI and are code fragments extracted from the initial HIGZ-based version of *Persint*. Like wrapper classes, these routines are organized by topics. For example, all methods dealing with AMDB volumes are gathered in file *wrap\_amdb.FF90*. Moreover, each routine name is prefixed with a string identifying its topic :

AMDB volume related routines start with "AMDB\_", etc. ... Files whose name does not start with "wrap\_" only contain routines called from other Fortran routines, not directly from the wrapper classes.

## 2. *Persint2Core*

This directory contains C++ header (.h) and source (.cpp) files respectively defining and implementing all wrapper classes. Each wrapper class in this directory is associated with a Fortran file in the *PersintCore/persint2\_core* directory. The only constructor in each of these classes has the "protected" attribute, so that the only way to actually instantiate a wrapper class - and to access its methods - is by creating a derived class. These wrapper classes have been implemented so that, whenever possible, they use standard C++ libraries rather than Qt-specific tools. This directory also contains classes required by the GUI but without calls to Fortran routines (e.g.: *ColorF*, *persint::Colors*, *FCString*, ...).

## 3. *PersintGui*

This directory contains all Qt classes developed for the new interface. Files with .ui extension are XML files created with the Qt designer and describing widgets. They should be edited with the designer-qt4 executable. The directory also contains .h and .cpp files implementing classes derived from Qt widgets. These classes inherit from wrapper classes as is necessary for interacting with the core of the application. For instance, the *persint::AmdcVolumeTree* class inherits from the *persint::Amdb* wrapper class in order to be able to access functions related to AMDB volumes. Files ending with *\_moc.cxx* or *\_ui.h* are generated automatically by Qt tools during compilation and should not be edited by hand.

- **Sample ASCII files**

The various files used by *Persint* are listed and described in Appendix D. They include files which contain all the information about geometry, detector description, magnetic field, events, track parameters, generated muons, etc.

## B Installation and dependencies

The latest release of *Persint* is : **Persint-00-02-27**. This version number is used throughout these instructions. Check for the latest version at:

<https://twiki.cern.ch/twiki/bin/view/Atlas/Persint2Wiki>

and change the commands accordingly (e.g. replace 00-02-27 by 00-02-*n*, where *n* is the latest release number).

Older releases can be found at:

<http://atlas.web.cern.ch/Atlas/GROUPS/MUON/Persint/releases/>

The running of *Persint* is dependent on a number of libraries which need to be installed beforehand. Satisfying these dependencies involves procedures which depend on the platform. On the contrary, the installation of *Persint* proper is common to all platforms. The complete procedures<sup>1</sup> are described below for reference.

However, for **easy installation** and **up-to-date instructions**, consult the **Twiki page**

<https://twiki.cern.ch/twiki/bin/view/Atlas/Persint2Wiki>

and use **copy-paste** operations.

Bugs, comments, installation problems, or questions can be reported to :

<https://groups.cern.ch/group/atlas-sw-persint-support/default.aspx>

### B.1 Installation

#### B.1.1 Tarball (*default procedure*)

Download and install the complete source tarball (15 MB).

```
wget http://atlasinfo.cern.ch/Atlas/GROUPS/MUON/Persint/releases/00.02.27/
src/Persint-00-02-27.tar.gz
```

```
tar xvfz Persint-00-02-27.tar.gz
```

```
cd Persint-00-02-27
```

```
./configure
```

```
make -j3
```

```
./start_persint.sh
```

**Warning:** the above instructions assume **all dependencies** are satisfied.

#### B.1.2 SVN

Download code from source repository and install, as follows.

After configuring subversion, checkout the *Persint* source code. From the *Persint* directory, run the `bootstrap.sh` script to download other required Atlas software components. You can then start compilation with "make".

After you are done, simply run the `.start_persint.sh` script, that will set your library and binary paths and run the program.

---

<sup>1</sup>When updating to a new version of *Persint*, it is usually sufficient to do only the installation without repeating the part concerning dependencies.

```

export SVNROOT=svn+ssh://svn.cern.ch/repos/atlasoff
svn co $SVNROOT/graphics/Persint/tags/Persint-00-02-27 Persint-00-02-27
cd Persint-00-02-27
./bootstrap.sh
make -j3
./start_persint.sh

```

### Warning:

- The above instructions assume **all dependencies** are satisfied.
- **Subversion configuration:** if your local username is different from your lxplus username, you may need to specify the latter in your \$HOME/.ssh/config file. For details, see: [https://twiki.cern.ch/twiki/bin/view/Atlas/SoftwareDevelopmentWorkBookSVN#Access\\_to\\_the\\_SVN\\_repositories](https://twiki.cern.ch/twiki/bin/view/Atlas/SoftwareDevelopmentWorkBookSVN#Access_to_the_SVN_repositories).

### B.1.3 Ubuntu

Install Ubuntu Persint package.

Persint is available as an Ubuntu package on a dedicated repository. The procedure below can be found at:

<http://sizun.web.cern.ch/sizun/persint/ubuntu.html>.

#### Persint on Ubuntu

To install Persint on *ubuntu*, follow the following steps:

1. Add the repository containing the *persint* package to the package manager's list of available repositories:
  - Edit the `/etc/apt/sources.list` file (with administrative privileges, e.g. `gksudo gedit /etc/apt/sources.list`) and add this line:
 

```
deb http://sizun.web.cern.ch/sizun/ubuntu <ubuntu_version> contrib
```

Replace `<ubuntu_version>` with the version of ubuntu you are using (i.e. *natty*, *maverick*, *lucid*, *karmic*, *jaunty*, *intrepid* or *hardy*). You may want to run `lsb_release --codename --short` to find out which it is.
2. Add to the package manager's list of trusted keys the GPG key used to digitally sign the *persint* package:
 

```
sudo apt-key adv --recv-keys --keyserver keyserver.ubuntu.com 25DB4A9D
```

In case the `keyserver.ubuntu.com` key server fails to respond, you may try one of the following servers: `pgp.mit.edu`, `keys.gnupg.net`, `wwwkeys.ch.gpg.net`.
3. Update the list of available packages:
 

```
sudo apt-get update
```
4. Install the *persint* package:
 

```
sudo apt-get install persint
```

You should then be able to start Persint via the Applications > Science Of Applications > Education menu panel (depending on your *ubuntu* release).

#### Support

- Mailing list: [atlas-sw-persint-support](mailto:atlas-sw-persint-support)

#### Notes

- For other distributions, platforms, installation methods or versions of Persint, please refer to the [official Persint page](#).
- This repository is not updated as frequently as the official Persint repository.
- ROOT histograms are missing in the *karmic* and *hardy* versions of the *persint* package, as the QIRROOT Ubuntu package, *root-plugin-qt*, was not available yet in *hardy* and was defective in *karmic*.

---

Creation: December 3rd, 2009. Last modification: February 18th, 2011.

### B.1.4 lxplus

Run the pre-installed version of *Persint* on *lxplus*.

If you have an account on the *lxplus* network, you can run a pre-installed version of *Persint* through AFS or SSH, though it might be a little slower:

```
ssh -X lxplus.cern.ch

\ln -sf /afs/cern.ch/atlas/www/GROUPS/MUON/Persint/releases/00.02.27/slc5-x86_64-gcc34/share/
  Persint/start_persint.sh

./start_persint.sh
```

### B.1.5 CernVM

#### 1. Install *Persint* on CernVM:

- Go to the page <https://twiki.cern.ch/twiki/bin/view/Atlas/CernVM>
- See also the VirtualBox page: <http://www.virtualbox.org/wiki/Downloads>
- The CernVM tutorial is at: <https://twiki.cern.ch/twiki/bin/view/Atlas/CernVMTutorialHead>

#### 2. Install *OpenAFS*

- Go to *OpenAFS* at: [https://cernvm.cern.ch/portal/release\\_2.2.0](https://cernvm.cern.ch/portal/release_2.2.0)
- Or type:

```
sudo conary update group-openafs-client openafs openafs-client
sudo mkdir -p /afs
echo cern.ch > /tmp/ThisCell
sudo cp /tmp/ThisCell /usr/vice/etc/ThisCell
```

and reboot your VM.

#### 3. Setup *Qt4*

```
### 64 bits Machine
export PKG_CONFIG_PATH=/afs/cern.ch/sw/lcg/external/qt/4.6.3/x86_64-slc5-gcc43-opt/
  lib/pkgconfig/${PKG_CONFIG_PATH}
### or 32 bits Machine
export PKG_CONFIG_PATH=/afs/cern.ch/sw/lcg/external/qt/4.6.3/i686-slc5-gcc43-opt/
  lib/pkgconfig/${PKG_CONFIG_PATH}
```

#### 4. Install *Persint*

- From source (tarball or subversion):

```
export SVNROOT=svn+ssh://svn.cern.ch/repos/atlasoff
svn co $SVNROOT/graphics/Persint/tags/Persint-00-02-27 Persint-00-02-27
cd Persint-00-02-27
./bootstrap.sh
make -j3
./start_persint.sh
```

- Or install binary tarball (i686, x86\_64):

```
### 64 bit Machine
wget http://atlasinfo.cern.ch/Atlas/GROUPS/MUON/Persint/releases/00.02.27/src/
  Persint-00-02-27-slc5-x86_64-gcc41.tar.gz
```

```

tar xvzf Persint-00-02-27-slc5-x86_64-gcc41.tar.gz

### 32 bit Machine
wget http://atlasinfo.cern.ch/Atlas/GROUPS/MUON/Persint/releases/00.02.27/src/
  Persint-00-02-27-slc5-i686-gcc41.tar.gz
tar xvzf Persint-00-02-27-slc5-i686-gcc41.tar.gz

cd Persint-00-02-27
./configure
./start_persint.sh

```

## B.2 Dependencies

- Minimum requirements
  1. *Persint* depends on Trolltech's Qt 4 library ( 4.3.4).
  2. Compilation also requires C++ and Fortran compilers, as well as standard utilities such as pkg-config, head, sed, ...
- Optional dependencies
  1. An optional additional dependency is QtROOT , e.g. the Qt plugin of ROOT, used to display ROOT histograms within the Qt interface. The version of QtROOT should be compatible with your version of the Qt4 library.
  2. The Oracle Database Instant Client software development kit and the SOCI C++ Database Access library are required for the application to be able to download geometry files from the ATLAS database.
- *Persint* no longer requires either CERNLIB, HIGZ or LAPACK.

### B.2.1 Ubuntu

- **Mandatory dependencies**

Install Fortran and C++ compilers:

```

sudo apt-get install gfortran
sudo apt-get install g++

```

Install Qt

```

sudo apt-get install libqt4-dev libmysqlclient15-dev

```

- **Optional dependencies**

1. Install **QtRoot** on Ubuntu
  - **Quick method:**  
Starting with Ubuntu 8.10 (Intrepid), QtRoot is directly available as an Ubuntu package :  

```
sudo apt-get install root-plugin-qt libroot-dev
```
  - **Recommended method:**  
However, for earlier Ubuntu versions (Hardy, Gutsy, ...) or for a more recent version of QtRoot, you will need to build QtRoot yourself, using the `INSTALL_QTROOT.sh` script and following the official instructions<sup>1</sup>:

---

<sup>1</sup><http://root.bnl.gov/QtRoot/How2Install4Unix.html>

- (a) After installing Qt (e.g. the `libqt4-dev` package, see above), define the `QTDIR` variable :

```
export QTDIR=/usr/share/qt4
```

- (b) Download and run the installation script as follows:

```
export QTROOT_INSTALL_DIR=${HOME}/qtRoot;
```

```
mkdir -p $QTROOT_INSTALL_DIR
```

```
cd $QTROOT_INSTALL_DIR
```

```
wget http://root.bnl.gov/QtRoot/INSTALL-QTROOT.sh
```

```
chmod u+x INSTALL-QTROOT.sh
```

```
./INSTALL-QTROOT.sh
```

```
The existing version of Qt package has been found under QTDIR=/usr/share/qt4
directory
```

```
Do you want to use it? (yes/no) yes
```

```
Do you want to proceed? (yes/no) yes
```

```
Do you want to install COIN3D also? (yes/no) no
```

- (c) Set environment variables for *Persint* to locate QtRoot:

```
./${QTROOT_INSTALL_DIR}/set_environment.sh
```

**Note:** with the above command lines, QtRoot will be installed in `${HOME}/qtRoot`.

If you prefer another location, set `QTROOT_INSTALL_DIR` accordingly.

2. Install the Oracle **Instant Client** SDK and the **SOCI** database access library on Ubuntu

– Oracle **Instant Client**

- (a) Go to the Oracle download page<sup>1</sup>, in the Instant client section and select the appropriate platform. Download the Instant Client Basic RPM package and the Instant Client SDK RPM package. You will need to create a (free) Oracle user account and to accept the license agreement.

- (b) Convert the RPM packages into debian packages :

```
sudo apt-get -y install alien
```

```
sudo alien -d oracle-instantclient-basic-<version>-<platform>.rpm
oracle-instantclient-basic-<version>-<platform>.rpm
```

- (c) Install the generated debian packages and their dependency *libaio* :

```
sudo dpkg -i oracle-instantclient-basic-<version>-<platform>.deb
oracle-instantclient-basic-<version>-<platform>.deb
```

```
sudo apt-get -y install libaio1
```

- (d) Define some environment variables to notify *Persint* of Oracle's location :

```
export ORACLE_LIBDIR=/usr/lib/oracle/<version>/client/lib;
```

```
export ORACLE_INCDIR=/usr/include/oracle/<version>/client;
```

The exact name of the installation directories will depend on your platform.

– **SOCI**

```
wget http://downloads.sourceforge.net/soci/soci-3.0.0.tar.gz
```

```
tar xvfz soci-3.0.0.tar.gz
```

```
\rm soci-3.0.0.tar.gz
```

```
cd soci-3.0.0
```

<sup>1</sup><http://www.oracle.com/technetwork/indexes/downloads/index.html>

```

./configure --include-prefix=<prefix>/include --lib-prefix=<prefix>/lib
--oracle-include=$ORACLE_INCDIR --oracle-lib=$ORACLE_LIBDIR
make
make install
cd ..
\rm -rf soci-3.0.0/

```

You might encounter an error if the version of your Oracle client is recent, as SOCI expects version 10. Just patch the SOCI source code before compilation :

```

sed -i 's;nnz10;nnz<version>;g' build/unix/build-oracle.tcl
sed -i 's;nnz10;nnz<version>;g' src/backends/oracle/test/Makefile.basic

```

Inform *Persint* of the library's location with an environment variable :

```
export SOCI_HOME=<prefix>;
```

## B.2.2 Debian

To install the minimal dependencies required for *Persint* under Debian Lenny :

```
sudo apt-get install gfortran g++ make pkg-config libqt4-dev libmysqlclient15-dev
```

You can then download and install *Persint* following the default procedure (section B.1.1).

## B.2.3 Fedora

To install the packages required for installing *Persint* under Fedora 14, open a terminal, acquire administrative privileges (with the `su` command) and execute the following command line:

```
yum install wget pkgconfig gcc-c++ gcc-gfortran qt-devel xterm perl
```

You can then download and install *Persint* following the default procedure (section B.1.1).

## B.2.4 Scientific Linux Cern

The release of Qt4 (4.2) provided by the `qt4-devel SLC5` package is too old for *Persint*. Hence, Qt4 needs to be installed from source.

- **lxplus**

The location of the Qt library on AFS will be automatically taken care of by the *Persint* makefile and the start up script.

- **Non-lxplus machine** with access to CERN AFS directories

1. Qt is installed in the `/afs/cern.ch/sw/lcg/external/qt/` directory. Choose the appropriate version and add the path of the `lib/pkgconfig` subdirectory to your `PKG_CONFIG_PATH` environment variable.
2. To activate the geometry data download feature, setup the Oracle Instant Client and the SOCI library environments:

```

export ORACLE_INCDIR=/afs/cern.ch/atlas/www/GROUPS/MUON/Persint/releases/opt
/oracle/instantclient10_1/sdk/include;
export ORACLE_LIBDIR=/afs/cern.ch/atlas/www/GROUPS/MUON/Persint/releases/opt/
oracle/instantclient10_1;
export SOCI_HOME=/afs/cern.ch/atlas/www/GROUPS/MUON/Persint/releases/opt;

```

- **Standalone machine**

Download and install Qt from source<sup>1</sup>. If you do not install it into a standard location, add the path of the `lib/pkgconfig` subdirectory to your `PKG_CONFIG_PATH` environment variable.

### B.2.5 Mac OS X

*Persint* has been successfully installed under Mac OS X 10.5 and 10.6 using the following environment.

- **Mandatory dependencies**

1. First install, if not already done, Apple's Xcode tools from Mac OS X installation DVD or from Apple's site
2. Download and install the MacPorts software distribution package
3. From a terminal, install everything *Persint* needs, using MacPorts (it could take several hours):

```
sudo port selfupdate
sudo port -v install pkgconfig
sudo port -v install gcc45
sudo port -v install qt4-mac +debug
```

4. Ensure the chosen Fortran compiler and the Qt library will be found:

```
sudo ln -s /opt/local/bin/gfortran-mp-4.5 /opt/local/bin/gfortran
export PKG_CONFIG_PATH=/opt/local/lib/pkgconfig;
```

You might want to add `PKG_CONFIG_PATH` to your login script.

Depending on the installation method chosen, it may require you to also install *wget* or *subversion*:

```
sudo port -dv install wget
sudo port -dv install subversion
```

- **Optional additional dependencies**

- Installing **QtRoot** on Mac OS X

To install QtRoot, you should download and run the `INSTALL_QTROOT.sh` shell script and follow the official instructions<sup>2</sup>.

1. After installing the Qt library, set environment variables for QtRoot to locate Qt:

```
export PKG_CONFIG_PATH=/opt/local/lib/pkgconfig;
export QTDIR='pkg-config --variable=prefix QtCore'
```

2. Download and run the installation script as follows:

```
export QTROOT_INSTALL_DIR=${HOME}/qtRoot;
mkdir -p $QTROOT_INSTALL_DIR
cd $QTROOT_INSTALL_DIR
wget http://root.bnl.gov/QtRoot/INSTALL_QTROOT.sh
chmod u+x INSTALL_QTROOT.sh
. ./INSTALL_QTROOT.sh
yes
yes
```

<sup>1</sup><http://qt.nokia.com/downloads>

<sup>2</sup><http://root.bnl.gov/QtRoot/How2Install4Unix.html>

```
no
```

**Note:** using the above command lines, QtRoot will be installed in `${HOME}/qtRoot`. If you prefer another location, set `QTRoot_INSTALL_DIR` accordingly.

3. Set environment variables for *Persint* to locate QtRoot:

```
. ${QTRoot_INSTALL_DIR}/set_environment.sh
```

You can then proceed with the default installation procedure (section B.1.1).

- Installing the Oracle **Instant Client** SDK and the **SOCI** database access library

- \* *Oracle Instant Client*

```
sudo port install oracle-instantclient
export ORACLE_LIBDIR=/opt/local/lib/oracle
export ORACLE_INCDIR=/opt/local/lib/oracle/sdk/include
```

MacPorts may not be able to download the necessary files. In that case, you shall :

1. Delete intermediate files created by the failed building process and create a directory `/opt/local/var/macports/distfiles/oracle-instantclient`:

```
sudo port clean --all oracle-instantclient
sudo port selfupdate
sudo mkdir /opt/local/var/macports/distfiles/oracle-instantclient
```

2. Go to the Oracle download page, register, download the `instantclient-basic-10.2.0.4.0-macosx-x86.zip` and `instantclient-sdk-10.2.0.4.0-macosx-x86.zip` packages manually and place them into the newly created `/opt/local/var/macports/distfiles/oracle-instantclient` directory.
3. Install the downloaded packages

```
sudo port install oracle-instantclient
export ORACLE_LIBDIR=/opt/local/lib/oracle
export ORACLE_INCDIR=/opt/local/lib/oracle/sdk/include
```

- \* *SOCI*

```
export SOCI_HOME=/usr/share/soci/3.0.0
wget http://downloads.sourceforge.net/soci/soci-3.0.0.tar.gz
tar xvfz soci-3.0.0.tar.gz
rm -rf soci-3.0.0.tar.gz
mv soci-3.0.0 soci-3.0.0_src
cd soci-3.0.0_src/
./configure --include-prefix=${SOCI_HOME}/include --lib-prefix=${SOCI_HOME}/lib
--oracle-include=${ORACLE_INCDIR} --oracle-lib=${ORACLE_LIBDIR}
make
sudo make install
```

**Note:** using the above command lines, SOCI will be installed in `/usr/share/soci/3.0.0`. Change this path if you want to install it somewhere else.

You can now download and install *Persint* following the default procedure (section B.1.1).

- **Updating with the latest *Persint* release**

Assuming you have already installed all required libraries for an old *Persint* release, you will need the following commands to setup your environment before installing a new release:

```
export PKG_CONFIG_PATH=/opt/local/lib/pkgconfig;
```

```
export ORACLE_LIBDIR=/opt/local/lib/oracle
export ORACLE_INCDIR=/opt/local/lib/oracle/sdk/include
export SOCI_HOME=/usr/share/soci/3.0.0
cd soci-3.0.0_src/
```

```
export QTROOT_INSTALL_DIR=${HOME}/qtRoot;
. ${QTROOT_INSTALL_DIR}/set_environment.sh
```

If you had chosen different installation paths, you shall adapt these commands accordingly.

### B.2.6 Cygwin

Install *Persint* on *Cygwin 1.7.x*<sup>1</sup> under *Windows 7*<sup>2</sup>.

- Install or update Cygwin by running `setup.exe`.

- The following packages are required to download and build *Persint*:

```
wget make sed tar pkg-config gcc4-g++ gcc4-fortran qt4-devel-tools libQtCore4-devel
libQtGui4-devel libQtTest4-devel libQtNetwork4-devel
```

- The following packages are required to connect to an X server and start *Persint*:

```
xorg-server xinit
```

- You can then download and install *Persint* following the default procedure (section B.1.1).
- Connect to a Cygwin/X server by typing `startxwin` from the Cygwin shell:

```
startxwin
```

- Start *Persint* with the `start_persint.sh` script.

```
./start_persint.sh
```

---

<sup>1</sup><http://www.cygwin.com/>

<sup>2</sup>Use the link `setup.exe` in the Twiki page: <https://twiki.cern.ch/twiki/bin/view/Atlas/Persint2Wiki>

## C ATLAS coordinate system

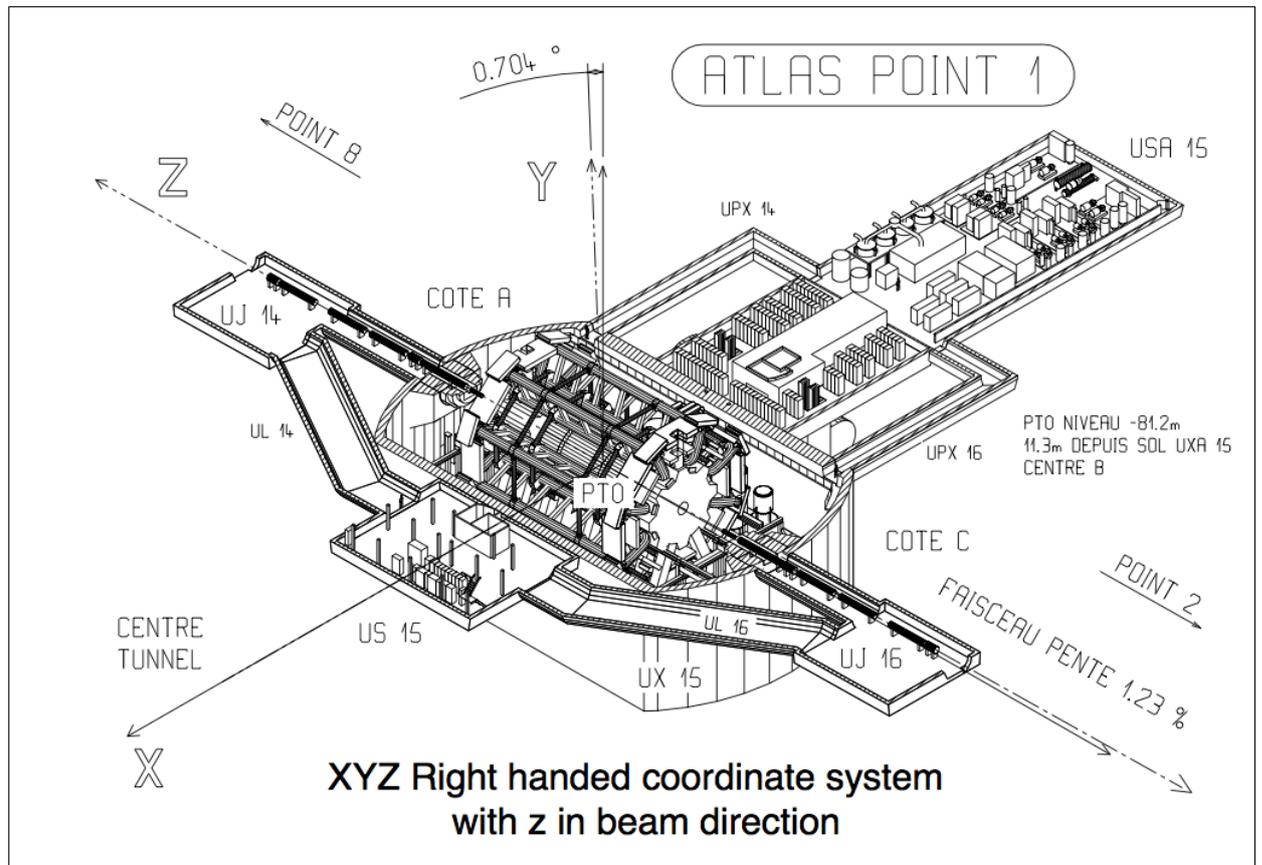


Figure 109: ATLAS coordinate system.


## D Files used in *Persint*

### D.1 File formats


Several types of files are encountered when using *Persint*. Most are specific to *Persint*, except the “exported” files used for presentations and publications.

<i>File extension</i>	<i>Description</i>	<i>Default directory</i>	<i>Comments</i>
.p2vf	Detector description file.	Persint-00-02-●● /example	Produced by <i>Persint</i> with the <i>Save view as</i> function of the <i>File</i> menu. Retrieved with the <i>Open view</i> function. (Section 6.3, item 3)
.p2ts	Track parameter file for displaying an event	Persint-00-02-●● /example	Produced with <i>Save</i> or <i>Save as</i> , retrieved with <i>Open</i> in the <i>Set track parameters</i> window. (Section 6.3, item 6)
.p2gm	Generated muon parameter file	Persint-00-02-●● /example	Produced with the <i>Save</i> action, retrieved with the <i>Open</i> action in the <i>Generate muon tracks</i> window. (Section 7.1, Figure 15)
amdb_simrec.xxx	Detector geometry file ("primary numbers")	Persint-00-02-●● /amdcData/share	Loaded from the <i>Volumes</i> tab of the <i>Data manager</i> window. (Section 6.1.1, item 1; figure 4a)
Bmagatlas.data	Magnetic field file	Persint-00-02-●● /BFieldData/share	Loaded from the <i>Magnetic Field</i> tab of the <i>Data manager</i> window. (Section 6.1.1, item 2; figure 4b)
Out.MboyView.yyy	Reconstructed event file	Persint-00-02-●● /example	ASCII file produced by <i>ATHENA</i> . (Section 6.1.1, item 3, figure 4c and Section 6.1.2, item 2)
.png, .jpg, .bmp .svg, .ps, .pdf	File containing the <i>Persint</i> Main Display	User's choice	Produced by <i>Persint</i> with the <i>Export</i> function of the <i>File</i> menu. (Section 6.4)
.dat	ASCII file	User's choice	Produced by the <i>Export</i> function in the various maps available in the <i>Tools</i> menu

## D.2 Directories for *Persint* files

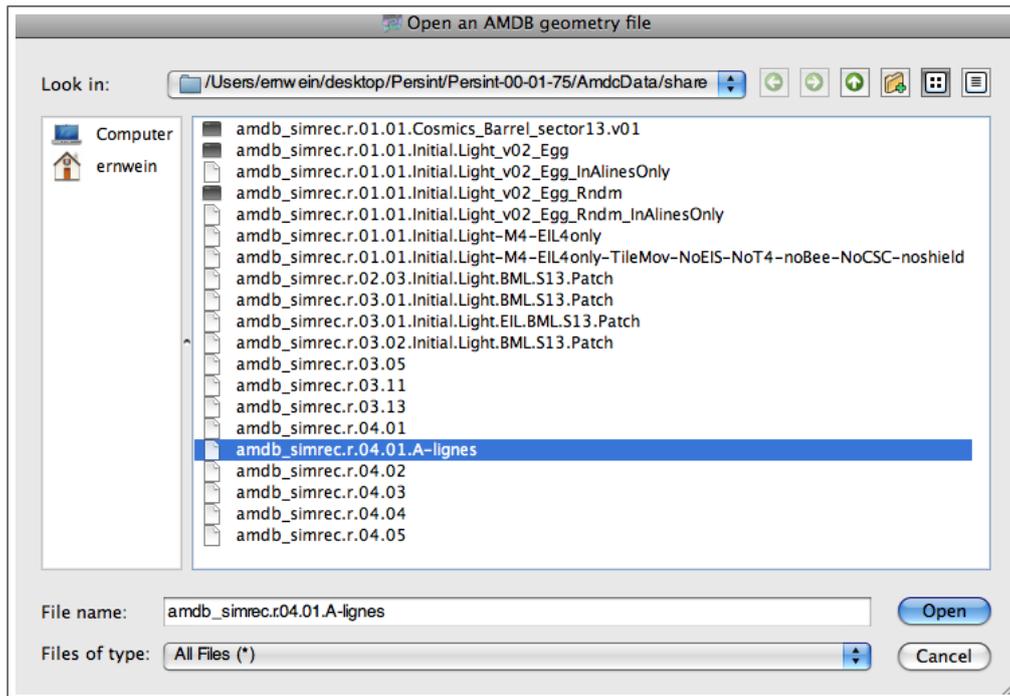

(a) Available geometry files in *Persint/AmdcData/share*. This window is prompted when clicking *Load* in the *Data manager* window (Fig. 4a)

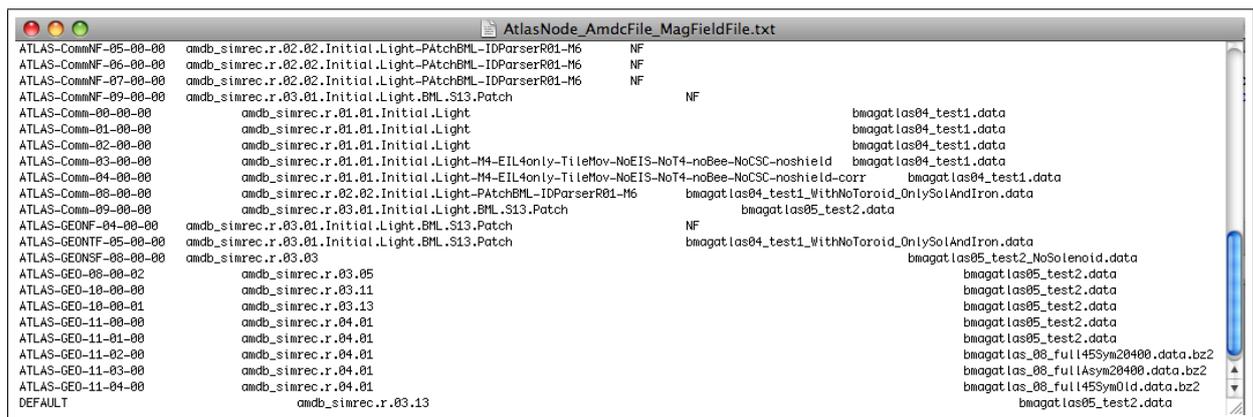

(b) Part of the file "*Persint-00-02-00/PersintData/AtlasNode\_AmdcFile\_MagFieldFile.txt*": Correspondence between geometry and magnetic field files

Figure 110: Details of some files used by *Persint*.

## D.3 File description



### D.3.2 .p2ts

```
[simulation]
parameters\Gen_trk_at_IP\checked=0
parameters\Gen_trk_at_IP\value=0.1
parameters\Gen_trk_at_spectro\checked=1
parameters\Gen_trk_at_spectro\value=0.1
options\simul\value=1

[reconstruction]
parameters\Mboy_Seg\checked=1
parameters\Mboy_Seg\red=1
parameters\Mboy_Seg\green=0
parameters\Mboy_Seg\blue=0
parameters\Moore_Seg\checked=0
parameters\Moore_Seg\red=0
parameters\Moore_Seg\green=1
parameters\Moore_Seg\blue=0
parameters\ID_trk_at_IP\checked=0
.
parameters\Mboy_trk_at_IP\checked=0
.
parameters\Mboy_trk_at_spectro\blue=0
parameters\Staco_trk_at_IP\checked=0
.
parameters\MuTag_trk_at_IP\checked=0
.
parameters\Moore_trk_at_spectro\checked=0
.
parameters\MuID_Extra._trk\checked=0
.
parameters\MuIDcomb_trk_at_IP%20\checked=0
.
options\matter\value=1
options\width\value=1.71

[calorimeterCells]
parameters\barrel_presampler\checked=1
.
parameters\barrel_lar_em\checked=1
.
parameters\endcap_lar_em\checked=1
.

parameters\tile\checked=1
.
parameters\endcap_lar_hadr\checked=1
.
parameters\very_forward_lar\checked=1
.
parameters\endcap_presampler\checked=1
parameters\endcap_presampler\value=0.1
parameters\endcap_presampler\red=1
parameters\endcap_presampler\green=0.2
parameters\endcap_presampler\blue=0.2
options\envelop\value=0

[EgamaObjects]
parameters\Photons\checked=1
parameters\Photons\red=1
parameters\Photons\green=0.6
parameters\Photons\blue=0.2
parameters\Electrons\checked=1
parameters\Electrons\red=0.6
parameters\Electrons\green=0.6
parameters\Electrons\blue=0

[TRT]
parameters\bra\checked=0
parameters\bra\min=6
parameters\bra\max=50
options\braphi\value=32
parameters\brc\checked=0
parameters\brc\min=6
parameters\brc\max=50
options\brcphi\value=32
parameters\eca\checked=0
parameters\eca\min=6
parameters\eca\max=50
options\ecaphi\value=32
parameters\ecc\checked=0
parameters\ecc\min=6
parameters\ecc\max=50
options\eccphi\value=32
options\allenvelop\value=0
```

### D.3.3 .p2gm

```
[Muons]
1\track=1.2, 90, 100, true, 0, 0, 0
1\color=@Variant(\0\0\0\x43\x1\xff\xff\xff\xff\0\0\0\0\0\0)
2\track=1.2, 0, 100, true, 0, 0, 0
2\color=@Variant(\0\0\0\x43\x1\xff\xff\0\0\0\0\xff\xff\0\0)
3\track=1.2, 0, 10, true, 0, 0, 0
3\color=@Variant(\0\0\0\x43\x1\xff\xff\0\0\xff\xff\0\0\0\0)
size=3
```

## D.3.4 amdb\_simrec.xxx

```

*****
*
* NAME (16 Char.) of this AMDB_SIMREC data base (ATLAS Muon Layout version R) :
*
*
* *****
* *****
N R.03 01
*   .Initial.Light.BML.S13.Patch
*   BIS 1,2,4,5,6 without supports
*   BML Old numbering
*   EIL mv by 20m to avoid clashes in GeoModel/G4
*   NO EEL, EES
* *****
* *****
*
* COMMENTS :
*   Final Layout R
*   R.03 01
*       Huge corrections From Stefania Spagnolo on RPC orientation
*       all corrections appear with comments "*"
*       Update on RPC and cutouts
*       -BMS 2 5, 6 , 7 (cutouts)
*       -BOF
*       -BOG
*       -W RPC 7
*       -add W DED 3
*       Update XML part for Andrea converter
*       -saddle
*       -PP2
*       -passerel/platforms
*       -ECT_Cryo7SidTemp suppress composition replace by a rotation
*       -many ";" + other correction in Patch Panel.
*   R.02 03
*       corrections From Andrea Dell'Acqua about ";" and TGCSupport
*       Without symetry convention to build TGC support
*   CSC position corrected
*   R.02 02
*       ID Patch Panels PP2 (not at the correct position)
*       Muon Barrel Access Platforms
*       Feet Struts
*       Access Platform Sector 13
*       MDT Big Wheel
*       Calorimeter Saddle
*       TGC support (not at the correct position)
*       BOL Support
*       Mobylette: Cyclomoteur
*
*   R.02 01:
*       Pierre-Francois
*       new 1 BIM with HV <-> RO inverted
*       new 6 BIR with HV <-> RO inverted + correction 75mm
*       BIS8 bad position
*       BML sector 13 add hole corresponding to elevator place
* 12345 -> 12367
*       BOG bad position
*       Stefania
*       BMF1,BMF2,BMF3 LB2->LB1
*       BOG1,BOG2,BOG4,BOG5 RPC size
*       W PRC8, RPC17
*       Florian
*       BOS2,BOS3,BOF1->BOF8 1868->1853 (+3mm? should be checked)

```

```

*           BOS1 CRO est a -2656mm
*           CRV est a 1050mm
*           : Same Dead Matter as R.01.01
*           initially based on q.02_test8
*           R.01 01 BOG positions from ATLM___0034 Version AG (Layout R sector 12) based on Feet as installed
*           EOL/EOS positions in Z according to Layout R Version AG
*           BOG 6 RO/HV swapped from ATLM___0041 Version AG (Layout R sector 14)
*           BOL sector 13 positions z+40 mm after elevator shaft according to Layout R Version AF
*           AGDD-XML section : correction to JDSH_TUBEIeng, JDSH_PLUGIeng
*                               variable names follow DB conventions
*                               implementation of ECT Service Tower
*           correction to EEL sector 9
*           positions of stations located at Z<0 not mirrored following 30.035 wire pitch
*           dz of BOG cutouts following 30.035 wire pitch
*           BOL 3,6,7 swap dz of RPC and DED (stations not mirrored)
*
*
*****
*
* VERSION NUMBER (Integer I5) of this AMDB_SIMREC data base (Default is 0)
*
* *****
* *****
V       7
* *****
* *****
*
*****
*
* The lines which start with the character D correspond to the
*                               *****
*
* DEFINITION OF THE DIFFERENT STATIONS
*
* The station Typ It is formed of No different objects (or multi-layers).
*           *****          ****
*
* Within a station, the relative position of each object is given by
* dx , dy and dz , the local reference frame (x,y,z) being
* ***** ***** *****
* the same one as in V.Chaloupka Data Base.
*
*
* -----> Typ It : Identify the station type.
* |
* | -----> No : Number of objects forming the station.
* | |
* | | And, for each object :
* | |
* | | -----> dx, dy, dz : Relative position of the object.
* | | |
* | | | -----> Io : Object serial number in the station.
* | | | |
* | | | | -----> Tec : Type of technology used for the object.
* | | | | |
* | | | | | -----> Iw : Inner structure type index.
* | | | | | |
* | | | | | | -----> Isplit_x : Number of sections in x
* | | | | | | | for RPC's (1 if missing).
* | | | | | | | -----> Isplit_y : Number of sections in y
* | | | | | | | | for RPC's (1 if missing).
* | | | | | | | |
* | | | | | | | | -----> Ishape : Type of geometrical shape

```

```

* | | | | | | | | | | missing
* | | | | | | | | | | or 0 --> trapezoidal (or rectangular)
* | | | | | | | | | | 1 --> "T" shaped
* | | | | | | | | | | 2 --> "Diamond" shape (CSC)
* | | | | | | | | | | 3 --> rotated trapezoids (TGC)
* | | | | | | | | | |
* | | | | | | | | | | -----> Width_xS, Width_xL, Length_y,
* | | | | | | | | | | | Excent., Dead1, Dead2 :
* | | | | | | | | | | | Dimensions of the object
* | | | | | | | | | | | (See figures).
* | | | | | | | | | |
* XXX-X X | | | | | | | |
*XXXXX--XXXXX--XXXXX X XXX X X X X XXXXXX--XXXXXX--XXXXXX--XXXXX--XXXXX--XXXXX
*XXXXX--XXXXX--XXXXX X XXX X X X X XXXXXX--XXXXXX--XXXXXX--XXXXX--XXXXX--XXXXX
* .....
*
*
*
*
*****
*
* The lines which start with the character C correspond to the
*
*****
*
* DEFINITION OF THE CUT-OUTS IN THE STATIONS
*
* The cut-out Icut in the station Typ It is formed of Nocut
*
*****
* different sub-cuts in the various objects (or multi-layers) of
* this station.
*
*
* -----> Typ It : Identify the station type.
* |
* | -----> Icut : Cut-out index
* | |
* | | -----> Nocut : Number of sub-cuts in the station.
* | | |
* | | | And, for each sub-cut :
* | | |
* | | | -----> dx, dy : Relative position of the sub-cut.
* | | | |
* | | | | -----> Io : Serial number of the object in which
* | | | | | the sub-cut is made.
* | | | | |
* | | | | | -----> Width_xS, Width_xL, Length_y,
* | | | | | | Excent.
* | | | | | | Dimensions of the sub-cut
* | | | | | | (see figures).
* XXX-X X X | | | |
*XXXXX--XXXXX X XXXXXX--XXXXXX--XXXXXX--XXXXX
*XXXXX--XXXXX X XXXXXX--XXXXXX--XXXXXX--XXXXX
* .....
*
*
*
*
*-- Definition of stations -----
* Typ I No
* s z t Io Tec i x y m W_xS W_xL L_y Ex D1 D2 D3
*****
* ***** ** ** ** ***** ***** ***** *****
*
*
*
*-- Definition of BIL stations -----
* Typ I No

```

```

* dx      dy      dz  Io Tec i x y s  W_xS    W_xL      L_y      Ex      D1      D2
* ...
D BIL 1  7
  0.      0.      0.   1 MDT 1      2671.5  2671.5 1081.261  0.    55.    0.
-1280.   0.    123.07 2 CHV 1      6.0     6.0 1081.261  0.    0.    0.
  0.      0.    123.07 3 CMI 1      6.0     6.0 1081.261  0.    0.    0.
1280.    0.    123.07 4 CRO 1      6.0     6.0 1081.261  0.    0.    0.
  0.    215.   170.57 5 LB  1      2620.0 2620.0  50.    0.    0.    0.
  0.    815.   170.57 6 LB  1      2620.0 2620.0  50.    0.    0.    0.
  0.      0.    293.07 7 MDT 2      2671.5 2671.5 1081.261  0.    55.    0.
D BIL 2  7
  0.      0.      0.   1 MDT 1      2671.5 2671.5  901.051  0.    55.    0.

```

and so on ...

towards end of file ...

```

      <mposPhi volume="rail1"  ncopy="8"  Phi0="-14.35"  R_Z="10040;-6000"  impliedRot="false"  />
      <mposPhi volume="rail2"  ncopy="8"  Phi0="14.35"   R_Z="10040;-6000"  impliedRot="false"  />
</composition>

</section>

<section name      = "Solenoid"
      version      = "1.1"
      date         = "22 11 1962"
      author       = "laurent"
      top_volume   = "Solenoid">

<!--
      *****
      ***              Solenoid              ****
      *****
-->

<tubs  name="tubs_hole"      material="Azur"   Rio_Z="1200;1300;5000"  />
<composition name="Solenoid">
  <posXYZ volume="tubs_hole"      X_Y_Z=" 0 ; 0 ; 0"  />
</composition>
</section>

<section name      = "Eta0Services"
      version      = "1.1"
      date         = "22 11 1962"
      author       = "laurent"
      top_volume   = "Eta0Services">
<cons  name="cons_angle" material="Orange"  Rio1_Rio2_Z="4500;9000;4500;9000;300"  profile="-14;28"  />

<composition name="servicesAtZ0" >
  <mposPhi volume="cons_angle" Phi0="45"  ncopy="8"  >
  </mposPhi>
</composition>

</section>

</AGDD>
X -----
*
*
*
End

```

### D.3.5 Bmagatlas

```

B-3D-R.1  ATLM dtb => atlm01p
  8      5.80 20500.00 20500.00
 30     4      1.28   5.78  492.20   985.30  1241.00   137.90
  1     4      1.25   4.30
 32
 122.46
 498.57
 825.04
1256.16
 96.00
 96.00
 80    99    0.785398185
0.000000000 0.006000000 0.008500000 0.009000000 0.011000000 0.013900000
0.017238000 0.019000000 0.022000000 0.024070000 0.027379000 0.030670000
0.035531000 0.043423000 0.052974000 0.064359000 0.078351000 0.115947000
0.168554000 0.231067000 0.285960000 0.325066000 0.341732000 0.349282000
0.356406000 0.359997000 0.364267000 0.368445000 0.370000000 0.372000000
0.374908000 0.378033000 0.379500000 0.380000000 0.381000000 0.382000000
0.384113000 0.388406000 0.392699000 0.396685000 0.398699000 0.400670000
0.401699000 0.402500000 0.403760000 0.404000000 0.405199000 0.406800000
0.409937000 0.411699000 0.414699000 0.416769000 0.420078000 0.428230000
0.445673000 0.471050000 0.508646000 0.561253000 0.623766000 0.678659000
0.699990000 0.717765000 0.729584000 0.734431000 0.738464000 0.741981000
0.745518000 0.749105000 0.752696000 0.756966000 0.761144000 0.762699000
0.764699000 0.767607000 0.770732000 0.772699000 0.774699000 0.776812000
0.781105000 0.785398000
  0.0000   38.0000   72.0000   100.0000   124.0000   145.0000
 492.0000  516.0000  543.0000  566.0000  636.0000  723.0000
 764.2500  791.7500  805.2619  812.8077  816.0000  818.0000

```

and so on ...

towards end of file ...

```

Cy; zJzEzNzOzv=yYP+2+1z+zwztzozmzjzhzf=xJ6=yZ1!2z8!2z7z6zaz5!2z7z6!2z7!4z6z5z6g.=
xrWy;=y6jyedPzu=z2m*2!5y;y,y,y,!2yZyXyWyV!2ySyQ!2yRySyVyXy.yL=-2Cy;zJzEzNzOzv=yY
P+2+1z+zwztzozmzjzhzf=xJb=yZ1!2z8z7z6z7zaz5!2z7z6!2z7!5z6z5g;=xrLy;=y;0*1=xQAzm=
z2ny;*1y;*1y;y;y,y,y,y,!2yY!2yV!2ySyQ!2yRySyVyXy.yL=-2Cy;zJzEzNzOzv=yYP+2+1z+z
wztzozmzjzhzf=xJi=yZ1z8z7z8z6z7zaz5!4z7z6z7z6z5!2z6z5h0=xrz*1=xYnystZzi=z2n*1y;*
1!3y;y;y,y,y,y,!2yY!2yV!2ySyQ!2yRySyVyXy.yL=-2Cy;zJzEzNzOzv=yYP+2+1z+zwztzozmzjz
hjf=xJq=yZ0z9!4z7zaz5z8z6!3z7!4z6z5z6h2Q0*3=xUezj=z2n*2!4y;y;y,y;!2y.!2yY!2yV!2y
SyQ!2yRySyVyXy.yL=-2Cy;zJzEzNzOzv=yYP+2+1z+zwztzozmzjzhzf=xJx=yZ0!2z8!3z7zaz6!2z
7z6!2z7z6z7z5!2z6z5h6=xqUz1NzyML1zm=z2oy;*1y;*1y;y;y,y,y;!2y.yZyXyWyU!2ySyQ!2yRy
SyVyXy.yL=-2Cy;zJzEzNzOzv=yYP+2+1z+zwztzozmzjzhzf=xJ)=yZ0!2z8!3z7zaz6!2z7z6z8z6z
7!3z6!2z5ha=xq-*1=y;0*1=xV)zq=z2o*1y;*1!3y;y;y,y,y,!2yZyXyWyUyTyRyQ!2yRySyVyXy.y
L=-2Cy;zJzEzNzOzv=yYP+2+1z+zwztzozmzjzhzf=xJD=yZ0!2z8!3z7zaz6!5z7!4z6z5z6hd=xqk*
1-xz3,Xzt=z2o*2!4y;y;y,y,y,!2yZyXyWyUyTyRyQ!2yRySyVyXy.yL=-2Cy;zJzEzNzOzv=yYP+2+
1z+zwztzozmzjzhzf=xJF=yZ0z8z7z8!2z7zaz6!5z7!5z6z5hfPQ*3=xVNzv=z2py;*1y;*1y;!2y:y
,y,y,!2yZyXyWyUyTyRyQ!2yRySyVyXy.yL

```

### D.3.6 Description of the *Out.MboyView* ASCII event file readable by PERSINT

Here is an example of an event file. The first word of each line is a keyword which has to start on the first column : only the first 3 letters are mandatory, and usually case sensitive.

The first part of the file contains global parameters which are optional.

GEO geometry : if present, it should be the first line and contains info on the geometry to be used, i.e. ATLAS-DC3-05.

RTpara integer allows to set the RT relations which will be used for MDT.

0 default, the RT will be explicitly given for each MDT of each event using the RS lines which will be described later.

> 0 will use our "home-made" parametrization done on the first cosmic runs.

< 0 a constant value (equals to the abs of the given value, divided by 100) in cm will be used.

For nice displays, -120 is a good choice.

Then for each event,

NEW EVT eventNumber runNumber AmdcAthenaFlag CosmicFlag

AmdcAthenaFlag : hits are identified by the Amdc (0) or Athena identifiers (1 = default).

CosmicFlag : 0 if standard (collision) or 1 if cosmic

HIT numberMDThits numberRPChits numberTGChits number CSChits

MDT BIL i1 i2 i3 i4 i5 X Y Z DriftTime ADCcount Particle TDCcount digitID

i1 to i5 are the Athena identifiers of the given tube/station

X Y Z are the positions of the middle of the tube. If unknow, put 0. 0. 0. and they will be computed by Amdc.

RPC BML i1 i2 i3 i4 i5 i6 i7 i8 X Y Z Particle digitID time

i1 to i8 are the Athena identifiers of the given strip/station

X Y Z are the positions of the middle of the strip. If unknow, put 0. 0. 0. and they will be computed by Amdc.

END EVT last line of the event.

In addition to the muon information, we can add calorimeter or tracking information in these files. Starting with the calorimeter cells, the format is

CAL TYP radius eta phi layer Energy(MeV) deta dphi dr dx dy dz

TYP indicates the type of calorimeter. It must be one of the following 3 characters words :

PSB(PreSamplerBarrel), EMB(largEmBarrel), EME(largEmEndcap), TIL(tile), HEC(largHadronicEndcap), FCA(veryForwardEndcap) or PSE(PreSamplerEndcap)

radius, eta and phi give the position of the center of the cell

deta, dphi, dr, dx, dy, dz give the size of the cell. The parameters used are (dx, dy, dz)

for FCA, (deta, dphi, dr) for PSB, EMB and TIL and (deta, dphi, dz) for EME, HEC and PSE.

The parameters not used may be arbitrary.

Example :

CAL EME 615.1562 -2.5600 0.2495 1 722.0 0.1000 0.0982 0.0000 0.0000 0.0000 224.1685 740294660

For Egamma Objects the format is :

CAL EgammaContainerLocation X Y Z Px Py Pz E eta phi Charge

electromagnetic objects are dumped if :  $!(isEM \& 0x7FF) == 0$  means all cuts except TRT

X,Y,Z are the track intercept at the perigee, Px,Py,Pz are the gtrack momentum at the perigee

for neutral particles, X,Y,Z and Px,Py,Pz are set to 0

E, eta, Phi are the cluster energy, pseudo-rapidity and azimuth respectively

Example :

EGA egammaCollection 0.001 -0.035 -11.853 -50455.172 -792.320 -49976.254 73027.702 -0.882 -3.117 -1

For Trackparticle and Trk::Track Objects the format is :

TRK TrackParticle TrackParticleContainerLocation dummy X Y Z Px Py Pz Charge PDG\_Code

the track representation is the perigee one

Examples

TRK McEventCollection TruthEvent dummy 0.009 0.006 23.258 -1400.825 2469.821 -6805.638 1 211

TRK CombinedMuon MboyESDMuonContainer dummy 2.488 -82.009 -591.075 -1125.241 -34.143 -7849.847 -1 0

TRK TrackRecord MuonEntryLayerFilter dummy -50.110 -52.002 -6740.000 -8.635 1.688 -125.547 -1 11

TRK CombinedMuon StacoCombinedMuonContainer dummy 0.000 0.001 84.526 31681.809 -12270.981 37905.569 1 0

TRK CombinedMuon MuidCombinedMuonContainer dummy 0.002 0.005 84.522 31454.320 -12184.459 37634.866 1 0

TRK CombinedMuon MuidExtrCombinedMuonContainer dummy -7.415 -19.176 94.293 32445.334 -12545.980 38727.635 1 0

TRK TrkTrack Tracks KalmanFitter 0.012 0.002 83.630 103.873 -670.289 -3445.807 1 0

TRK TrkTrack ConvertedMBoyMuonSpectroOnlyTracks Muonboy 4021.170 -1375.752 4822.313 28616.934 -9429.886 33776.897 1 0

TRK TrkTrack ConvertedMooreTracks MooreLegacyCnv 4133.017 -1699.972 5078.248 30054.322 -11982.251 36321.348 1 0

Description

TRK McEventCollection TruthEvent are the generated tracks. They are drawn inside the tracker (except for muons).

TRK TrackRecord MuonEntryLayerFilter are the generated tracks at the spectrometer entrance. They are drawn starting from the surface defining this spectrometer entrance.

TRK TrkTrack ConvertedMBoyMuonSpectroOnlyTracks are the Muonboy tracks, drawn inside the spectro.

TRK CombinedMuon MboyESDMuonContainer are the Muonboy tracks, back-propagated to the interaction point.

TRK TrkTrack Tracks are the tracks from the Inner Detector.

TRK CombinedMuon StacoCombinedMuonContainer describe the Staco tracks, i.e. combination of InDet and Spectro tracks.

For Segment Objects the format is :

SEG MuonSegment TrkSegmentCollectionLocation X Y Z Dx Dy Dz Chi2

X,Y,Z are the segment position (global frame)

Dx,Dy,Dz the segment direction

Chi2 the segment Chi-squared

Example :

SEG MuonSegment ConvertedMBoySegments -7271.419 -5869.373 -14294.539 -0.114541 -0.096927 -0.988679 8.2018

## D.3.7 Out.MboyView\_Zmumu4023

GEO ATLAS-GEO-02-01-00  
 NEW EVT 4023 5145 1 0  
 HIT 44 36 0 0 0

MDT	BIL	2	3	1	1	1	0.000	4770.927	1280.035	0.000	101	6	1737	0	1
MDT	BIL	2	3	1	2	2	0.000	4796.939	1295.052	0.000	88	6	1224	1	1
MDT	BIL	2	3	1	3	2	0.000	4822.950	1310.070	0.000	161	6	1098	2	1
MDT	BIL	2	3	1	4	3	0.000	4848.961	1325.087	0.000	90	6	1385	3	1
MDT	BIL	2	3	2	1	5	0.000	5048.997	1385.157	0.000	145	6	1539	4	1
MDT	BIL	2	3	2	2	4	0.000	5075.009	1370.140	0.000	85	6	1552	5	1
MDT	BIL	2	3	2	3	5	0.000	5101.020	1385.157	0.000	116	6	1162	6	1
MDT	BIL	2	3	2	4	5	0.000	5127.031	1400.175	0.000	147	6	1152	7	1
MDT	BIL	2	7	1	1	7	-0.000	-4770.927	1460.245	0.000	83	6	1571	8	1
MDT	BIL	2	7	1	2	7	-0.000	-4796.939	1445.227	0.000	88	6	1574	9	1
MDT	BIL	2	7	1	3	7	-0.000	-4822.950	1460.245	0.000	107	6	1188	10	1
MDT	BIL	2	7	1	4	8	-0.000	-4848.961	1475.262	0.000	90	6	1112	11	1
MDT	BIL	2	7	2	1	10	-0.000	-5048.997	1535.332	0.000	108	6	1098	12	1
MDT	BIL	2	7	2	2	10	-0.000	-5075.009	1550.350	0.000	146	6	1205	13	1
MDT	BIL	2	7	2	3	11	-0.000	-5101.020	1565.367	0.000	83	6	1613	14	1
MDT	BIL	2	7	2	4	10	-0.000	-5127.031	1550.350	0.000	80	6	1532	15	1
MDT	BIS	-7	8	1	3	6	4176.601	-1730.005	-6070.210	0.000	129	6	1326	16	1
MDT	BIS	-7	8	2	4	23	4306.481	-1783.803	-6580.805	0.000	94	6	1958	17	1
MDT	BML	2	3	1	1	3	0.000	6913.457	1925.087	0.000	103	6	1179	18	1
MDT	BML	2	3	1	2	3	0.000	6939.469	1940.105	0.000	133	6	1134	19	1
MDT	BML	2	3	1	3	4	0.000	6965.480	1955.122	0.000	83	6	1426	20	1
MDT	BML	2	3	2	1	7	0.000	7312.517	2045.227	0.000	106	6	1302	21	1
MDT	BML	2	3	2	2	7	0.000	7338.529	2060.245	0.000	66	6	1096	22	1
MDT	BML	2	3	2	3	8	0.000	7364.540	2075.262	0.000	104	6	1250	23	1
MDT	BML	2	7	1	1	10	-0.000	-6913.457	2135.332	0.000	94	6	1504	24	1
MDT	BML	2	7	1	2	9	-0.000	-6939.469	2120.315	0.000	101	6	1653	25	1
MDT	BML	2	7	1	3	10	-0.000	-6965.480	2135.332	0.000	120	6	1220	26	1
MDT	BML	2	7	2	1	14	-0.000	-7312.517	2255.472	0.000	116	6	1237	27	1
MDT	BML	2	7	2	2	14	-0.000	-7338.529	2270.490	0.000	83	6	1683	28	1
MDT	BML	2	7	2	3	14	-0.000	-7364.540	2255.472	0.000	116	6	1475	29	1
MDT	BOL	2	3	1	1	12	0.000	9274.457	2675.402	0.000	98	6	1084	30	1
MDT	BOL	2	3	1	2	12	0.000	9300.469	2690.420	0.000	110	6	1126	31	1
MDT	BOL	2	3	1	3	13	0.000	9326.480	2705.437	0.000	64	6	1700	32	1
MDT	BOL	2	3	2	1	16	0.000	9673.517	2795.542	0.000	99	6	1418	33	1
MDT	BOL	2	3	2	2	16	0.000	9699.529	2810.560	0.000	97	6	1152	34	1
MDT	BOL	2	3	2	3	17	0.000	9725.540	2825.577	0.000	106	6	1178	35	1
MDT	BOL	2	7	1	1	18	-0.000	-9274.457	2855.612	0.000	127	6	1185	36	1
MDT	BOL	2	7	1	2	18	-0.000	-9300.469	2870.630	0.000	126	6	1148	37	1
MDT	BOL	2	7	1	3	19	-0.000	-9326.480	2885.647	0.000	96	6	1441	38	1
MDT	BOL	2	7	2	1	22	-0.000	-9673.517	2975.752	0.000	107	6	1323	39	1
MDT	BOL	2	7	2	2	22	-0.000	-9699.529	2990.770	0.000	75	6	1096	40	1
MDT	BOL	2	7	2	3	23	-0.000	-9725.540	3005.787	0.000	111	6	1257	41	1
MDT	BOL	4	2	2	2	4	6858.603	6858.603	6330.140	0.000	98	6	1650	42	1
MDT	BOL	4	6	1	1	23	-6558.031	-6558.031	6885.787	0.000	95	6	1961	43	1
RPC	BML	2	3	1	1	2	1	0	2	-860.000	6808.790	1900.750	6	44	31.250
RPC	BML	2	3	1	1	2	1	0	3	-860.000	6808.790	1927.250	6	45	31.250
RPC	BML	2	3	1	1	2	1	0	1	-860.000	6808.790	1874.250	6	46	34.375
RPC	BML	2	3	1	1	2	2	0	2	-860.000	6831.090	1900.750	6	47	31.250
RPC	BML	2	3	1	1	2	2	0	3	-860.000	6831.090	1927.250	6	48	31.250
RPC	BML	2	3	1	1	2	1	1	41	-1086.100	6808.790	2285.000	6	49	25.000
RPC	BML	2	3	1	1	2	1	1	40	-1059.500	6808.790	2285.000	6	50	31.250
RPC	BML	2	3	1	1	2	2	1	41	-1086.100	6831.090	2285.000	6	51	28.125
RPC	BML	2	3	2	1	2	1	0	10	-860.000	7486.900	2112.750	6	52	31.250
RPC	BML	2	3	2	1	2	2	0	10	-860.000	7509.200	2112.750	6	53	31.250
RPC	BML	2	3	2	1	2	1	1	44	-1165.900	7486.900	2285.000	6	54	34.375
RPC	BML	2	3	2	1	2	1	1	45	-1192.500	7486.900	2285.000	6	55	34.375
RPC	BML	2	3	2	1	2	2	1	45	-1192.500	7509.200	2285.000	6	56	34.375
RPC	BML	2	7	1	1	2	1	0	9	860.000	-6808.790	2086.250	6	57	34.375
RPC	BML	2	7	1	1	2	2	0	10	860.000	-6831.090	2112.750	6	58	31.250
RPC	BML	2	7	1	1	2	2	0	9	860.000	-6831.090	2086.250	6	59	34.375
RPC	BML	2	7	1	1	2	1	1	12	314.700	-6808.790	2285.000	6	60	28.125
RPC	BML	2	7	1	1	2	1	1	13	341.300	-6808.790	2285.000	6	61	31.250
RPC	BML	2	7	1	1	2	2	1	13	341.300	-6831.090	2285.000	6	62	28.125
RPC	BML	2	7	2	1	2	1	0	17	860.000	-7486.900	2298.250	6	63	34.375
RPC	BML	2	7	2	1	2	2	0	17	860.000	-7509.200	2298.250	6	64	37.500
RPC	BML	2	7	2	1	2	1	1	14	367.900	-7486.900	2285.000	6	65	31.250
RPC	BML	2	7	2	1	2	2	1	14	367.900	-7509.200	2285.000	6	66	34.375
RPC	BOL	2	3	1	1	2	1	0	15	-1212.500	9835.400	2834.000	6	67	40.625
RPC	BOL	2	3	1	1	2	1	0	16	-1212.500	9835.400	2868.000	6	68	43.750
RPC	BOL	2	3	1	1	2	1	0	17	-1212.500	9835.400	2902.000	6	69	43.750
RPC	BOL	2	3	1	1	2	2	0	16	-1212.500	9857.700	2868.000	6	70	43.750
RPC	BOL	2	3	1	1	2	1	1	51	-1528.550	9835.400	2885.000	6	71	40.625
RPC	BOL	2	3	1	1	2	1	1	52	-1558.650	9835.400	2885.000	6	72	40.625
RPC	BOL	2	3	1	1	2	1	1	54	-1618.850	9835.400	2885.000	6	73	40.625
RPC	BOL	2	3	1	1	2	1	1	53	-1588.750	9835.400	2885.000	6	74	43.750
RPC	BOL	2	3	1	1	2	2	1	52	-1558.650	9857.700	2885.000	6	75	40.625
RPC	BOL	2	7	1	1	2	1	0	23	1212.500	-9835.400	3023.150	6	76	50.000
RPC	BOL	2	7	1	1	2	2	0	24	1212.500	-9857.700	3053.450	6	77	50.000
RPC	BOL	2	7	1	1	2	1	1	16	475.050	-9835.400	2705.000	6	78	37.500
RPC	BOL	2	7	1	1	2	2	1	16	475.050	-9857.700	2705.000	6	79	40.625
RS3	0	-1308.750	4770.927	1280.035	1.0000000	0.0000000	0.0000000	0.0000000	12	222.625	12.860	12.854	12.846	12.838	12.830
RS3	1	-1308.750	4796.939	1295.052	1.0000000	0.0000000	0.0000000	0.0000000	12	222.625	5.662	5.646	5.628	5.608	5.587
RS3	2	-1308.750	4822.950	1310.070	1.0000000	0.0000000	0.0000000	0.0000000	12	222.625	1.356	1.324	1.289	1.261	1.239
RS3	3	-1308.750	4848.961	1325.087	1.0000000	0.0000000	0.0000000	0.0000000	12	222.625	8.765	8.752	8.740	8.729	8.718


and so on ...

RS3	43	-4822.968	-8293.094	6885.787	-0.7071068	0.7071068	0.0000000	21	236.262	14.548	14.546	14.543	14.541	14.538
TRK	TrackRecord	MuonEntryLayerFilter	dummy	26.231	31.511	-5169.224	0.120	-7.474	-239.587	1	-11			
TRK	TrackRecord	MuonEntryLayerFilter	dummy	34.158	-22.677	4018.539	-37.150	33.002	325.454	1	211			
TRK	TrackRecord	MuonEntryLayerFilter	dummy	303.879	1107.051	-881.413	275.440	-195.088	-130.474	1	211			
TRK	TrackRecord	MuonEntryLayerFilter	dummy	26.442	31.334	3931.646	-265.210	-166.037	1465.477	-1	-211			
TRK	TrackRecord	MuonEntryLayerFilter	dummy	-19.992	77.941	-6750.000	18.730	99.074	-7258.469	-1	-211			
TRK	TrackRecord	MuonEntryLayerFilter	dummy	-0.584	40.996	-4986.499	-3.045	-9.014	-114.564	1	-11			




## E Menu items

### E.1 File menu

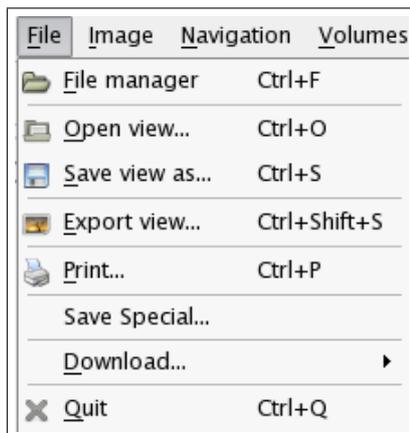

(a) Linux style

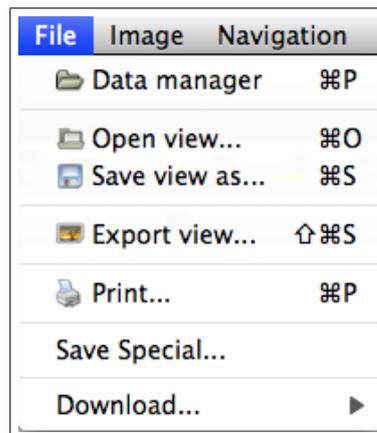


(b) Mac OS style




<i>Item name</i>	<i>Action</i>
<b>Data manager</b>	Load various files: <i>Volumes, Events, Magnetic field and others</i>
<b>Open view ...</b>	Open a <i>Persint</i> .p2vf file for display
<b>Save view as ...</b>	Save view as a <i>Persint</i> .p2vf file
<b>Export view ...</b>	Export (save) view as a local file (.png, .jpg, .bmp, .svg)
<b>Save special...</b>	To compare geometries (sections 6.4, and 9.3)
<b>Print</b>	Print current view
<b>Download ...</b>	- Download geometry files from Oracle data base at CERN - Download data from Trac server ( <b>Not yet available</b> ) - Download additional field maps from: <a href="https://atlas.web.cern.ch/Atlas/GROUPS/MUON/magfield/Fieldmap">https://atlas.web.cern.ch/Atlas/GROUPS/MUON/magfield/Fieldmap</a>
<b>Quit</b>	Quit <i>Persint</i> (for Linux only) <sup>1</sup>

<sup>1</sup>In Mac OS, use “Quit” in the *persint* menu (section E.8).

## E.2 Image menu

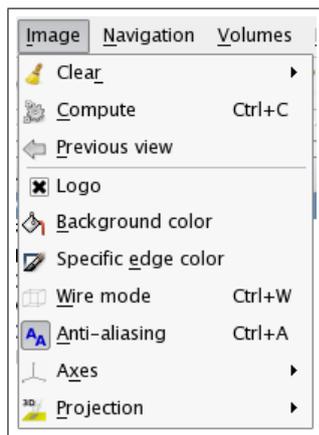

(a) Linux style

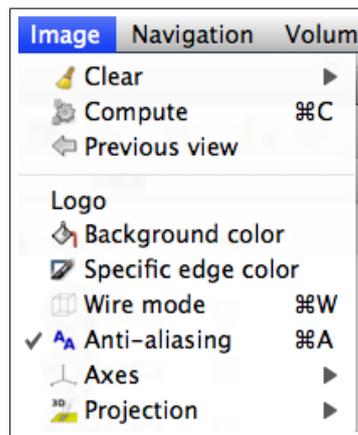


(b) Mac OS style





<i>Item name</i>	<i>Action</i>
<b>Clear</b>	Several options: <ul style="list-style-type: none"> <li>- Clear view (completely); one can also use the “Brush”</li> <li>- Partial clear of AMDB or AGDD volumes</li> <li>- Clear event: clears the event hits and associated chambers</li> <li>- Clear labels: clears <u>all</u> labels in the display.</li> <li>- Clear captions: clears <u>all</u> captions in the display.</li> <li>- Clear pictures (logos): clears <u>all</u> pictures in the display.</li> </ul>
<b>Compute</b>	Make the calculation to display the newly defined view
<b>Previous view</b>	Display the view defined by the previous “Compute” action. Up to 10 backward steps are possible
<b>Logo</b> <sup>1</sup>	Display or hide the <i>Persint</i> logo at the bottom left of the display.
<b>Background color</b> <sup>1</sup>	Choose the background color of the main display window
<b>Specific edge color</b> <sup>1</sup>	Define the color of volume edges in the display
<b>Wire mode</b>	Switch the Wire mode on/off for all the displayed volumes
<b>Anti-aliasing</b>	Provide smooth volume edges
<b>Axes</b>	Display the ATLAS coordinate system in various styles
<b>Projection</b>	Display 3D views or 2D projections; makes axes inversion

<sup>1</sup>Not present as an icon in the default tool bar.

### E.3 Navigation menu

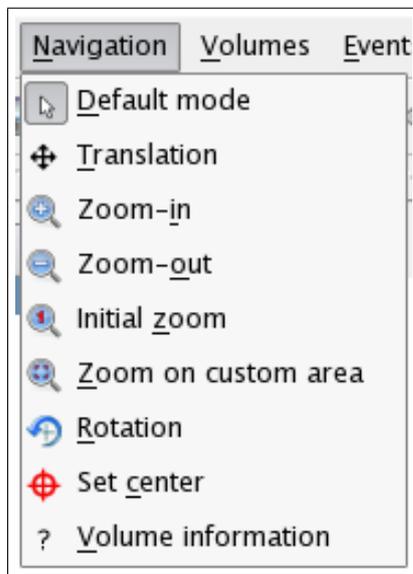

(a) Linux style

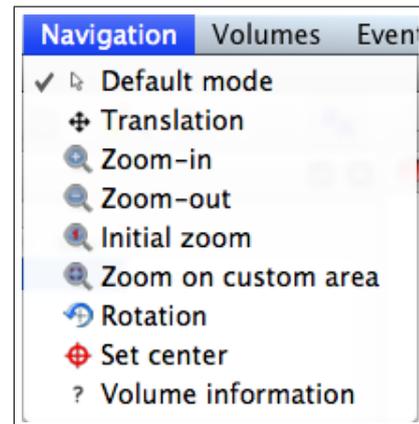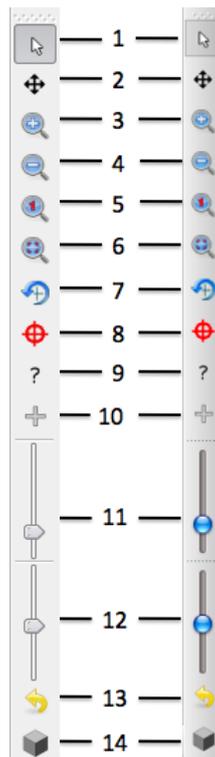

(d) Mac OS style


#	Item name	Action
1	<b>Default mode</b>	All purpose function to perform <i>Rotation, Translation, Zoom-in/out, Zoom on custom area</i> (see section 8.2)
2	<b>Translation</b>	Translate the view in any direction
3	<b>Zoom-in</b> <sup>1</sup>	Zoom-in by moving the viewing point forward, to enlarge the view
4	<b>Zoom-out</b> <sup>1</sup>	Zoom-out by moving the viewing point backwards, to reduce the view
5	<b>Initial zoom</b>	Retrieve the original viewing parameters
6	<b>Zoom on custom area</b>	Define the region to be enlarged
7	<b>Rotation</b> <sup>1</sup>	Rotate view around center point of display
8	<b>Set center</b>	Center view on a point chosen with the cursor
9	<b>Volume information</b>	Open the <i>Modify volume</i> window to choose volume parameters: <b>Color, Hide, Translation, Rotation</b>
10	<b>Selection mode</b> <sup>2</sup>	Select a series of volumes to be hidden
11	<b>Navigation scale</b> <sup>2</sup>	Set the amplitude of the following navigation actions: <b>Rotation, Zoom-in/out</b>
12	<b>Focal length</b> <sup>2</sup>	Set the focal length of the viewing.
13	<b>Reset focal length</b> <sup>2</sup>	Reset focal length to nominal value (35 mm)
14	<b>Isometric view</b> <sup>2</sup>	Set/reset parameters for isometric viewing (infinite focal length).

---

<sup>1</sup>The amplitude of these actions is controlled by the displacement of the cursor in the *Navigation scale* gauge

<sup>2</sup>These five items of the *Navigation* tool bar are NOT in the Menu.

## E.4 Volumes menu

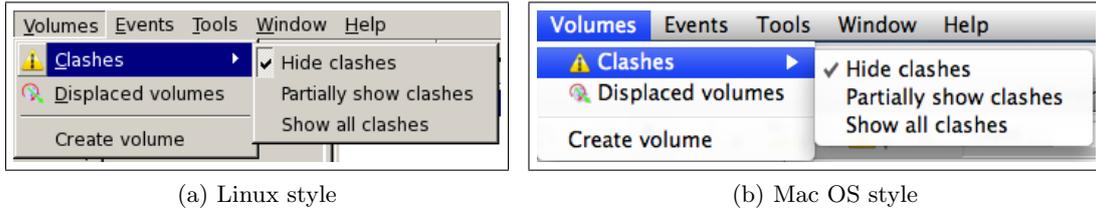

(a) Linux style

(b) Mac OS style



### Displaced volumes window

	Volume	X Offset	Y Offset	Z Offset	Ax Angle	Ay Angle	Az Angle
1	EOL_F4_Z+6	19999.00 cm	19999.00 cm	19999.00 cm	0.00 °	0.00 °	0.00 °
2	EOL_F4_Z+5	19999.00 cm	19999.00 cm	19999.00 cm	0.00 °	0.00 °	0.00 °
3	EOS_F4_Z+6/EOS/Eta6/Phi4/MDT/ML2/	19999.00 cm	19999.00 cm	19999.00 cm	0.00 °	0.00 °	0.00 °
4	EOS_F4_Z+5/EOS/Eta5/Phi4/MDT/ML2/	19999.00 cm	19999.00 cm	19999.00 cm	0.00 °	0.00 °	0.00 °
5	EOS_F4_Z+4/EOS/Eta4/Phi4/MDT/ML2/	19999.00 cm	19999.00 cm	19999.00 cm	0.00 °	0.00 °	0.00 °

Buttons: Refresh list, Reset volume displacement, Reset all the displacements, Close window

Figure 111: Volumes can be displaced in the X, Y, Z directions and/or rotated. The volumes shown in this window are "hidden" or *Moved to infinity*:  $X = Y = Z = 19999.00$  cm. (section 9.2)


### Create volume window

The *Create volume* function is used to draw many types of volumes. The function is embedded in *Persint* and is used, for example, to display the dead matter structures of ATLAS. It uses the AGDD XML description.

The xml structure of the AGDD file is given below in E.4.1, and the subroutine used to create volumes is shown in E.4.2.

Figure 112: With the *Create volume* function it is possible to draw one volume at a time with chosen dimensions and color.

- Box (width, length, height)
- Sphere (diameter, # of facets)
- Cone (diameter, height, # of facets)
- Frame (Diameter, length, height, thickness)

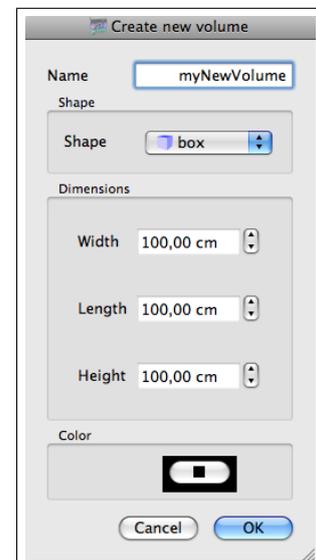

Very clear examples of the various AGDD XML volumes can be found in [9], where the *ATHENA* package *AGDD2Geo* is presented in connexion with the AGDD XML structure.

A summary list of the AGDD volume types described in [9] is given below:

- Cube
- Tube
- Pyramid
- Cylinder
- Chain
- Polygons
- Combined volumes
- Merged volumes
- Subtracted volumes
- Extruded volumes

<i>Item name</i>	<i>Action</i>
<b>Clashes</b>	Show/Hide intersections of clashing volumes (for debugging geometry)
<b>Displaced volumes</b>	Show and edit list of displaced volumes (“ <i>Move to infinity</i> ”)
<b>Create volumes</b>	Draw many types of volumes, e.g. dead matter, using the AGDD XML description

## E.4.1 xml description of AGDD files

```

<?xml version="1.0"?>
<!DOCTYPE AGDD SYSTEM "AGDD.dtd" >
<AGDD>
<section name = "Solids"
  version = "1.1"
  date = "29 August 2002"
  author = "Marc Virchaux"
  top_volume = "TEST">
<defaults unit_length="mm" />
<box name="box" material="Green" X_Y_Z="500;200;800" />
<trd name="trd" material="Blue" Xmp_Ymp_Z=" 300 ; 30 ; 200 ; 80 ;
800 " />
<trd name="trd_tilt_1" material="Red" Xmp_Ymp_Z=" 300 30 200 80
800" side_tilts="15 -15" />
<trd name="trd_tilt_2" material="Orange" Xmp_Ymp_Z=" 300 30 200 80
800" side_tilts="22.5 7.5" />
<trd name="trd_incli" material="Yellow" Xmp_Ymp_Z=" 300 30 200 80
800" inclination="15 30" />
<trd name="trd_incli_tilt" material="Purple" Xmp_Ymp_Z=" 300 30 200 80
800" side_tilts="7.5 15" inclination="5 -30" />
<tubs name="tubs_full" material="Azur" Rio_Z=" 0 100 800"
nbPhi="100" />
<tubs name="tubs_full2" material="Azur" Rio_Z=" 0 100 800"
nbPhi="10" />
<tubs name="tubs_hole" material="Yellow" Rio_Z="50 100 800" />
<tubs name="tubs_angle" material="Red" Rio_Z="50 100 800"
profile="30 180" />
<cons name="cons_full" material="Blue" Rio1_Rio2_Z="0 ; 0;100;140;
800" />
<cons name="cons_hole" material="Green" Rio1_Rio2_Z="50 90 100 140
800" />
<cons name="cons_angle" material="Orange" Rio1_Rio2_Z="50 150 50 150
80" profile="60 90" />
<elipso name="elipso" material="Purple" radiusXYZ=" 150 ; 200 ; 400 "
nbPhi="6" />
<gvxysx name="gvxysx" material="Azur" dz="230."
X=" 50. 115. 115. 20. 20. 10. 10. 60. 60."
Y=" 0. 65. 165. 270. 600. 630. 1050. 1060. 1110." />
<gvxy name="gvxy" material="Orange" dz="330." >
<gvxy_point X_Y=" -60.0 0.0" />
<gvxy_point X_Y=" 50.0 0.0" />
<gvxy_point X_Y=" 115.0 65.0" />
<gvxy_point X_Y=" 115.0 165.0" />
<gvxy_point X_Y=" 20.0 270.0" />
<gvxy_point X_Y=" 20.0 600.0" />
<gvxy_point X_Y=" 10.0 630.0" />
<gvxy_point X_Y=" 10.0 1050.0" />
<gvxy_point X_Y=" 60.0 1060.0" />
<gvxy_point X_Y=" 60.0 1110.0" />
<gvxy_point X_Y=" -60.0 1110.0" />
<gvxy_point X_Y=" -60.0 600.0" />
<gvxy_point X_Y=" -10.0 550.0" />
<gvxy_point X_Y=" -10.0 450.0" />
<gvxy_point X_Y=" -60.0 400.0" />
<gvxy_point X_Y=" -60.0 300.0" />
<gvxy_point X_Y=" -10.0 250.0" />
<gvxy_point X_Y=" -10.0 150.0" />
<gvxy_point X_Y=" -60.0 100.0" />
</gvxy>
<gvxysx name="gvxysx" material="Black" dz="100." >
<gvxy_point X_Y=" 120.0 80.0" />
<gvxy_point X_Y=" 200.0 200.0" />
<gvxy_point X_Y=" 20.0 100.0" />
</gvxysx>
<pcon name="pcon" material="Black" >
<polyplane Rio_Z="100 150 400" />
<polyplane Rio_Z="100 110 280" />
<polyplane Rio_Z=" 25 75 50" />
<polyplane Rio_Z=" 25 165 -200" />
<polyplane Rio_Z=" 50 140 -400" />
</pcon>
<composition name="TEST">
<posXYZ volume="box" X_Y_Z=" 700 800 400" />
<posXYZ volume="trd" X_Y_Z=" -800 500 0" />
<posXYZ volume="trd_tilt_1" X_Y_Z=" -800 800 0" />
<posXYZ volume="trd_tilt_2" X_Y_Z=" -800 200 0" />
<posXYZ volume="trd_incli_tilt" X_Y_Z=" -800 -100 0" />
<posXYZ volume="trd_incli" X_Y_Z=" -200 200 0" />
<posXYZ volume="tubs_full" X_Y_Z=" 200 -200 0" />
<posXYZ volume="tubs_full2" X_Y_Z=" 0 0 0" />
<posXYZ volume="tubs_hole" X_Y_Z=" 500 -320 0" />

```

```

<posXYZ volume="tubs_angle"
X_Y_Z=" 600 -620 0" />
<posXYZ volume="cons_full"
X_Y_Z="-200 -200 0" />
<posXYZ volume="cons_hole"
X_Y_Z="-500 -500 0" />
<posXYZ volume="cons_angle"
X_Y_Z=" 800 -100 0" />
<posXYZ volume="pcon"
X_Y_Z=" 550 700 0" />
<posXYZ volume="snake"
X_Y_Z=" 0 -800 50" />
<posXYZ volume="snake_nphi"
X_Y_Z=" 0 -800 -400" />
<posXYZ volume="gvxyx"
X_Y_Z="-300 350 0" />
<posXYZ volume="gvxy"
X_Y_Z=" 100 350 0" />
<posXYZ volume="gvxyxy"
X_Y_Z="-900 -800 0" />
<posXYZ volume="elipso"
X_Y_Z=" 500 200 0" />
</composition>
</section>

<section name = "Solids"
version = "1.1"
date = "29 August 2002"
author = "Marc Virchaux"
top_volume = "TESTtruc">

<composition name="TESTtruc">
<posXYZ volume="box"
X_Y_Z="-700 -800 -400" />
<posXYZ volume="trd"
X_Y_Z=" 800 -500 0" />
</composition>
</section>

<section name = "Solids"
version = "1.1"
date = "29 August 2002"
author = "Marc Virchaux"
top_volume = "TESTtruc">

<composition name="TESTtruc2">
<posXYZ volume="box2"
X_Y_Z="100;200;800"
material="Gray" />
<trd
name="trd2"
material="black"
Xmp_Ymp_Z=" 300 ; 30 ; 200 ; 80 ;
800 " />
<composition name="TESTtruc2">
<posXYZ volume="box2"
X_Y_Z=" 700 800 400" />
<posXYZ volume="trd2"
X_Y_Z="-800 500 0" />
</composition>
</section>

<section name = "AllBazard"
version = "1.1"
date = "29 August 2002"
author = "Marc Virchaux"
top_volume = "all">

<composition name="All">
<posXYZ volume="TEST" X_Y_Z=" 0 0 0" />
<posXYZ volume="TESTtruc" X_Y_Z=" 0 0 0" />
<posXYZ volume="TESTtruc2" X_Y_Z=" 0 0 0" />
</composition>

</AGDD>

```



```

CALL ADD_XML_ATT('unit_length', 'A', 'default', ')
CALL ADD_XML_ATT('unit_angle', 'A', 'default', ')
i>> 13 -----
CALL ADD_XML_ELEMENT('gvyx')
*****
CALL ADD_XML_ATT('name', 'A', '#', ')
CALL ADD_XML_ATT('material', 'A', 'air', ')
CALL ADD_XML_ATT('parameters', 'A', 'none', ')
CALL ADD_XML_ATT('sensitive', 'A', 'false', ')
CALL ADD_XML_ATT('Phi0', 'A', '0', ')
CALL ADD_XML_ATT('dPhi', 'R', '#', ')
CALL ADD_XML_ATT('nbPhi', 'I', '6', ')
CALL ADD_XML_ATT('unit_length', 'A', 'default', ')
CALL ADD_XML_ATT('unit_angle', 'A', 'default', ')
i>> 19 -----
CALL ADD_XML_ELEMENT('gslice')
*****
CALL ADD_XML_ATT('name', 'A', '#', ')
CALL ADD_XML_ATT('material', 'A', 'air', ')
CALL ADD_XML_ATT('unit_length', 'A', 'default', ')
CALL ADD_XML_ATT('unit_angle', 'A', 'default', ')
i>> 20 -----
CALL ADD_XML_ELEMENT('elcyl')
*****
CALL ADD_XML_ATT('name', 'A', '#', ')
CALL ADD_XML_ATT('material', 'A', 'air', ')
CALL ADD_XML_ATT('parameters', 'A', 'none', ')
CALL ADD_XML_ATT('sensitive', 'A', 'false', ')
CALL ADD_XML_ATT('RXio.RYio.Z', 'R', '#', ')
CALL ADD_XML_ATT('profile', 'R', '0.360', ')
CALL ADD_XML_ATT('nbPhi', 'I', '0', ')
CALL ADD_XML_ATT('unit_length', 'A', 'default', ')
CALL ADD_XML_ATT('unit_angle', 'A', 'default', ')
i>> 21 -----
Ie11.xml_solid = Nb.xml_ele
CALL ADD_XML_ELEMENT('MDT_Chamber')
*****
CALL ADD_XML_ATT('ShortWidth', 'R', '#', ')
CALL ADD_XML_ATT('LongWidth', 'R', '#', ')
CALL ADD_XML_ATT('Length', 'R', '#', ')
CALL ADD_XML_ATT('UpperMultilayer', 'Aref', '#', ')
CALL ADD_XML_ATT('LowerMultilayer', 'Aref', '#', ')
CALL ADD_XML_ATT('Spacer', 'Aref', '#', ')
CALL ADD_XML_ATT('unit_length', 'A', 'default', ')
Ie10.xml_cmpac = Nb.xml_ele
i>> 22 -----
CALL ADD_XML_ELEMENT('MDT_Multilayer')
*****
CALL ADD_XML_ATT('nLayers', 'I', '#', ')
CALL ADD_XML_ATT('nTubesPerStep', 'I', '#', ')
CALL ADD_XML_ATT('Tube', 'Aref', '#', ')
CALL ADD_XML_ATT('Support', 'Aref', '#', ')
CALL ADD_XML_ATT('unit_length', 'A', 'default', ')
i>> 23 -----
CALL ADD_XML_ELEMENT('MDT_Spacer')
*****
CALL ADD_XML_ATT('Height', 'R', '#', ')
CALL ADD_XML_ATT('C_Channel', 'Aref', '#', ')
CALL ADD_XML_ATT('unit_length', 'A', 'default', ')
i>> 24 -----

CALL ADD_XML_ATT('unit_length', 'A', 'default', ')
CALL ADD_XML_ATT('unit_angle', 'A', 'default', ')
i>> 13 -----
CALL ADD_XML_ELEMENT('gvyx')
*****
CALL ADD_XML_ATT('name', 'A', '#', ')
CALL ADD_XML_ATT('material', 'A', 'air', ')
CALL ADD_XML_ATT('parameters', 'A', 'none', ')
CALL ADD_XML_ATT('sensitive', 'A', 'false', ')
CALL ADD_XML_ATT('X', 'R', '79R', ')
CALL ADD_XML_ATT('Y', 'R', '79R', ')
CALL ADD_XML_ATT('dZ', 'R', '#', ')
CALL ADD_XML_ATT('unit_length', 'A', 'default', ')
CALL ADD_XML_ATT('unit_angle', 'A', 'default', ')
i>> 14 -----
CALL ADD_XML_ELEMENT('gvyxex')
*****
CALL ADD_XML_ATT('name', 'A', '#', ')
CALL ADD_XML_ATT('material', 'A', 'air', ')
CALL ADD_XML_ATT('parameters', 'A', 'none', ')
CALL ADD_XML_ATT('sensitive', 'A', 'false', ')
CALL ADD_XML_ATT('X', 'R', '79R', ')
CALL ADD_XML_ATT('Y', 'R', '79R', ')
CALL ADD_XML_ATT('dZ', 'R', '#', ')
CALL ADD_XML_ATT('unit_length', 'A', 'default', ')
CALL ADD_XML_ATT('unit_angle', 'A', 'default', ')
i>> 15 -----
CALL ADD_XML_ELEMENT('gvyxxy')
*****
CALL ADD_XML_ATT('name', 'A', '#', ')
CALL ADD_XML_ATT('material', 'A', 'air', ')
CALL ADD_XML_ATT('parameters', 'A', 'none', ')
CALL ADD_XML_ATT('sensitive', 'A', 'false', ')
CALL ADD_XML_ATT('X', 'R', '79R', ')
CALL ADD_XML_ATT('Y', 'R', '79R', ')
CALL ADD_XML_ATT('dZ', 'R', '#', ')
CALL ADD_XML_ATT('unit_length', 'A', 'default', ')
CALL ADD_XML_ATT('unit_angle', 'A', 'default', ')
i>> 16 -----
CALL ADD_XML_ELEMENT('snake')
*****
CALL ADD_XML_ATT('name', 'A', '#', ')
CALL ADD_XML_ATT('material', 'A', 'air', ')
CALL ADD_XML_ATT('radius', 'R', '#', ')
CALL ADD_XML_ATT('Phi0', 'R', '0', ')
CALL ADD_XML_ATT('nbPhi', 'I', '0', ')
CALL ADD_XML_ATT('unit_length', 'A', 'default', ')
CALL ADD_XML_ATT('unit_angle', 'A', 'default', ')
i>> 17 -----
CALL ADD_XML_ELEMENT('ellipse')
*****
CALL ADD_XML_ATT('name', 'A', '#', ')
CALL ADD_XML_ATT('material', 'A', 'air', ')
CALL ADD_XML_ATT('radiusXYZ', 'I', '3R', ')
CALL ADD_XML_ATT('nbPhi', 'I', '0', ')
CALL ADD_XML_ATT('nbTheta', 'I', '0', ')
CALL ADD_XML_ATT('unit_length', 'A', 'default', ')
CALL ADD_XML_ATT('unit_angle', 'A', 'default', ')
i>> 18 -----

```





```


CALL ADD_XML_ATT('unit_length', 'A', 'default', ' ')
CALL ADD_XML_ATT('unit_angle', 'A', 'default', ' ')
Ie11_xml_mupos = Nb_xml_ele
I>> 46 -----
CALL ADD_XML_ELEMENT('foreach')
*****
CALL ADD_XML_ATT('index', 'I', '#', ' ')
CALL ADD_XML_ATT('begin', 'R', '0', ' ')
CALL ADD_XML_ATT('step', 'R', '1', ' ')
CALL ADD_XML_ATT('loops', 'I', '#', ' ')
CALL ADD_XML_ATT('when', 'I', '1', ' ')
Ie10_xml_forea = Nb_xml_ele
I>> 47 -----
CALL ADD_XML_ELEMENT('volume')
*****
CALL ADD_XML_ATT('name', 'A', '#', ' ')
Ie10_xml_volum = Nb_xml_ele
I>> 48 -----
CALL ADD_XML_ELEMENT('identifier')
*****
CALL ADD_XML_ATT('field', 'A', '#', ' ')
CALL ADD_XML_ATT('value', 'I', '0', ' ')
CALL ADD_XML_ATT('step', 'I', '0', ' ')
Ie10_xml_ident = Nb_xml_ele
I>> 49 -----
CALL ADD_XML_ELEMENT('layer')
*****
CALL ADD_XML_ATT('field', 'A', 'layer', ' ')
CALL ADD_XML_ATT('value', 'I', '0', ' ')
CALL ADD_XML_ATT('step', 'I', '0', ' ')
I>> 50 -----
CALL ADD_XML_ELEMENT('ring')
*****
CALL ADD_XML_ATT('field', 'A', 'ring', ' ')
CALL ADD_XML_ATT('value', 'I', '0', ' ')
CALL ADD_XML_ATT('step', 'I', '0', ' ')
I>> 51 -----
CALL ADD_XML_ELEMENT('sector')
*****
CALL ADD_XML_ATT('field', 'A', 'sector', ' ')
CALL ADD_XML_ATT('value', 'I', '0', ' ')
CALL ADD_XML_ATT('step', 'I', '0', ' ')
Ie11_xml_ident = Nb_xml_ele
I>> 52 -----
CALL ADD_XML_ELEMENT('polyplane')
*****
CALL ADD_XML_ATT('Rto_Z', 'R', '3R', '#', ' ')
I>> 53 -----
CALL ADD_XML_ELEMENT('snake_point')
*****
CALL ADD_XML_ATT('X_Y_Z', 'R', '3R', '#', ' ')
I>> 54 -----
CALL ADD_XML_ELEMENT('gvxy_point')
*****
CALL ADD_XML_ATT('X_Y', 'R', '2R', '#', ' ')
I>> 55 -----
CALL ADD_XML_ELEMENT('gcylrz_point')
*****
CALL ADD_XML_ATT('R_Z', 'R', '2R', '#', ' ')
CALL ADD_XML_ELEMENT('gslice_new')
*****
CALL ADD_XML_ATT('Z', 'R', 'R', '#', ' ')
I>> 57 -----
CALL ADD_XML_ELEMENT('gslice_point')
*****
CALL ADD_XML_ATT('X_Y', 'R', '2R', '#', ' ')
I>> 58 -----
CALL ADD_XML_ELEMENT('row')
*****
CALL ADD_XML_ATT('values', 'R', '79R', '#', ' ')
I>> 59 -----
CALL ADD_XML_ELEMENT('parameters')
*****
CALL ADD_XML_ATT('name', 'A', '#', ' ')
CALL ADD_XML_ATT('type', 'A', '#', 'none', ' ')
I>> 60 -----
CALL ADD_XML_ELEMENT('real')
*****
CALL ADD_XML_ATT('name', 'A', '#', ' ')
CALL ADD_XML_ATT('value', 'R', '0', ' ')
CALL ADD_XML_ATT('unit', 'A', 'mm', ' ')
CALL ADD_XML_ATT('comment', 'A', '#', 'none', ' ')
I>> 61 -----
CALL ADD_XML_ELEMENT('sIDigit')
*****
CALL ADD_XML_ATT('id', 'A', '#', 'no_id', ' ')
CALL ADD_XML_ATT('kine', 'I', '0', ' ')
CALL ADD_XML_ATT('type', 'A', '#', 'pixel', ' ')
CALL ADD_XML_ATT('dir', 'A', '#', 'barrel', ' ')
CALL ADD_XML_ATT('phi', 'R', '0', ' ')
CALL ADD_XML_ATT('rho', 'R', '0', ' ')
CALL ADD_XML_ATT('z', 'R', '0', ' ')
CALL ADD_XML_ATT('top_x', 'R', '0', ' ')
CALL ADD_XML_ATT('top_y', 'R', '0', ' ')
CALL ADD_XML_ATT('top_z', 'R', '0', ' ')
CALL ADD_XML_ATT('bottom_x', 'R', '0', ' ')
CALL ADD_XML_ATT('bottom_y', 'R', '0', ' ')
CALL ADD_XML_ATT('bottom_z', 'R', '0', ' ')
Ie10_xml_digit = Nb_xml_ele
I>> 62 -----
CALL ADD_XML_ELEMENT('StripCluster')
*****
CALL ADD_XML_ATT('id', 'A', '#', 'no_id', ' ')
CALL ADD_XML_ATT('kine', 'I', '0', ' ')
CALL ADD_XML_ATT('type', 'A', '#', 'pixel', ' ')
CALL ADD_XML_ATT('phi', 'R', '0', ' ')
CALL ADD_XML_ATT('rho', 'R', '0', ' ')

```


```

CALL ADD_XML_ATT('z
CALL ADD_XML_ATT('d_rphi
CALL ADD_XML_ATT('d_rz
CALL ADD_XML_ATT('length
CALL ADD_XML_ATT('pitch
CALL ADD_XML_ATT('thickness
CALL ADD_XML_ATT('sin_stereo
CALL ADD_XML_ATT('sin_tilt
!>> 63 -----
CALL ADD_XML_ELEMENT('TRTDigit')
!
*****
CALL ADD_XML_ATT('id
CALL ADD_XML_ATT('kine
CALL ADD_XML_ATT('dir
CALL ADD_XML_ATT('above_threshold
CALL ADD_XML_ATT('drift
CALL ADD_XML_ATT('phi
CALL ADD_XML_ATT('zrho
CALL ADD_XML_ATT('min
CALL ADD_XML_ATT('max
!>> 64 -----
CALL ADD_XML_ELEMENT('TruthTrack')
!
*****
CALL ADD_XML_ATT('particle
CALL ADD_XML_ATT('kine
CALL ADD_XML_ATT('rep
CALL ADD_XML_ATT('charge
CALL ADD_XML_ATT('eta
CALL ADD_XML_ATT('phi
CALL ADD_XML_ATT('v_phi
CALL ADD_XML_ATT('v_rho
CALL ADD_XML_ATT('v_z
!
Iell_xml_digit = Nb_xml_ele
!
!>> Specify the hierarchy of the identifiers -----
CALL ADD_XML_IND('sector')
CALL ADD_XML_IND('ring')
CALL ADD_XML_IND('multilayer')
CALL ADD_XML_IND('layer')
CALL ADD_XML_IND('strip')
CALL ADD_XML_IND('tube')
!
!
%

```

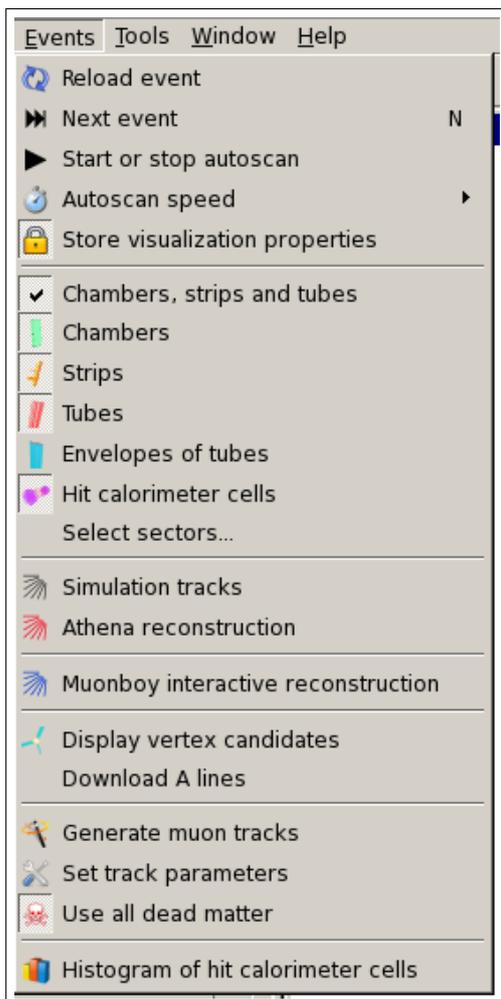E.5 *Events* menu

(a) Linux style

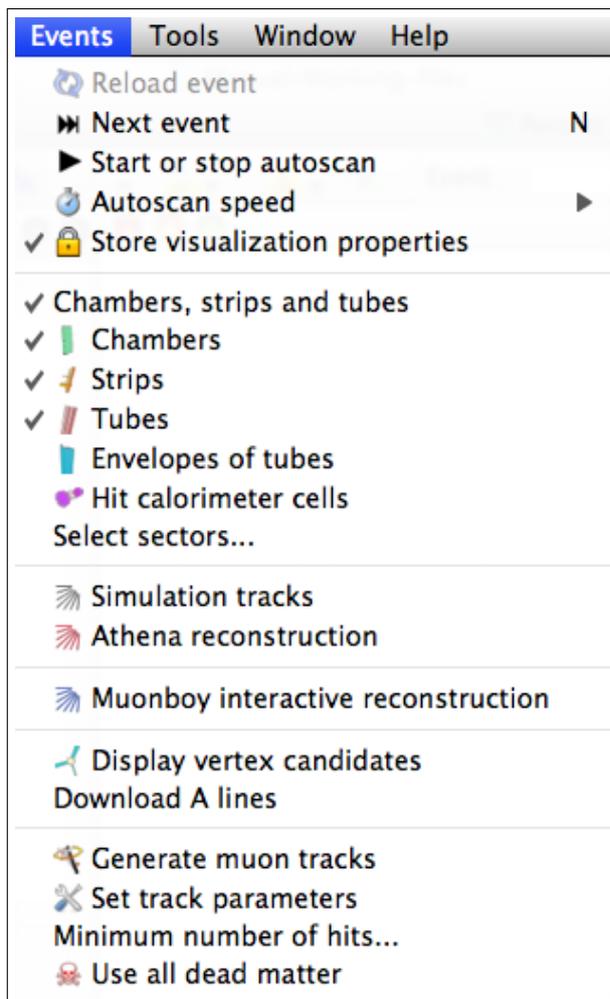

(b) Mac OS style






<i>Item name</i>	<i>Action</i>
<b>Reload event</b> <sup>1</sup>	Load current event again
<b>Next event</b>	Display next event of the active <i>Event</i> file
<b>Start autoscan</b>	Display successive events in regular time intervals
<b>Autoscan speed</b>	Set the time interval between two consecutive event displays (1, 2, 5, 10, 20, or 30 seconds)
<b>Store visualization properties</b>	Store viewing parameters from one event to the next, when scanning an event file
<b>Chambers, strips and tubes</b> <sup>3</sup>	Display/Hide chambers, trips and tubes "in one stroke"
<b>Chambers</b> <sup>3</sup>	Display/Hide the entire chamber
<b>Strips</b> <sup>3</sup>	Display/Hide RPC strips
<b>Tubes</b> <sup>3</sup>	Display/Hide MDT tubes
<b>Envelopes of tubes</b> <sup>3</sup>	Display/Hide the tube envelopes
<b>Hit calorimeter cells</b>	Display the hit cells of the calorimeters
<b>Select Sectors...</b>	Select sectors for displaying chambers with hits in an event
<b>Simulation tracks</b>	Display simulation tracks
<b>Athena reconstruction</b>	Display tracks reconstructed by <i>ATHENA</i>
<b>Muonboy interactive reconstruction</b>	Use the embedded MuonBoy program to ineractively reconstruct segments and tracks
<b>Display vertex candidates</b>	Display primary vertex candidates of the current event
<b>Download A lines</b> <sup>3</sup>	Download A-lines for each event from the ATLAS data base
<b>Generate muon tracks</b>	Generate muon tracks at the IP. The vertex position, $\varphi, \eta$ , and $P_t$ can be chosen (and the color !)
<b>Set track parameters</b>	Open window (Fig. 6) where the objects to be displayed are chosen and their parameters set
<b>Minimum number of hits...</b>	Minimum # of hits required for a MDT chamber to be displayed
<b>Use all dead matter</b>	Choose to use ALL dead matter or only DISPLAYED dead matter when computing track momentum with energy loss

<sup>1</sup>Active only if an event is displayed.

<sup>2</sup>Active only if an event file is loaded.

<sup>3</sup>Not present as an icon in the default tool bar.

### E.5.1 Set track parameters window

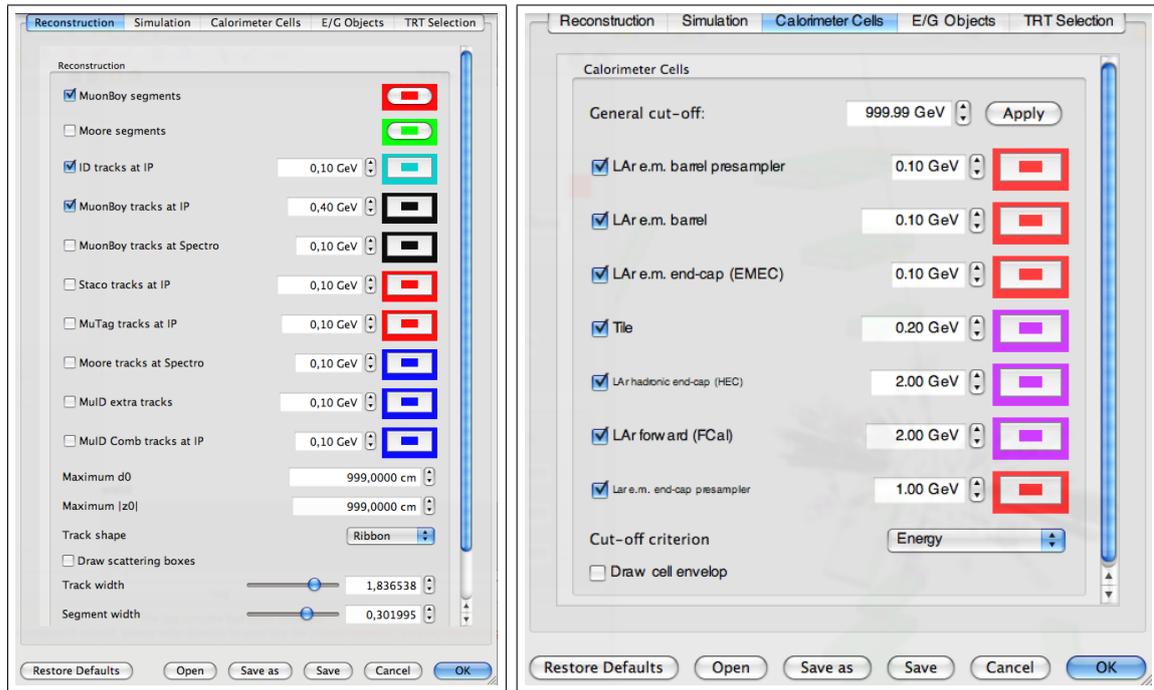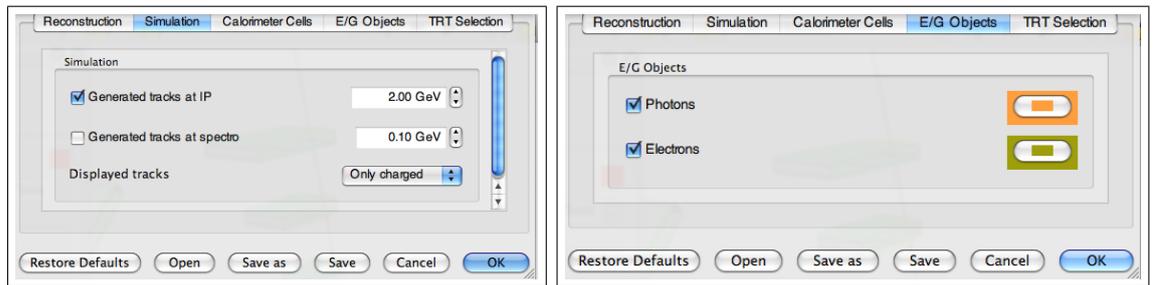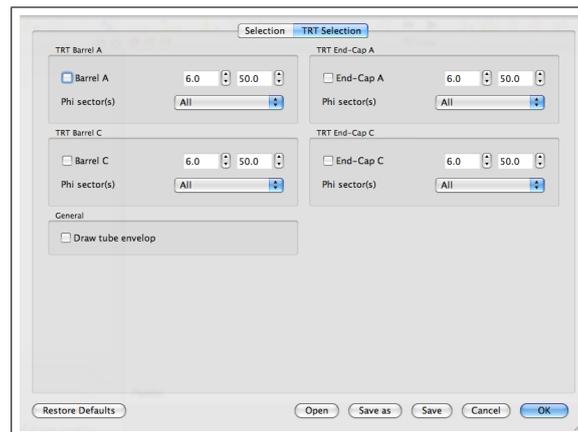(a) Selections for *Reconstruction*(b) Selections for *Calorimeter cells*(c) Selections for *Simulation*(d) Selections for *E/G objects*

(e) Selections specific to the TRT detector

Figure 113: The two panes in the *Set track parameters* window (Mac OS style). Thresholds can be set for track momentum and calorimeter cell energy (both in GeV). The selections in the TRT pane concern cuts on timing.

<i>Parameter</i>	<i>Description</i>
<b><i>Reconstruction</i></b>	
Muonboy segments	Choose color
Moore segments	Choose color
ID tracks at IP	Pt threshold in $GeV/c$ ; choose color
Muonboy tracks at IP	Pt threshold in $GeV/c$ ; choose color
Muonboy tracks at Spectrometer	Pt threshold in $GeV/c$ ; choose color
Staco tracks at IP	Pt threshold in $GeV/c$ ; choose color
MuTag tracks at IP	Pt threshold in $GeV/c$ ; choose color
Moore tracks at Spectrometer	Pt threshold in $GeV/c$ ; choose color
MuID extra tracks	Pt threshold in $GeV/c$ ; choose color
MuID Combined tracks at IP	Pt threshold in $GeV/c$ ; choose color
Maximum $ d_0 $	Maximum allowed track impact parameter (x,y plane)
Maximum $ z_0 $	Maximum allowed track impact parameter (z direction)
Track shape	Choose shape of the track: <i>Ribbon</i> , <i>Crossed ribbons</i> , or <i>Cylinder</i>
Draw scattering boxes	Scattering centers used in the reconstruction are shown (or hidden)
Track width	Can be adjusted with ruler or spinbox
Segment width	Can be adjusted with ruler or spinbox
<b><i>Simulation</i></b>	
Generated tracks at IP	Pt threshold in $GeV/c$
Generated tracks at Spectro	Pt threshold in $GeV/c$
Displayed tracks	Only muons; only charged; only neutrals; all tracks
<b><i>Calorimeter cells</i></b>	
General threshold	General threshold on $E$ or $E_T$ for <u>all</u> calorimeter cells, in $GeV/c^2$
LAr e.m. barrel presampler	$E$ or $E_T$ threshold in $GeV/c^2$ ; choose color
LAr e.m. barrel	$E$ or $E_T$ threshold in tower ( $GeV/c^2$ ); choose color
LAr e.m. end-cap (EMEC)	$E$ or $E_T$ threshold in $GeV/c^2$ ; choose color
Tile calorimeter	$E$ or $E_T$ threshold in $GeV/c^2$ ; choose color
LAr hadronic end-cap (HEC)	$E$ or $E_T$ threshold in $GeV/c^2$ ; choose color
LAr forward (FCAL)	$E$ or $E_T$ threshold in $GeV/c^2$ ; choose color
Cut-off criterion	Choose $E$ or $E_T$ threshold
Draw cell envelope	
<b><i>E/G objects</i></b>	
Photons	Display or hide photons
Electrons	Display or hide electrons


<i>Parameter</i>	<i>Description</i>
<b><i>TRT</i></b>	
<b>TRT barrel A and C</b>	- Cuts on "time over threshold" - Choose Phi sectors (1-32)
<b>TRT End-Cap A and C</b>	- Cuts on "time over threshold" - Choose Phi sectors (1-32)
<b>Draw tube envelope</b>	Draw or hide

<i>Action box</i>	<i>What it does</i>
-------------------	---------------------


<b>Restore defaults</b>	Sets parameters back to default values
<b>Open</b>	Open any .p2ts file containing saved parameters from previous work
<b>Save as</b>	Save parameter file with the name of your choice to any directory
<b>Save</b>	Save modified parameter file with the same name to the same directory
<b>Cancel</b>	Cancel operation and leave parameter file unchanged
<b>OK</b>	Validates parameter file; to take effect, this validation must be followed by the <i>Compute</i> action; the file is <u>not</u> automatically saved

## E.6 Tools menu

There is no default tool bar for this menu.

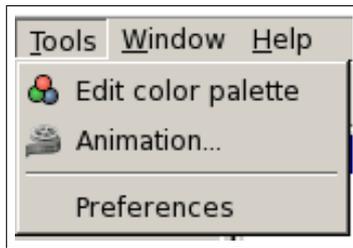


(a) Linux style

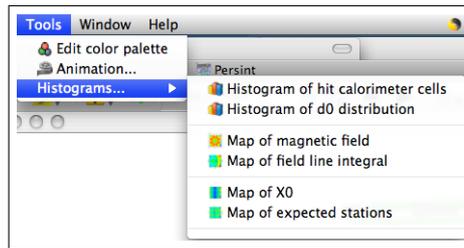


(b) Mac OS style

<i>Item name</i>	<i>Action</i>
<b>Edit color palette</b>	Opens the <i>Edit color table</i> window, where the colors as well as the color density can be chosen
<b>Animation ...</b>	Opens the <i>Generating animation</i> window, where parameters which control the animation can be chosen
<b>Preferences ...</b> <sup>1</sup>	Set preferences for saving track parameters, magnetic field display, show warnings for reconstruction errors, disable Log console, as well as network parameters for access to CERN data bases
<b>Histogram ...</b> <sup>2</sup>	There are 6 types of histograms/maps available: calorimeter cells, vertex (d0), magnetic field, field integral, $X_0$ , expected # of stations

Edit color palette and Animation windows:

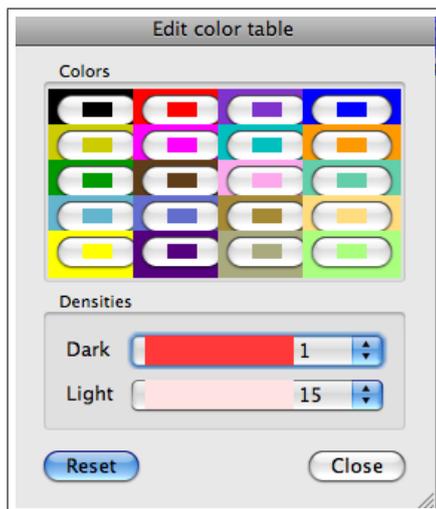

(a) Edit color palette

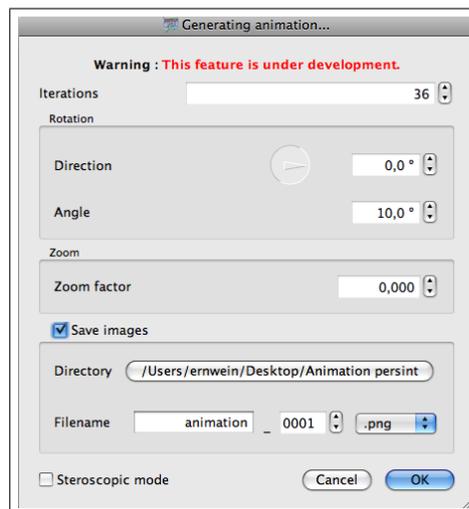


(b) Generating animation

Figure 114: Layout of the windows for "Editing the color palette" (a), and "Generating animation" (b).


<sup>1</sup>In the case of a Mac OS environment, the *Preferences* function is found in the *Persint* menu.

<sup>2</sup>With Linux, *Create histogram* is also found in the *Tools* menu, provided QtRoot is installed.

Preferences windows:

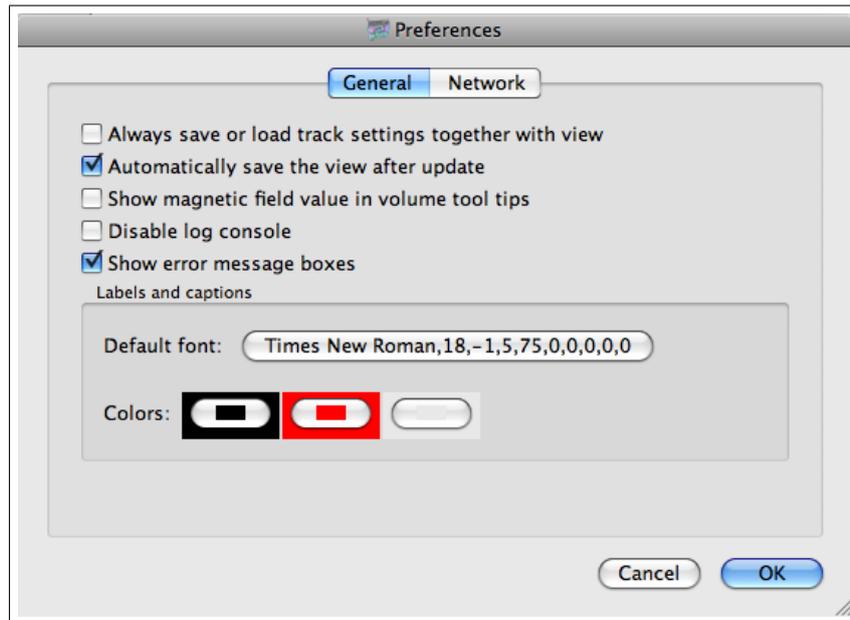

(a) "General" Preferences

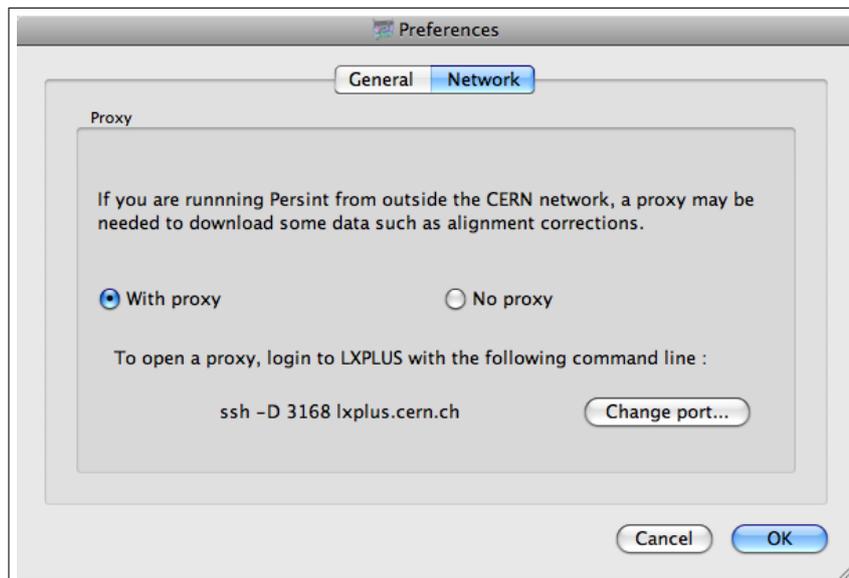


(b) "Network" Preferences

Figure 115: The setting of **Preferences** (to be found in the *Persint* menu for the Mac OS environment):


- a) **General** for saving track settings with view, update/no-update of view, showing magnetic field in volume information boxes, disabling/enabling Log console and warning messages for reconstruction errors
- b) **Network** for choosing a "proxy" when downloading from a CERN server (e.g. alignment constants)

## E.7 Window menu

There is no default tool bar for this menu.

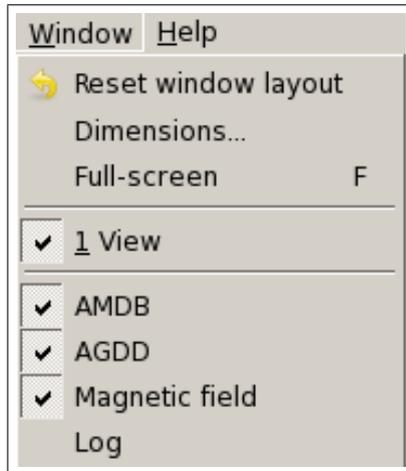

(a) Linux style

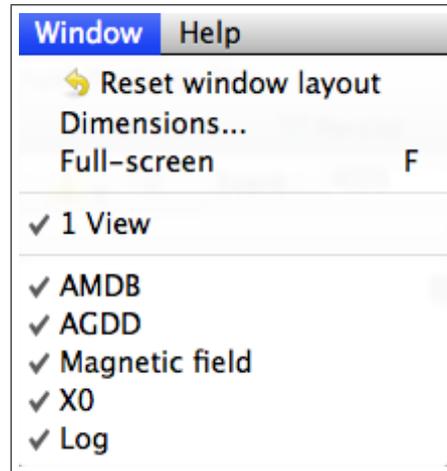


(b) Mac OS style

<i>Item name</i>	<i>Action</i>
------------------	---------------


<b>Reset window layout</b>	Set the default layout of the <i>Persint</i> display
<b>Dimensions</b>	Set image canvas size
<b>Full-screen</b>	Makes the Main display full-screen; as a shortcut, type <i>F</i> (lower case) to enter or quit full-screen mode
<b>1 View</b>	
<b>AMDB</b>	Enable the <i>AMDB Selector</i> window
<b>AMDB (v1)</b>	Enable a previous version of the <i>AGDD Selector</i> window
<b>AGDD</b>	Enable the <i>AGDD Selector</i> window
$X_0$	Enable the $X_0$ window (amount of material)
<b>Log</b>	Enable the <i>Log</i> window

## E.8 *Help* menu

There is no default tool bar for this menu.



(a) Linux style

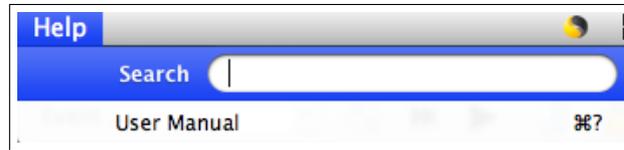

(b) Mac OS style


<i>Item name</i>	<i>Action</i>
------------------	---------------

<u>Linux style</u>	
<b>User Manual</b>	Opens the <i>Persint</i> User Manual in your web browser
<b>About Persint</b>	Open information window about <i>Persint</i> ; the version number is found here
<b>About Qt</b>	Open information window about <i>Qt</i>

<u>Mac OS style</u>	
<b>Search</b>	Search for commonly used functions
<b>User Manual</b>	Opens the <i>Persint</i> User Manual in your web browser

### E.9 *persint* menu (Mac OS only)

There is no default tool bar for this menu.

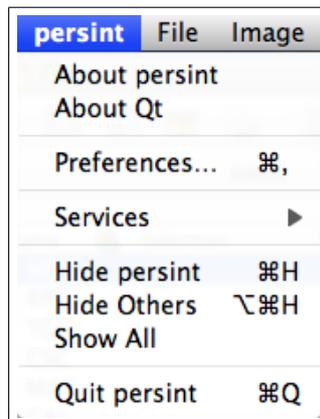

(a) Mac OS style

<i>Item name</i>	<i>Action</i>
<b>About Persint</b>	Open information window about <i>Persint</i> ; the version number is found here
<b>About Qt</b>	Open information window about <i>Qt</i>
<b>Preferences ...</b> <sup>1</sup>	Set preferences for saving track parameters, magnetic field display, show warnings for reconstruction errors, disable Log console, as well as network parameters for access to CERN data bases
...	
<b>Quit Persint</b> <sup>1</sup>	

<sup>1</sup>In the Linux environment, **Preferences** is found in the **Tools** menu (see section E.6 where the two Preferences windows are shown), and **Quit** is found in the **File** menu (section E.1)


## E.10 Warning messages

On various occasions, *Persint* encounters an error which is reported in a message like those shown below.

Note that for these messages to appear, the *Show errors* box should be checked in the *Preferences* window (see figure 115a, page 143).



(a) Failed download of alignment corrections

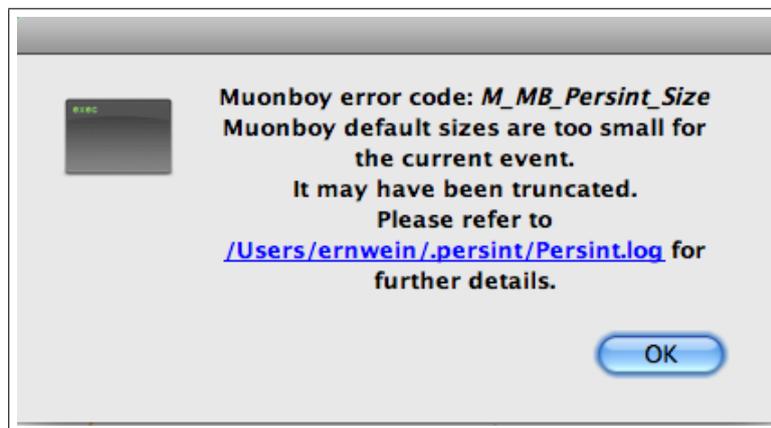

(b) Event too big for Muonboy reconstruction with standard settings

## F Right-click

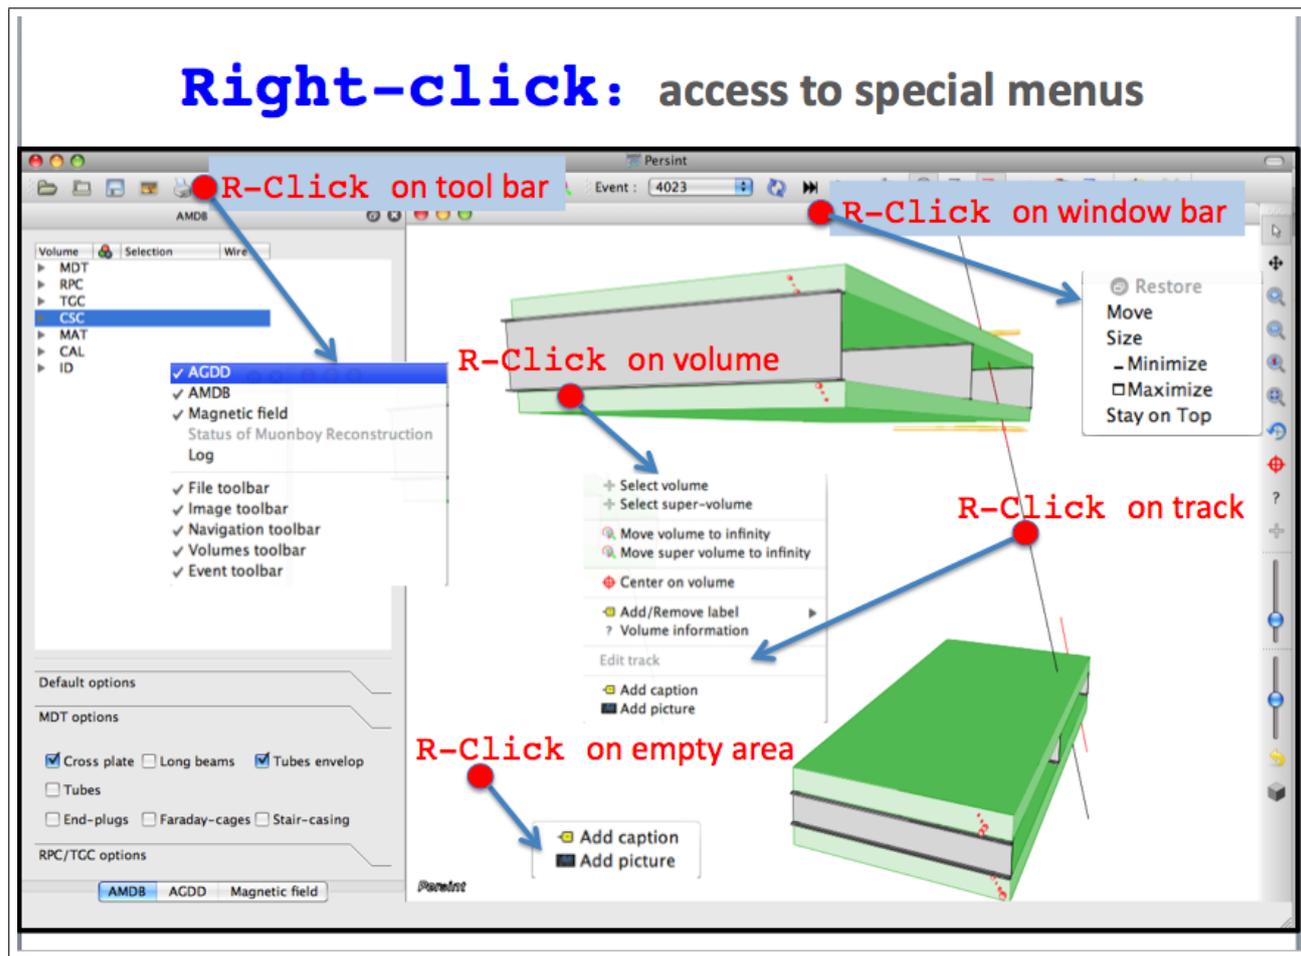


Figure 116: Special menus available through Right-click on various areas of the *Persint* display

The special menu which appears depends on the location of the cursor when right-clicking. In the case of a reconstructed track, there is a menu item called *Edit track* illustrated in figure 117.

$R_{max}$  and  $Z_{max}$  (both in *cm*) define the cylinder, centered on the IP, which contains the track.

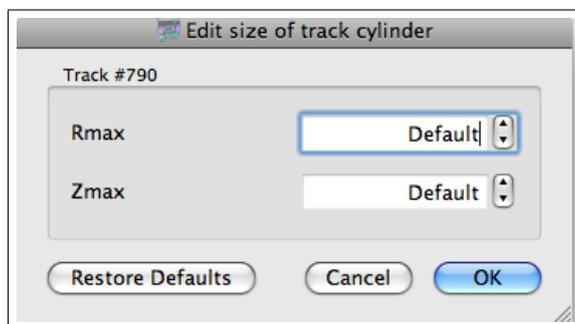


Figure 117: Window which opens when clicking on *Edit track* in the special menu obtained with a right-click on a track

## G Producing *Event files* for *Persint* in *ATHENA*

ASCII *Event files* for input to *Persint* (Out.MboyView.xxx) are produced in *ATHENA* from raw data. These files contain all coded information needed to display the reconstructed objects. It is possible to display tracks reconstructed by the various reconstruction packages (e.g. *MuonBoy*, *Staco*, *Moore*, *MuID*, ...) by selecting the appropriate objects in the window described in figure 6 (*Set track parameters*).

### G.1 Event files from raw data

Inside *ATHENA*, *Event files* for *Persint* are produced by the *MboyView* package via the *doPersint* flag in *RecExCommon*:

```
doPersint=true
```

It is possible to make a selection of events to be included in the *Event file* by using the following parameters in the *PITHON* file used for running *ATHENA*:

```
# Event Selection:  EvtSelectionType and EvtSelectionThreshold
#   = 1 view without Selection
#   = 2 view only for evts Nber of Tracks .le.  EvtSelectionThreshold
#   = 3 view only for evts Nber of Tracks .ge.  EvtSelectionThreshold
#   = 4 view only for evts Nber of Tracks .eq.  EvtSelectionThreshold
# GenEvent Selection:  GenEvtSelectionType and GenEvtSelectionEta<Min/Max>
#   = 1 view without Selection
#   = 2 view only for evts with at least a gen track with
#       GenEvtSelectionEtaMin<abs(eta)<GenEvtSelectionEtaMax

if doPersint:

    MboyView = Algorithm( "MboyView" )
    MboyView.EvtSelectionType = 1
    MboyView.EvtSelectionThreshold = 0
    MboyView.GenEvtSelectionType = 2
    MboyView.GenEvtSelectionEtaMin = 0.
    MboyView.GenEvtSelectionEtaMax = 2.7
```

The information to be included in the *Events* for *Persint* can be chosen as follows (0=no; 1=yes):

```
if doPersint:

    MboyView = Algorithm( "MboyView" )
    MboyView.ViewDigits = 1          # dump the spectrometer digits
    MboyView.ViewCalo = 0           # dump the calorimeter cells
    MboyView.ViewMcEventCollection = 1  # dump the truth info
    MboyView.ViewTrackRecordCollection = 1 # dump the TrackRecord
    #   (i.e. truth info at the spectrometer entrance)
    MboyView.TrackRecordCollectionLocationForGenEventSelectionList =
    [ "MuonEntryLayerFilter" ]
    MboyView.TrackRecordCollectionLocationForGenEventSelectionList +=
    [ "MuonEntryRecordFilter" ]
```

## G.2 Event files from ESDs or dESDs

The ASCII input file for *Persint* (Out.MboyView.xxx) can also be produced from ESD files.

### G.2.1 Procedure

- Set up *ATHENA* release 15.6.3 or higher. You may follow instructions given in: <https://twiki.cern.ch/twiki/bin/view/Atlas/WorkBook>, in particular in sections: *Getting an Account*, *Setting up your Account*, *Running Athena HelloWorld*.
- Get a *job options* file.  
A generic *job options* file ([MboyViewESD.py](#)) is located in the directory `Persint-00-02-●●/example`.  
It is also available as an attachment to the following Twiki page [the file is listed in the next section (G.2.3)]:  
<https://twiki.cern.ch/twiki/bin/view/Atlas/PersintDumpESD>  
You may want to edit the *job options* file for geometry and conditions tags associated with your ESD file.
- Finally, execute the following command:  
`athena MboyViewESD.py -c 'inputFileList=["/path/to/ESD/file"]'`  
where `/path/to/ESD/file` is "comme son nom l'indique".

This will create a file `MboyView` which can be read by *Persint*.

### G.2.2 Limitations

The method described above does not re-run the reconstruction but only dumps the values already available in the ESD file. The advantage of this method is its speed. However, in the ESD file, only the TDC counts of MDT hits are stored, and not the radius returned by the RT calibration service.

An approximate radius is thus associated with MDT hits, in the following way:

1. If the MDT hit is associated with a Muonboy segment, the calibrated radius is saved in the segment and this is what is returned in the ASCII dump
2. If the MDT hit is not associated with any segment, its radius is set to 7.5 mm

This last approximation makes the ASCII dump suitable for display, but not suitable for [Muonboy interactive reconstruction](#) in *Persint*.

In future versions of this tool, a better radius determination may be included.



Muonboy  
interactive  
reconstruction

### G.2.3 ATHENA job options file, an example: MboyViewESD.py

```
#-----
# Configure the input file, in a way compatible with auto-configuration
#-----
from AthenaCommon.AthenaCommonFlags import athenaCommonFlags
athenaCommonFlags.FilesInput = inputFileList

#-----
# Include the RecExCommon flags, to force trigger the auto-configuration
#-----
```

```

include('RecExCond/RecExCommon_flags.py')

#-----
# Load POOL support
#-----
import AthenaPoolCnvSvc.ReadAthenaPool
from AthenaCommon.AppMgr import ServiceMgr as svcMgr
from AthenaCommon.AppMgr import ToolSvc as toolSvc

from AthenaCommon.AlgSequence import AlgSequence
topSequence = AlgSequence()

from AthenaCommon.AlgSequence import AthSequencer
selectionSequence = AthSequencer("selectionSequence")

#-----
# Event related parameters
#-----
# theApp.EvtMax = 100

#-----
# GeoModel stuff
#-----
from AthenaCommon.GlobalFlags import GlobalFlags
from AthenaCommon.DetFlags import DetFlags
DetFlags.ID_setOn()
DetFlags.Calo_setOn()
DetFlags.Muon_setOn()

# GeoModel initialisation
from AtlasGeoModel import SetGeometryVersion
from AtlasGeoModel import GeoModelInit

#-----
# Set output level threshold (2=DEBUG, 3=INFO, 4=WARNING, 5=ERROR, 6=FATAL )
#-----
MessageSvc = Service( "MessageSvc" )
MessageSvc.OutputLevel = 3

#-----
# Define the input collection
#-----
svcMgr.EventSelector.InputCollections = athenaCommonFlags.FilesInput()

#-----
# Optionally add to selectionSequence any private alg that selects the
# events to be dumped in Out.MboyView
#-----
# from PFMuonAnalysis.PFMuonAnalysisConf import CosmicMuonAnalysis
# selectionSequence += CosmicMuonAnalysis("CosmicMuonAnalysis")

#-----

```

```
# Configure the MboyView algs
#-----
from MboyView.MboyViewConf import MboyViewDigiMaker
selectionSequence += MboyViewDigiMaker("MboyViewDigiMaker")
selectionSequence.MboyViewDigiMaker.ApproximateRsLine = True

from MboyView.MboyViewConf import MboyView
selectionSequence += MboyView("MboyView")
selectionSequence.MboyView.SwitchOff = 0
selectionSequence.MboyView.ViewDigits = 1
selectionSequence.MboyView.ViewTrackRecordCollection = 1
selectionSequence.MboyView.ViewCombinedMuonContainer = 1
selectionSequence.MboyView.ViewTrackParticleContainer = 1
selectionSequence.MboyView.ViewTrkTrackCollection = 1
selectionSequence.MboyView.ViewTrkSegmentCollection = 1
selectionSequence.MboyView.ViewMcEventCollection = 1
selectionSequence.MboyView.ViewEgammaContainer = 1

topSequence += selectionSequence

# AthenaEventLoopMgr = Service( "AthenaEventLoopMgr" )
# AthenaEventLoopMgr.OutputLevel = WARNING
```

## Index

- .dat, 55
- .p2gm, 29, 33, 34, 36, 96, 109
- .p2ts, 21, 24, 78, 96, 109
- .p2vf, 15, 21, 24, 33, 34, 36, 37, 41, 45, 46, 59, 61, 65, 67, 78, 96, 109
- [.bmp, .jpg, .png], 24, 109
- [.svg, .ps, .pdf], 24, 109
  
- AGDD, 12, 17, 19, 33, 37, 57, 65, 128
- AMDB, 12, 17, 19, 30, 57, 65, 77
- amdb\_simrec, 17, 19, 56, 57, 65, 109, 111
- Animation, 48, 142
- Anti-aliasing, 124
- Architecture, 14, 97
- ASCII files, 14, 21, 55
- ATHENA, 12, 14, 23, 149, 150
- Athena reconstruction, 63, 70, 77, 78
- ATLAS Physics Events, 56
- Axes, 35, 63, 64
  
- C++, 14
- Calorimeter hits, cells, 23, 77, 78
- Calorimeters, 32
- Caption (Add/Remove/Edit), 26–28
- Clashes (volume), 46, 47
- Clear, 22, 27–29, 41, 42, 56, 57, 60, 65, 70, 75, 77, 124
- Color, 30–32, 44
- Color (background, 27
- Color (background), 25, 31, 124
- Color code for hits, 73, 74
- Color palette, 142
- Compare geometries, 25, 45
- Compute, 24, 34, 36, 37, 60, 66, 70, 76–78, 82, 96
- Computer mouse, 38
- Coordinate system, 31, 35, 108
- Cygwin, 107
  
- Data cards, 56, 65, 70, 73
- Data manager, 19, 22, 56, 57, 61, 65
- Dead material, 33
- Dead materiel, 34
- Dead matter, 138
- Debian, 104
- Default files, 19, 21
- Default mode (Magic wand), 31, 36, 38, 67
- Dependencies, 14, 102
- Detector description file, 19, 21
- Detector feet, 37
  
- Directories, 19
- Displace (super) volumes, 43, 44, 46
  
- ECAL, 32
- Edge color, 25
- Edit track, 148
- Energy loss, 32
- English, 15
- Envelope of calor. cells, 79
- ESD, 14, 21, 150
- Event file, 21, 56, 61, 119, 121
- Event number, 27, 62
- Event tool bar, 29
- Events menu, 137
- Example files, 21
- Exercise1, 19, 22
- Exercise2, 29
- Exercise3, 37
- Exercise4, 41
- Exercise5, 56
- Exercise6, 65
- Expected number of stations, 65
- Expected stations, 55
- Export, 55
- Export view, 17, 19, 24, 33, 67
  
- Fedora, 104
- Field integral, 53
- File description, 111
- File menu, 123
- Focal length, 39
- Fortran90, 14
- French, 15
- Full-screen, 17, 144
  
- Generate muon tracks, 29, 83, 96
- Geometry file, 19
- German, 15
- Graphic User Interface, 14, 17
  
- Hardware name, 42
- HCAL, 32
- Help menu, 145
- Hide (super) volumes, 43, 44
- Histogram of calorimeter cells, 81, 82
  
- ID (Inner Detector), 31, 75
- Image menu, 124
- Inert material, 33
- Information box, 41, 46
- Initial zoom, 39

- Installation, 14
- Interfaces to applications, 21
- Invariant mass, 72
- Invert, 35
- IP, 32
- Isometric view, 39
- Italian, 15
  
- Label (Add/Remove), 41, 42
- Label (additional text), 41
- Label (customized), 41, 67
- Label (Default), 41, 42, 60
- Language, 15
- Linux, 12, 14
- Load caption from. . . , 27
- Log console (disable), 143
- Log window, 17
- Logo (*Persint*), 26
- Logos (Add/remove), 26–28
- lxplus, 14, 101
  
- Mac OS, 12, 14, 17, 105
- Magnetic field, 17, 19, 49–51, 61, 65, 70, 71, 73, 109, 110
- Magnetic field (download), 71
- Main display window, 17
- MAT, 32
- Maximize, 82
- MboyViewESD.py, 150
- MDT muon chambers, 30
- MDT options, 36, 68, 73
- MDT tubes, 36, 68
- Menu items, 123
- Minimize, 82
- Modify volume, 47
- Modify volume window, 44, 46
- Moore, 14
- Move volumes to infinity, 43, 44, 74
- Muid, 14
- Multiple scattering, 36
- Multiple scattering center, 69
- Muonboy, 12, 14
  
- Navigation, 31, 37
- Navigation menu, 125
- Navigation scale, 37, 39
- Navigation tool bar, 17, 31, 32, 38
- Necessary files, 19
- Next event, 22, 57, 62, 65
  
- Octant wheel selector, 30
- Online help, 17
- Open view, 22, 24, 37, 46, 61
- Out.MboyView, 21, 22, 57, 61, 65, 109, 119, 121
  
- Persint menu, 146
- Picture (Add/remove), 26–28
- Platforms, 14
- Port (open port to data base), 56
- Preferences, 142, 143, 146
- Previous view, 32, 46, 96
- Print, 25
- Projection, 35, 36, 40, 64, 69, 73, 80
- Proxy, 143
  
- Qt, 14
  
- Range, 55
- Raw data, 14, 149
- Reconstruction (interactive), 70, 71, 74
- Releases (Version number), 14, 15
- Reload event, 41, 42, 62, 70, 75, 77
- Reset displacements, 43
- Restore, 82
- Right-click, 17, 26, 41, 44, 46, 67, 72, 82, 148
- Rotation, 38, 39, 44
- RPC muon chambers, 30
- RPC options, 36
- RPC strips, 36, 68
- Run number, 27
  
- Save (automatic), 34
- Save caption as. . . , 27
- Save histogram, 82
- Save special, 25, 45
- Save view as, 17, 24, 33, 61, 67
- Scanning (autoscan), 62
- Scanning events, 61, 62, 82
- Scientific Linux, 104
- Sector (Small/Large), 30, 37
- Segments, 66
- Select Sectors, 58
- Selected volumes window, 44
- Selection mode, 40, 44
- Selector window, 17, 22, 30–34, 36, 37, 49, 50, 59, 77
- Set center, 39
- Simulation tracks, 23, 70
- Software name, 42
- Speed, 18
- Spinbox, 37, 39, 140
- Staco, 14
- Start *Persint*, 15
- Station, 36

Stations, 65  
Store, 46  
subscript, 27  
Super volume, 44  
superscrip, 27

Threshold of calorimeter hits, 78  
Time stamp, 27  
Tool bars, 17  
Tools menu, 142  
Toroids, 37  
Track parameters, 21, 23, 57, 66, 68–70, 75,  
77–79, 81, 96, 139  
Track shape, 66  
Track width, 66  
Translation, 38, 39, 44  
Transparency of volumes, 49  
Twiki page, 14

Ubuntu, 14, 100, 102  
Update release, 106  
Useful hints, 96  
User Manual, 145

Version number (Releases), 14, 15, 19  
Vertex, 75  
Video software, 48  
Visualization properties, 62, 63  
Volume (Create volume), 127  
Volume information, 40, 44, 46  
Volumes menu, 127

Warning messages, 147  
Window menu, 144  
Windows 7, 14, 107  
Wire mode, 30, 36, 49, 59

X0 map, 54  
XML, 14

Z-halves selector, 30  
Zoom, 36, 38, 39  
Zoom on custom area, 38, 39, 46

## References

- [1] *Persint* was originally developed and maintained by the Saclay Muon Software Group: *L. Chevalier, F. Gaillot, J.-F. Laporte, A. Ouraou, D. Pomarède, P. Sizun. M. Virchaux* (1953-2004) was the principal developer.
- [2] The *Persint* visualization program for the ATLAS experiment, *D. Pomarède, M. Virchaux*: Conference for Computing in High Energy and Nuclear Physics, La Jolla, California, March 24-29, 2003. (arXiv: cs/0305057v1, 29 May 2003)
- [3] The Users' manual of the original *Persint* is on  
"<http://atlas.web.cern.ch/Atlas/GROUPS/MUON/persint.html>"
- [4] AMDB documentation:  
L. Chevalier et al., ATLAS Internal Note, ATL-MUON-97-148 (1997).  
"<http://muondoc.web.cern.ch/muondoc/Software/DetectorDescription/amdbdoc/amdbmanual.ps>"
- [5] M. Virchaux et al., ATLAS Internal Note ATL-MUON-97-198 (1997).
- [6] "<http://atlas.web.cern.ch/Atlas/GROUPS/MUON/Persint/releases/doc/index.html>"  
and: "Rapport de stage F. Gaillot et documentation for developers"
- [7] Section 5.6 in the AMDB Documentation:  
"<http://muondoc.web.cern.ch/muondoc/Software/DetectorDescription/amdbdoc/amdbmanual.ps>"
- [8] ATL-COM-PHYS-2010-045  
<http://cdsweb.cern.ch/record/1236325/files/ATL-COM-PHYS-2010-045.pdf>
- [9] Jochen Meyer,  
"<https://twiki.cern.ch/twiki/bin/view/Atlas/AGDDVolumeTypes>"

# Notes

# Notes

# Notes

# Notes