
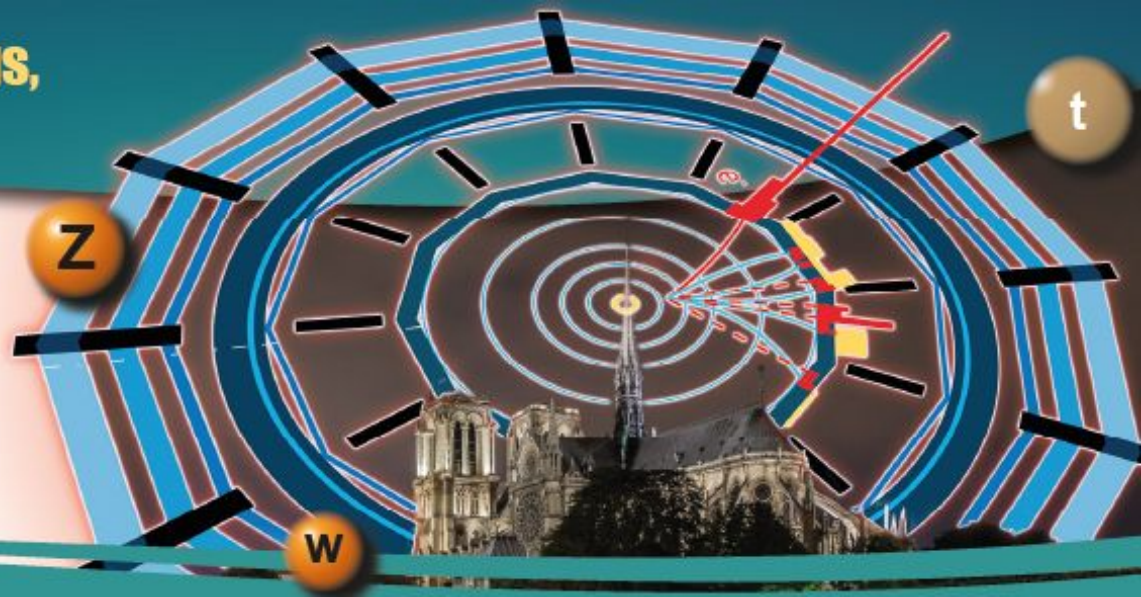


# 3<sup>rd</sup> ECFA workshop on $e^+e^-$ Higgs, Top & ElectroWeak Factories

9–11 October 2024

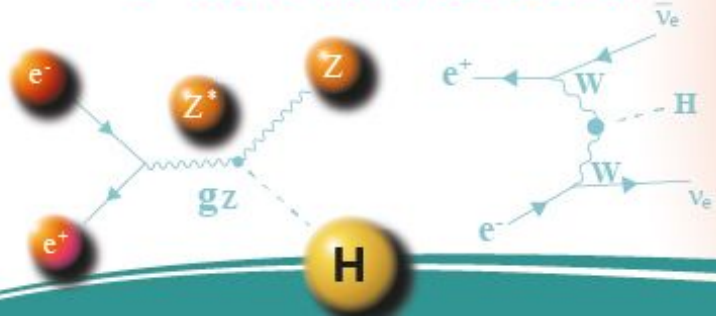

$\mu$ -RWELL muon system  
and pre-shower for IDEA FCC-ee

R. Farinelli, on behalf of INFN Bologna/Ferrara/Frascati



# Outline


1. IDEA detector and  $\mu$ RWELL pre-shower and muon systems
2.  $\mu$ RWELL technology
3. Layout optimization 1D: DLC resistivity and strip pitch scan
4. Layout optimization 2D: standard, charge sharing, TOP readout
5. TIGER +  $\mu$ RWELL testbeam preliminary results
6. Further activities

**IDEA detector**

# Innovative Detector for Electron-positron Accelerators



Combining novel elements with past and present lepton colliders, the FCC-ee design achieves outstandingly high luminosity.

This will make the FCC-ee an instrument to study the heaviest known particles (Z, W and H bosons and the top quark) to improve the precision measurement in literature and the sensitivity to new physics.

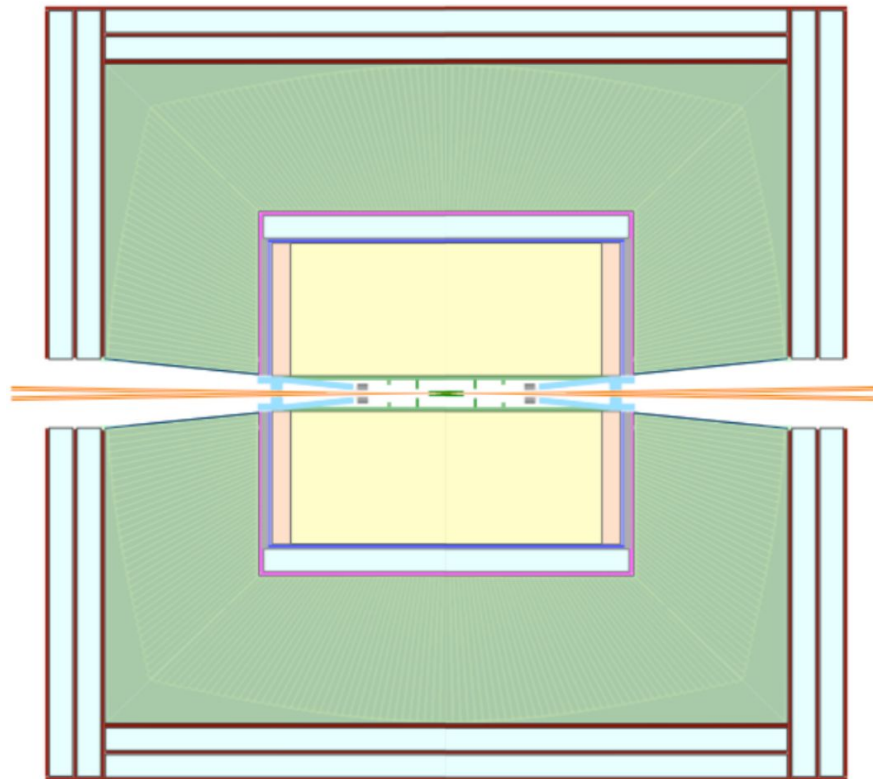

# IDEA baseline detector concept

Here is shown the original concept but some update/upgrade are under study (i.e. EM calorimeter)

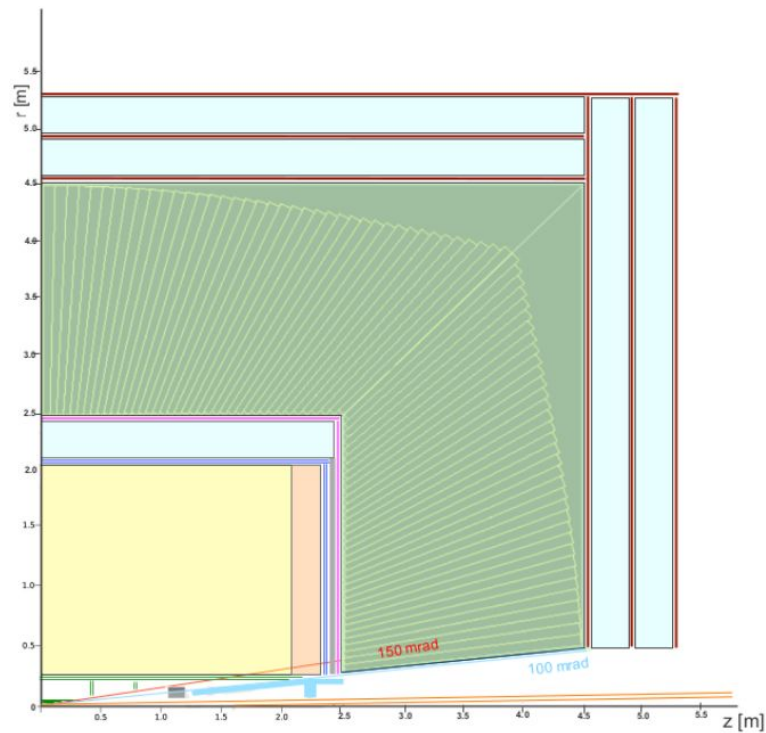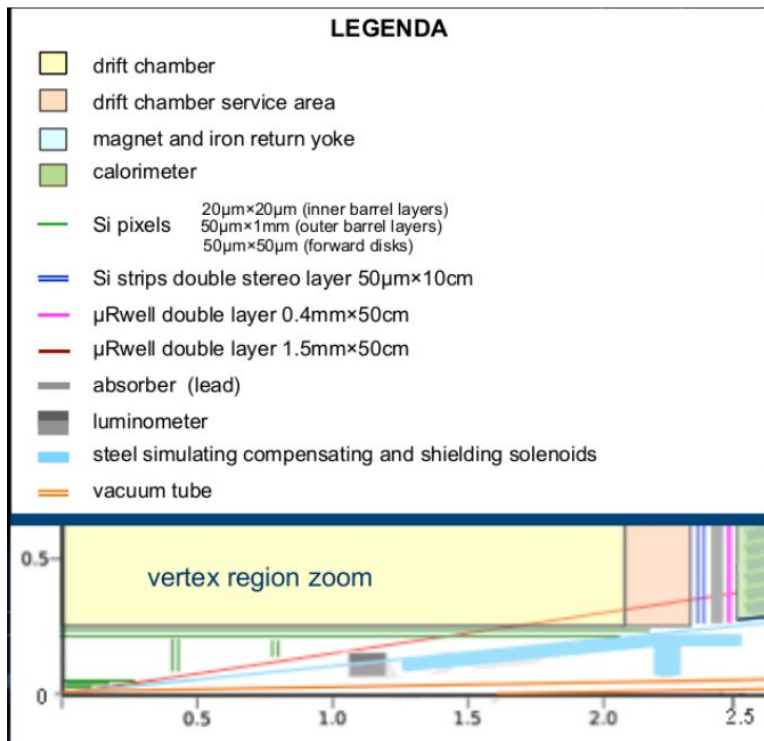







# The IDEA pre-shower

High resolution after the magnet to  
to maximize the energy resolution of  
the dual readout calorimeter and tag  
 $\pi^0$  and  $\gamma$

Efficiency > 98%  
Space Resolution < 100  $\mu\text{m}$   
Mass production  
Optimization of FEE channels/cost

pitch = 0.4 mm  
FEE capacitance = 70 pF  
1.3 million channels

-  magnet and iron return yoke
-  calorimeter
-  Si strips double stereo layer  $50\mu\text{m}\times 10\text{cm}$
-   $\mu\text{Rwell}$  double layer  $0.4\text{mm}\times 50\text{cm}$

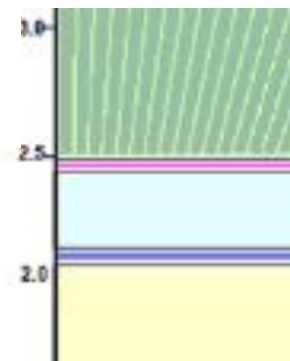

50x50  $\text{cm}^2$  2D tiles  
to cover about **130  $\text{m}^2$**





# The IDEA muon detector

Reconstruct and tag the muon  
with three layers in between  
the iron return yoke

Efficiency > 98%  
Space Resolution < 400  $\mu\text{m}$   
Mass production  
Optimization of FEE channels/cost

pitch = 1.5 mm  
FEE capacitance = 270 pF  
5 million channels

- magnet and iron return yoke
- calorimeter
- $\mu\text{Rwell}$  double layer 1.5mm $\times$ 50cm

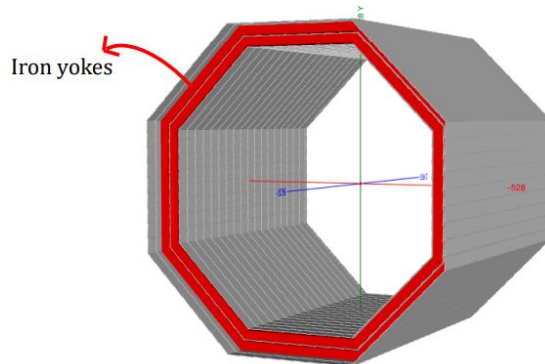

50x50 cm<sup>2</sup> 2D tiles  
to cover about 1525 m<sup>2</sup>

**μRWELL**  
**technology and R&D activities**





# $\mu$ -RWELL technology

The  $\mu$ -RWELL is composed of only **two elements**:

- **$\mu$ -RWELL\_PCB** = amplification-stage  $\oplus$   
resistive stage  $\oplus$   
readout PCB
- **cathode** defining the gas gap

$\mu$ -RWELL operation:

1. A charged particle **ionizes** the gas between the two detector elements
2. Primary electrons **drift** towards the  $\mu$ -RWELL\_PCB (anode) where they are **multiplied**, while ions drift to the cathode or to the PCB TOP
3. The signal is **induced** capacitively, through the DLC layer, to the readout PCB
4. only two HV for the drift region (cathode-drift wrt PCB TOP) and the amplification region (PCB TOP wrt resistive stage)

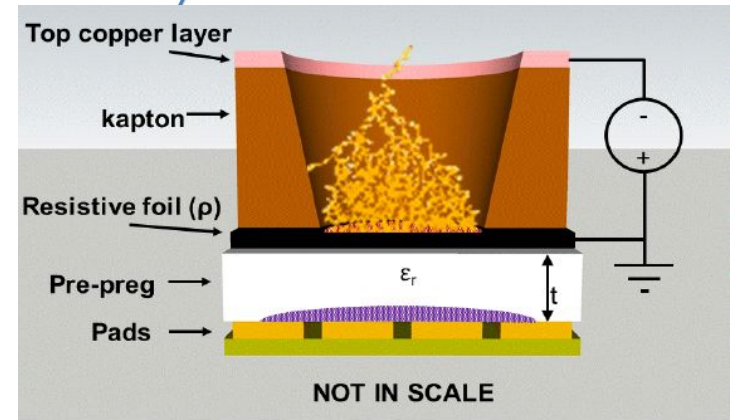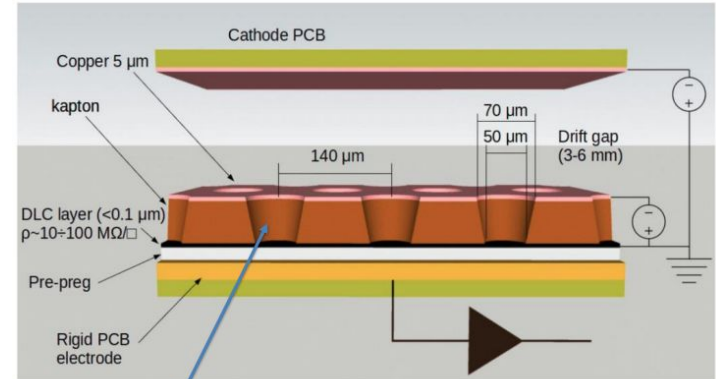



# $\mu$ -RWELL technology

Well known performance on prototypes  $10 \times 10 \text{ cm}^2$  active area:

efficiency > 98%  
 spatial resolution <  $100 \mu\text{m}$   
 rate capability  $\sim 1\text{-}10 \text{ MHz/cm}^2$

The detector is build up by two “pieces” only.  
 This simplifies the construction, the assembly and the HV operation wrt  
 MicroMegas and triple-GEM

The  $\mu$ RWELL technology fully compatible with standard PCB building  
 procedures **allows an easy Technological Transfer** to industry,  
 opening the way towards industrial **mass production**.







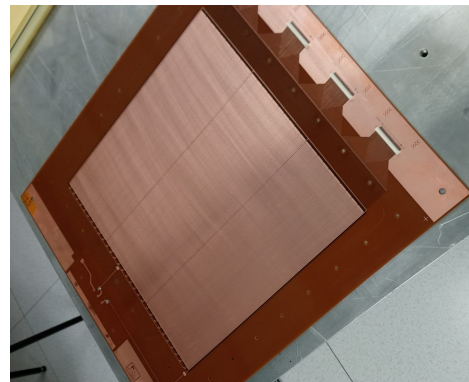
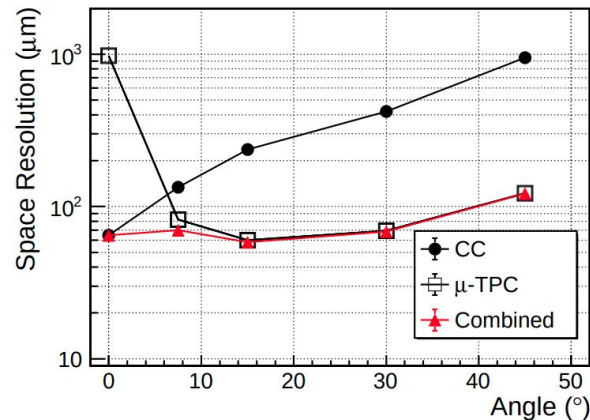


# $\mu$ -RWELL R&D history


R&D on low-rate layout

R&D on high-rate layout


New  $\mu$ -RWELL ideas  
(in collaboration  
with RD51)

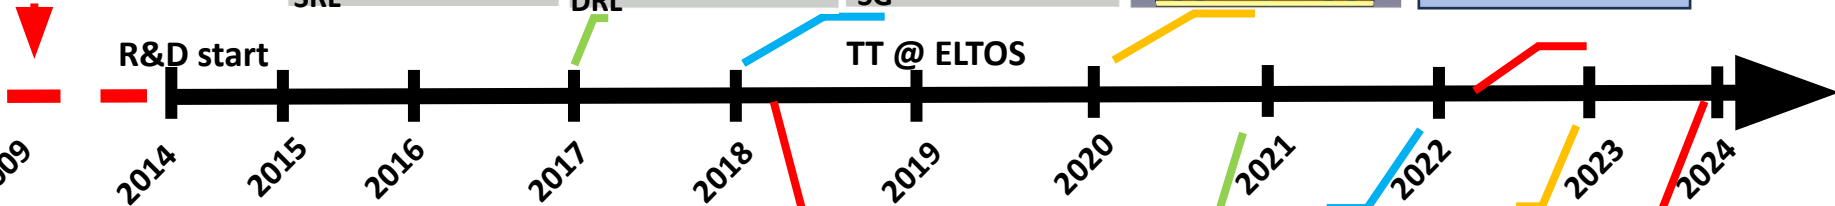


IDEA  
slice test:  
DC+  
preshower+  
dual\_calor+  
muon




DLC  
Resistivity



Readout  
segmentation  
+  
2D readout



2D readout






TIGER FEE


R&D on large area and 2D readout

# Layout optimization 1D

# Resistivity Optimization

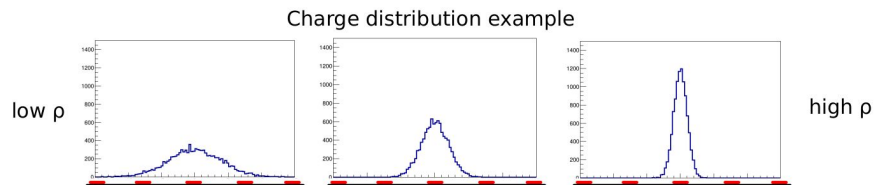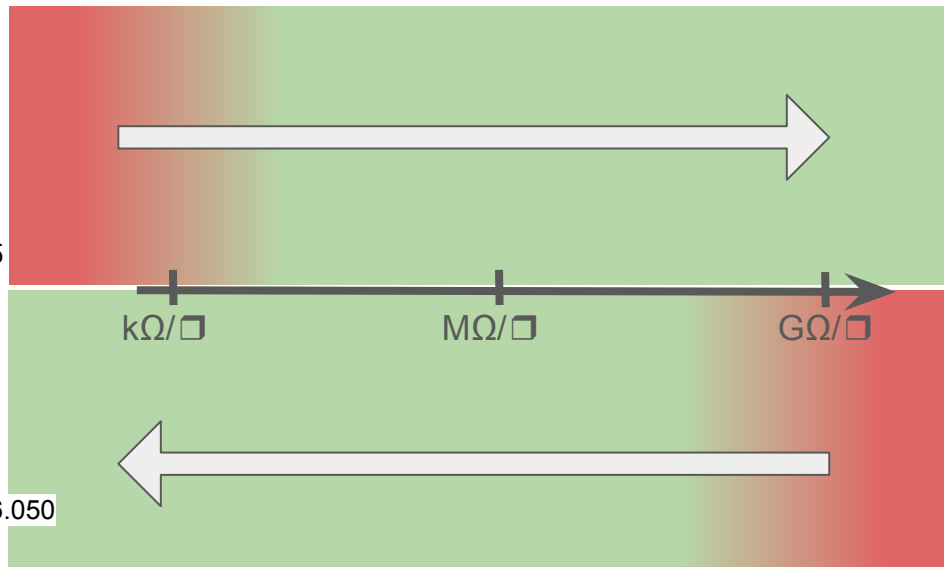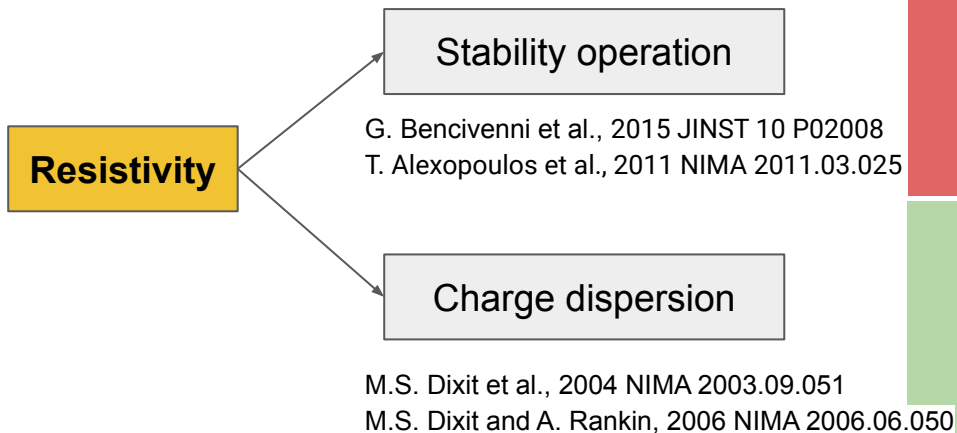




# Resistivity Optimization

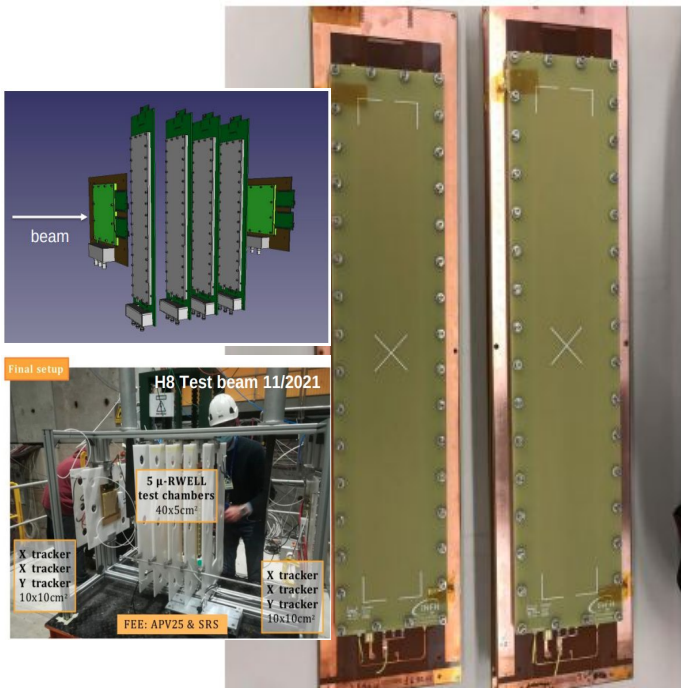



Active area = 400 x 50 mm<sup>2</sup>  
 Pre-preg thickness = 50 μm  
**Resistivity = 10-80 MΩ/□**  
 Strip pitch = 0.4 mm  
 Strip width = 0.15 mm  
 Ratio p/w = 2.66

An **HV scan** shows a large range of operability with a cluster size range [1-5]. The core spatial resolution is better than 50 μm with a strip pitch of 400 μm and center of gravity algorithm.

The **dependence** on the DLC resistivity is smaller in the range 40-80 MΩ/□ for cluster charge and cluster size, while the major dependency are observed in the efficiency.

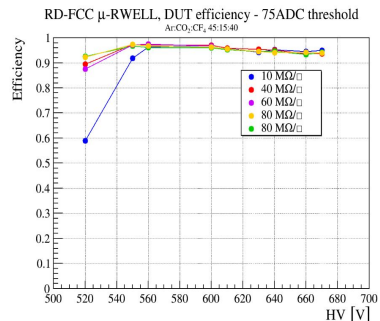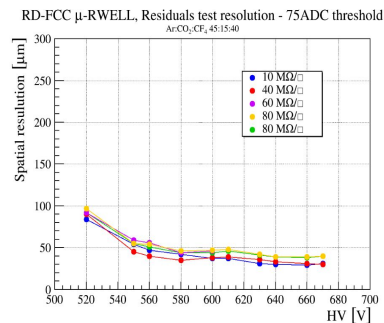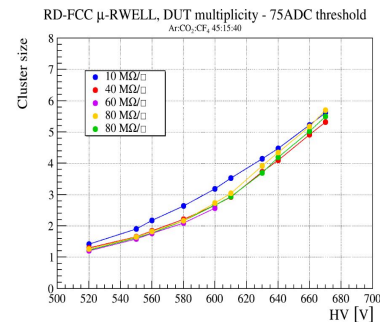


# Resistivity Optimization

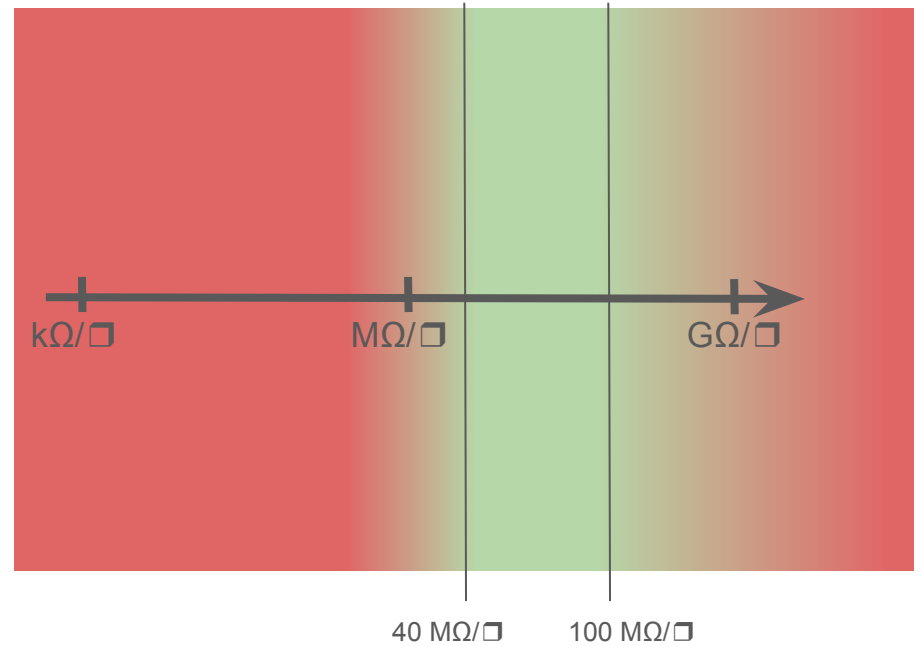
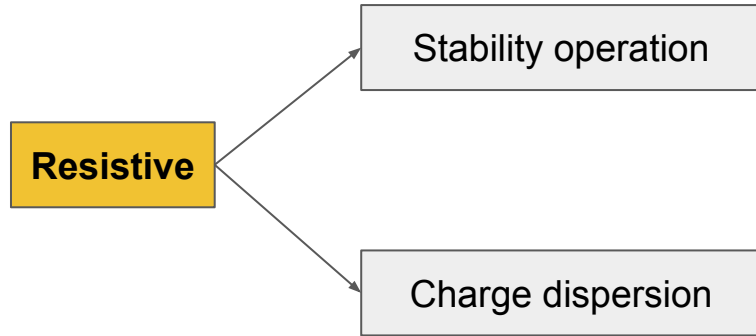


# Pitch scan

high segmentation

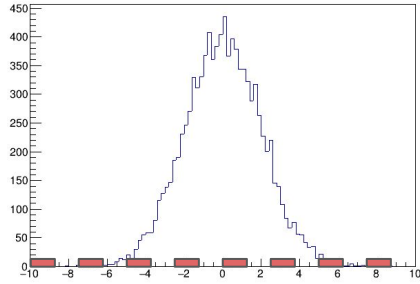

charge distribution

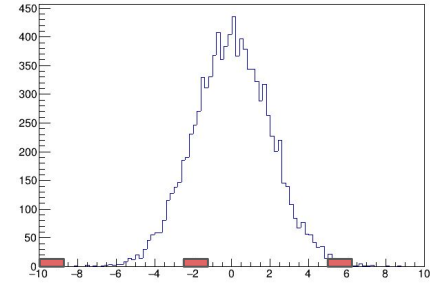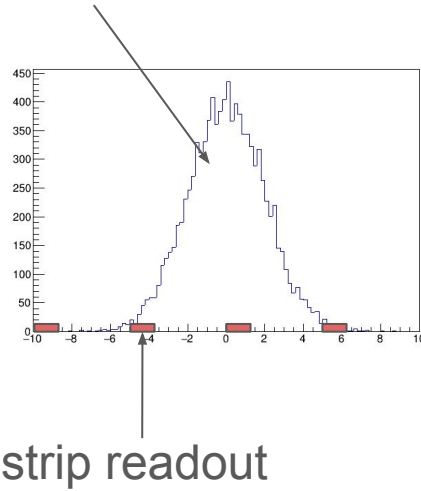

low segmentation



# Pitch scan






Active area = 400 x 50 mm<sup>2</sup>  
Pre-preg thickness = 50  $\mu\text{m}$   
Resistivity = 80 M $\Omega/\square$   
**Strip pitch = 0.4/0.8/1.2/1.6 mm**  
Strip width = 0.15 mm  
Ratio p/w = 2.66/5.33/8.0/10.66

An **HV scan** shows a cluster size scaling with the pitch plus threshold effects.


The smaller is the pitch the better is the resolution. If a cluster size of 2 is not reached then resolution of pitch/sqrt(12) is expected.

A larger gain is needed to achieve the efficiency plateau. A shift of 40V is observed between 0.4 mm and 1.6 mm

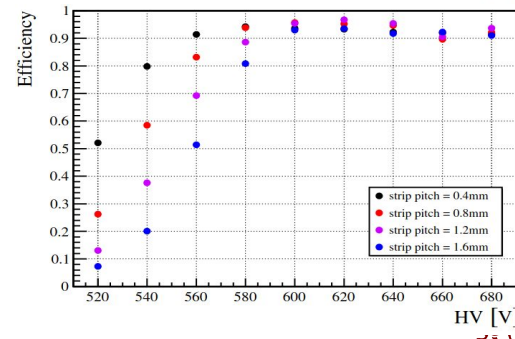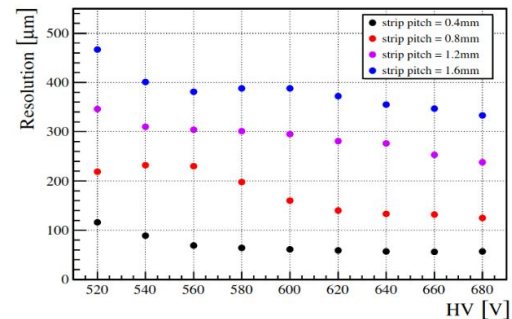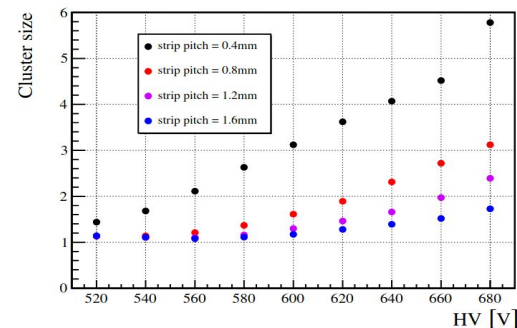


# Layout optimization 2D

# Possible 2D R/out layout

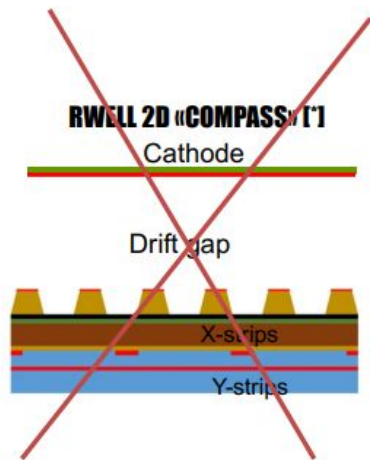


The «COMPASS» R/out requires higher gas gain due to the coupling of the X and Y R/out strips  
Good performance  
No easy optimization of the charge sharing on X-Y views

(\*) Y. Zhou et al. NIMA 927 (2019) 31

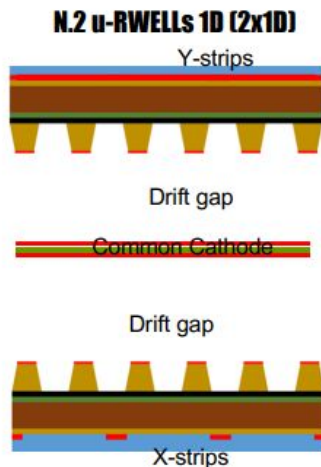


This option certainly allows to work at **lower gas gain** wrt the «COMPASS» R/out (X-Y r/out are decoupled)  
→ **TB2022 results:**  
- **IDEA pre-shower:** Efficiency knee @ 550 V,  $\sigma_x < 100 \mu\text{m}$  with 0.4 mm strip pitch for the  
- **IDEA Muon:** Efficiency knee @ 600 V &  $\sigma_x < 400 \mu\text{m}$  for a strip pitch = 1.6 mm

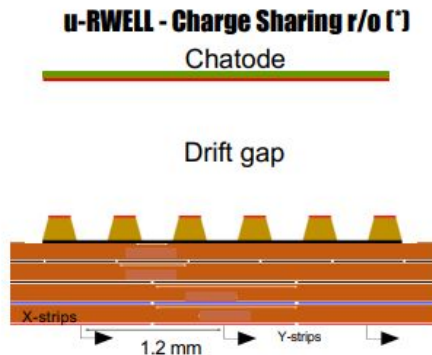

The charge sharing structures: the **charge transfer** and **charge sharing** using **capacitive coupling** between a **stack of layers** of pads and the **r/out board**.

This technique offers the possibility to **reduce the FEE channels**, but the **total charge is divided between the X & Y r/out** (similar to the «COMPASS» R/out)


(\*) K. Gnanvo et al. NIMA 1047 (2023) 167782

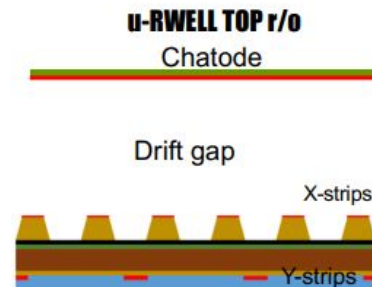


The **TOP layout** certainly allows to work at **lower gas gain** wrt the «COMPASS» r/out (X-Y r/out are decoupled)

→ X coordinate on the TOP of the amplification stage introduces same **dead zone in the active area**


# Experimental measurements - 2D readout

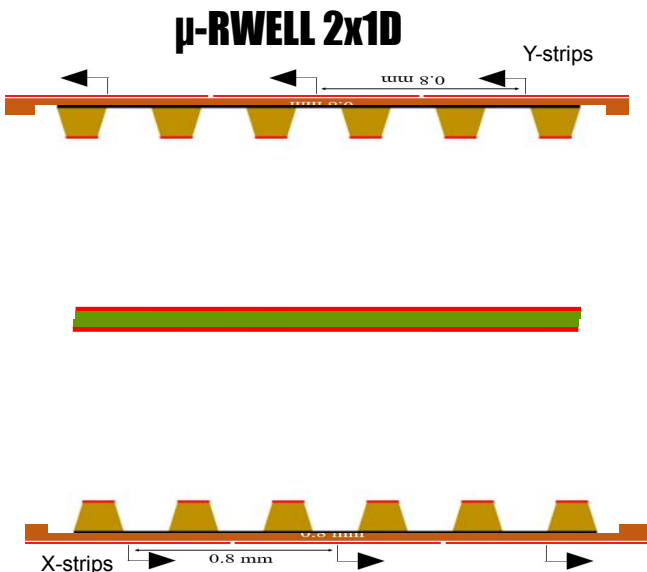

Active area = 100 x 100 mm<sup>2</sup>  
 Pre-preg thickness = 20 μm  
 Resistivity = 50 MΩ/□  
**Strip pitch = 0.76 mm**  
 Strip width = 0.30 mm  
 Ratio p/w = 2.53

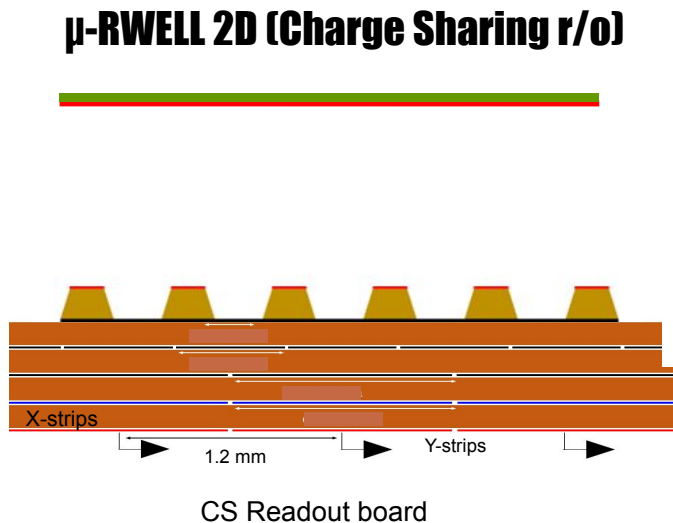


Active area = 100 x 100 mm<sup>2</sup>  
 Pre-preg thickness = 4 x 50 μm  
 Resistivity = 50 MΩ/□  
**Strip pitch = 1.2 mm**  
 Strip width = 1.10 mm  
 Ratio p/w = 1.09

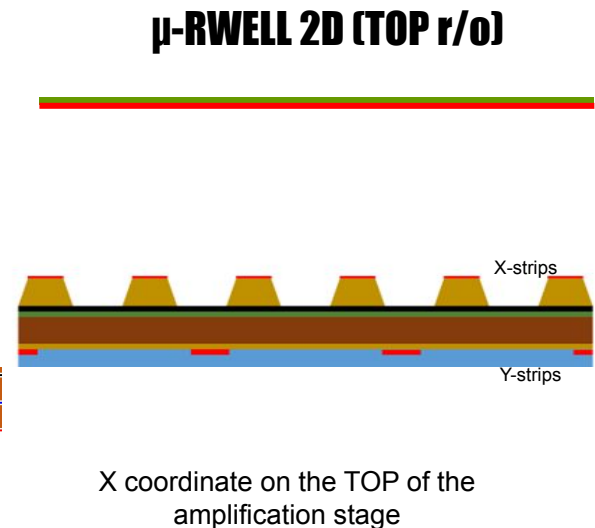




Active area = 100 x 100 mm<sup>2</sup>  
 Pre-preg thickness = 70 μm  
 Resistivity = 50 MΩ/□  
**Strip pitch = 0.8 mm**  
 Strip width = 0.7 mm  
 Ratio p/w = 1.14

# Charge Sharing and TOP r/o results

**$\mu$ -RWELL 2D (Charge Sharing r/o)**

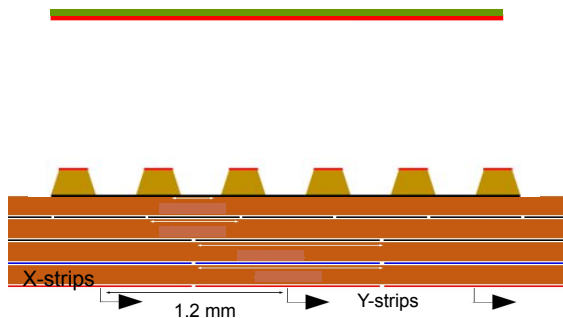



**$\mu$ -RWELL 2D (TOP r/o)**

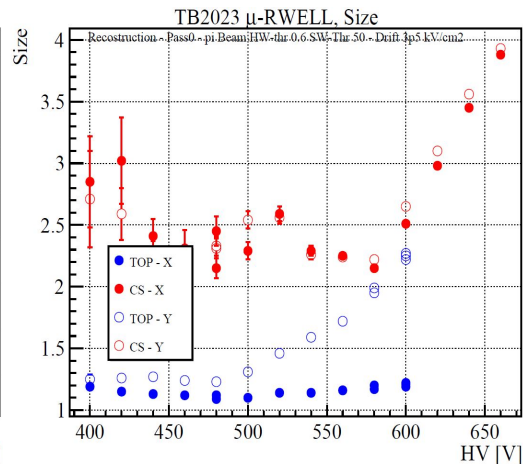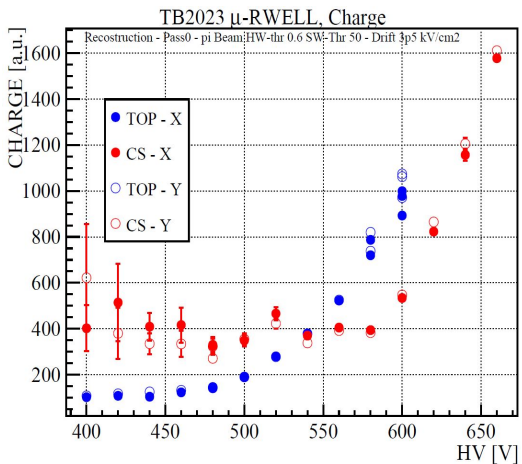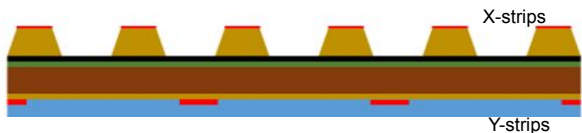

**TOP r/o** does not share the signal charge between X and Y. On the X (TOP) its cluster size is fixed and the spatial resolution is digital; while on the Y it has a standard behavior.

**CS r/o** shares the signal charge between X and Y. The charge sharing mechanics works properly and it increases the cluster size up to 4; this improves the spatial resolution.

# Spatial resolution and 2D efficiency

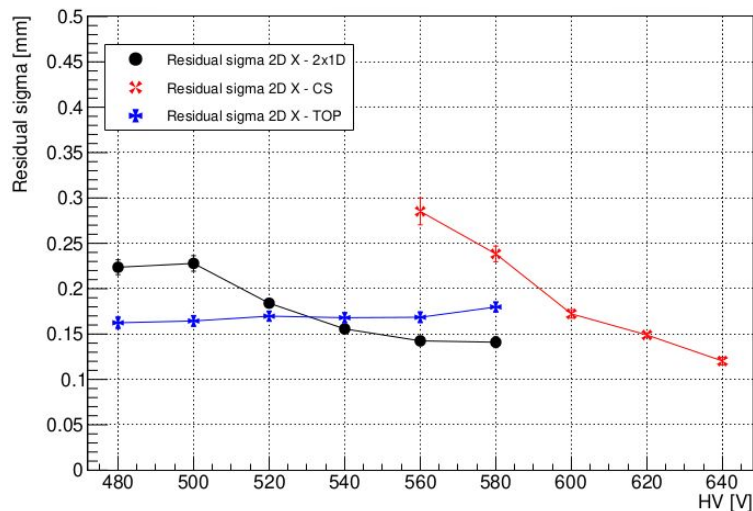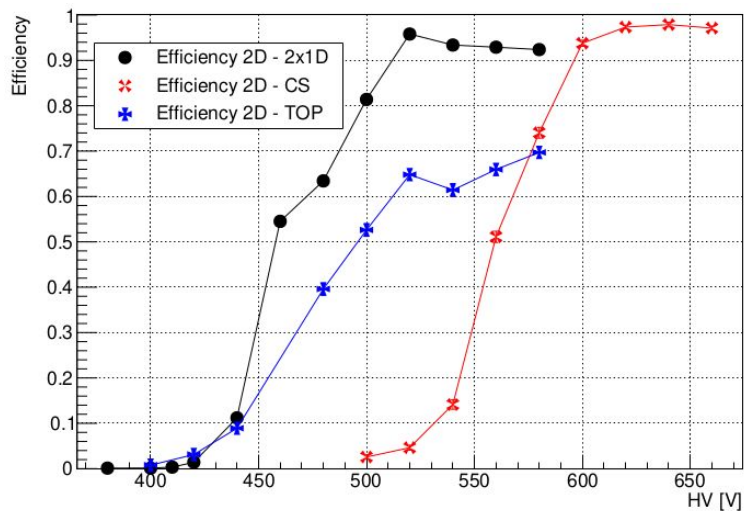


**2x1D** is the first to reach the plateau and a spatial resolution of about  $150\mu\text{m}$  with a pitch of  $760\mu\text{m}$

**TOP r/o** best efficiency is 70% due to the dead area on the amplification stage and it shows similar performance of the 2x1D

**CS r/o** has a plateau 100V after the 2x1D but it can provide a resolution better than  $150\mu\text{m}$  using a pitch of  $1200\mu\text{m}$

$\mu$ RWELL and TIGER asic

# $\mu$ RWELL and TIGER electronics

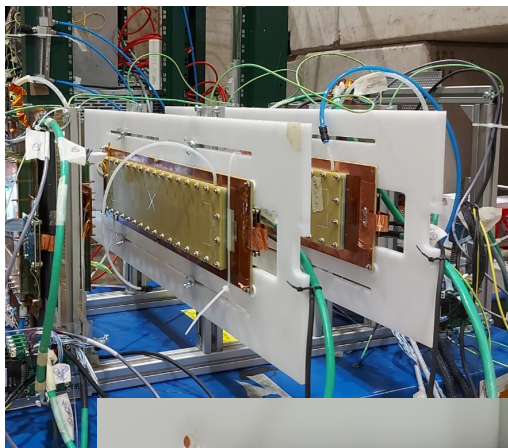

## Detector under test:

- 4  $\mu$ RWELL w/ 40 cm strip length  
1D strip pitch of 0.4/0.8/1.2/1.6 mm

## Readout under test:


- TIGER FEE
- GEMROC FPGA

## Goals of the testbeam:

- Define the state of art of  $\mu$ RWELL+TIGER for IDEA Muon system optimization studies
- Compare the APV-25 performance studies with TIGER
- Performance in Ar:CO<sub>2</sub> and Ar:CO<sub>2</sub>:CF<sub>4</sub> comparison
- Collect data to compare experimental measurement and simulation

## Measurements:

- Gain scan to evaluate the amplification/saturation/performance
- Drift scan to evaluate the signal collection
- Threshold scan to optimize S/N



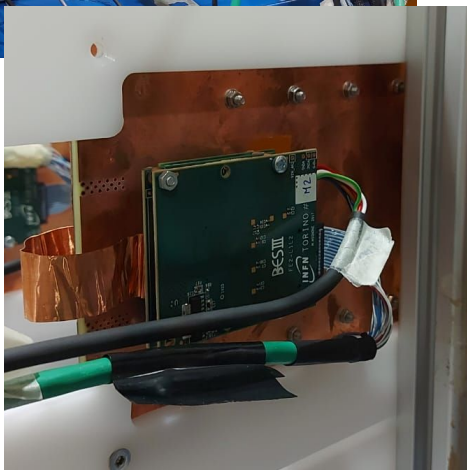




# Pitch scan w/ TIGER

Similar results are obtained with TIGER electronics and APV as shown in previous slides, even if some differences are present in the two setup (noise, threshold).

A spatial resolution of 100  $\mu\text{m}$  is achieved with 400  $\mu\text{m}$  pitch and a shift between the efficiency plateau of 0.4 mm and 0.8 mm pitch is observed, as expected.

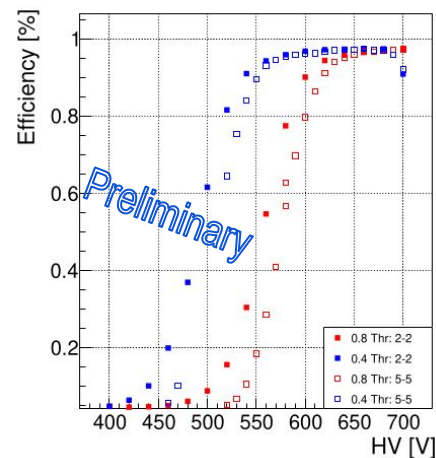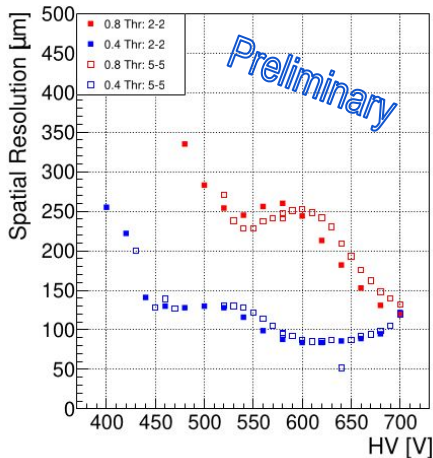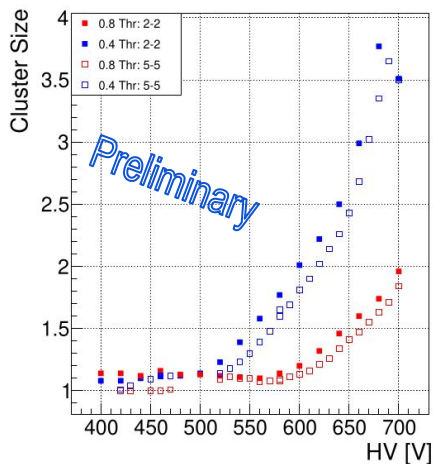




# Results without CF4 gas

The gas mixtures based on CF4 are suitable for a fast electron diffusion but they are not classified as eco-gases.

**Alternative to CF4 are needed. Here the performance of a  $\mu$ RWELL with Ar:CO2 (70/30) is compared with Ar:CO2:CF4 (45:15:40)**


A shift in the working point of about 50-100V is observed due to different ratio of Argon but similar results are achieved.

**The most important measurement here is the time resolution where a good value of 10 ns is reached with ArCO2**

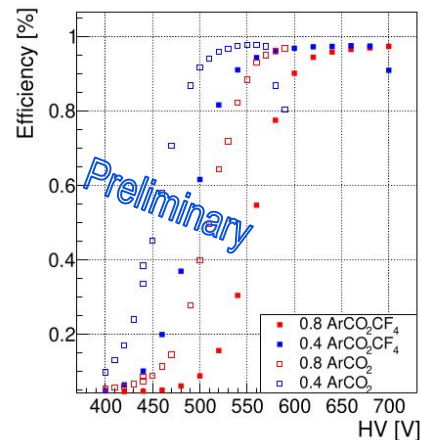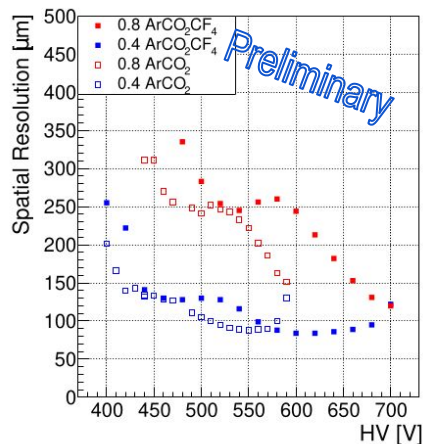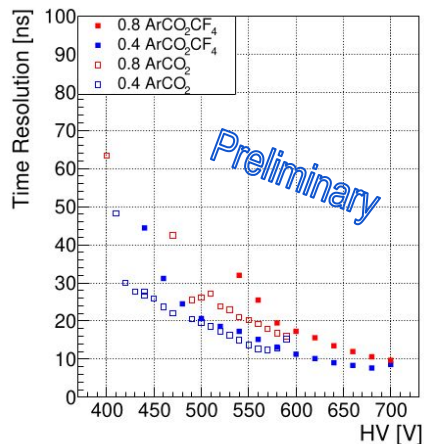

Further activities

# Parametrization of a $\mu$ -RWELL

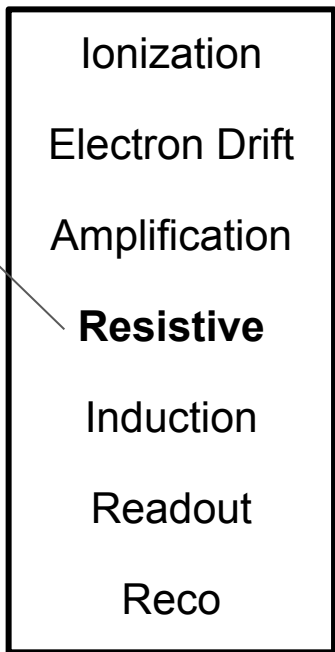

Reading from the webpage <https://garfieldpp.web.cern.ch>


is a toolkit for the **detailed simulation of detectors which use gases** or semi-conductors as sensitive medium.

the main area of application is currently in **micropattern gaseous detectors**.

**Ionisation** → **Heed** generates ionisation patterns of fast charged particles

**Electric fields** → interfaces with the finite element programs (Ansys, Elmer, Comsol and CST) which can compute approximate fields in nearly arbitrary 3D configurations with dielectrics and conductors

**Transport of electrons** → **Magboltz** is used for computing electron transport and avalanches in nearly arbitrary gas mixtures

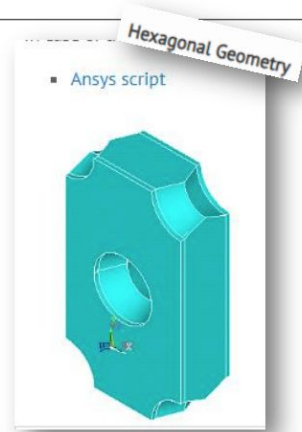

GARFIELD++ capabilities



More speed

Parametrization!



# Simulation results





Thanks to a detector parametrization, it is possible to reproduce the  $\mu$ -RWELL signal.

Different **configuration** (resistivity, angle, etc...) can be tested

Results shows a good agreement with the experimental data w/ APV electronics

- Cluster Size and Cluster Charge
- Charge Centroid and  $\mu$ TPC spatial resolution
- Charge Dispersion of the DLC

Next activities will implement the TIGER electronics in the simulation and a tuning with the experimental data will be performed.

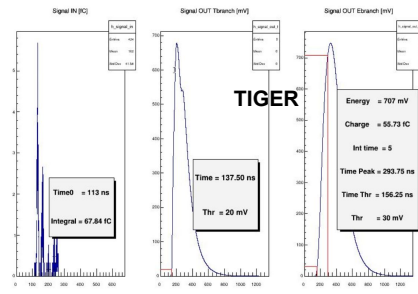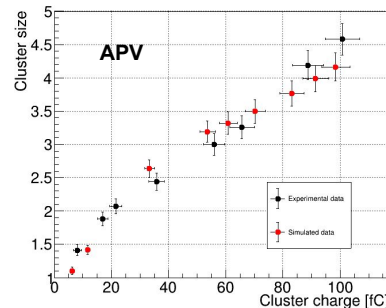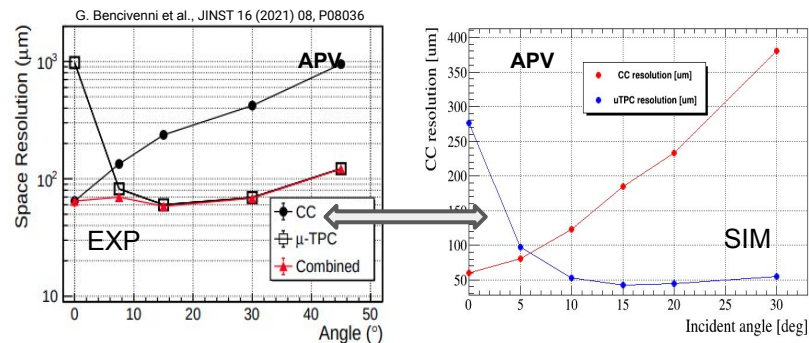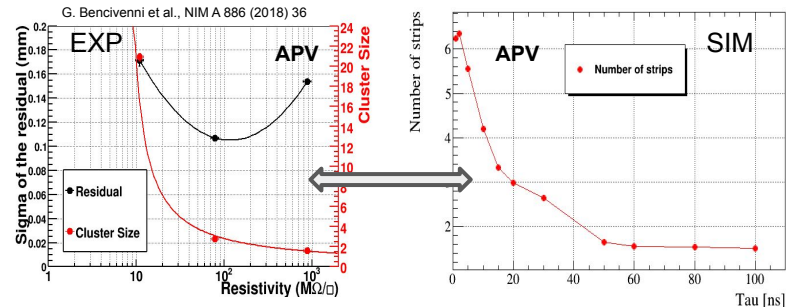

# IDEA R&D and DRD1

The ECFA DRD themes define the key R&D areas of interest within the Detector Roadmap, and the  $\mu$ RWELL R&D for IDEA aligns with these priorities.

The  $\mu$ RWELL activities focus on detector technology e.g., new resistive MPGD structures, front-end electronics and readout systems, eco-friendly gases, manufacturing, and longevity.

The DRD1 proposal outlines several Working Packages (WP) to group strategic R&D efforts from various institutes.

**A significant overlap between the ongoing and future tasks of  $\mu$ RWELL and DRD1-WP1 is present.**

#	Task	Performance Goal	DRD1 WGs	ECFA DRD1	12M	Milestones/Deliverable	36M	Institutes
11	New RPC structures	- Develop low-cost resistive layers - Increase rate capability from 10 kHz to 1 MHz per cm <sup>2</sup> - Improve timing resolution from sub-ns to ps levels	WG1, WG2, WG3, WG4, WG5, WG6, WG7, WG8	1.1, 1.3	<b>M1.1</b>  <b>Review of Detector Prototypes:</b> examining the current status and future prospects of innovative resistive materials, novel structures, and challenges in hybridizing Resistive Plate Chambers (RPC) and Micro-Pattern Gas Detectors (MPGD). This evaluation includes compiling a comprehensive report highlighting comparative performance, along with the respective advantages and disadvantages of available technologies. [T1, T2, T5, T6, T7, T8]	<b>M2.1</b>  <b>Detector Prototypes Enhancement:</b> building upon the insights from M1.1. Proof of rate capability above 100 kHz/cm <sup>2</sup> , assessing the status and potential improvements of RPC and MPGD detectors, informed by feedback from the previous phase. [T1, T2, T5, T6, T7, T8]	<b>D1</b>  <b>Large area RPC and MPGD prototypes:</b> design, construction, and test of RPC and MPGD-based prototypes [T1, T2] with advanced solution for extensive surface coverage [T6], optimized for medium-high flow rates (range tens kHz/cm <sup>2</sup> – few MHz/cm <sup>2</sup> ), precise tracking (100 $\mu$ m) and timing (ns and sub-ns time resolution).  <b>M2.2</b>  <b>Design and Simulation studies of new ASIC:</b> Building blocks for MPGD and RPC and technical note(s) about the chips expected performance. [T3]	INFN-BA, UniBA, PoliBA, INFN-LNF, INFN-RM2, UniRomaTOV, INFN-BO, INFN-FE, INFN-NA, INFN-RM3, INFN-TO, IRFU/CEA, IFIN-HH, Istinye U, CERN, CIEMAT, LMU, WIS, Wigner, U Kobe, U Cambridge, USTC, U Oviedo, UNSTPB, UTransilvania, VUB and UGent, U Genève, U Hong Kong, MPP, BNL, FIT, JLab, MSU, Tufts, UC Irvine, U Florida, U Massachusetts, Amherst, U Michigan, UW-Madison, IGPC
12	New Resistive MPGD Structures	- Stable up to gains of $O(10^6)$ - High gain in a single multiplication stage - High rate, capability (1 MHz/cm <sup>2</sup> and beyond) - High tracking performance (100 $\mu$ m) - Development of low-granularity 2D-readout with high-tracking performance						
13	New Front-end electronics	- New front-end - 1 fC threshold - High-sensitivity electronics to help achieve stable and efficient operation up to $\approx$ 3MHz/cm <sup>2</sup> - High granularity detector capability						
14	Optimization of scalable multichannel readout systems	- Front-end link concentrator to a powerful FPGA with possibilities of triggering and $\approx$ 20 GBits/s DAQ for high-rate experiment - Develop robust, compact, and low power DAQ for low-rate experiment						
15	Eco-friendly gases	- Guarantee long-term operation - Explore compatibility and optimized operation with low-GWP gases						
16	Manufacturing	- Technological transfer for cost-effective production of high-quality, high-performance large area resistive MPGD. - Reliable production of homogeneous resistive large DLC foils with the CERN-INFN sputtering machine						
17	Longevity on large detector areas	- Study discharge rate and the impact of irradiation and transported charge (up to C/cm <sup>2</sup> ) - Study the impact of low-GWP gases and new materials on high radiation hardness environment						
18	New Hybrid-multi-technologies Structures	- Development of new ideas of detector structures and hybridization						

# Conclusion

Ongoing **R&D** on  $\mu$ RWELL technologies **is focused on developing large-area detectors** (50x50 cm tiles) for the pre-shower and muon systems in the IDEA detector. These efforts aim to optimize performance together the segmentation of the readout.

**Key studies** on **DLC** resistivity, strip **pitch**, and various **2D readout configurations** have provided valuable information for defining the preliminary layout of the tiles. Further studies are planned to finalize the design, including the characterization of 2D readouts with final dimensions.

An electronics design campaign has also begun. A test beam using **TIGER electronics** has been performed, and **simulations** will be used to optimize the integration between the detector and electronics.

Thank You