

Machine Learning Lecture - 2

Sanmay Ganguly
Indian Institute of Technology, Kanpur
sanmay@iitk.ac.in


23/07/2024



30-th Vietnam School of Physics : Particles and Dark Matter



The path we will take

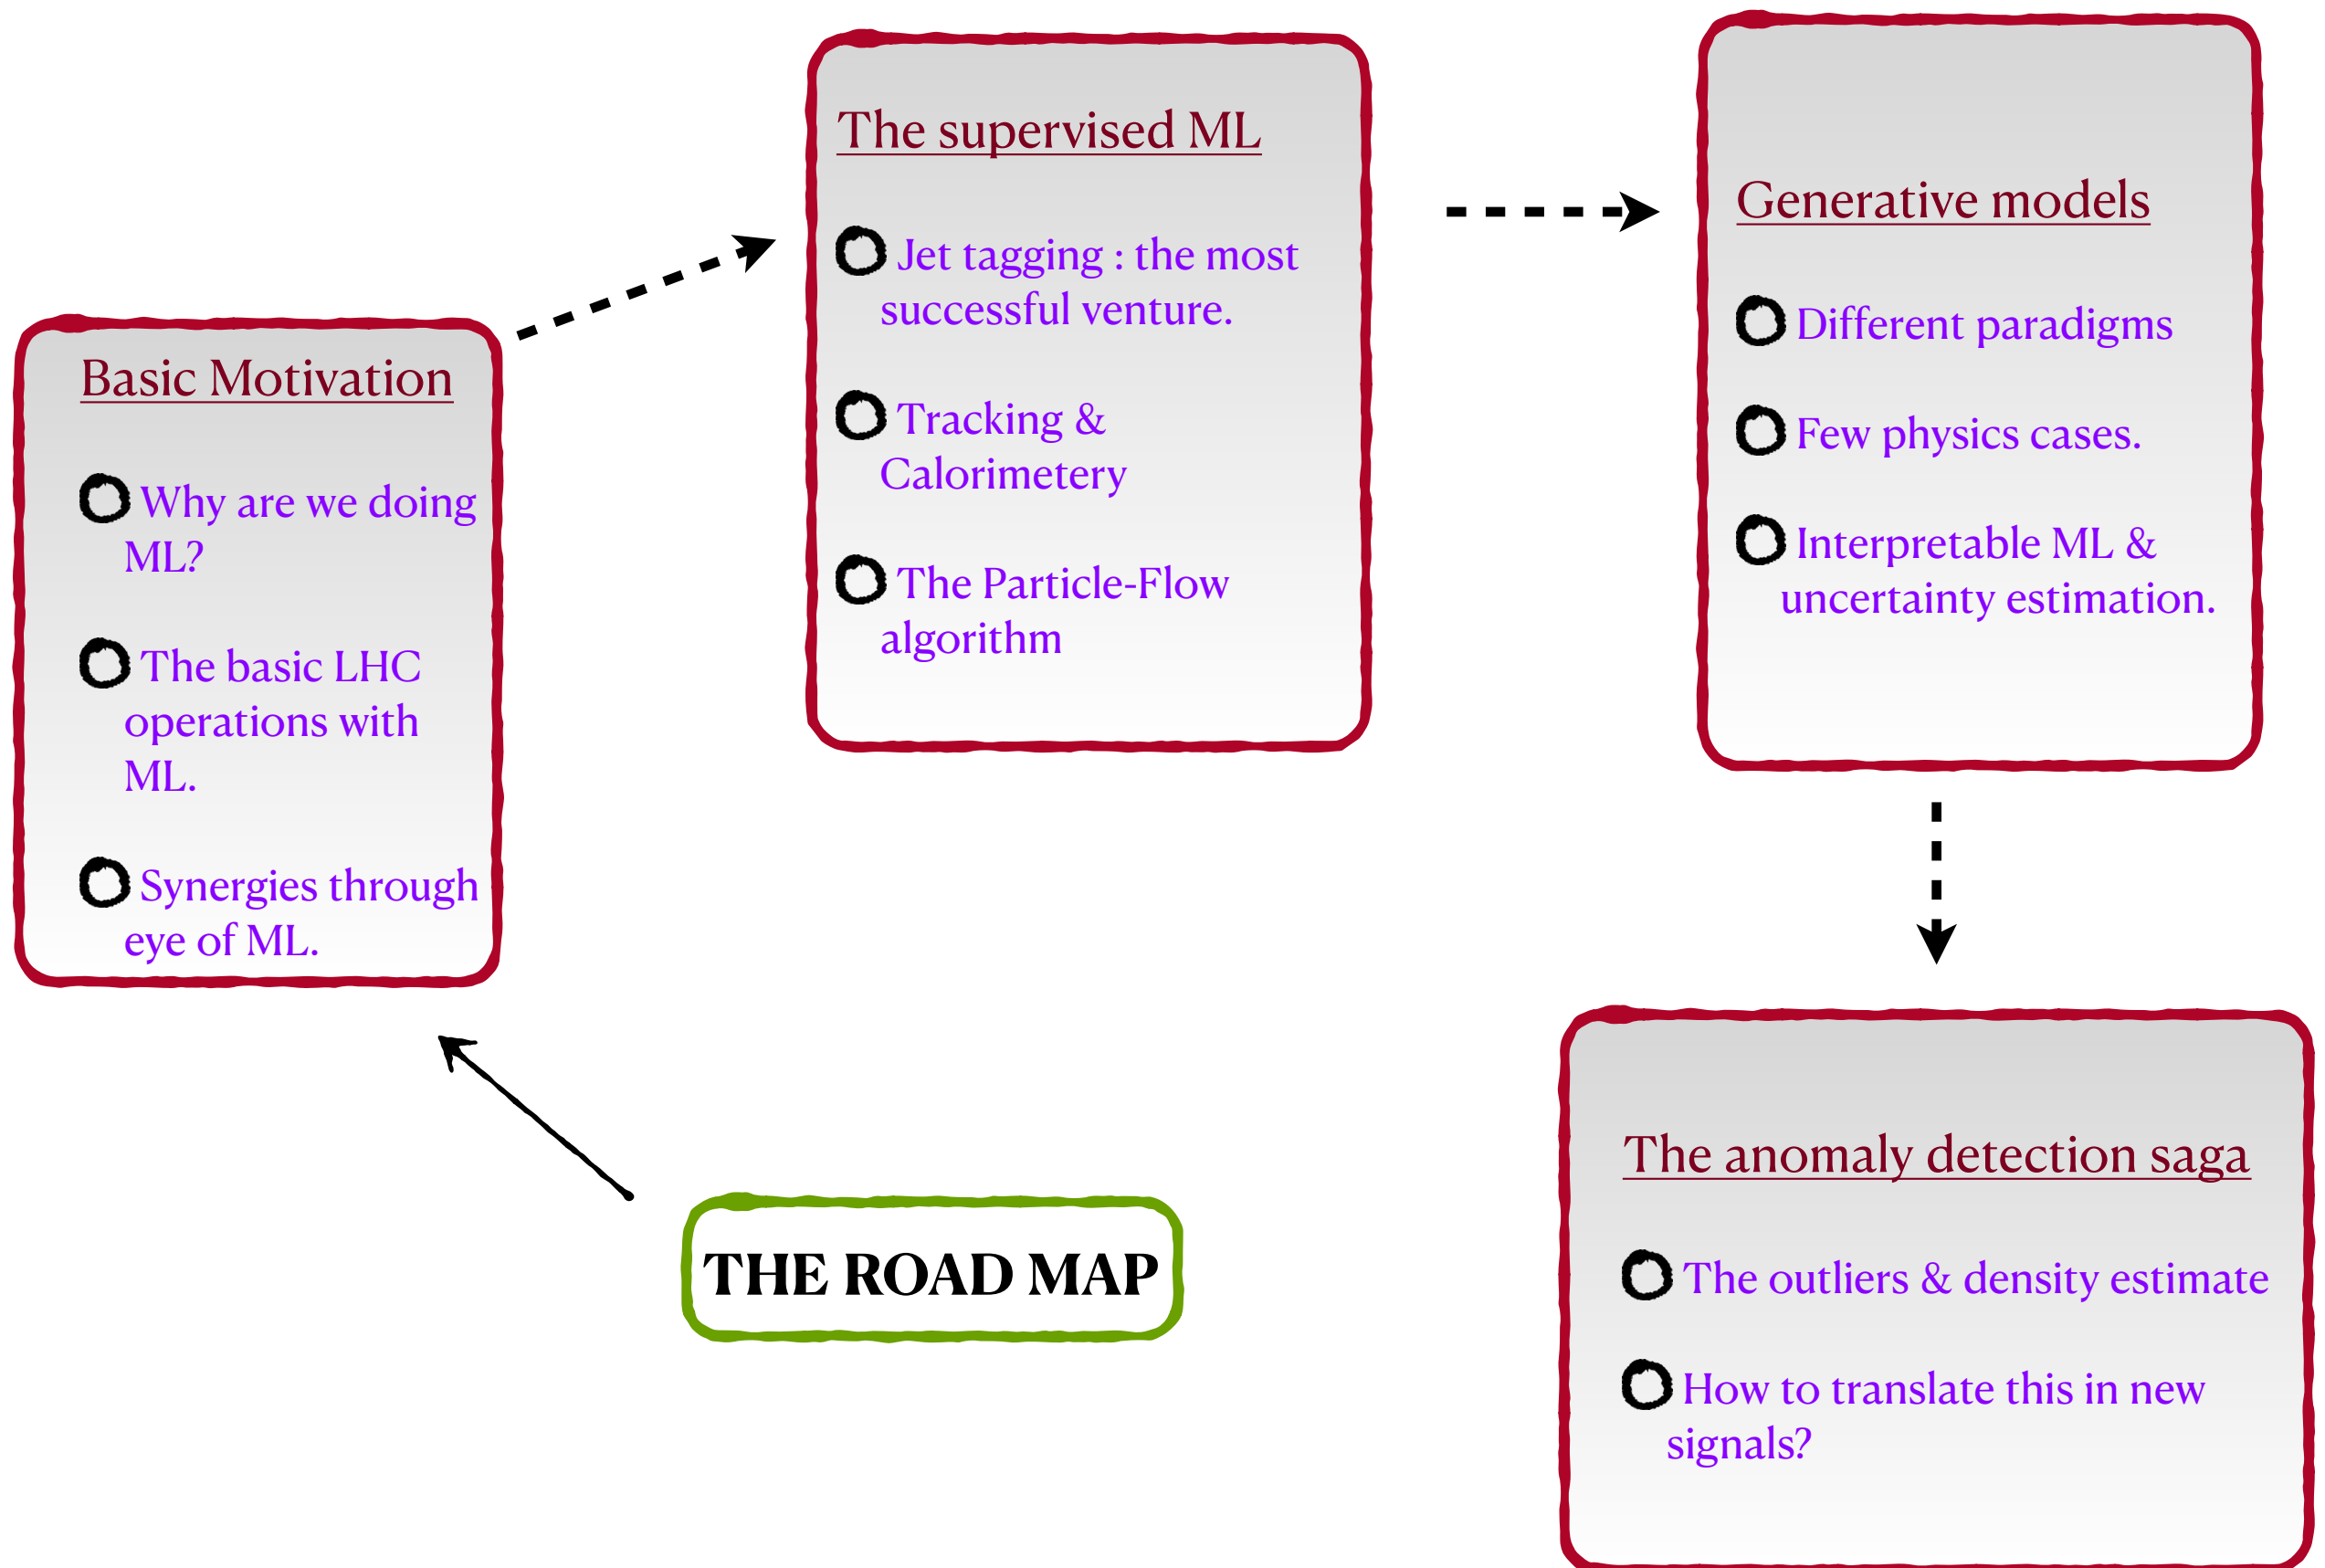


A broad strategy towards physics inference

Guess the Lagrangian

solving the inverse problem via ML

$$\frac{1}{\mathcal{L}} \frac{d^2 N}{dp_T d\eta}$$





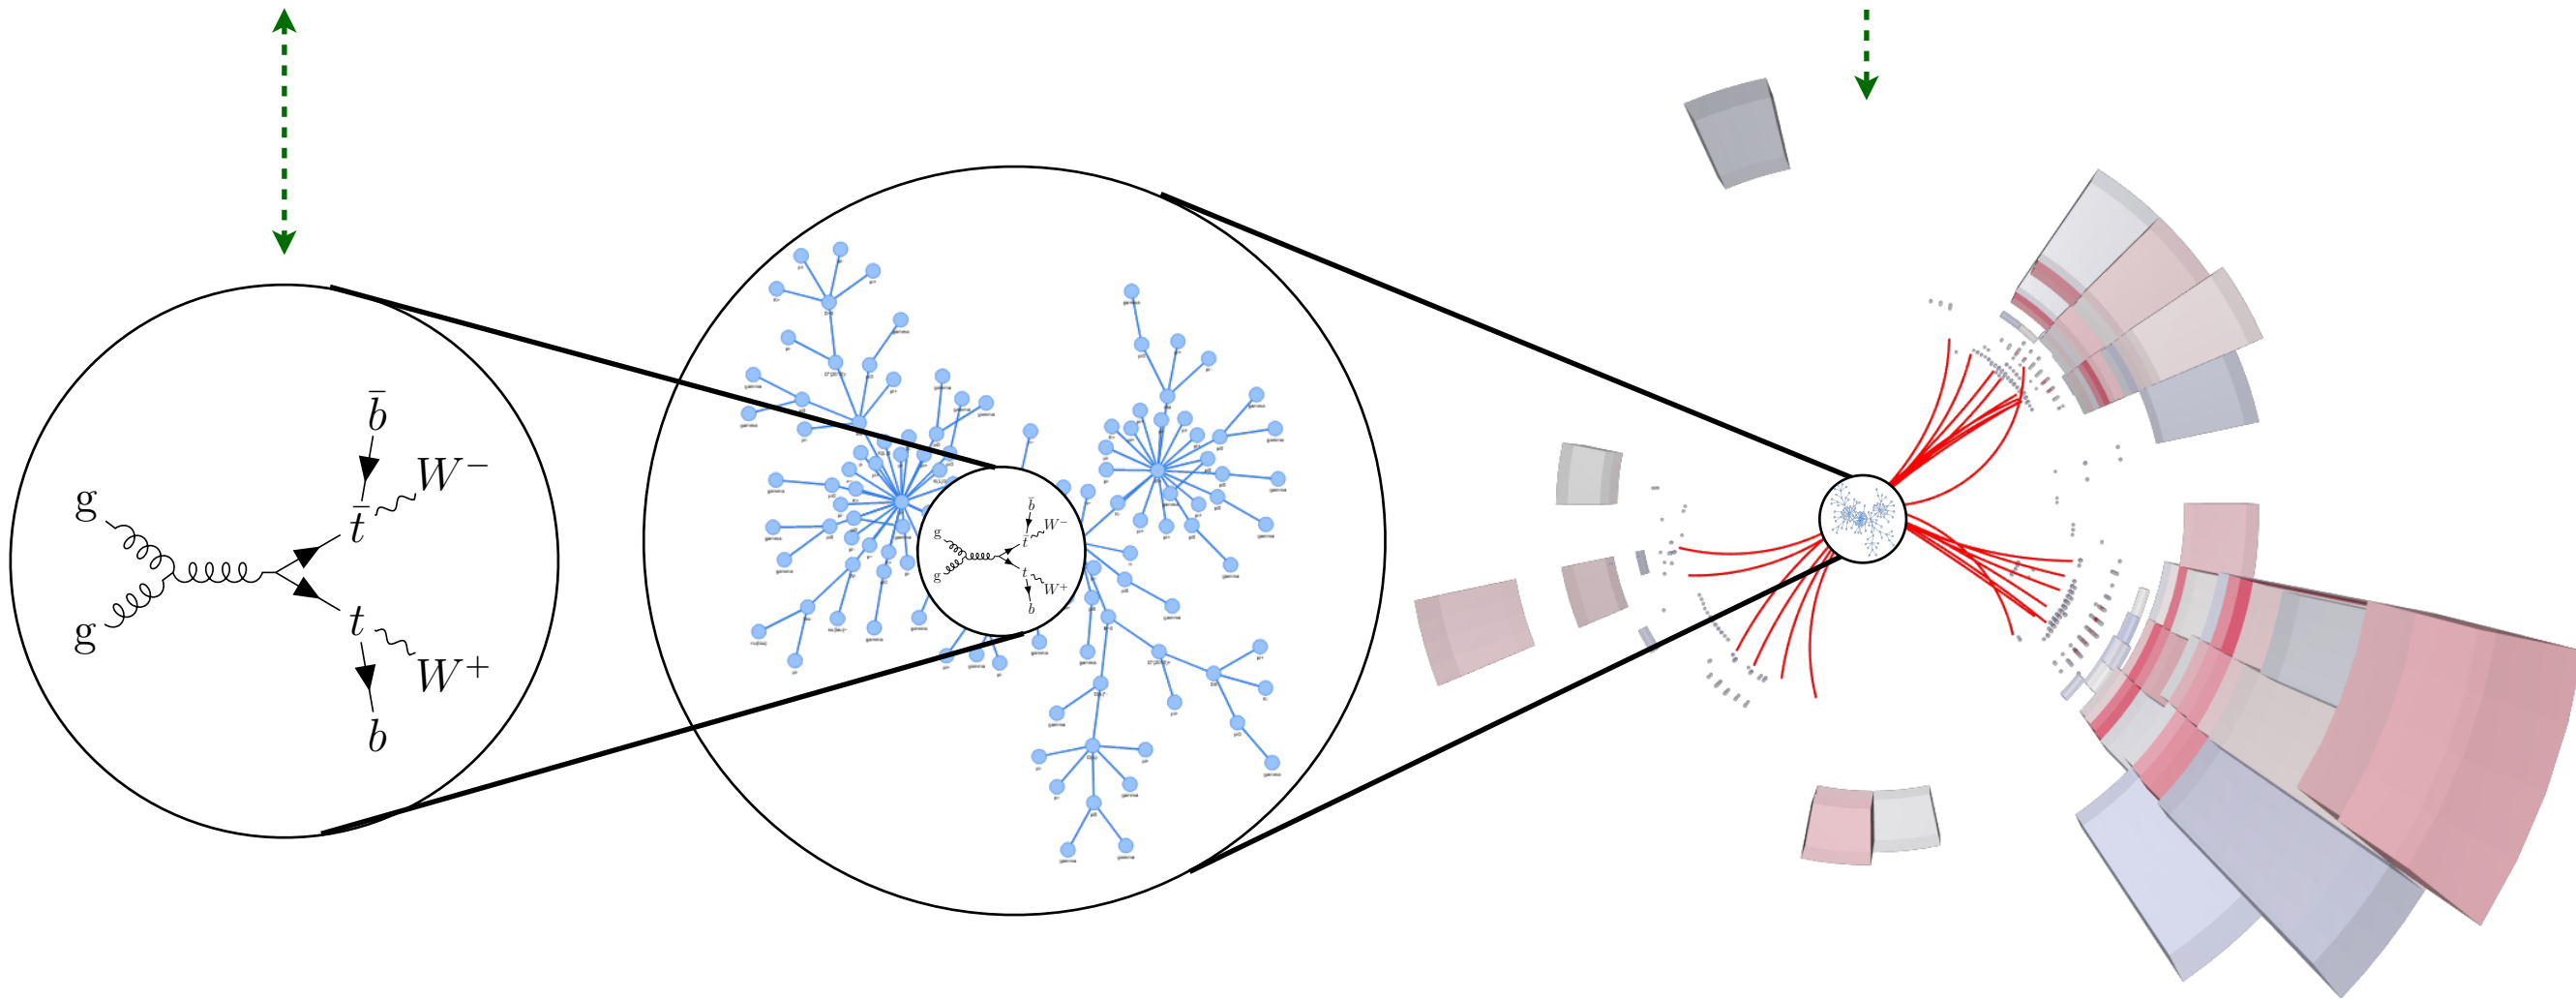


The physics at the core:
driven by the interaction
between quantum fields,
computed via perturbative
or lattice techniques.

Final Particles
Produced via hadronization
(no first principle analytic
techniques are available)

Detector output/Readout
Produced via hardware
or simulation

The collider program flow-chain

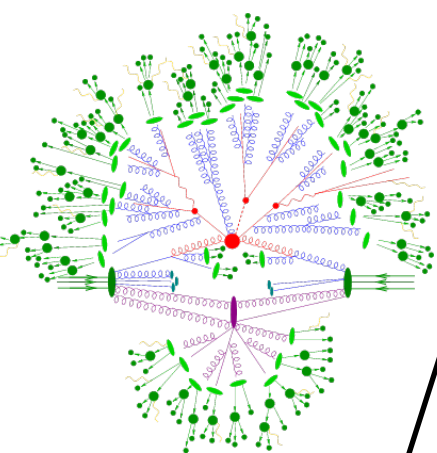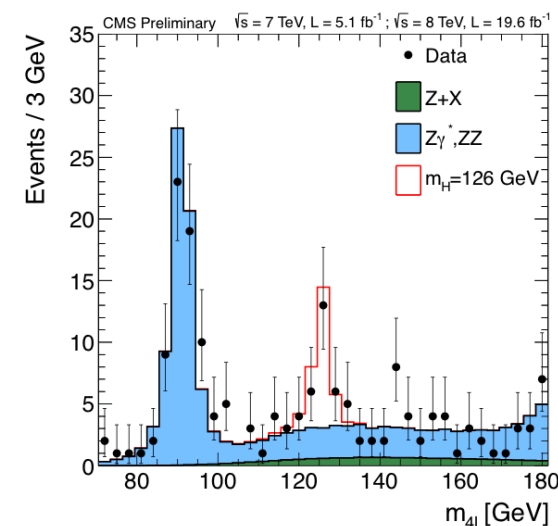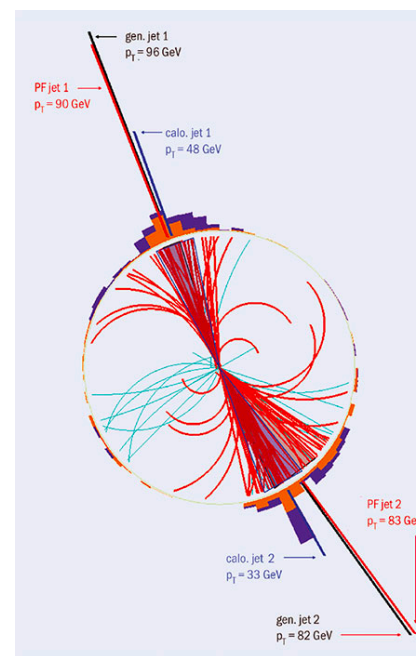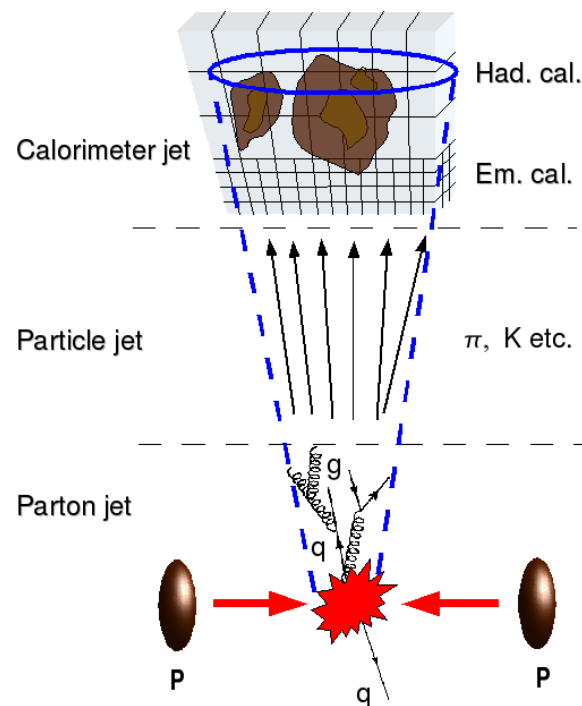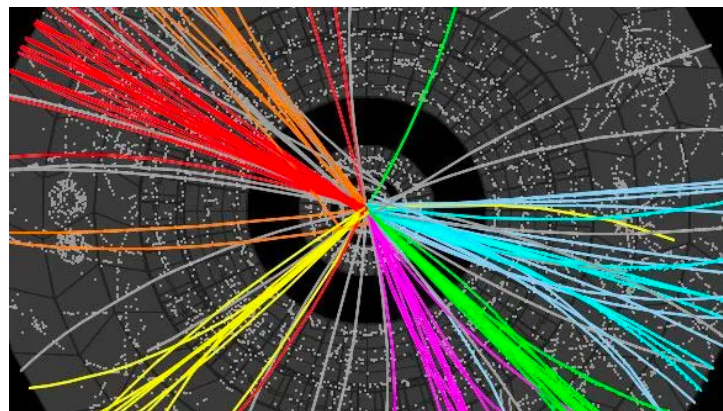


Trigger
Online process



Object rec
PID + calib

Event rec
sig/bkg class.

Analysis
Unfolding/matching

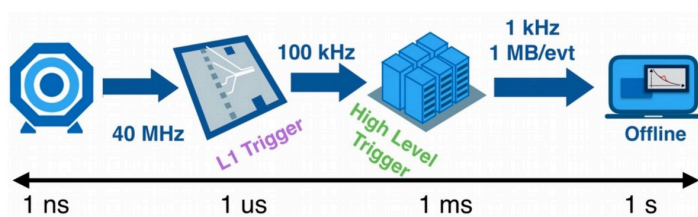








ME + PS generation
Detector Simulation

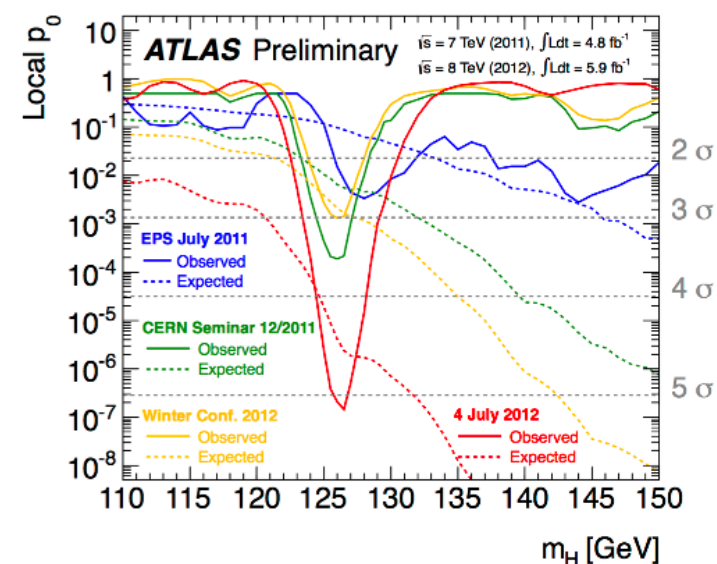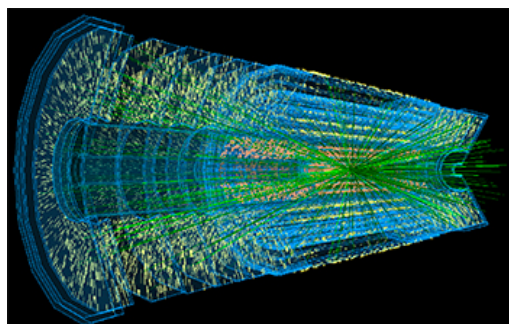



Inference

The collider program flow-chain

ML can (and will) play a role at every instance of this flow chain.

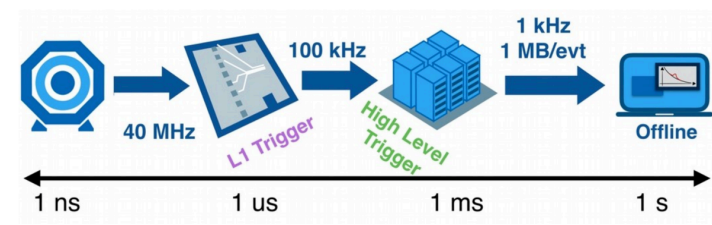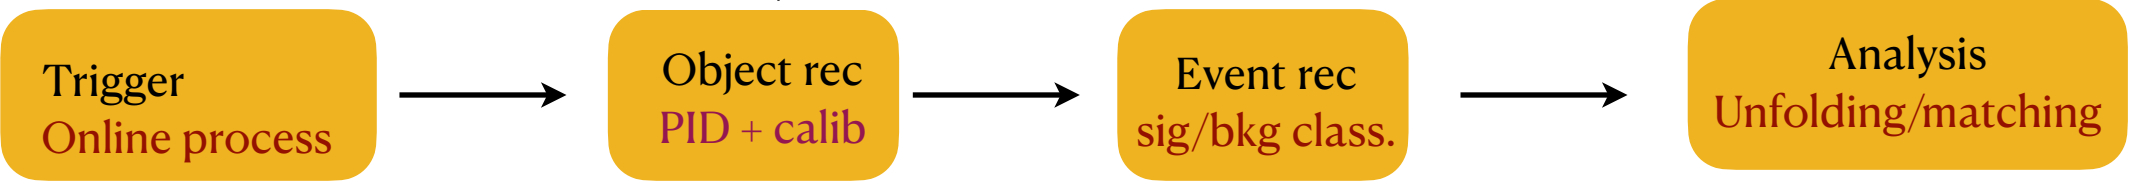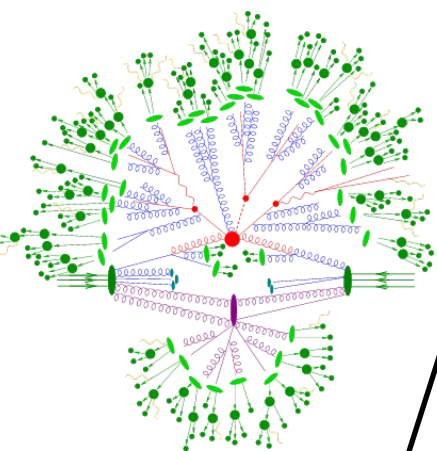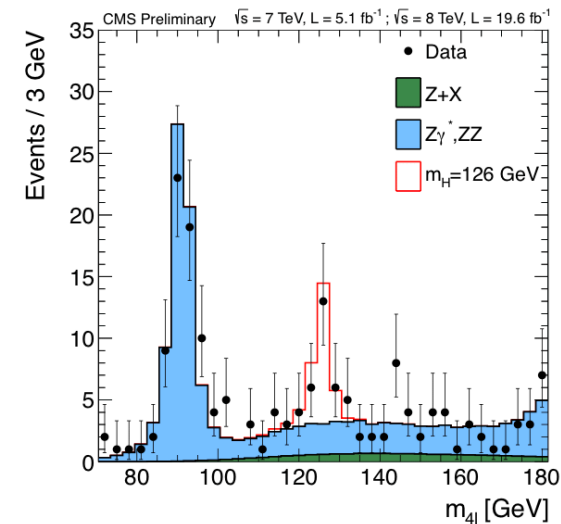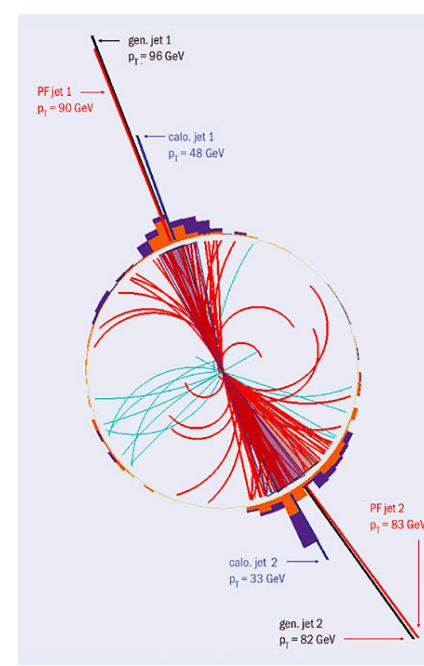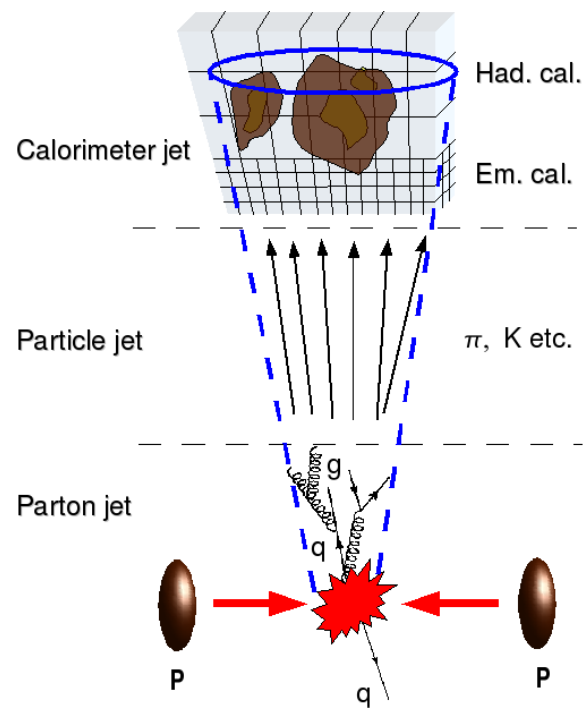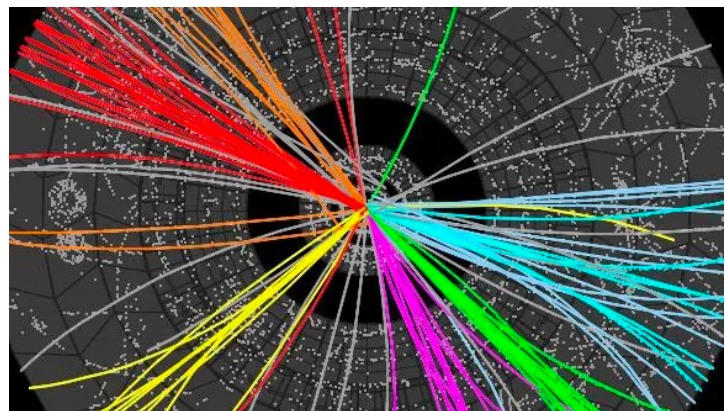


ME + PS generation
Detector Simulation

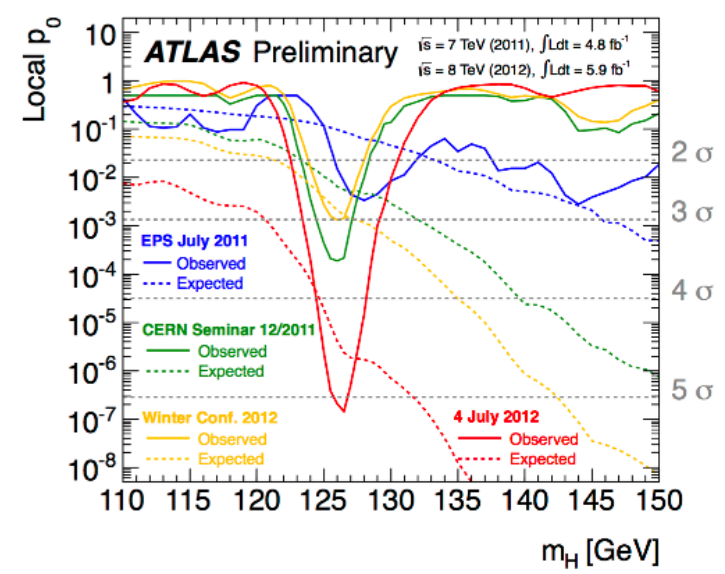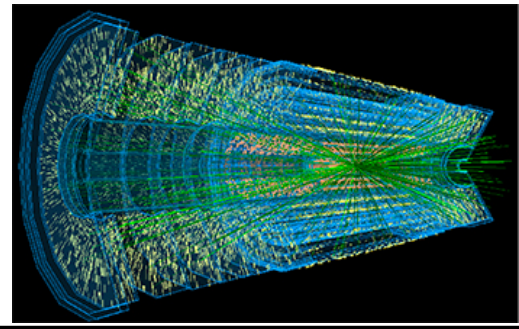


Inference

ML@Colliders : what's the broad task?

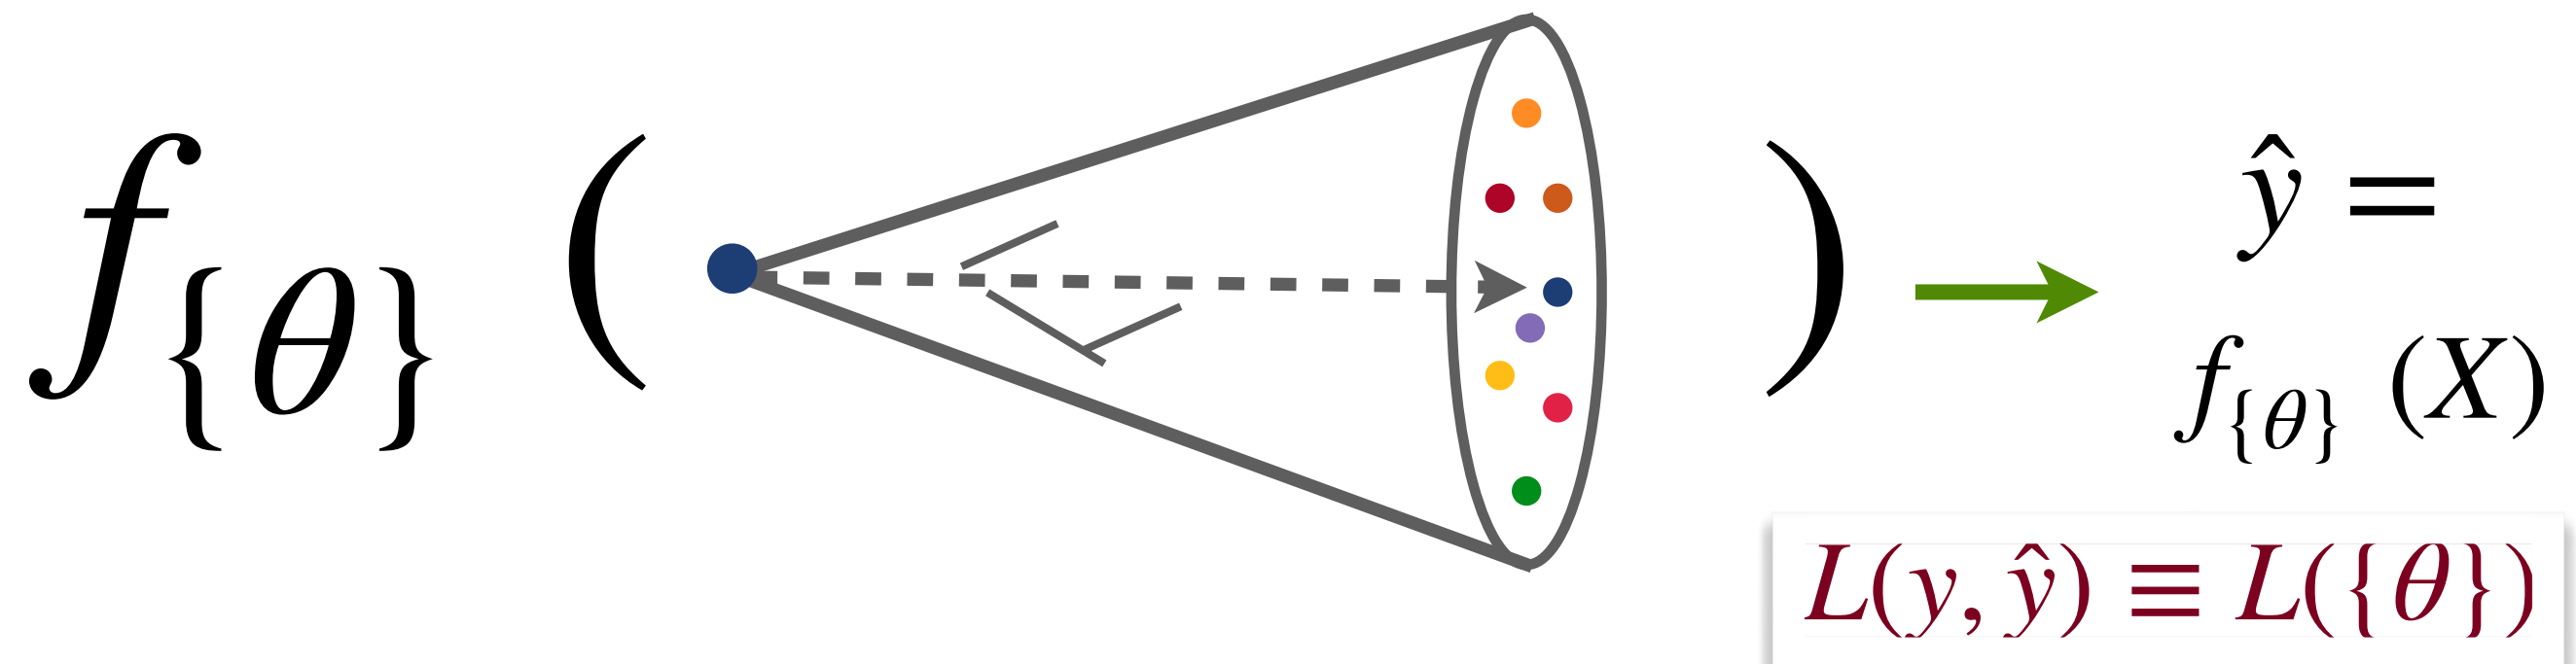

ML@Colliders : what's the broad task?


1. Decide the right representation of the data (images/graphs/trees..)

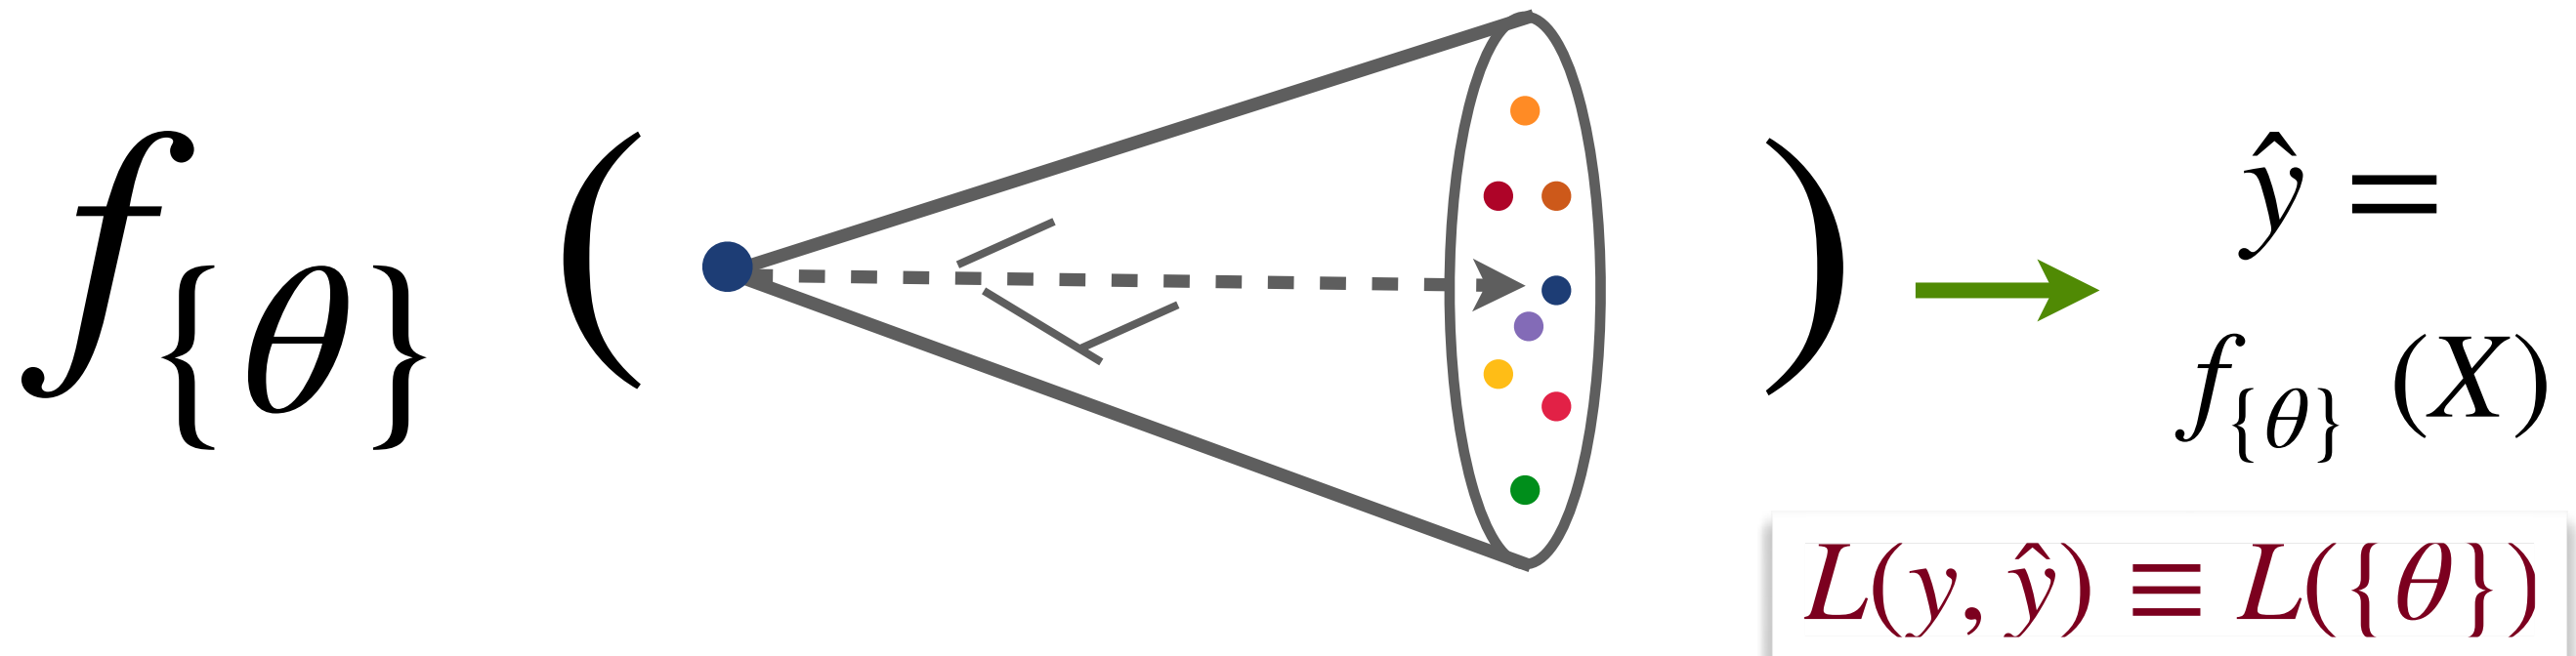

ML@Colliders : what's the broad task?

2. Choose a NN model
(CNN/GNN/)

1. Decide the right representation
of the data (images/graphs/trees..)

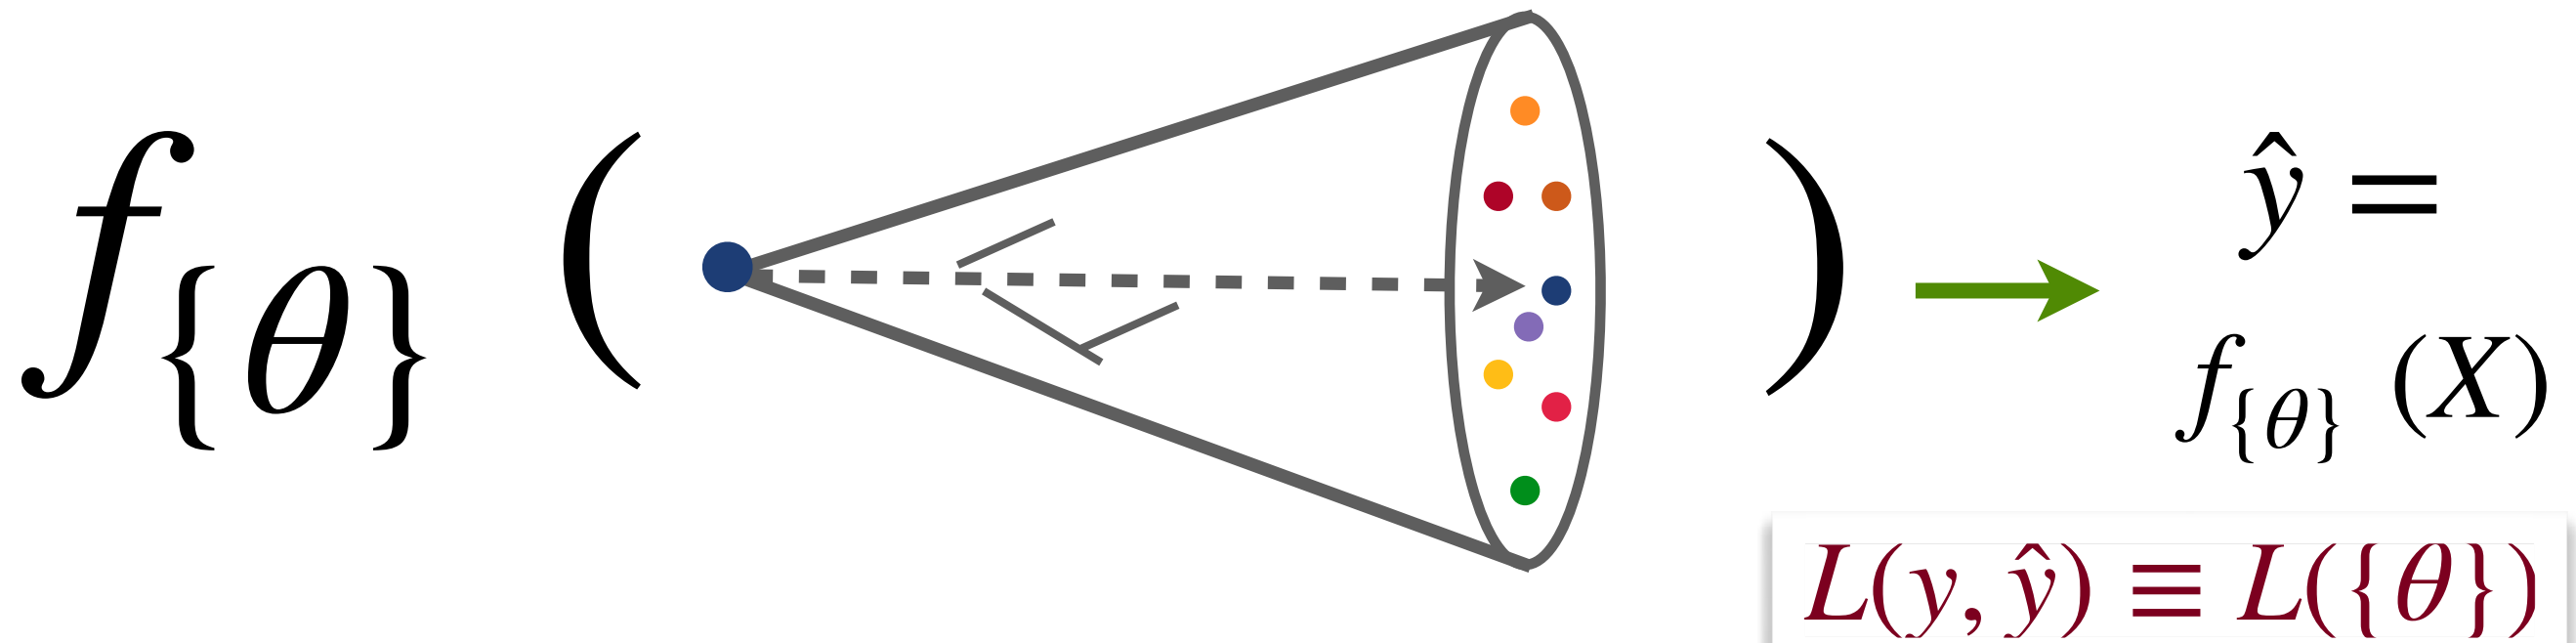


ML@Colliders : what's the broad task?

2. Choose a NN model
(CNN/GNN/)

1. Decide the right representation
of the data (images/graphs/trees..)

3. With a defined learning task,
compute the loss function.

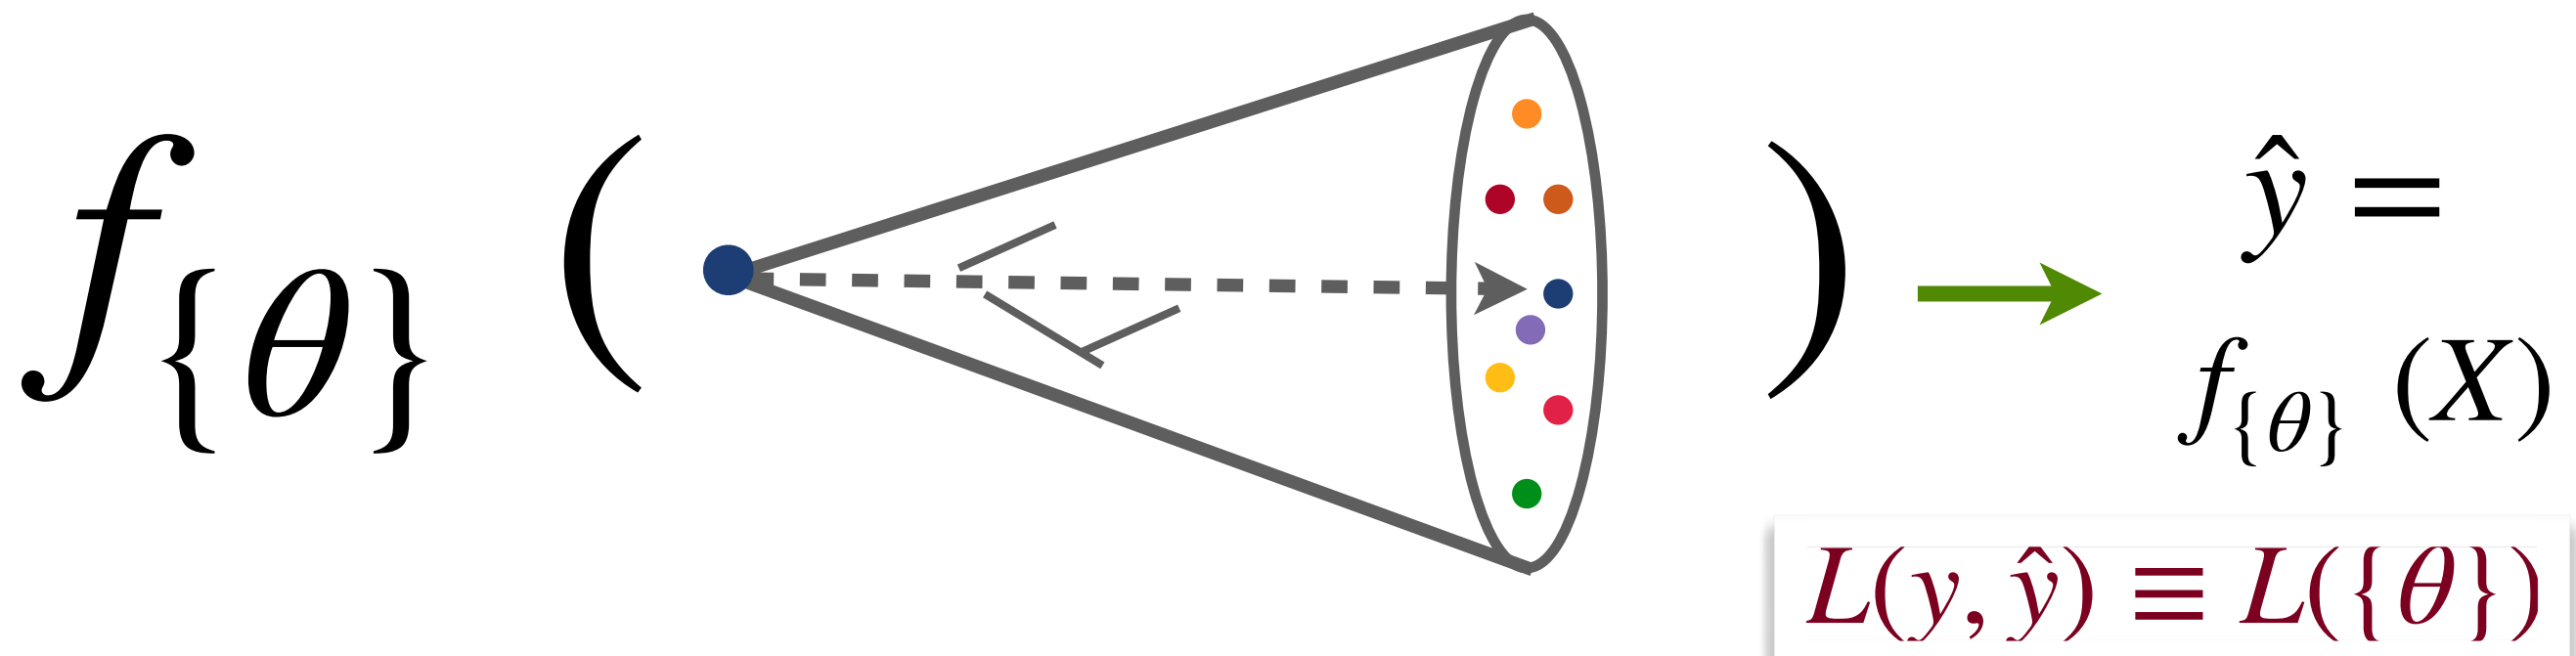


ML@Colliders : what's the broad task?

2. Choose a NN model
(CNN/GNN/)

1. Decide the right representation
of the data (images/graphs/trees..)

3. With a defined learning task,
compute the loss function.

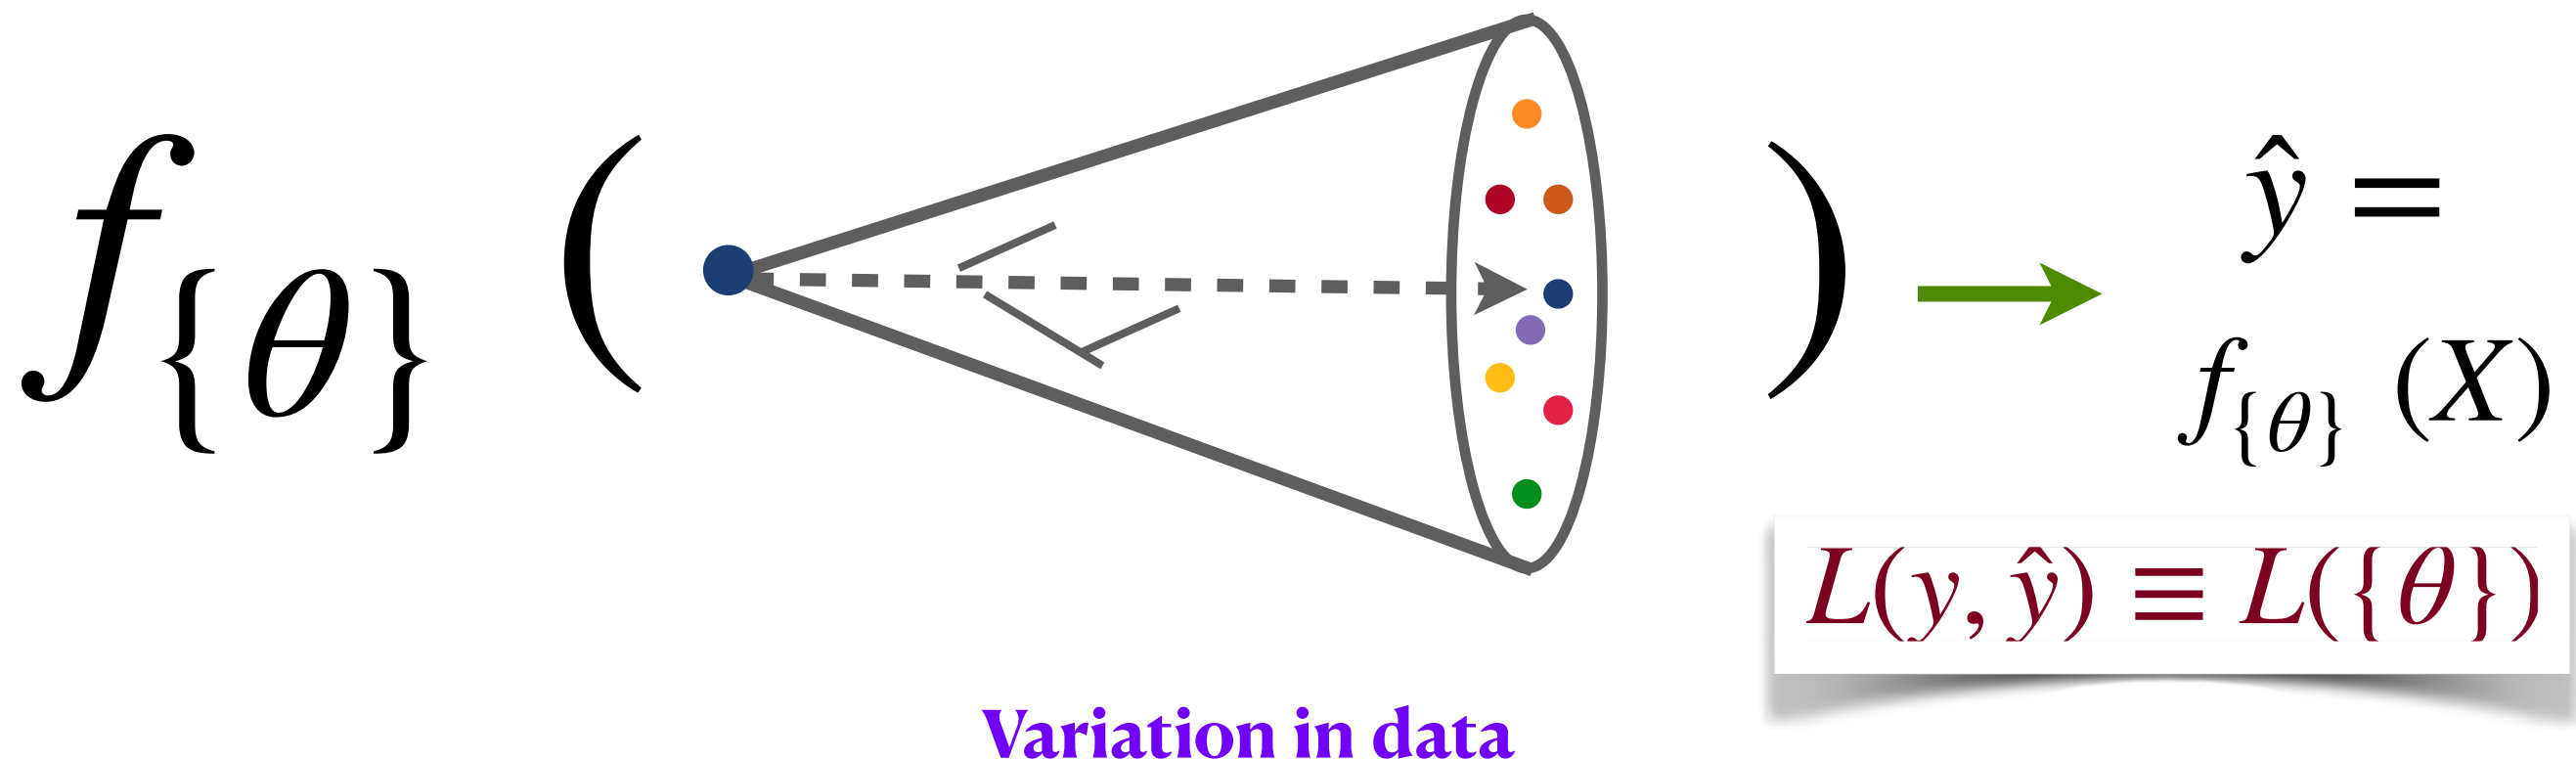


ML@Colliders : what's the broad task?

2. Choose a NN model
(CNN/GNN/)

1. Decide the right representation
of the data (images/graphs/trees..)

3. With a defined learning task,
compute the loss function.

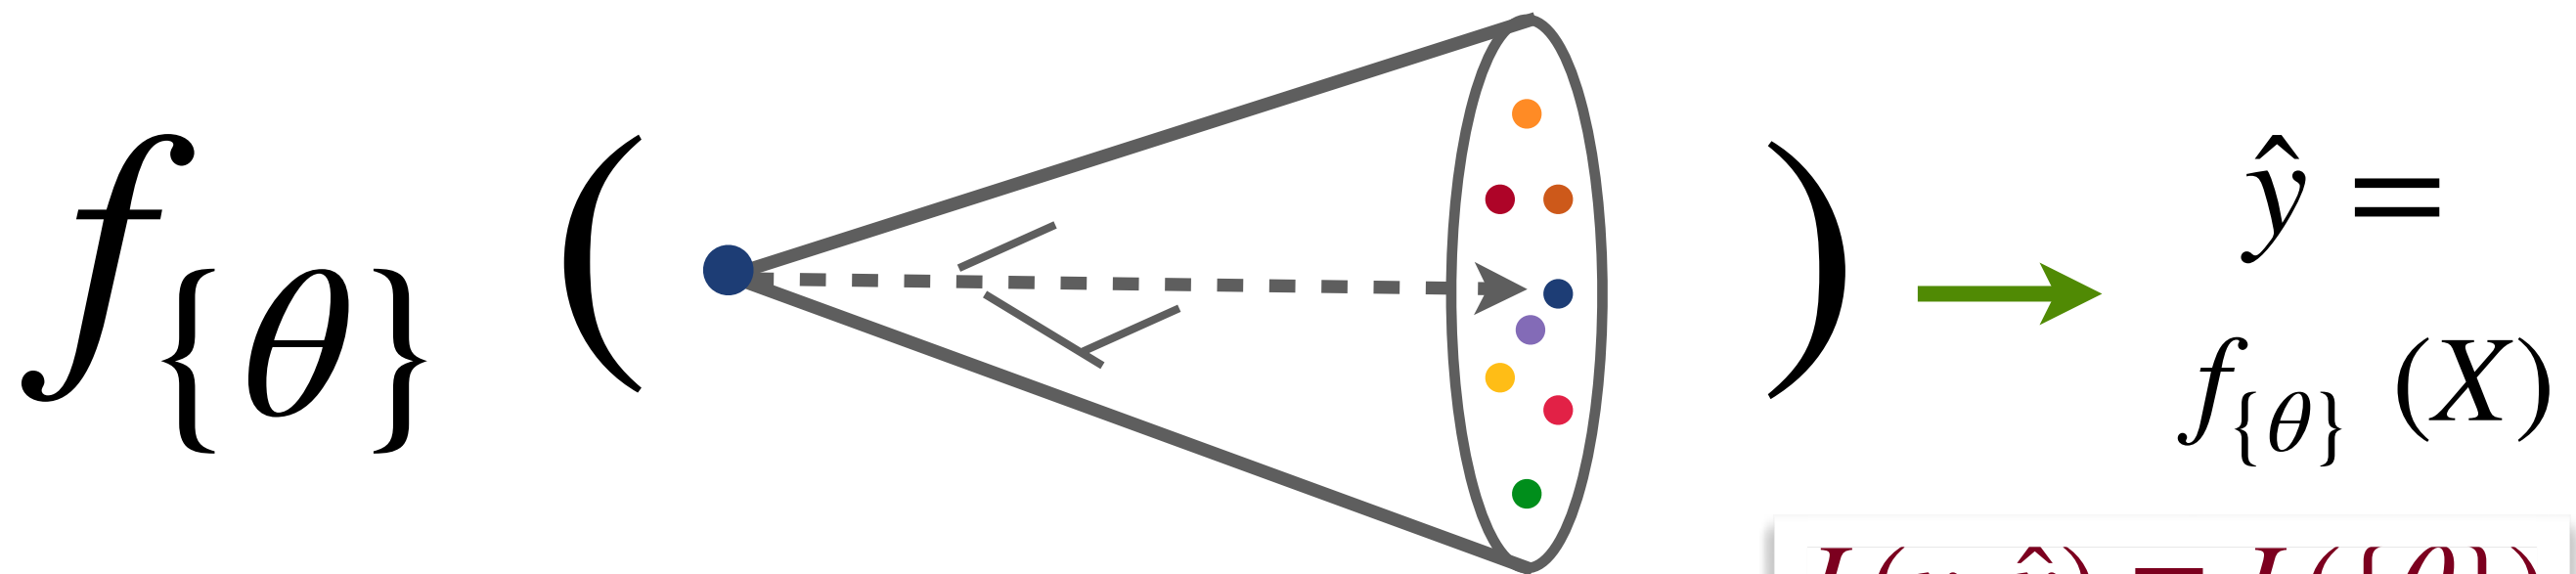

$$L(y, \hat{y}) \equiv L(\{\theta\})$$

Variation in data

Unsupervised


No-labels, the task is to
figure out $p(x)$ from which
the data is drawn. e.g. VAE

ML@Colliders : what's the broad task?

2. Choose a NN model
(CNN/GNN/)

1. Decide the right representation
of the data (images/graphs/trees..)

3. With a defined learning task,
compute the loss function.

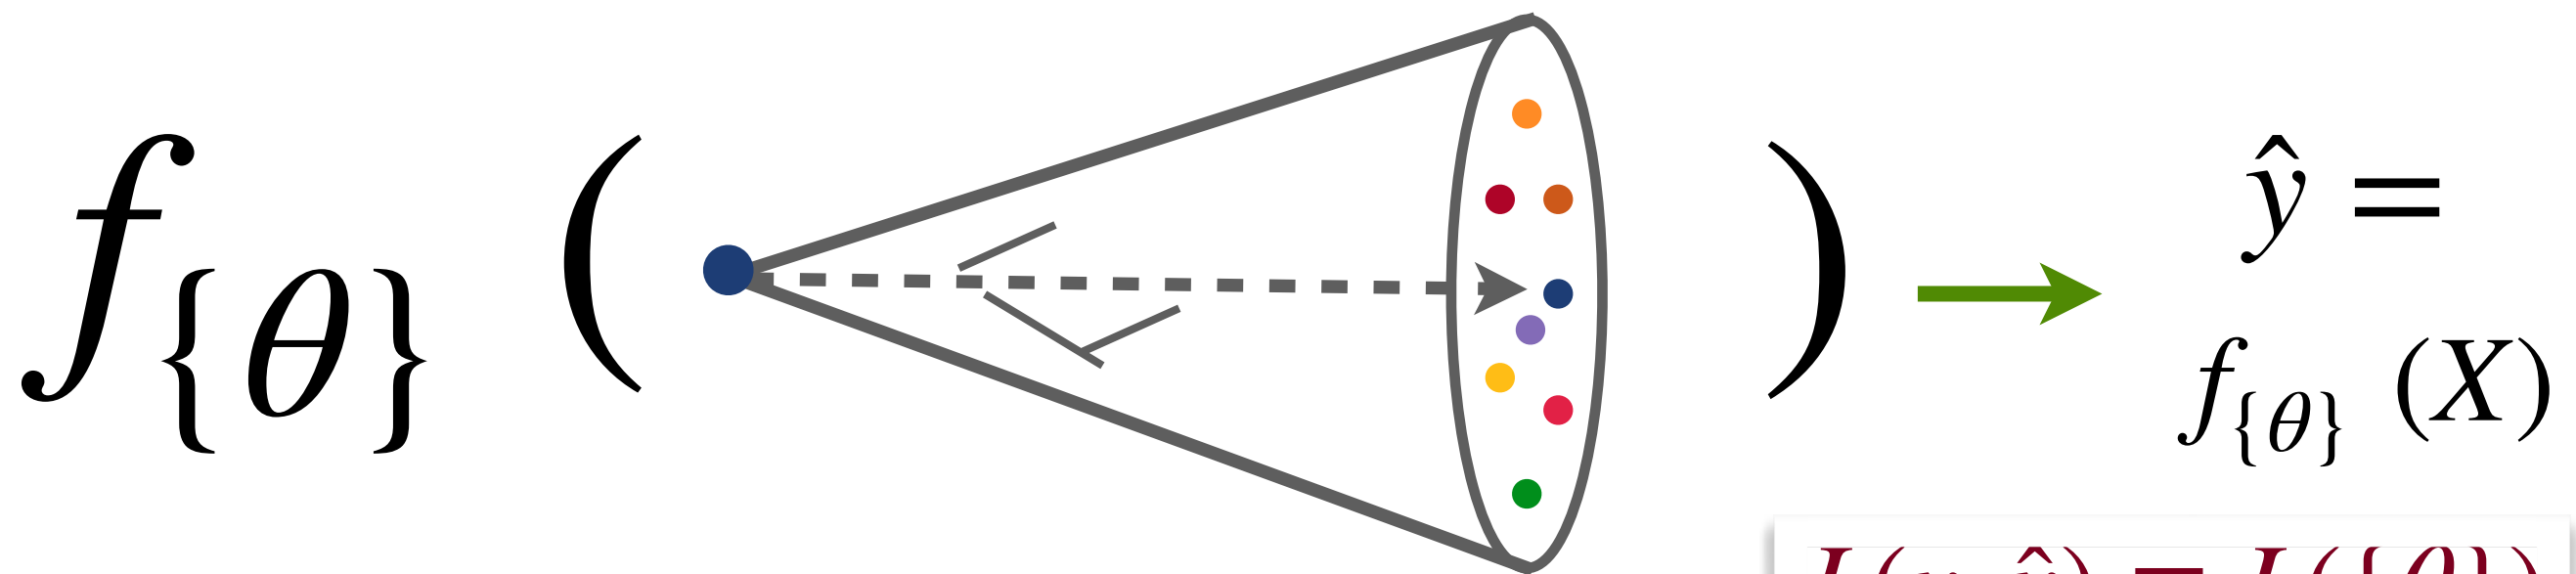

$$L(y, \hat{y}) \equiv L(\{\theta\})$$

Variation in data

Unsupervised

Semi-supervised

No-labels, the task is to
figure out $p(x)$ from which
the data is drawn. e.g. VAE


Noisy labels. estimate :
 $p(s\text{-enriched})/p(s\text{-depleted})$

ML@Colliders : what's the broad task?

2. Choose a NN model
(CNN/GNN/)

1. Decide the right representation
of the data (images/graphs/trees..)

3. With a defined learning task,
compute the loss function.

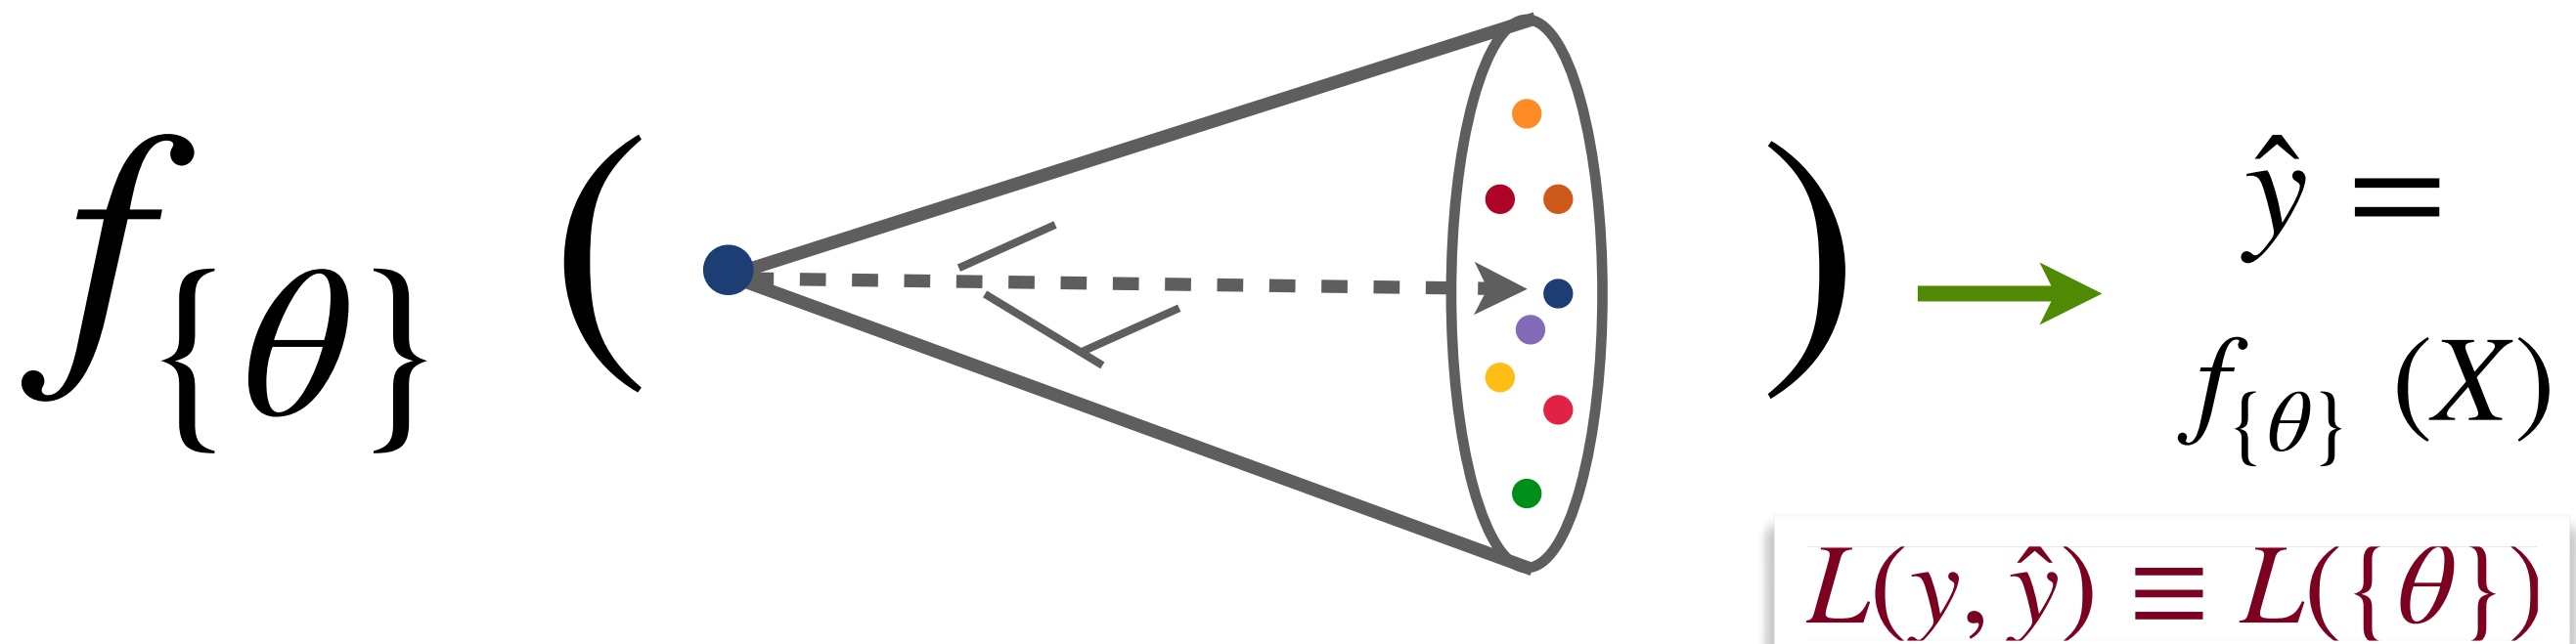

Variation in data

Unsupervised

Semi-supervised

Weakly-supervised

No-labels, the task is to figure out $p(x)$ from which the data is drawn. e.g. VAE

Noisy labels. estimate : $p(s\text{-enriched})/p(s\text{-depleted})$


Partial labels. e.g. simulating : SM bkg vs many NP signals.

ML@Colliders : what's the broad task?

2. Choose a NN model
(CNN/GNN/)

1. Decide the right representation
of the data (images/graphs/trees..)

3. With a defined learning task,
compute the loss function.

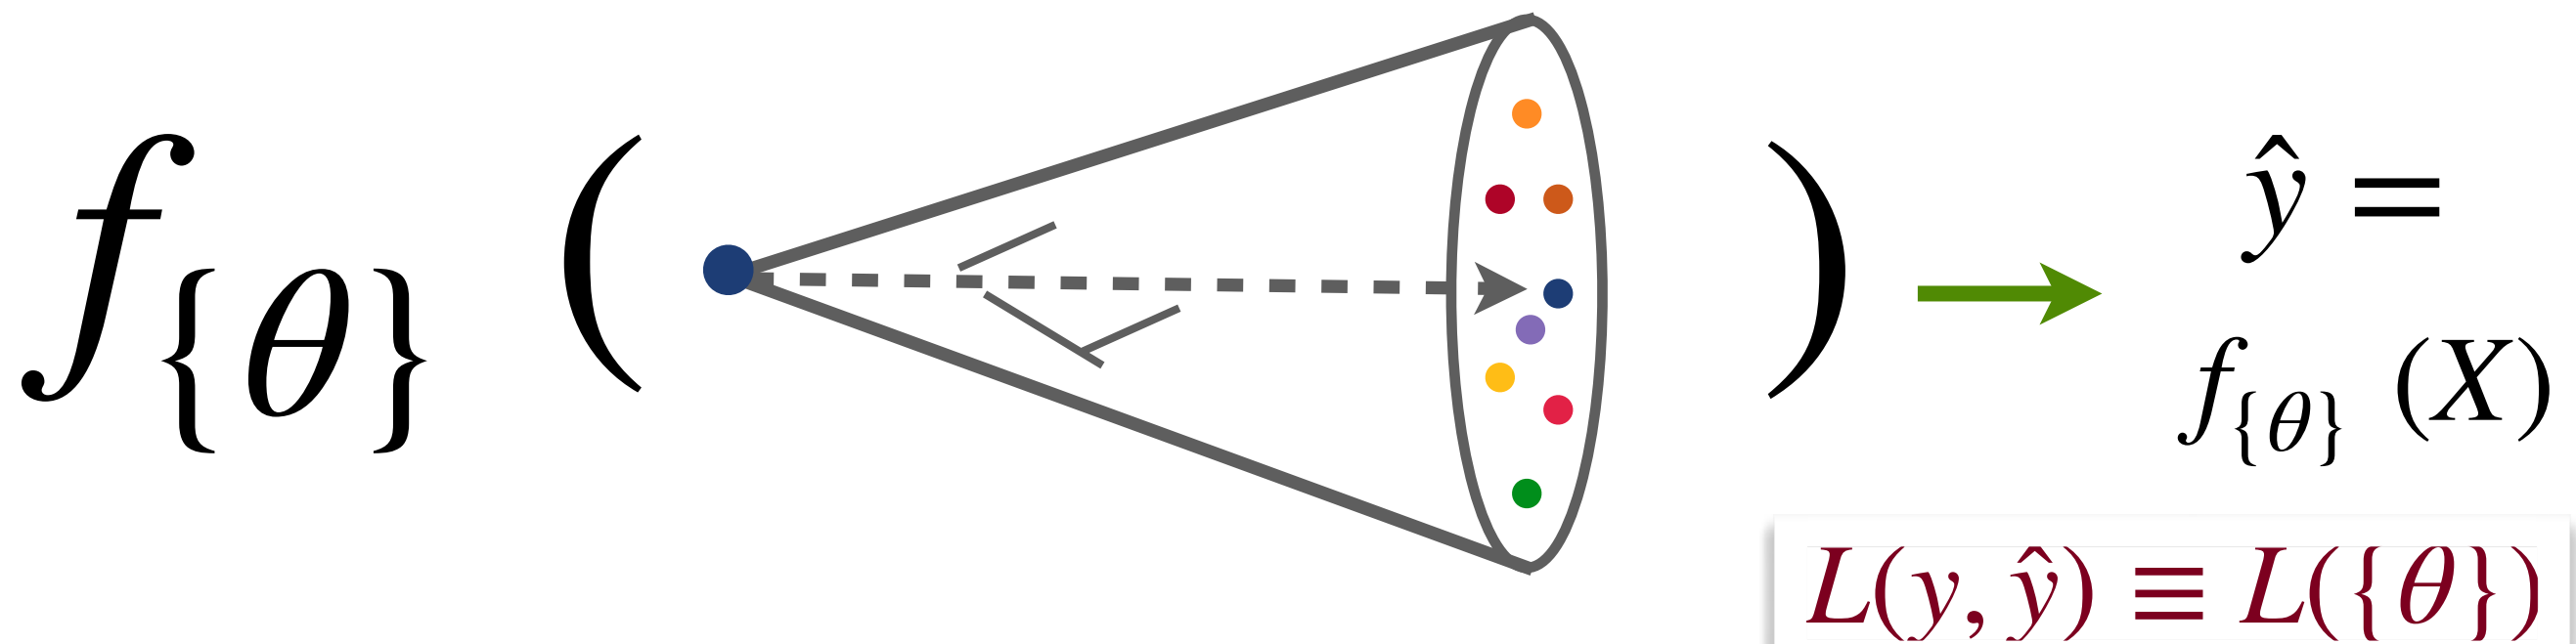

Variation in data

Unsupervised

Semi-supervised

Weakly-supervised

Supervised

No-labels, the task is to figure out $p(x)$ from which the data is drawn. e.g. VAE

Noisy labels. estimate : $p(s\text{-enriched})/p(s\text{-depleted})$

Partial labels. e.g. simulating : SM bkg vs many NP signals.


Learning on all the well labeled data.

ML@Colliders : what's the broad task?

2. Choose a NN model
(CNN/GNN/)

1. Decide the right representation
of the data (images/graphs/trees..)

3. With a defined learning task,
compute the loss function.

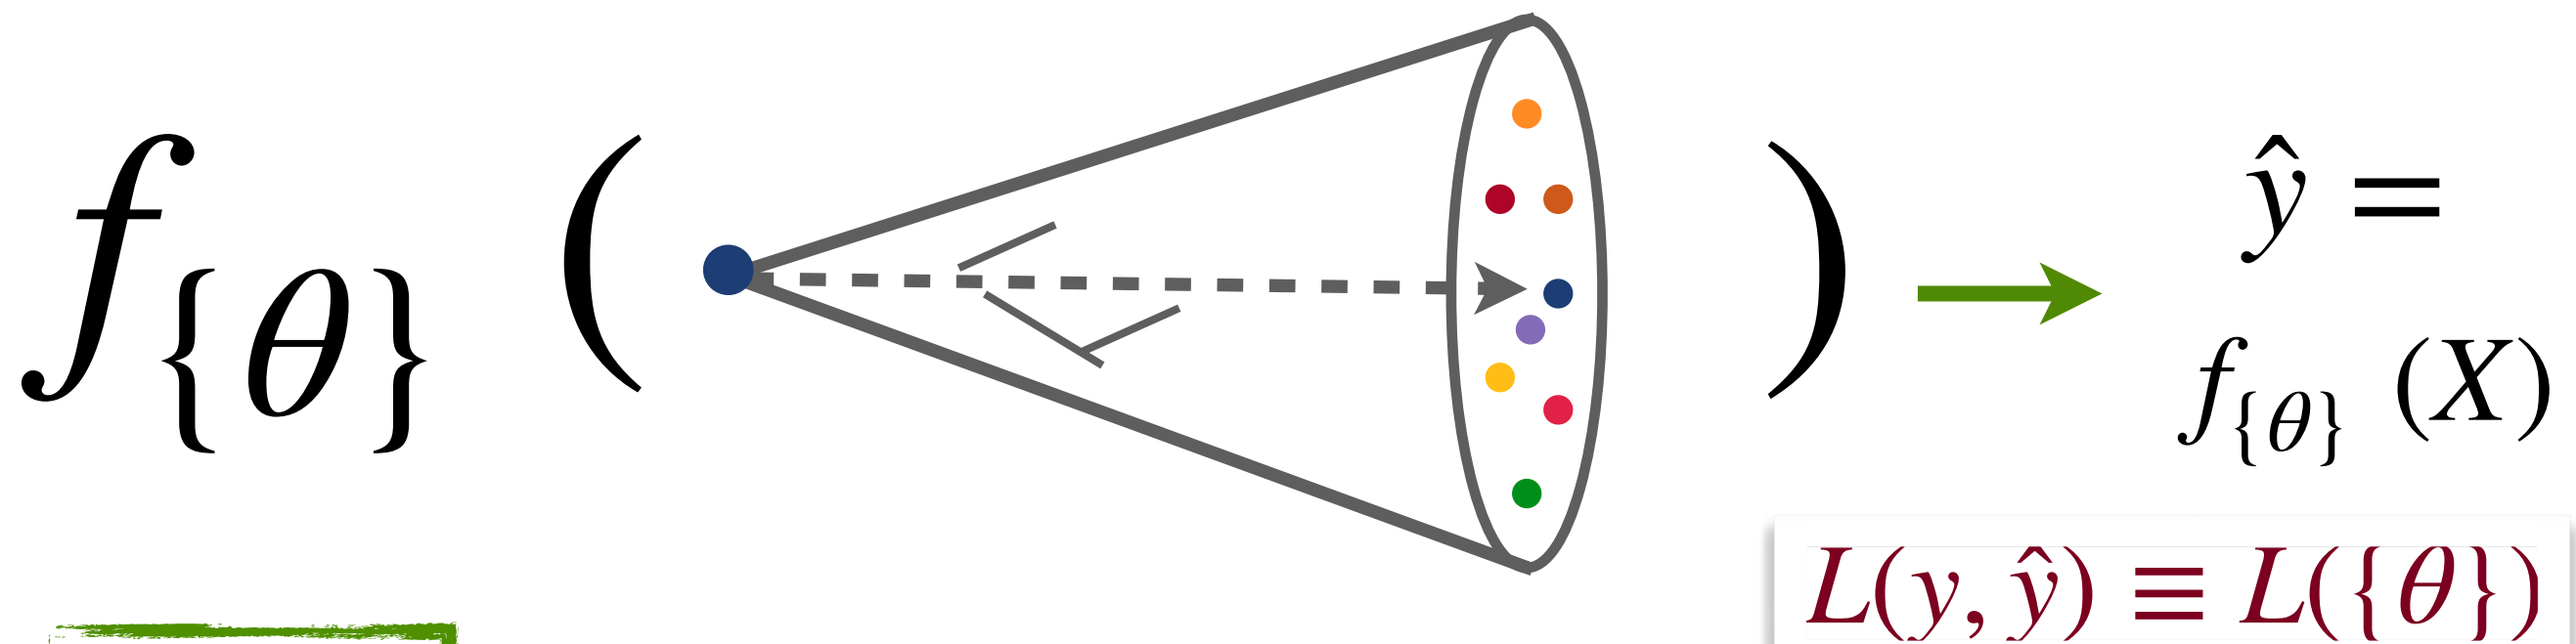

Self-supervised

Variation in data

Unsupervised

Semi-supervised

Weakly-supervised

Supervised

No-labels, the task is to figure out $p(x)$ from which the data is drawn. e.g. VAE

Noisy labels. estimate : $p(s\text{-enriched})/p(s\text{-depleted})$

Partial labels. e.g. simulating : SM bkg vs many NP signals.

Learning on all the well labeled data.

The path we will take



Basic Motivation

- Why are we doing ML?
- The basic LHC operations with ML.
- Synergies through eye of ML.

The supervised ML

- Jet tagging : the most successful venture.
- Tracking & Calorimetry
- The Particle-Flow algorithm

Generative models


- Different paradigms
- Few physics cases.
- Interpretable ML & uncertainty estimation.

The anomaly detection saga

- The outliers & density estimate
- How to translate this in new signals?

THE ROAD MAP

Jet tagging (where it all started)

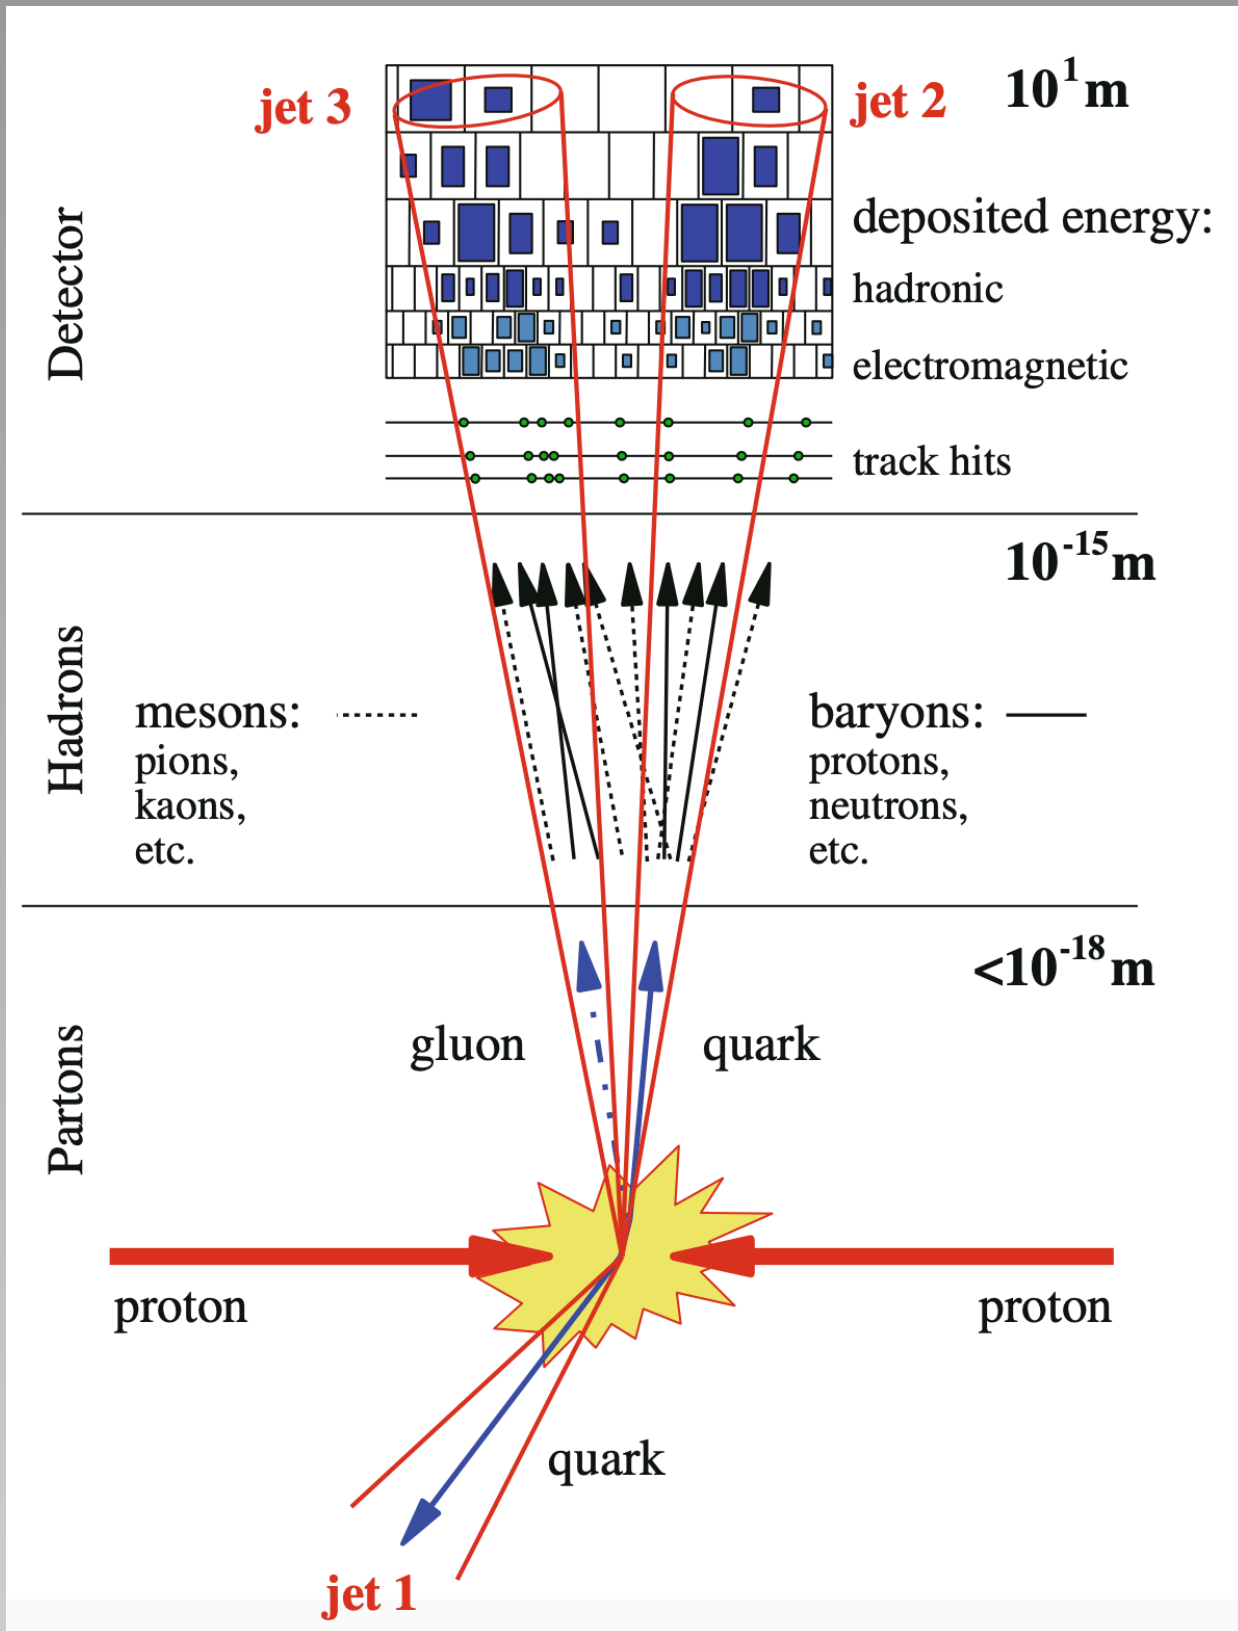

$$\{p_1, p_2, \dots, p_n\}$$

Jet Algorithm (for CA, kT, anti-kT)

$$\{j_1, j_2, \dots, j_k\}$$

$$\{p_1, p_2, \dots, p_n\} = F(q)$$



The forward problem is not computable from first principle

The question of jet tagging is how do we define the inverse problem?

$$q = F^{-1}\left(\{p_1, p_2, \dots, p_n\}\right) ?$$


Early jet tagging

J. Cogan et-al JHEP 02 (2015) 118

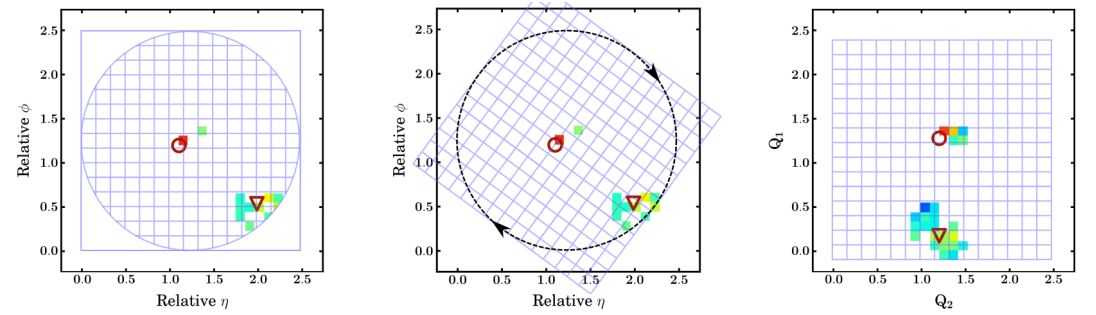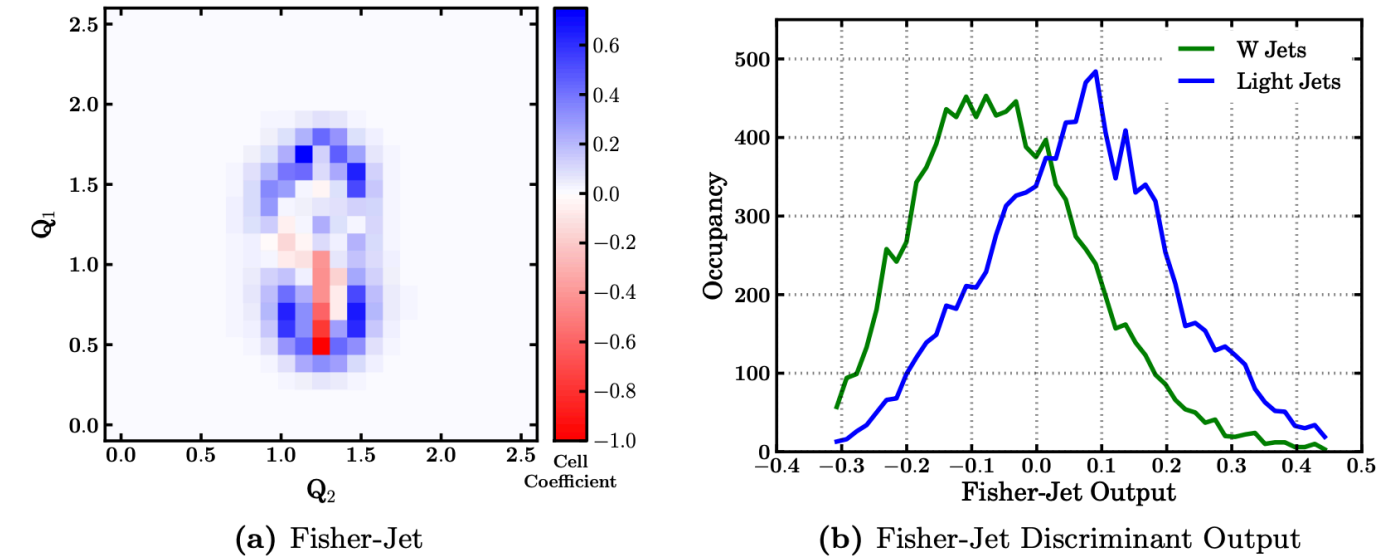


The first paper to discuss


image pre-processing for jet physics

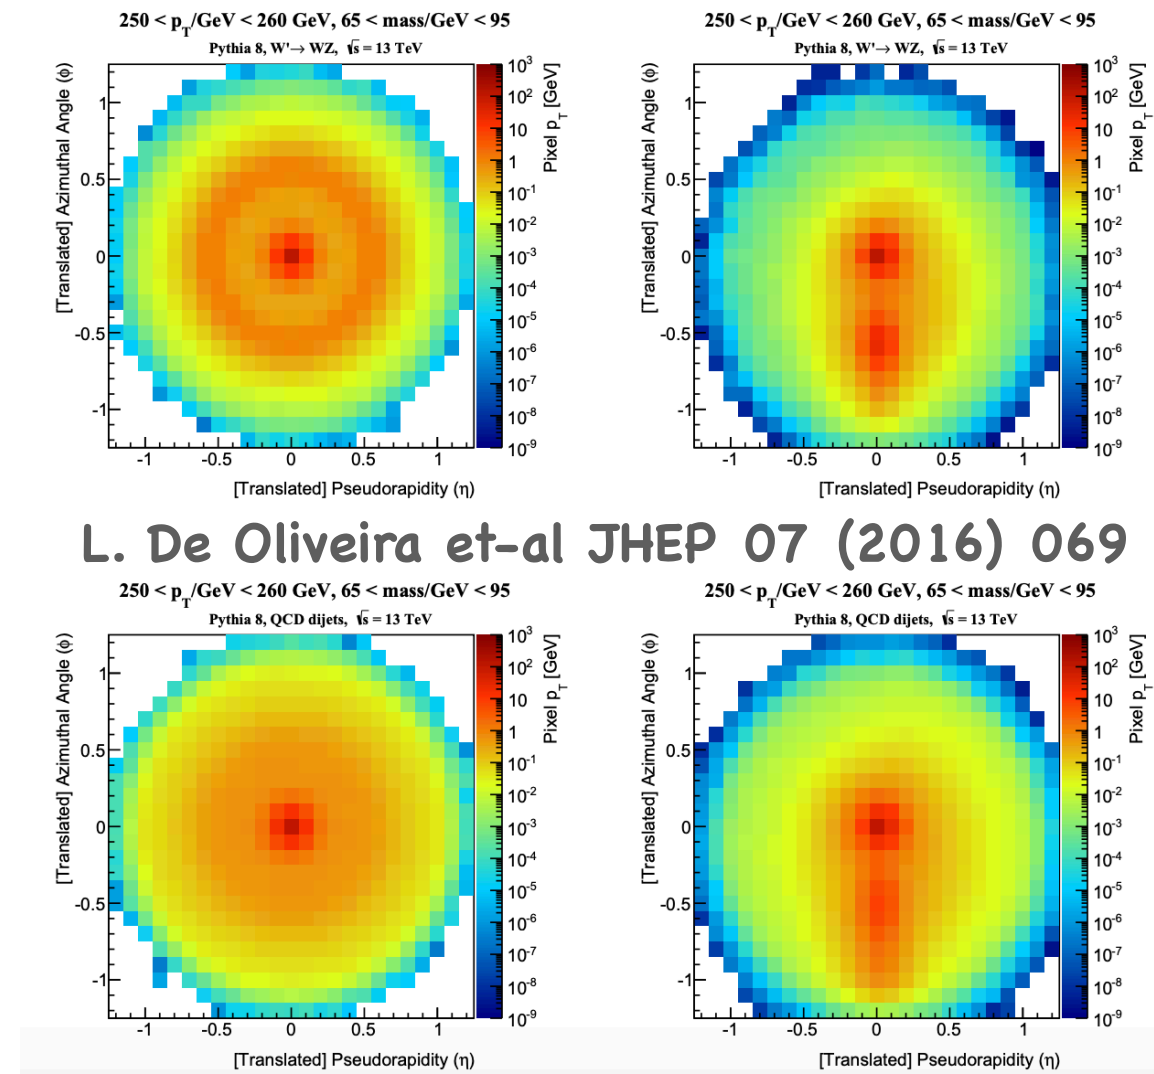

$250 < p_T/\text{GeV} < 300 \text{ GeV}$, $65 < \text{mass}/\text{GeV} < 95$
 $\sqrt{s} = 13 \text{ TeV}$, Pythia 8

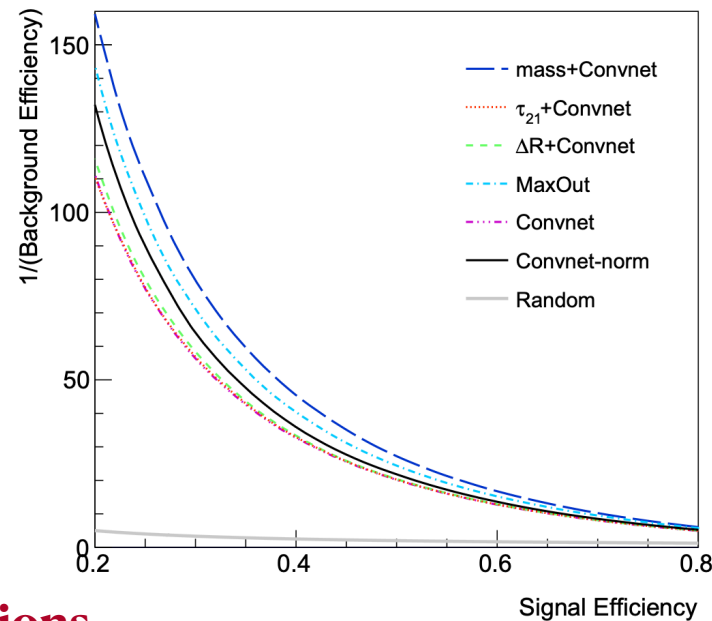

$250 < p_T/\text{GeV} < 300 \text{ GeV}$, $65 < \text{mass}/\text{GeV} < 95$
 $\sqrt{s} = 13 \text{ TeV}$, Pythia 8

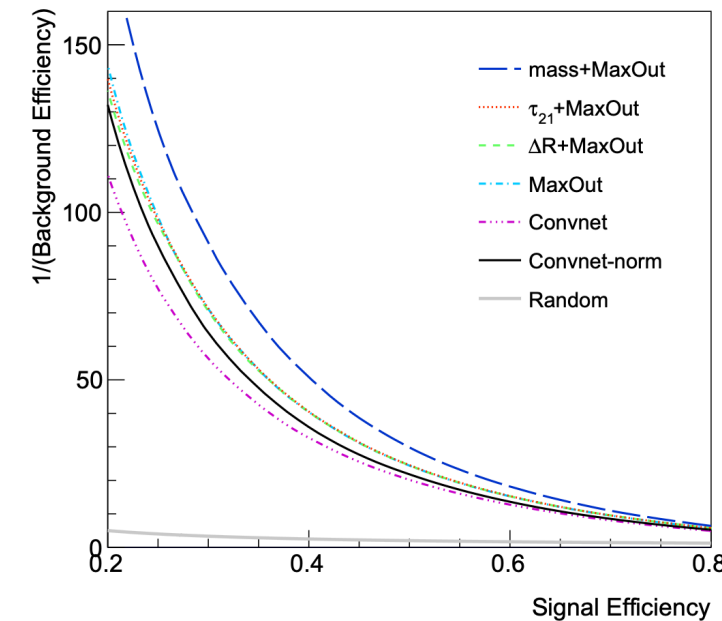

Similar methods were applied for particle identifications

Different possible representations

The energy deposition pattern can be thought as multi-layer image.


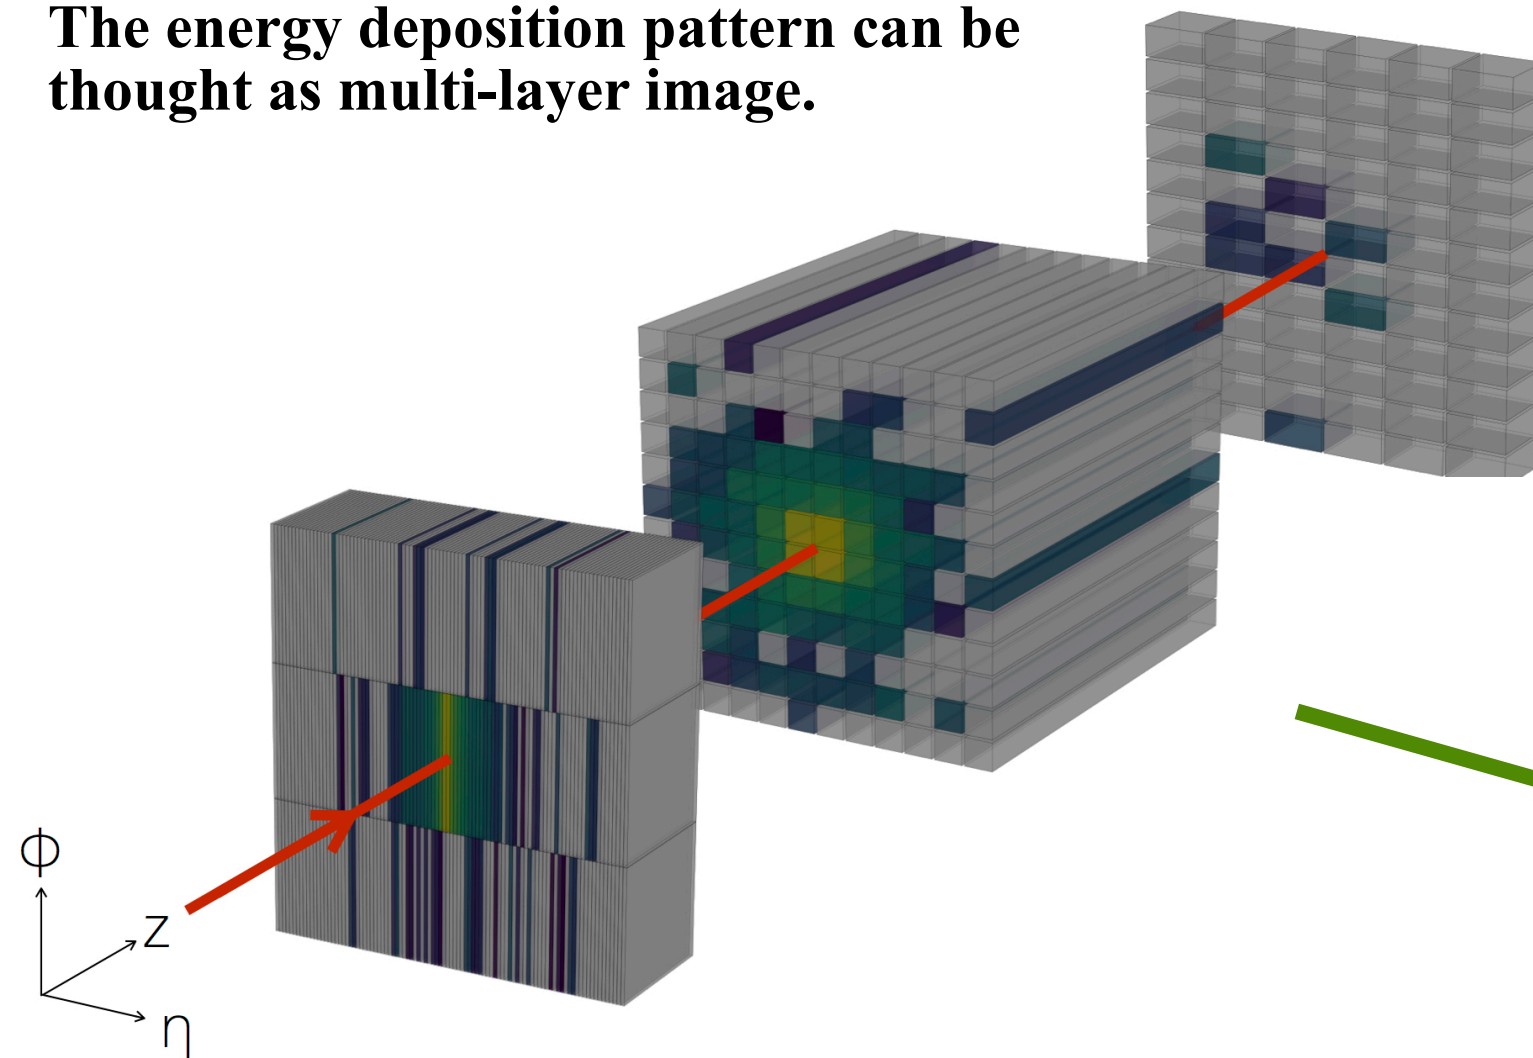


Image from 1705.02355

S. Qasim et-al EPJC 79 7 (2019) 608

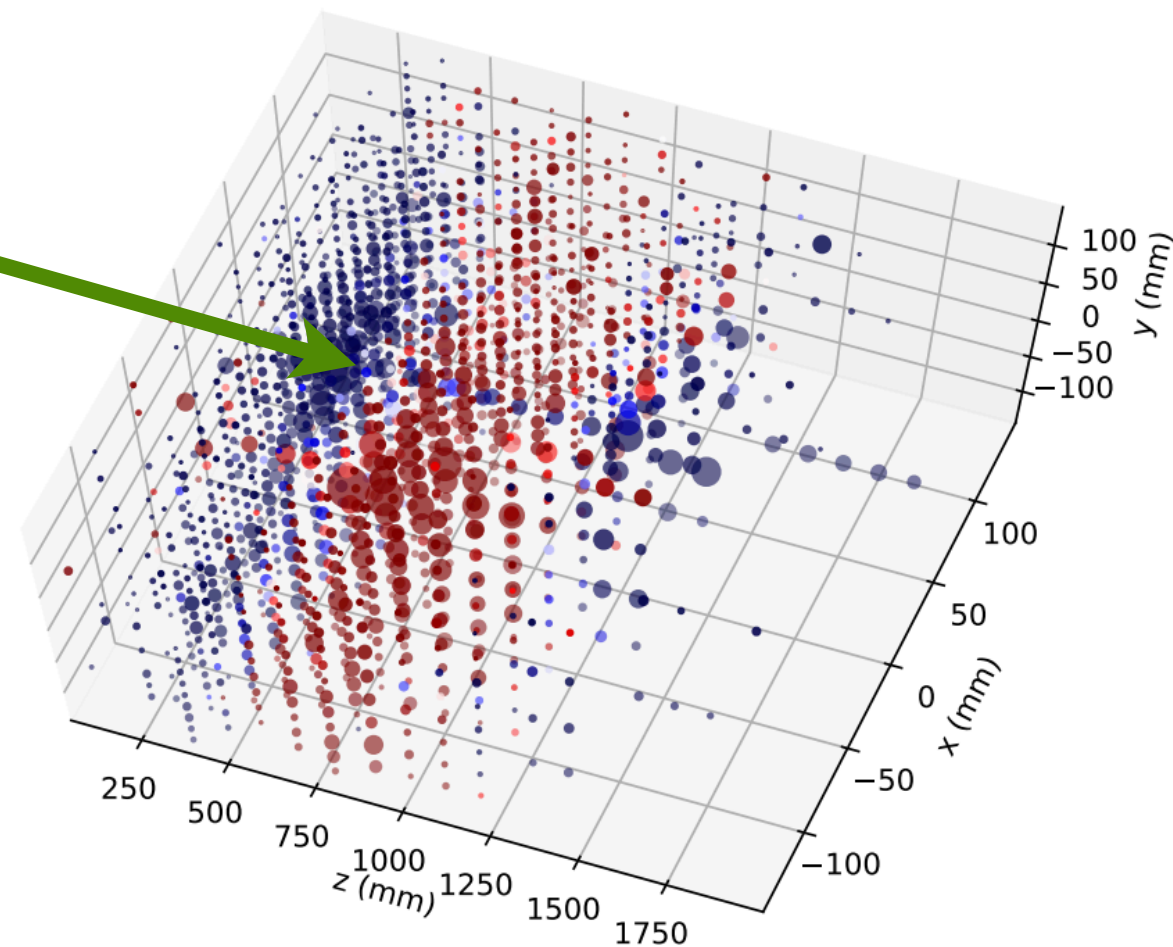


(a) Truth



Soon point-cloud based methods became more popular.
Large sparsity in calorimeter shower were more efficient to treat.

Data representation $\Leftrightarrow$ NN correspondence



$$J = \{p_1^\mu, p_2^\mu, \dots\}$$

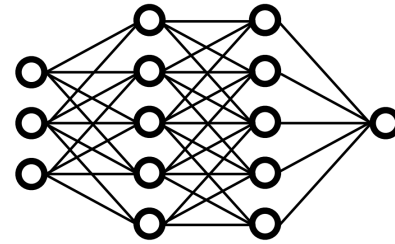



Ordered set
DNN

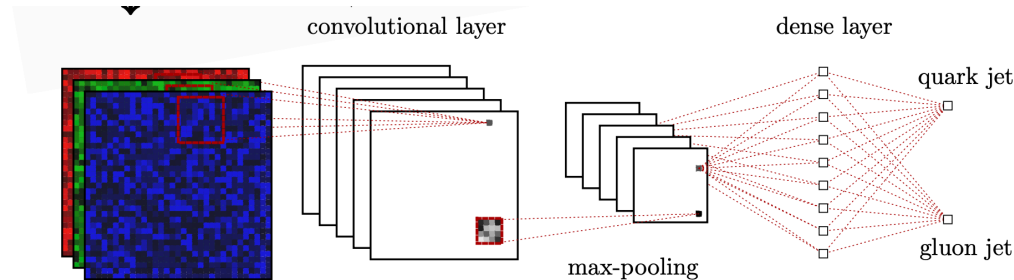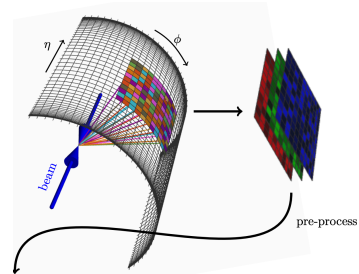

Grid
CNN

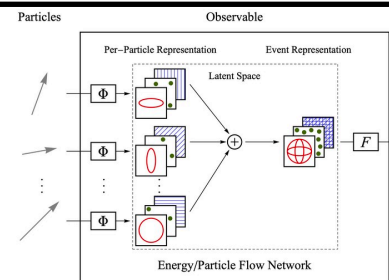
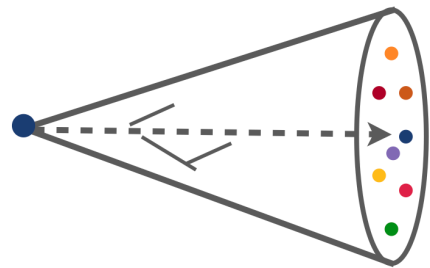


Unordered set
Deepest

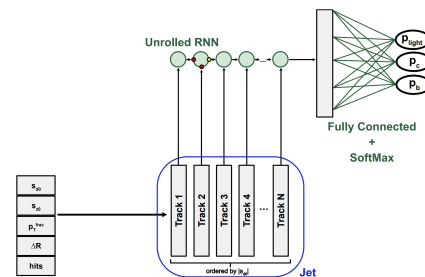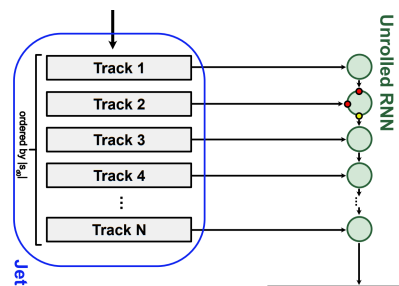


Sequential data
RNN


ML4Jets

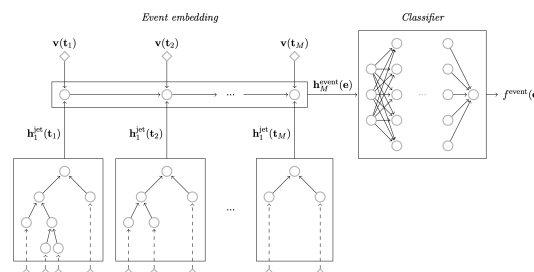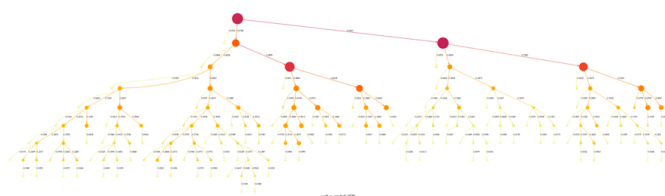

Tree structure
Deepset/GNN

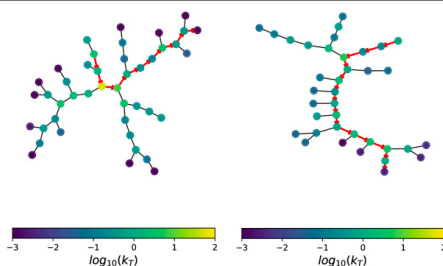

The three "flavours" of GNN layers

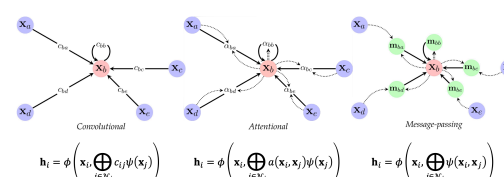


Graph
GNN

Object tagging


$$e'_{ijm} = \text{ReLU}(\theta_m \cdot (\mathbf{x}_j - \mathbf{x}_i) + \phi_m \cdot \mathbf{x}_i),$$

Particle Net : 1902.08570
Huilin Qu, Loukas Goukos

♣ Building block

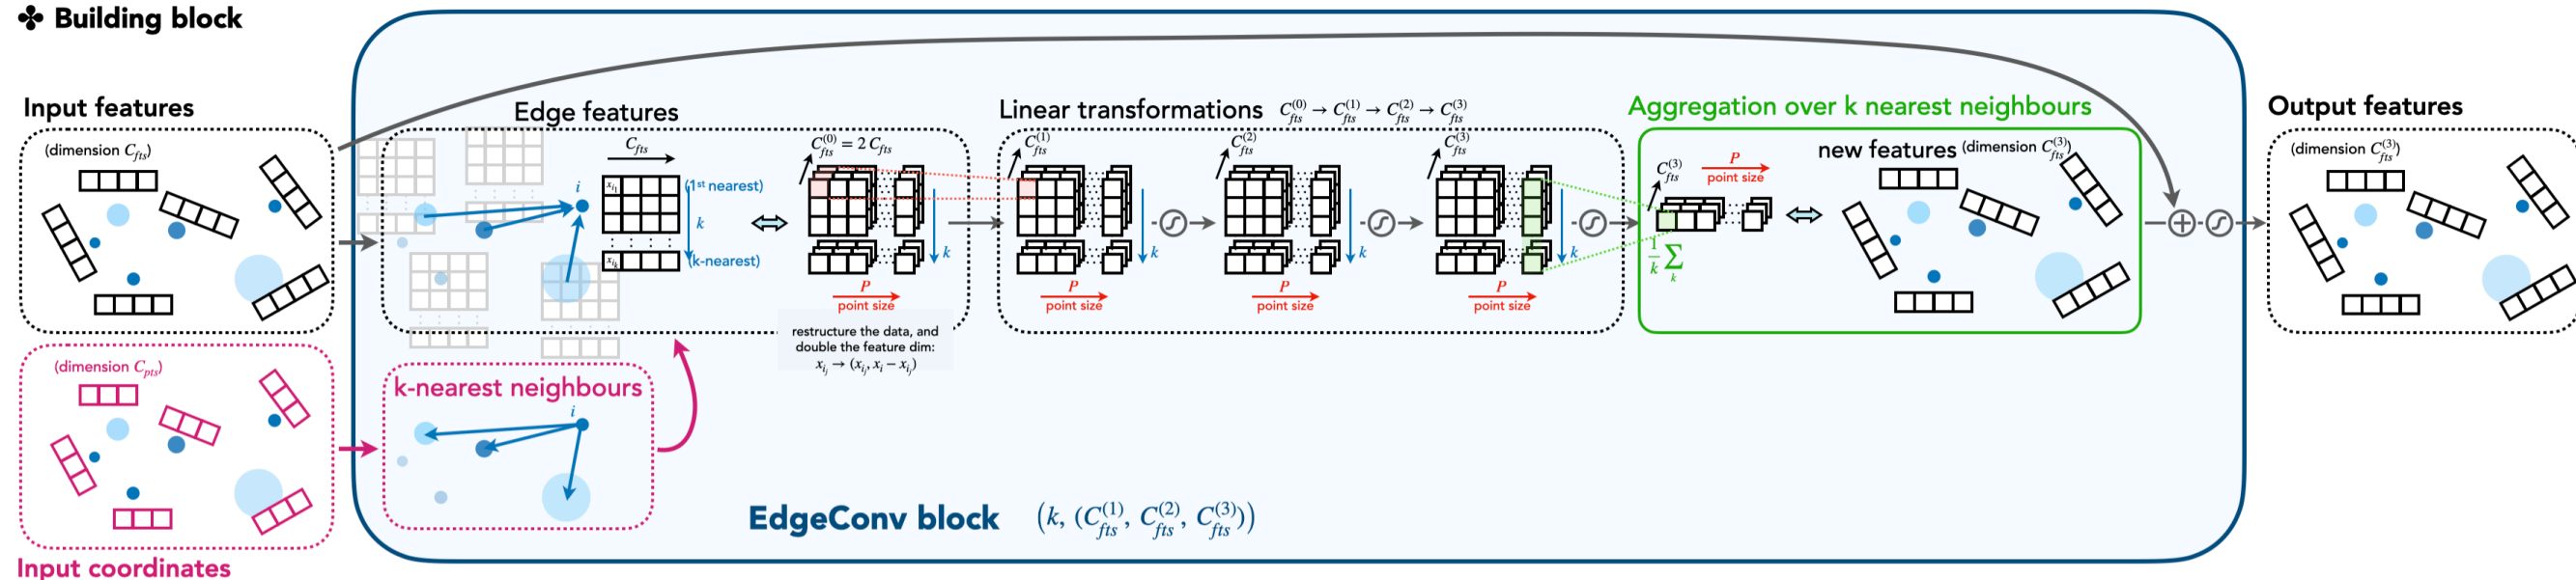

♣ Architecture

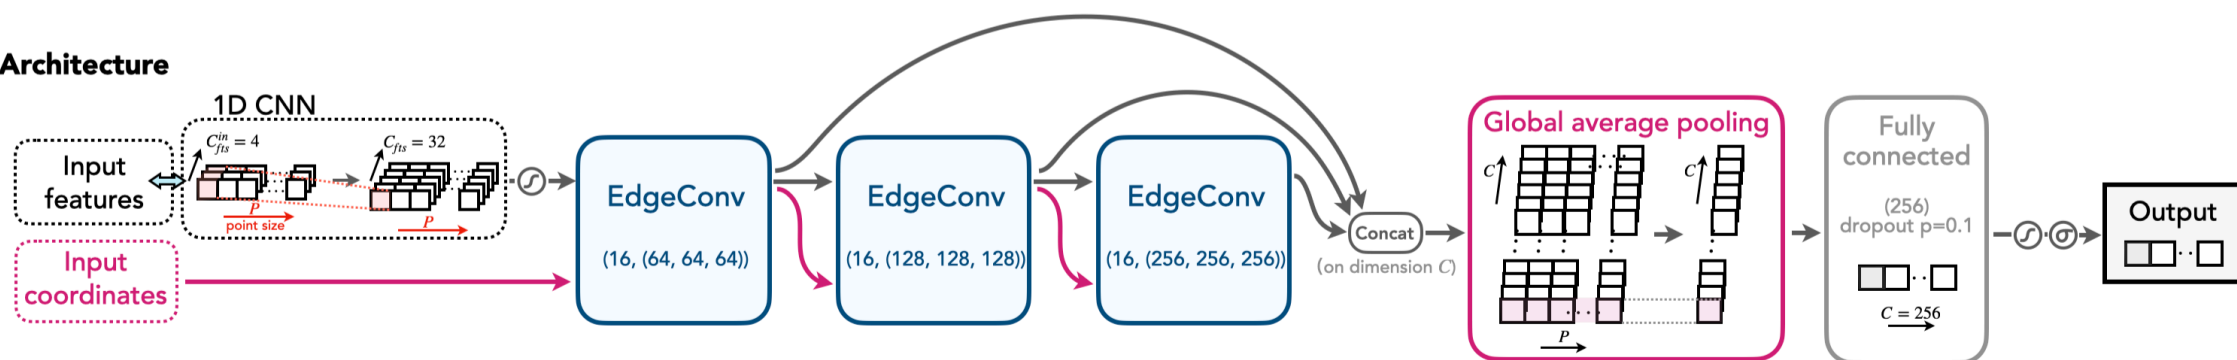

arXiv > cs > arXiv:1801.07829

Computer Science > Computer Vision and Pattern Recognition

[Submitted on 24 Jan 2018 (v1), last revised 11 Jun 2019 (this version, v2)]

Dynamic Graph CNN for Learning on Point Clouds

Yue Wang, Yongbin Sun, Ziwei Liu, Sanjay E. Sarma, Michael M. Bronstein, Justin M. Solomon

Machine learning on sets

Let $\mathbf{x}_1, \mathbf{x}_2, \dots, \mathbf{x}_N \in \mathbb{R}^k$ be n pieces of data. This forms a set of cardinality N .

<https://geometricdeeplearning.com/lectures/>

Machine learning on sets

Let $\mathbf{x}_1, \mathbf{x}_2, \dots, \mathbf{x}_N \in \mathbb{R}^k$ be n pieces of data. This forms a set of cardinality N .

Neural network on a set


<https://geometricdeeplearning.com/lectures/>

Machine learning on sets

Let $\mathbf{x}_1, \mathbf{x}_2, \dots, \mathbf{x}_N \in \mathbb{R}^k$ be n pieces of data. This forms a set of cardinality N .

Neural network on a set

<https://geometricdeeplearning.com/lectures/>

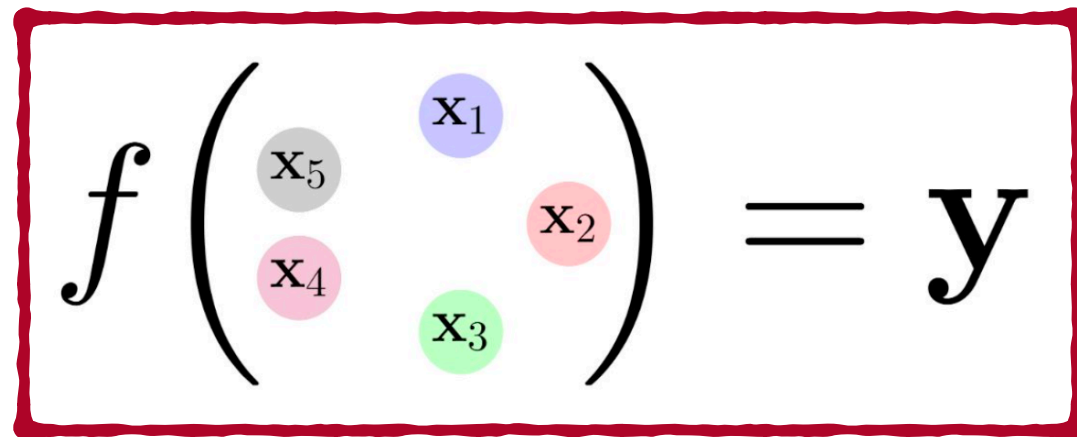

The diagram shows a function f applied to a set of five data points, resulting in a value y . The data points are represented as colored circles: $\mathbf{x}_1$ (blue), $\mathbf{x}_2$ (red), $\mathbf{x}_3$ (green), $\mathbf{x}_4$ (pink), and $\mathbf{x}_5$ (grey). These points are arranged within the large parentheses of the function f . The entire expression $f(\dots) = y$ is enclosed in a red rectangular box.


$$f \left(\begin{array}{c} \mathbf{x}_5 \\ \mathbf{x}_4 \end{array} \begin{array}{c} \mathbf{x}_1 \\ \mathbf{x}_3 \end{array} \mathbf{x}_2 \right) = y$$

Machine learning on sets

Let $\mathbf{x}_1, \mathbf{x}_2, \dots, \mathbf{x}_N \in \mathbb{R}^k$ be n pieces of data. This forms a set of cardinality N .

Neural network on a set

<https://geometricdeeplearning.com/lectures/>

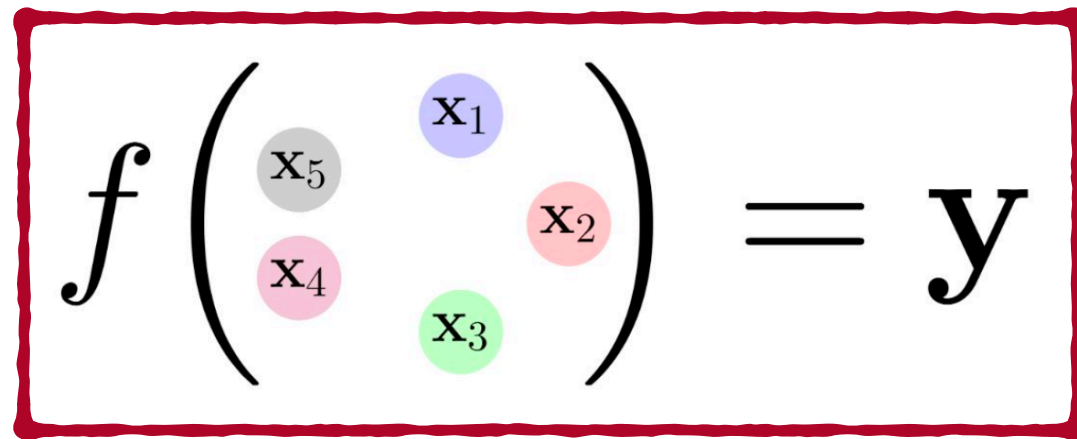

The diagram shows a function f applied to a set of five data points, $\mathbf{x}_1, \mathbf{x}_2, \mathbf{x}_3, \mathbf{x}_4, \mathbf{x}_5$, which are represented as colored circles. The points are arranged in a set, and the function f maps this set to a output y . The entire expression is enclosed in a red rectangular box.

$$f\left(\begin{matrix} \mathbf{x}_5 & \mathbf{x}_1 \\ \mathbf{x}_4 & \mathbf{x}_2 \\ & \mathbf{x}_3 \end{matrix}\right) = y$$

Basic required property : permutation invariance

Machine learning on sets

Let $\mathbf{x}_1, \mathbf{x}_2, \dots, \mathbf{x}_N \in \mathbb{R}^k$ be n pieces of data. This forms a set of cardinality N.

Neural network on a set

<https://geometricdeeplearning.com/lectures/>

$$f \left(\begin{array}{c} \text{X}_5 \\ \text{X}_4 \end{array} \begin{array}{c} \text{X}_1 \\ \text{X}_3 \end{array} \text{X}_2 \right) = \mathbf{y}$$

Basic required property : permutation invariance

$$f\left(\begin{array}{ccc} & \text{X}_1 & \\ \text{X}_5 & & \\ \text{X}_4 & & \text{X}_2 \\ & \text{X}_3 & \end{array}\right) = \mathbf{y} = f\left(\begin{array}{ccc} & \text{X}_2 & \\ & \text{X}_5 & \text{X}_4 \\ \text{X}_1 & & \\ & & \text{X}_3 \end{array}\right)$$


How the P.I. is achieved?

Remember the permutation on a set?

$$\mathbf{f}(\mathbf{PX}) = \mathbf{f}(\mathbf{X})$$

$$\mathbf{P}_{(2,4,1,3)}\mathbf{X} = \begin{bmatrix} 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \\ 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} \text{---} & \mathbf{x}_1 & \text{---} \\ \text{---} & \mathbf{x}_2 & \text{---} \\ \text{---} & \mathbf{x}_3 & \text{---} \\ \text{---} & \mathbf{x}_4 & \text{---} \end{bmatrix} = \begin{bmatrix} \text{---} & \mathbf{x}_2 & \text{---} \\ \text{---} & \mathbf{x}_4 & \text{---} \\ \text{---} & \mathbf{x}_1 & \text{---} \\ \text{---} & \mathbf{x}_3 & \text{---} \end{bmatrix}$$

$$\mathbf{h}_i = \psi(\mathbf{x}_i)$$

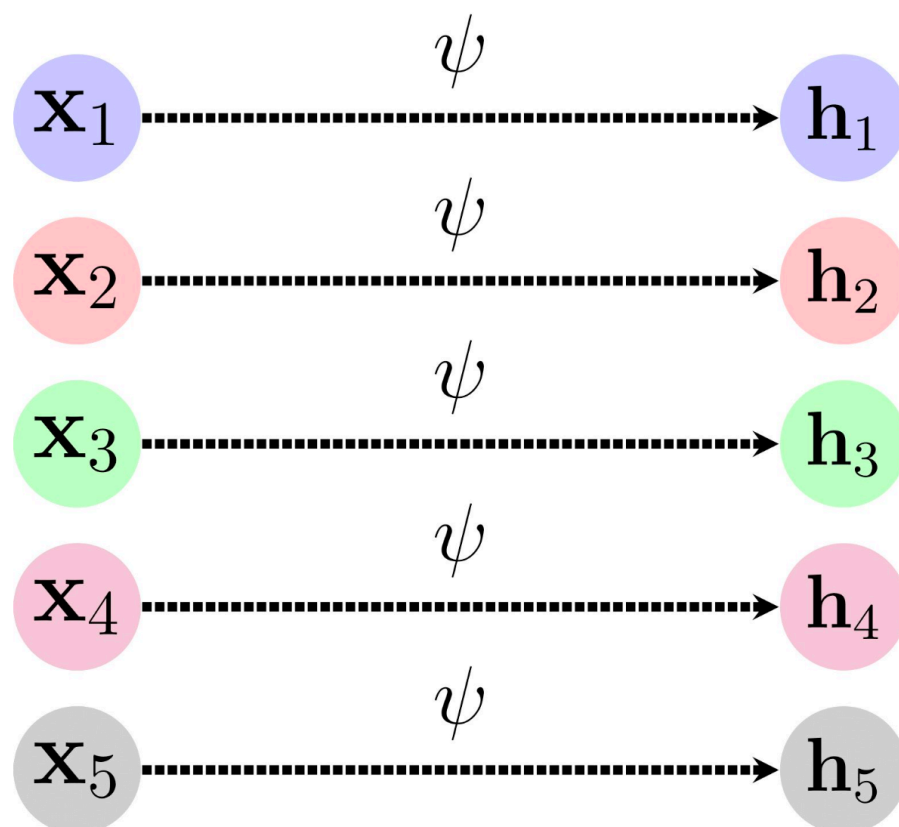

$$f(X) = \phi\left(\bigoplus_{i \in V} \psi(X_i)\right)$$

<https://geometricdeeplearning.com/lectures/>

The permutation equivariant operation :

$$\Theta = \lambda \mathbf{I} + \gamma (\mathbf{1}\mathbf{1}^\top) \text{ for } \lambda, \gamma \in \mathbb{R}.$$

What's the basic criteria of a GNN?

<https://geometricdeeplearning.com/lectures/>

$$f\left(\begin{array}{ccc} & \text{X}_1 & \\ \text{X}_5 & & \text{X}_2 \\ \text{X}_4 & & \\ & \text{X}_3 & \end{array}\right) = \mathbf{y} = f\left(\begin{array}{ccc} & \text{X}_2 & \\ \text{X}_5 & & \text{X}_4 \\ \text{X}_1 & & \text{X}_3 \end{array}\right)$$


$$f\left(\begin{array}{ccc} & \text{X}_1 & \\ \text{X}_5 & & \text{X}_2 \\ \text{X}_4 & & \\ & \text{X}_3 & \end{array}\right) = \mathbf{y} = f\left(\begin{array}{ccc} & \text{X}_2 & \\ \text{X}_5 & & \text{X}_4 \\ \text{X}_1 & & \text{X}_3 \end{array}\right)$$

Invariance: $f(\mathbf{P}\mathbf{X}, \mathbf{P}\mathbf{A}\mathbf{P}^\top) = f(\mathbf{X}, \mathbf{A})$

Equivariance: $f(\mathbf{P}\mathbf{X}, \mathbf{P}\mathbf{A}\mathbf{P}^\top) = \mathbf{P}f(\mathbf{X}, \mathbf{A})$


General methods of GNN

General methods of GNN

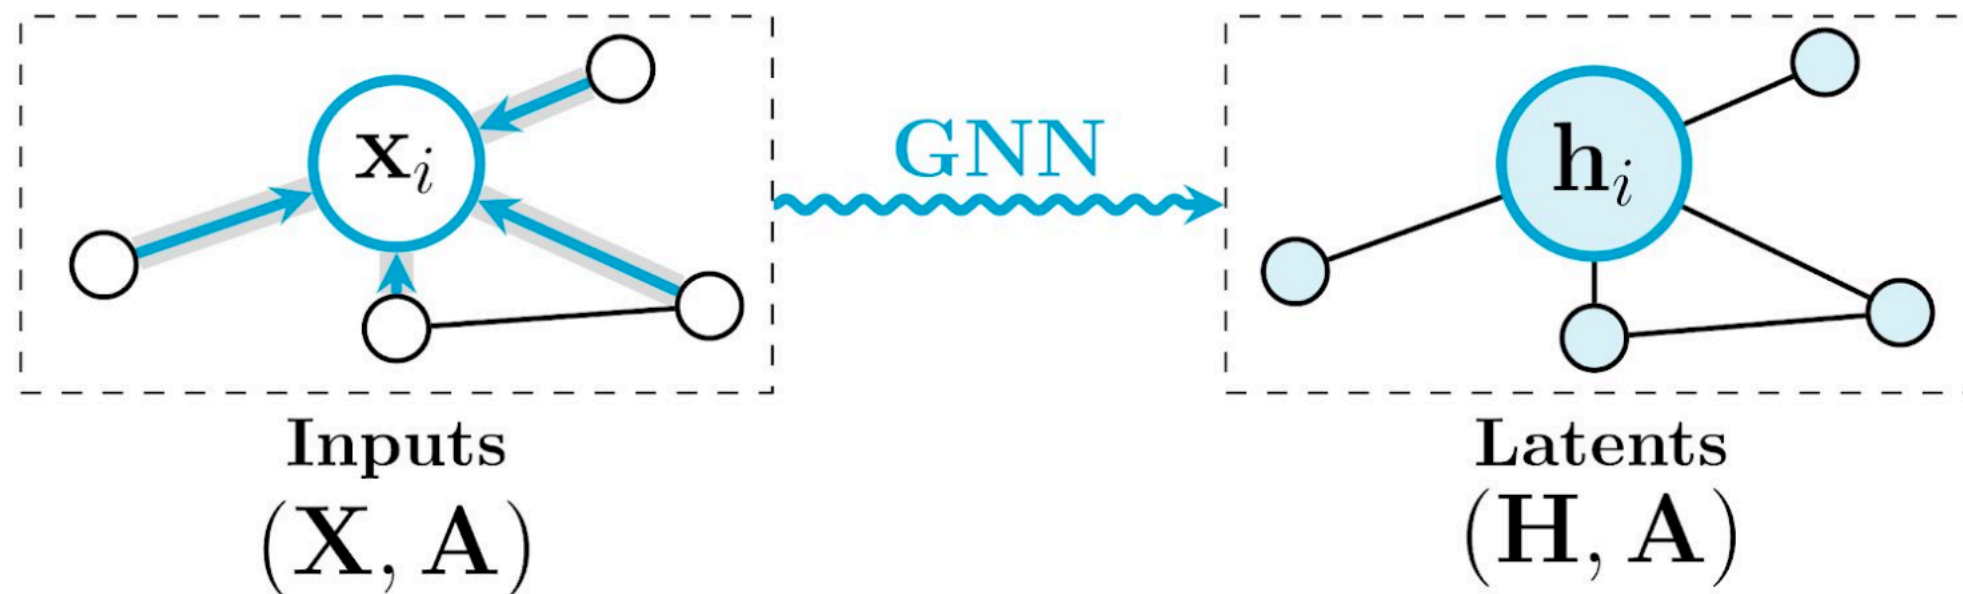


General methods of GNN

General methods of GNN

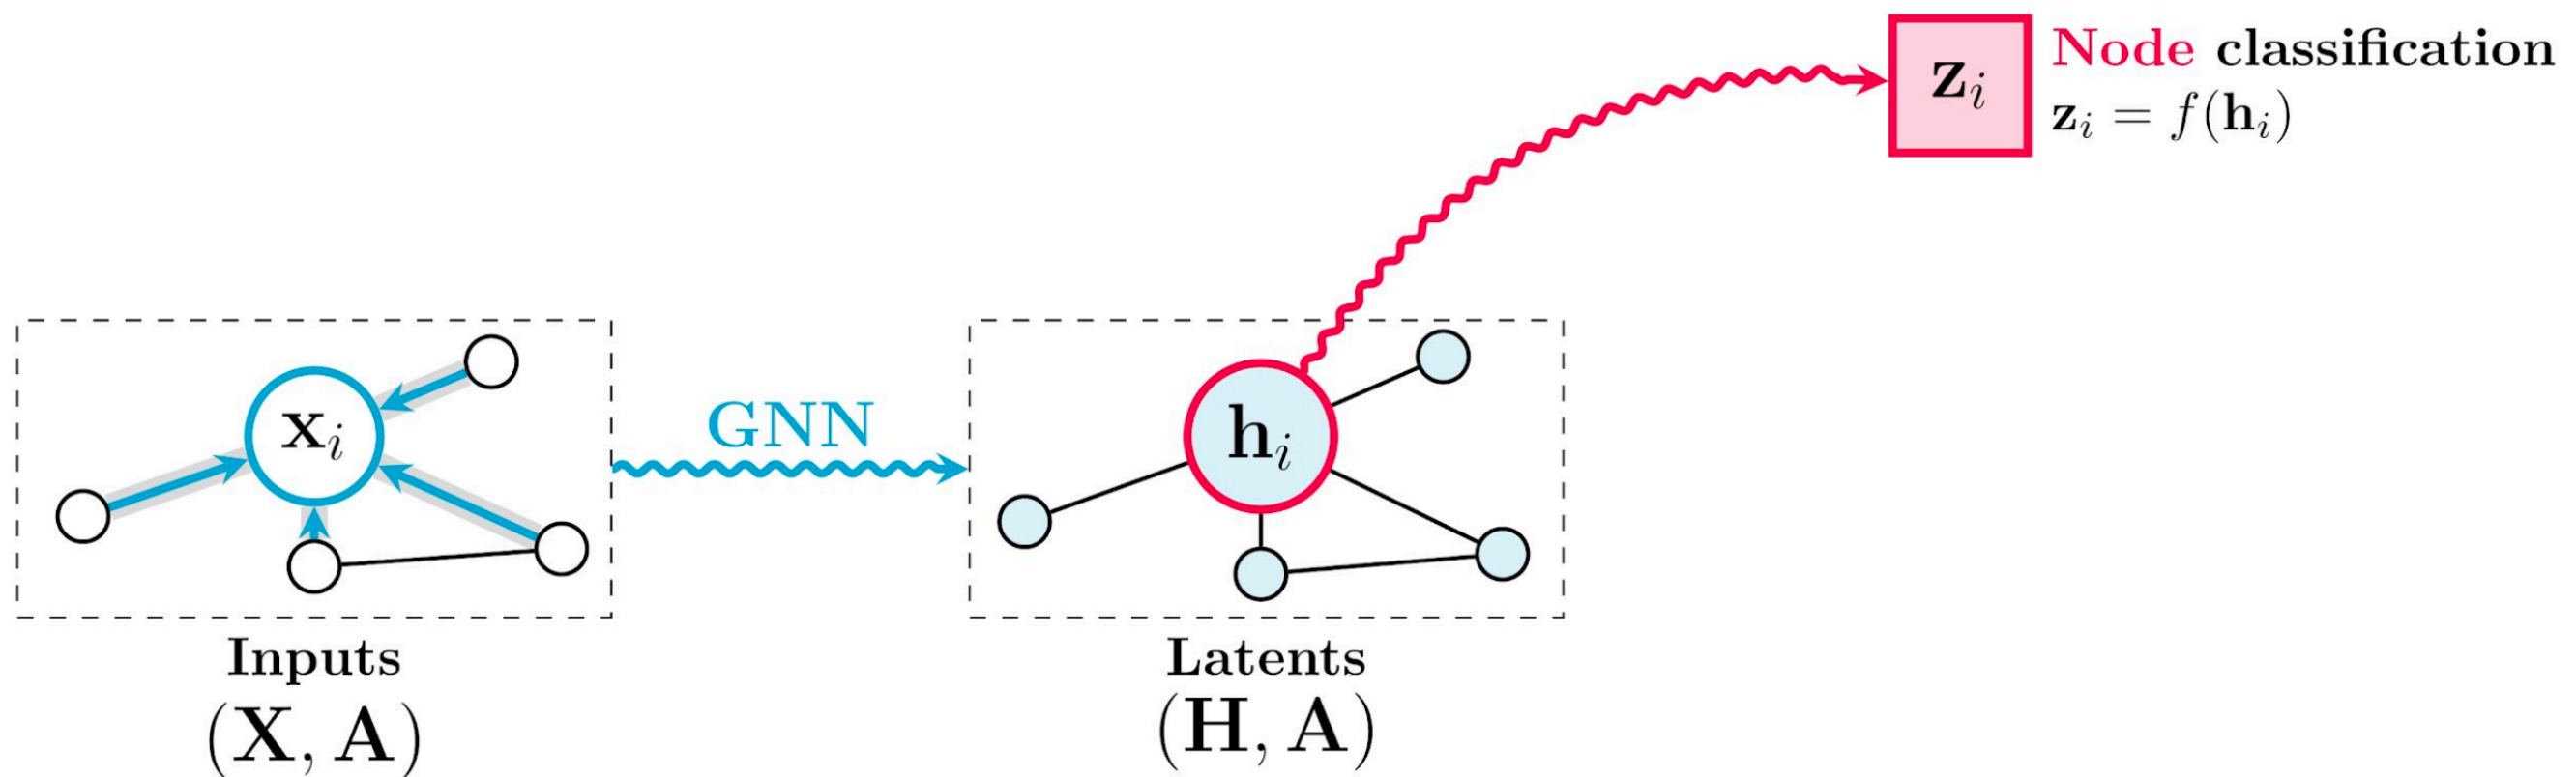


General methods of GNN

General methods of GNN

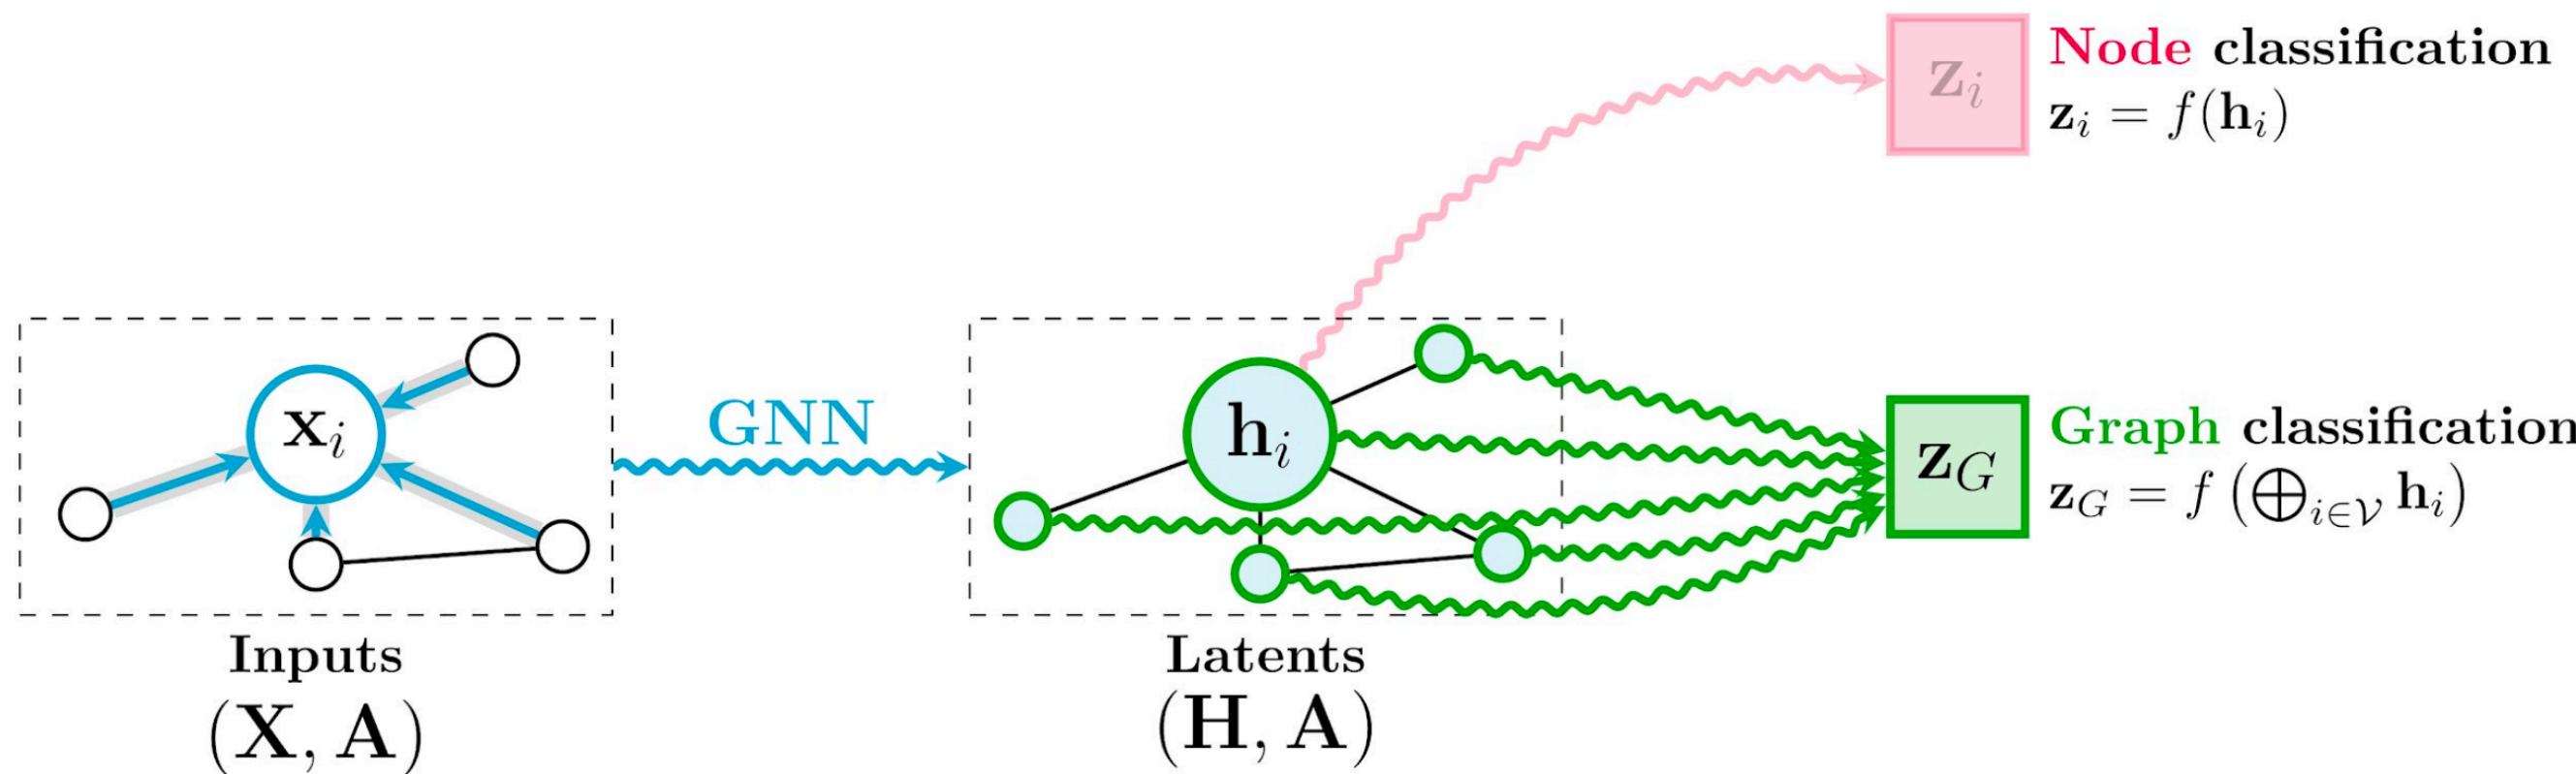


General methods of GNN

General methods of GNN

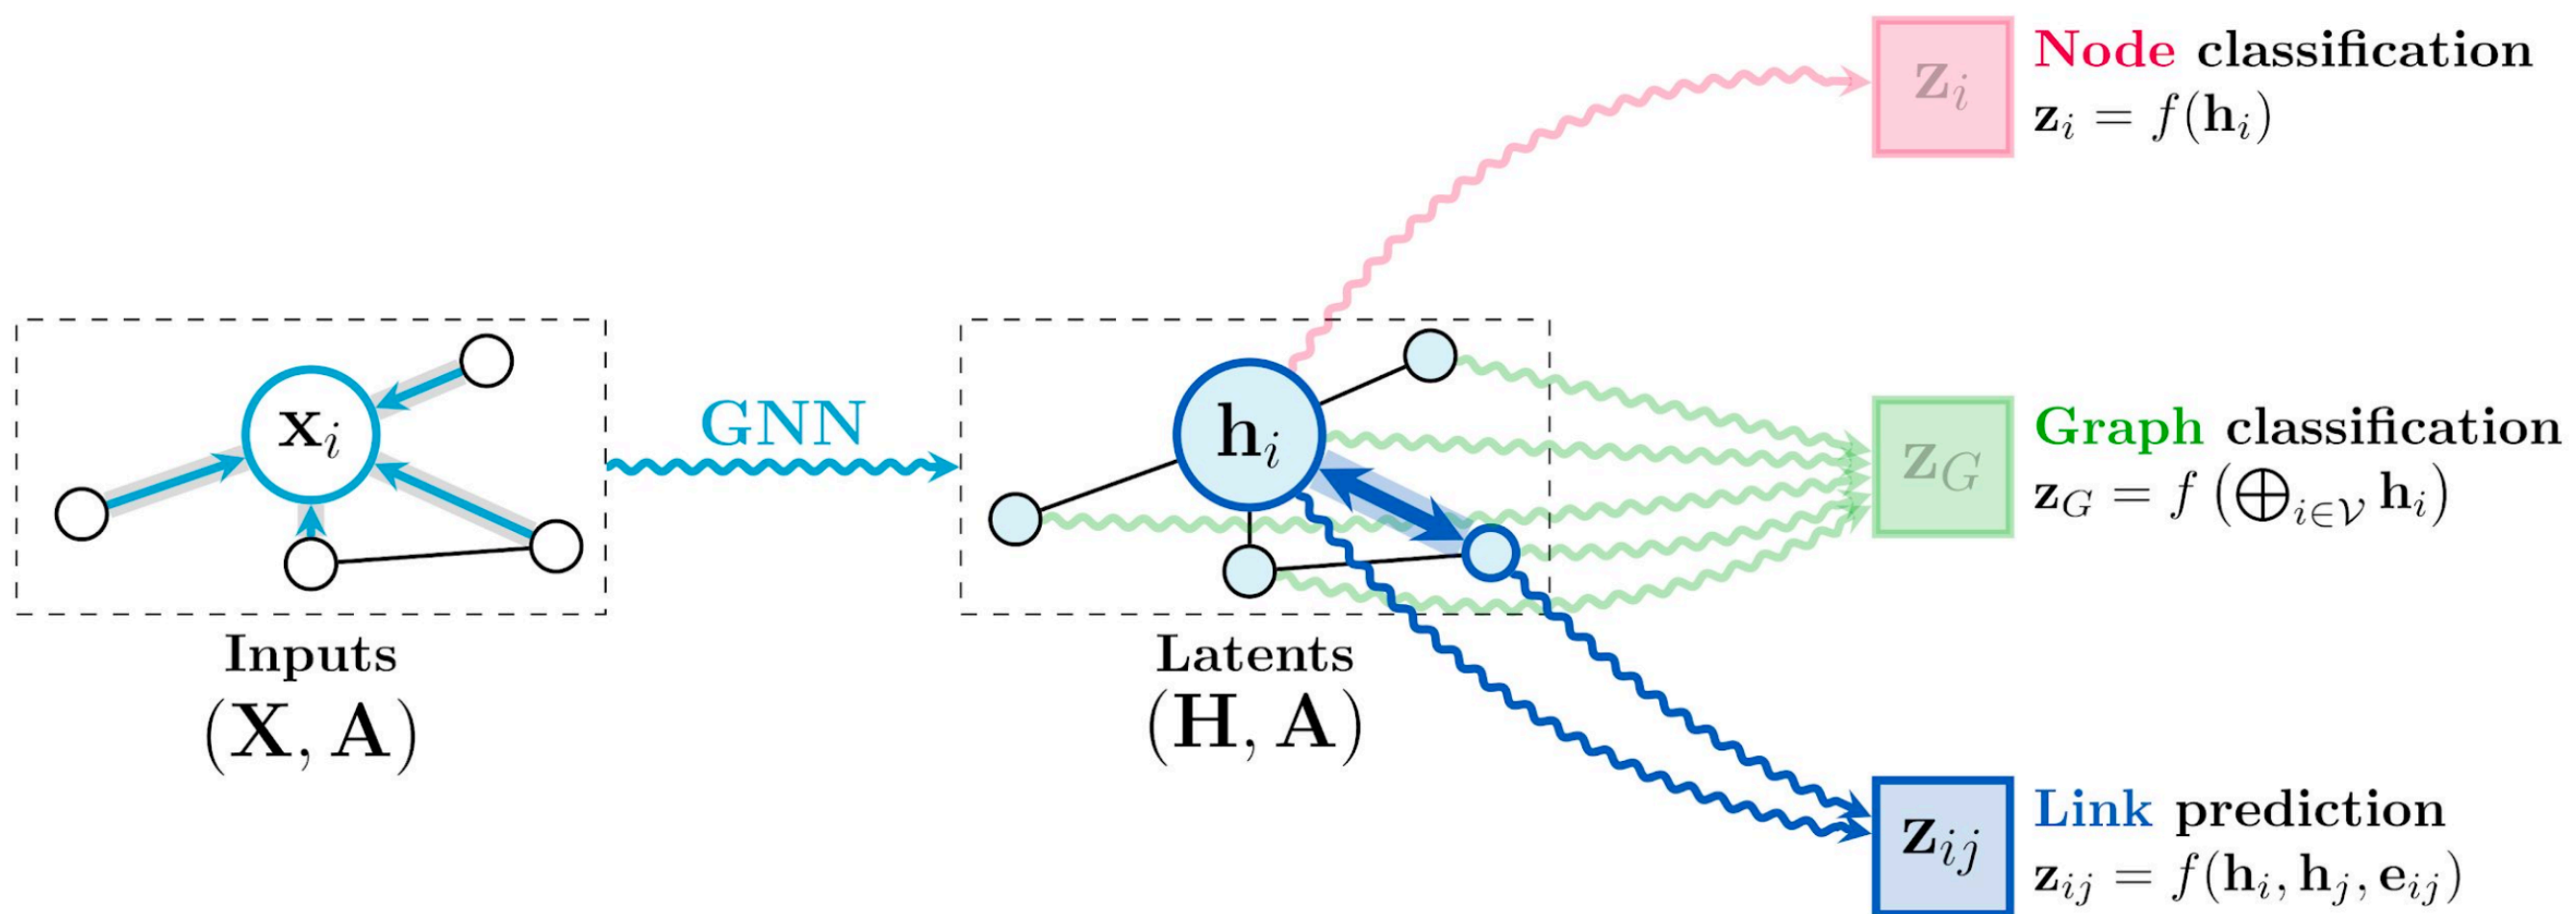


The different flavors of MPN

The three “flavours” of GNN layers

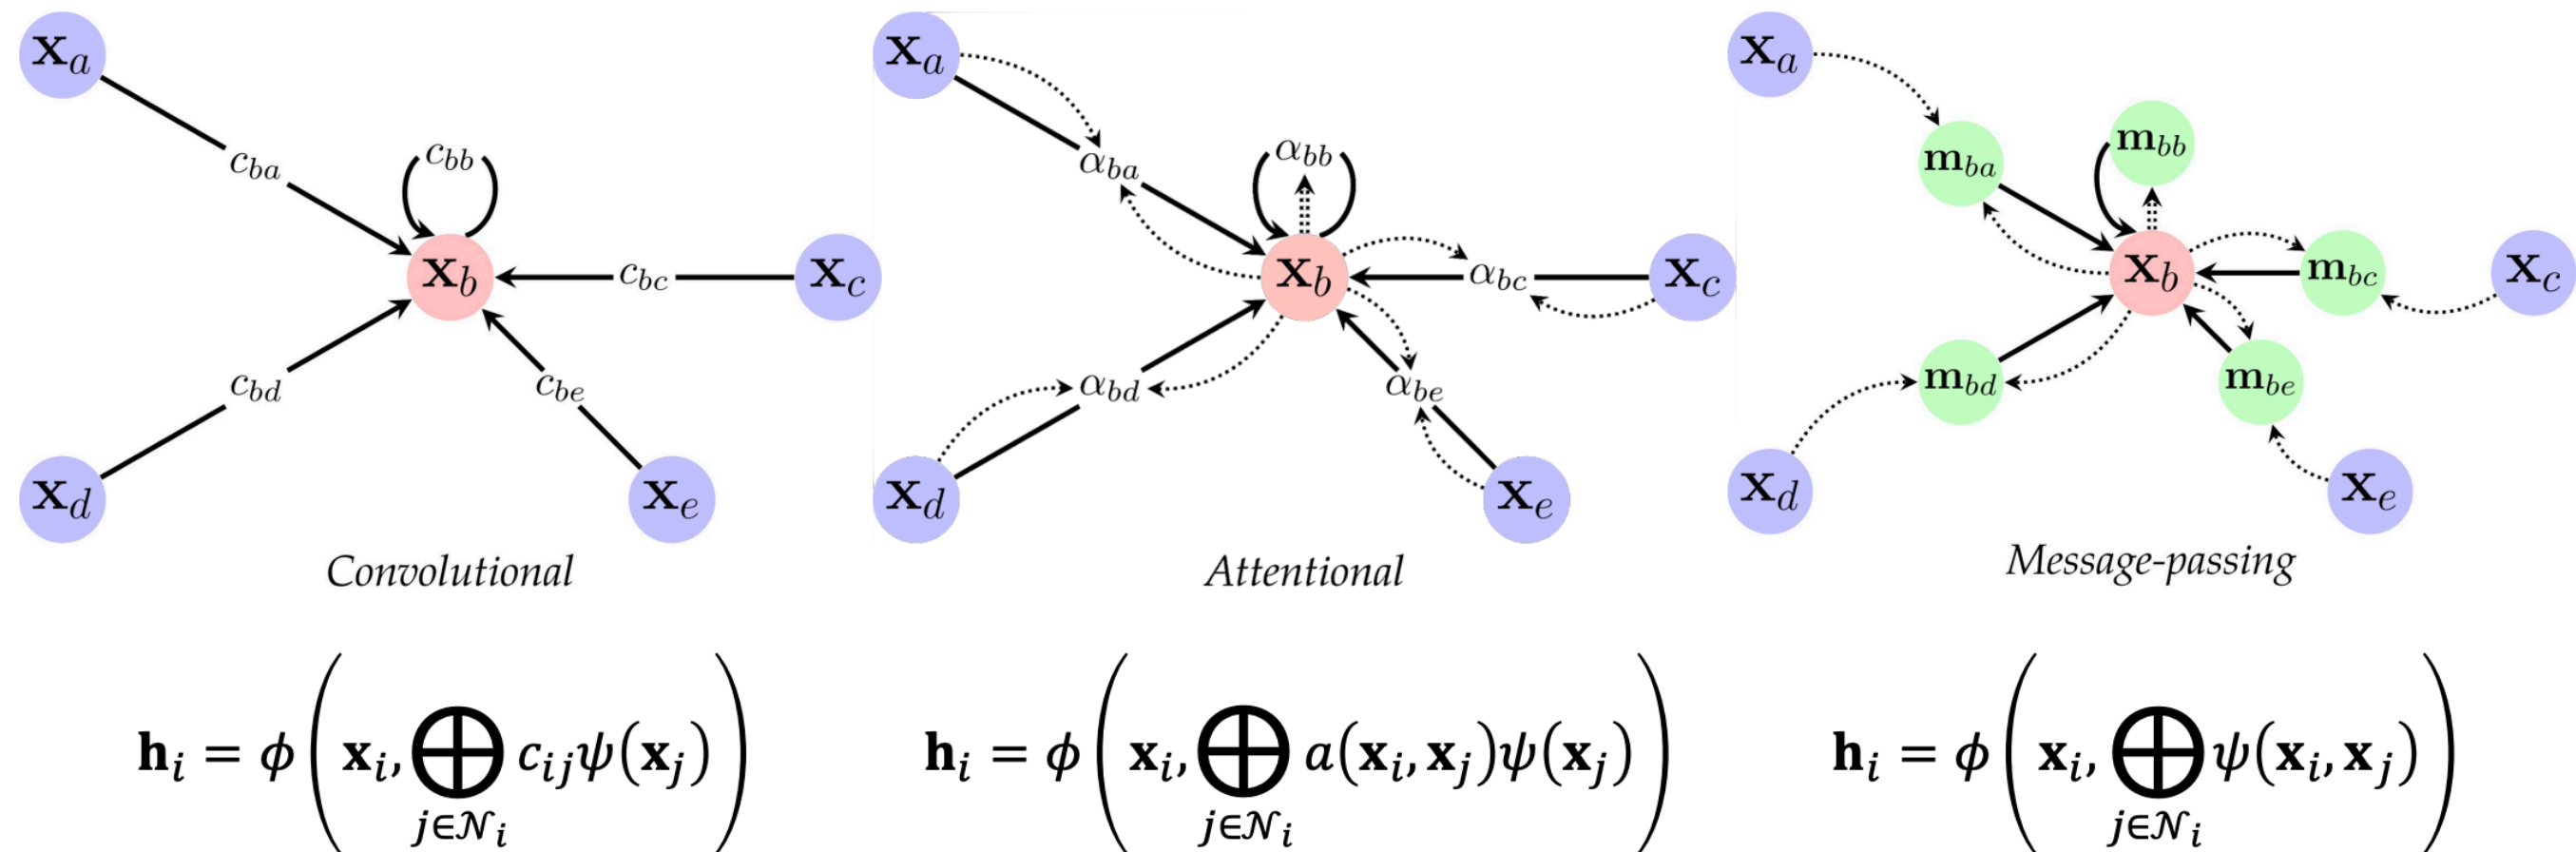


The general GNN

arXiv : 1806.01261

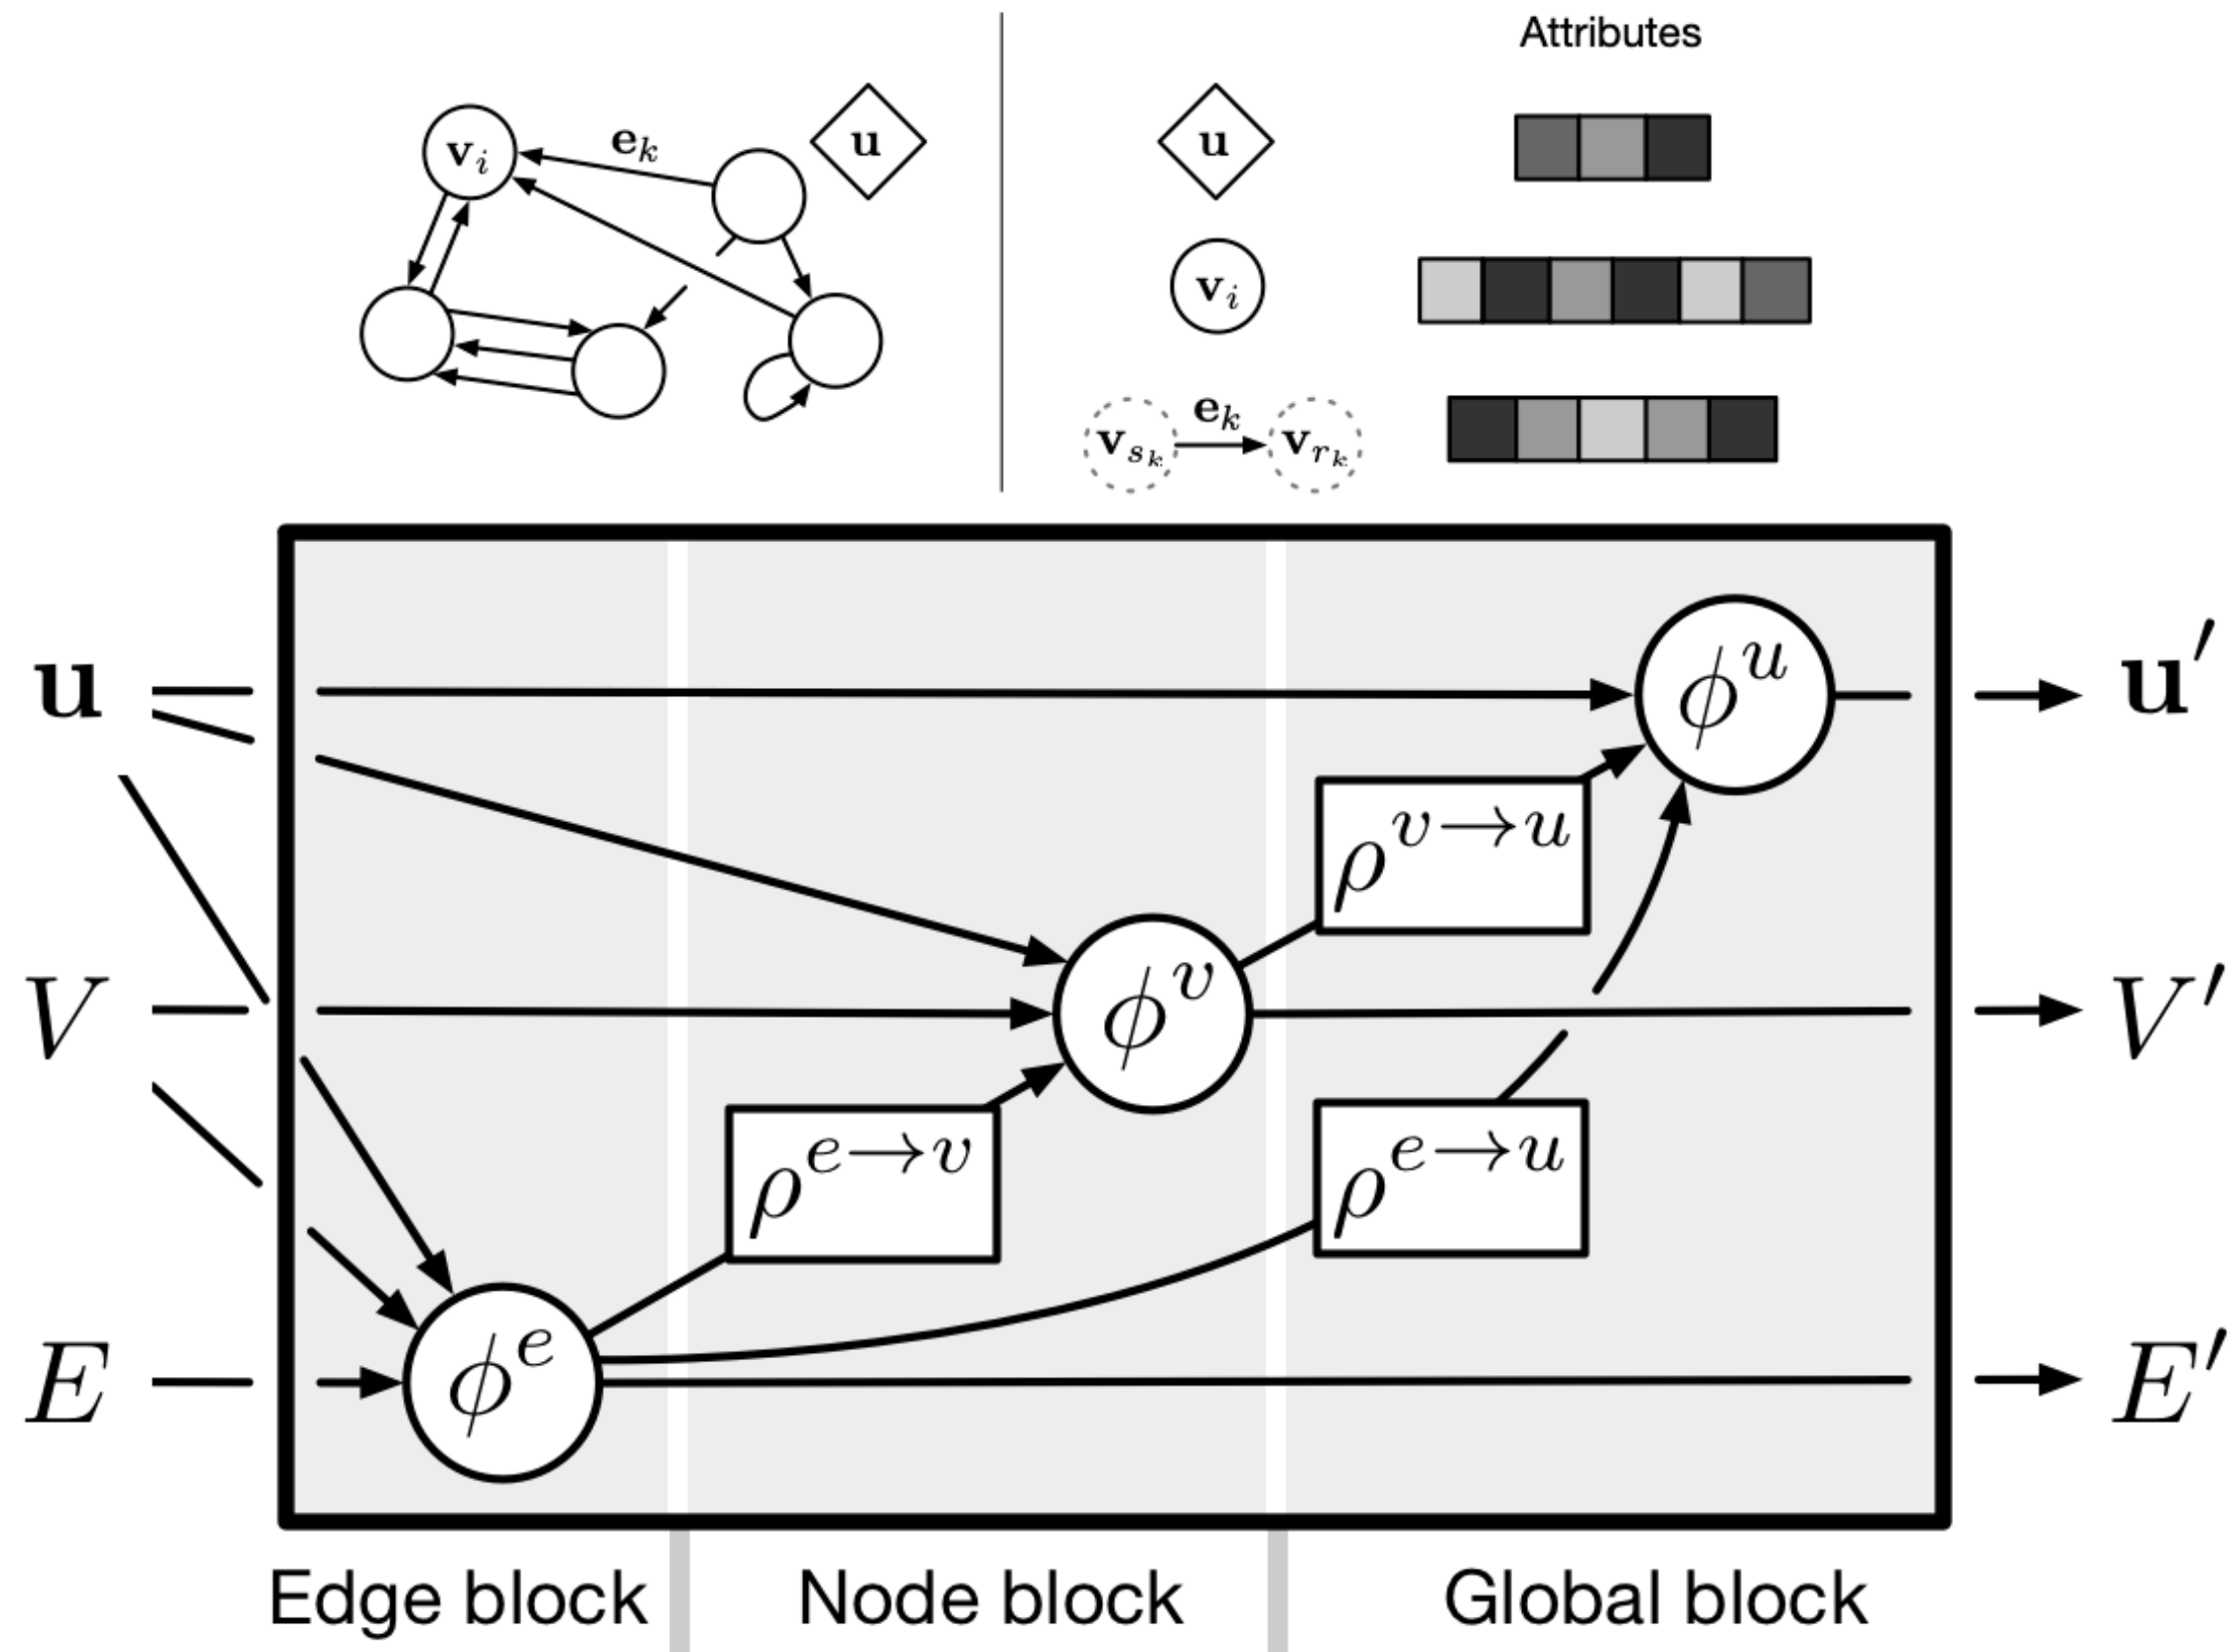


The general GNN


arXiv : 1806.01261

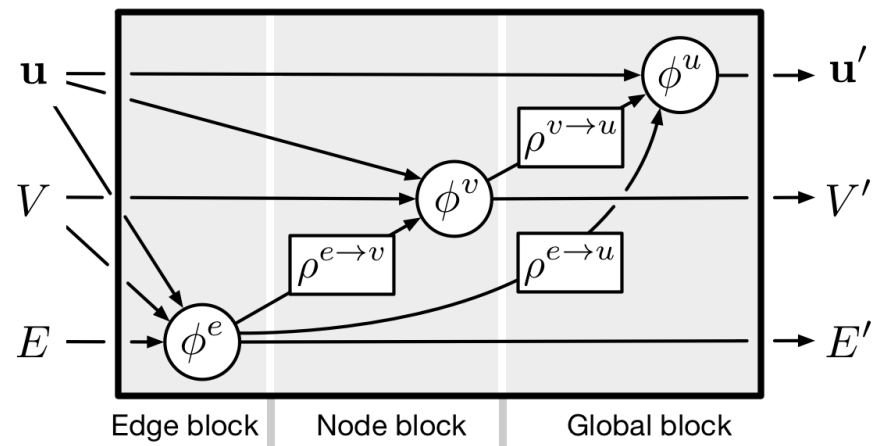


Full GN block

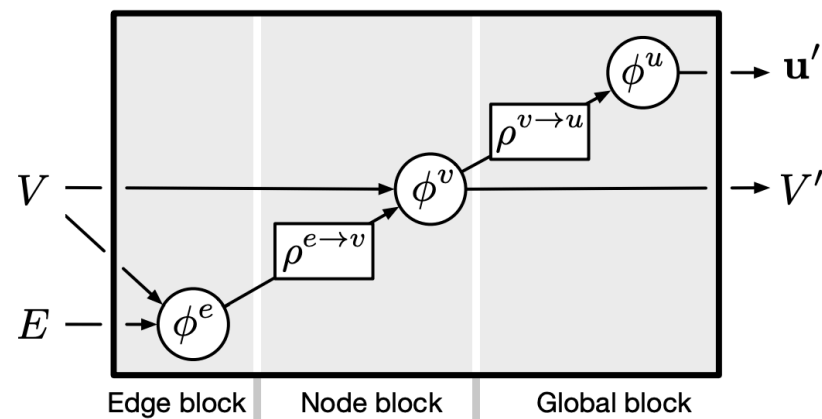


MPNN Layer

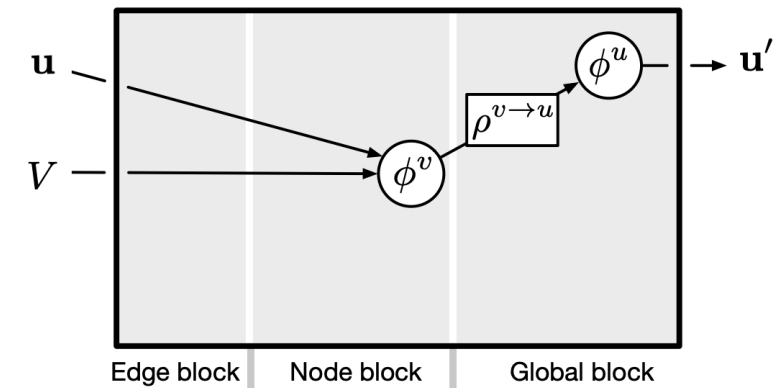


Deep-set layer

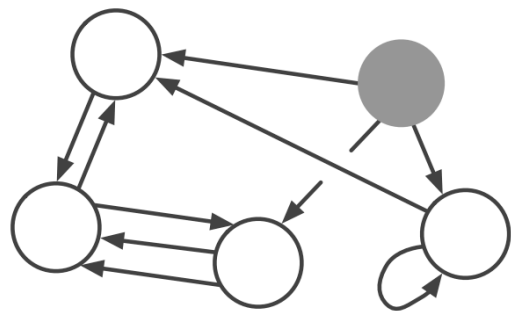


$m = 0$

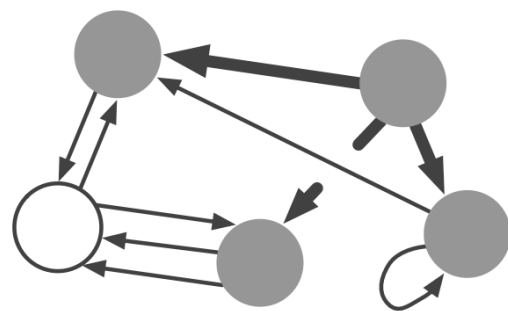


$m = 1$

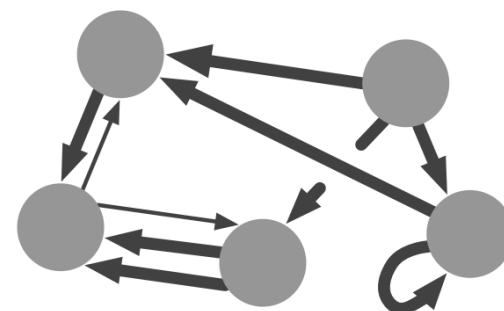


$m = 2$

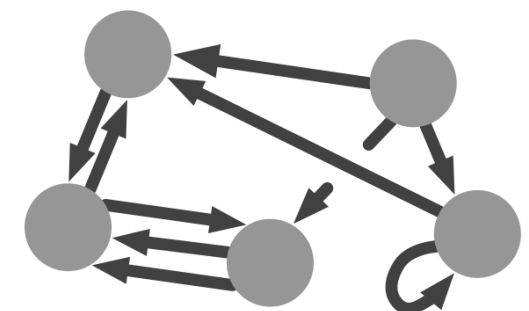


$m = 3$

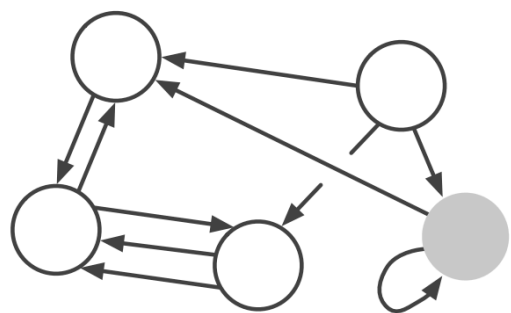


$m = 0$

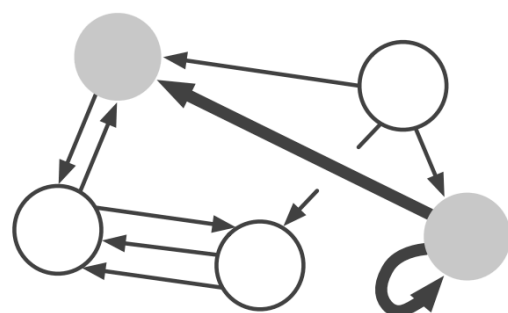

$m = 1$

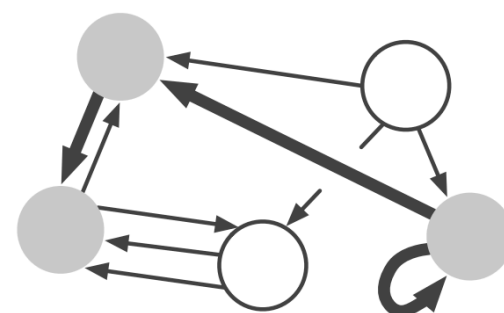

$m = 2$

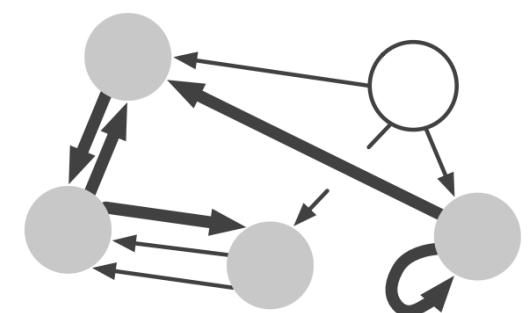

$m = 3$

Application of sets & graphs in HEP

arXiv > hep-ex > arXiv:2203.12852

Search...
Help | Advan

High Energy Physics – Experiment

[Submitted on 23 Mar 2022 (v1), last revised 25 Mar 2022 (this version, v2)]

Graph Neural Networks in Particle Physics: Implementations, Innovations, and Challenges

Savannah Thais, Paolo Calafiura, Grigorios Chachamis, Gage DeZoort, Javier Duarte, Sanmay Ganguly, Michael Kagan, Daniel Murnane, Mark S. Neubauer, Kazuhiro Terao

arXiv > hep-ph > arXiv:2012.01249

High Energy Physics – Phenomenology

[Submitted on 2 Dec 2020 (v1), last revised 7 Dec 2020 (this version, v2)]

Graph Neural Networks for Particle Tracking and Reconstruction

Javier Duarte, Jean-Roch Vlimant


arXiv > hep-ex > arXiv:2007.13681

High Energy Physics – Experiment

[Submitted on 27 Jul 2020 (v1), last revised 21 Oct 2020 (this version, v2)]




Graph Neural Networks in Particle Physics

Jonathan Shlomi, Peter Battaglia, Jean-Roch Vlimant

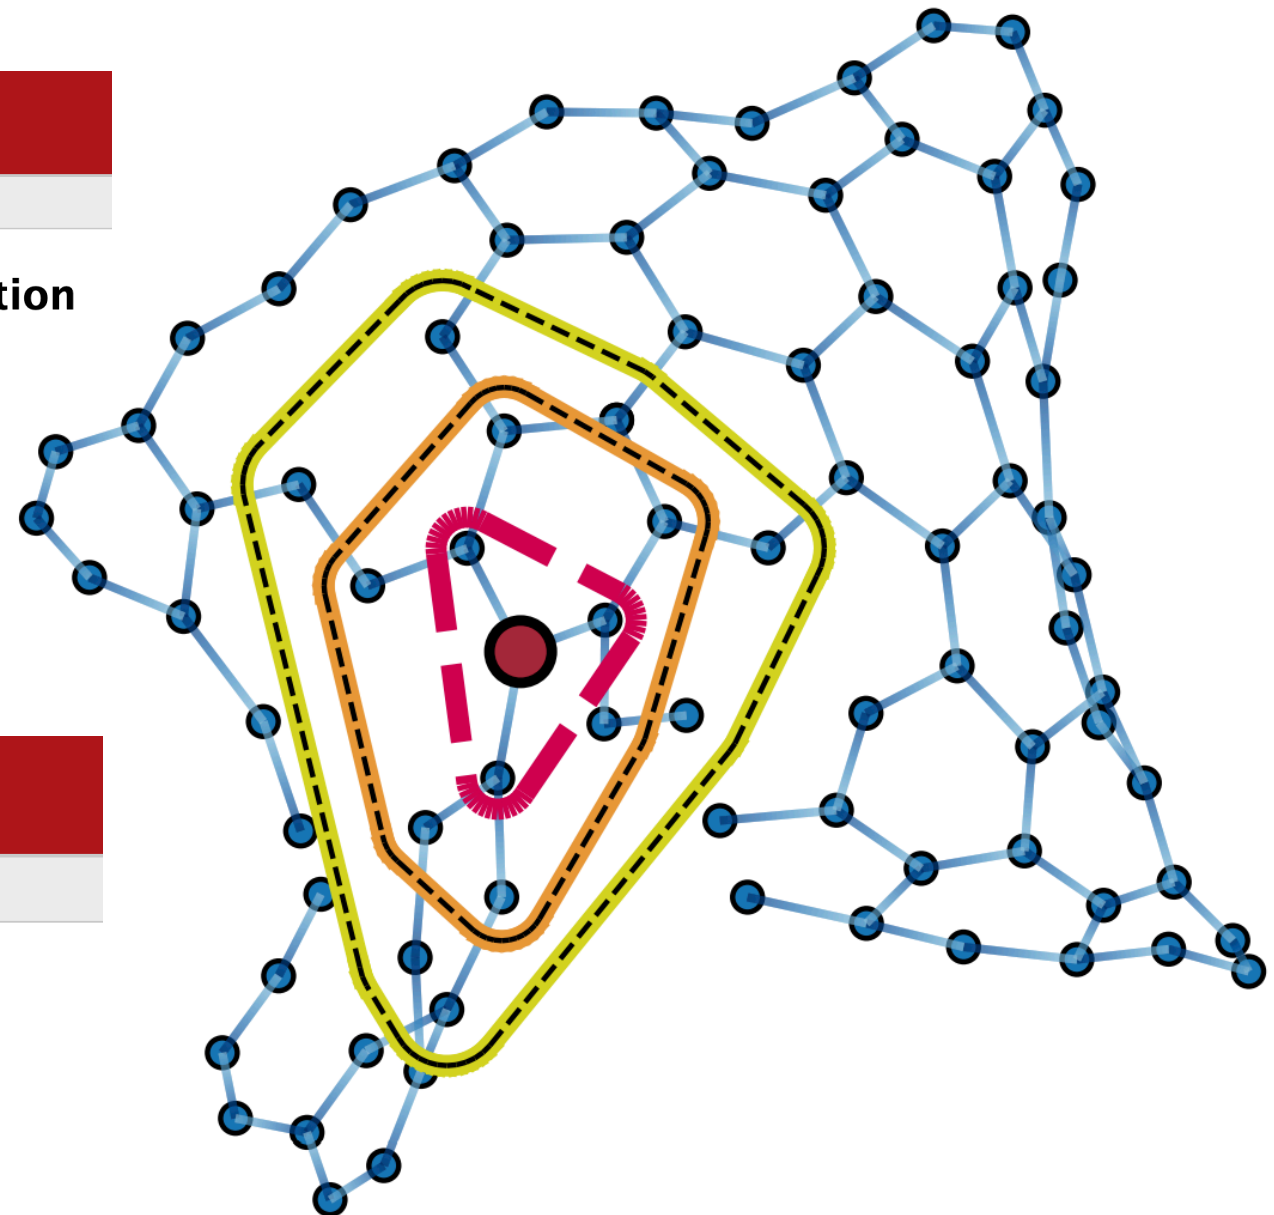



Object tagging

See talk by Felix Ringer for ML based EIC jet tagging

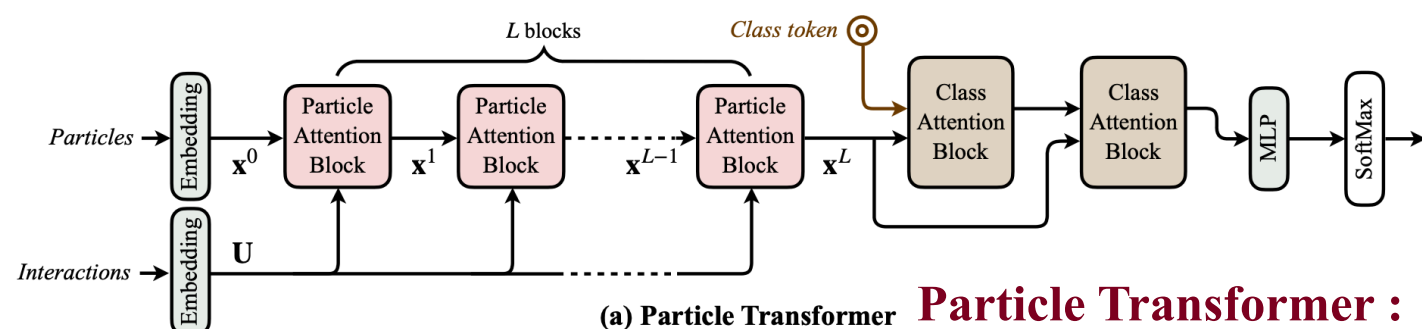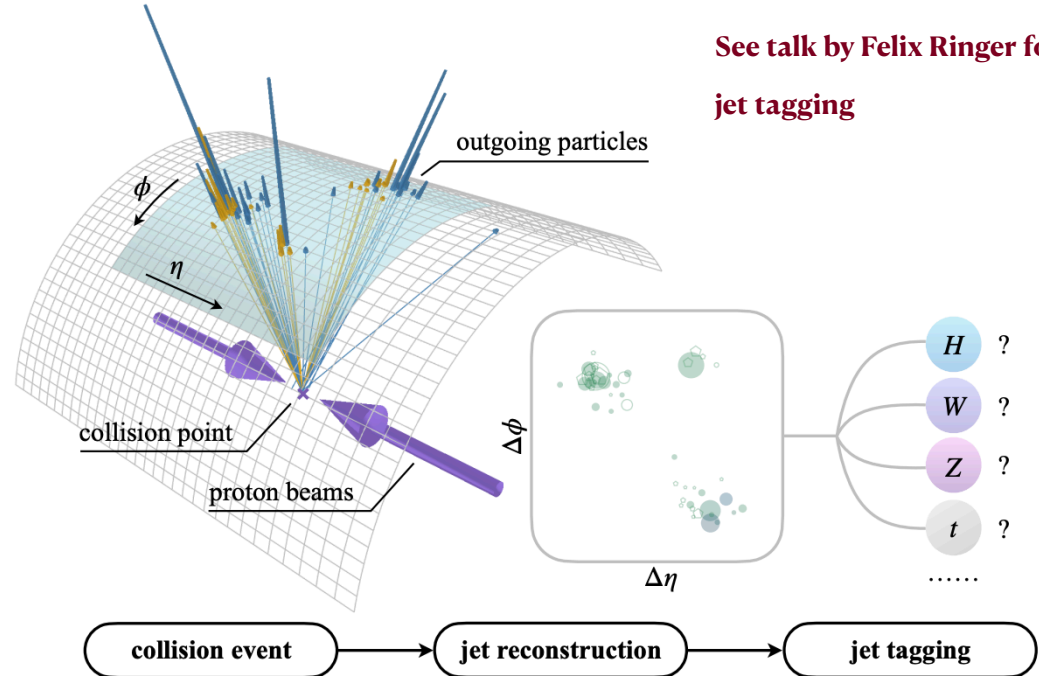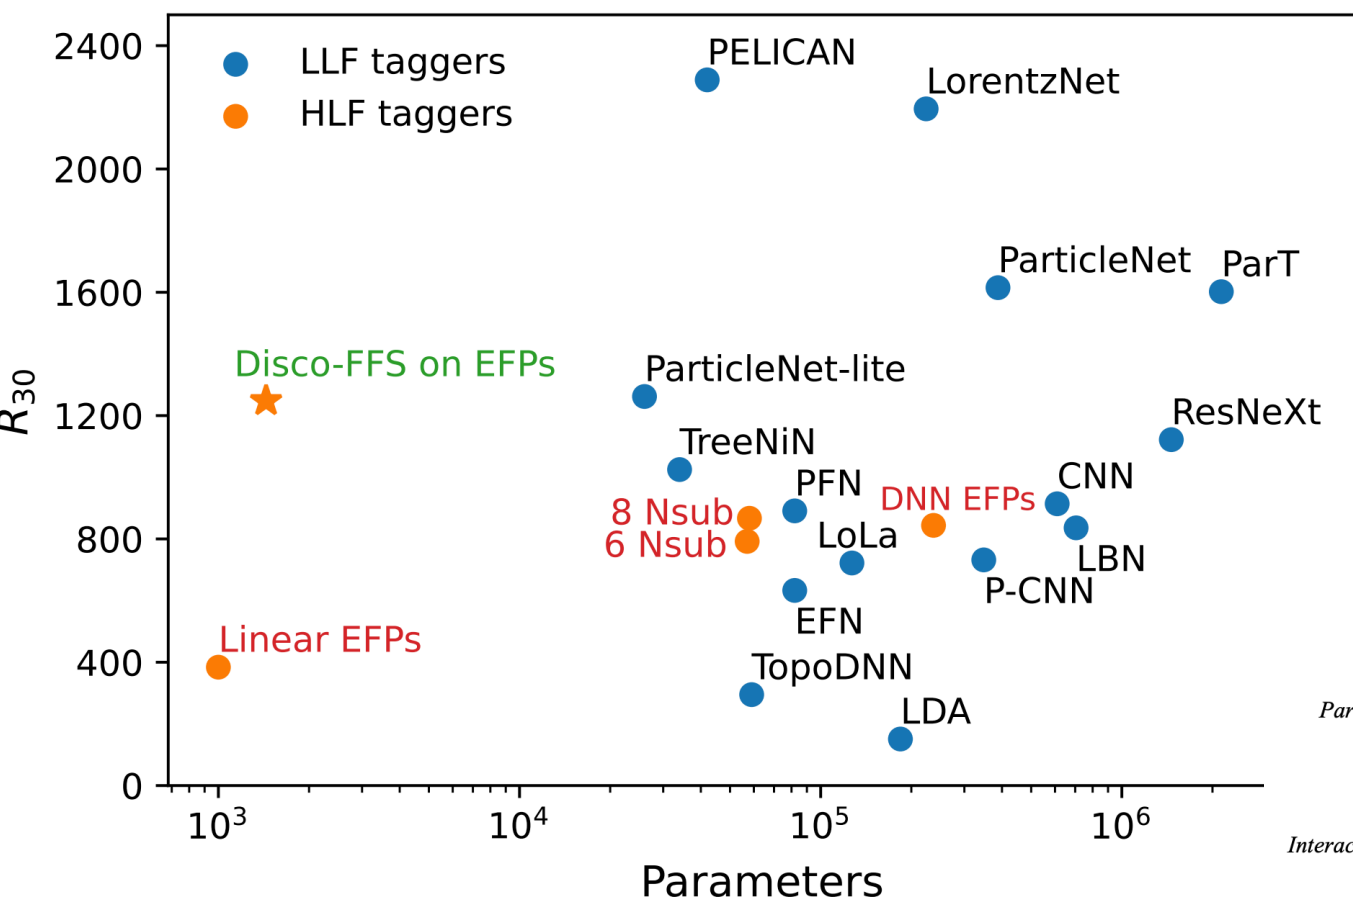


Particle Transformer : 2202.03772

	Accuracy	AUC	Rej _{50%}	Rej _{30%}
P-CNN	0.930	0.9803	201 ± 4	759 ± 24
PFN	—	0.9819	247 ± 3	888 ± 17
ParticleNet	0.940	0.9858	397 ± 7	1615 ± 93
JEDI-net (w/ $\sum O$)	0.930	0.9807	—	774.6
PCT	0.940	0.9855	392 ± 7	1533 ± 101
LGN	0.929	0.964	—	435 ± 95
rPCN	—	0.9845	364 ± 9	1642 ± 93
LorentzNet	0.942	0.9868	498 ± 18	2195 ± 173
ParT	0.940	0.9858	413 ± 16	1602 ± 81
ParticleNet-f.t.	0.942	0.9866	487 ± 9	1771 ± 80
ParT-f.t.	0.944	0.9877	691 ± 15	2766 ± 130

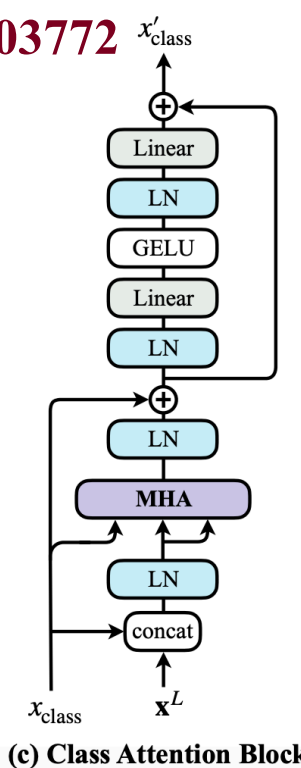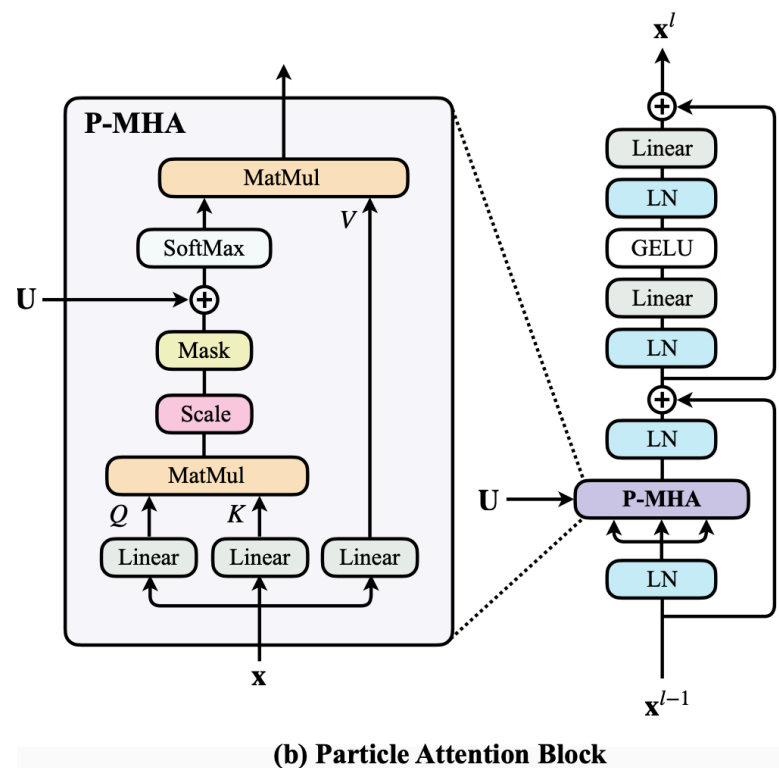


Calorimetry

Image from 1705.02355

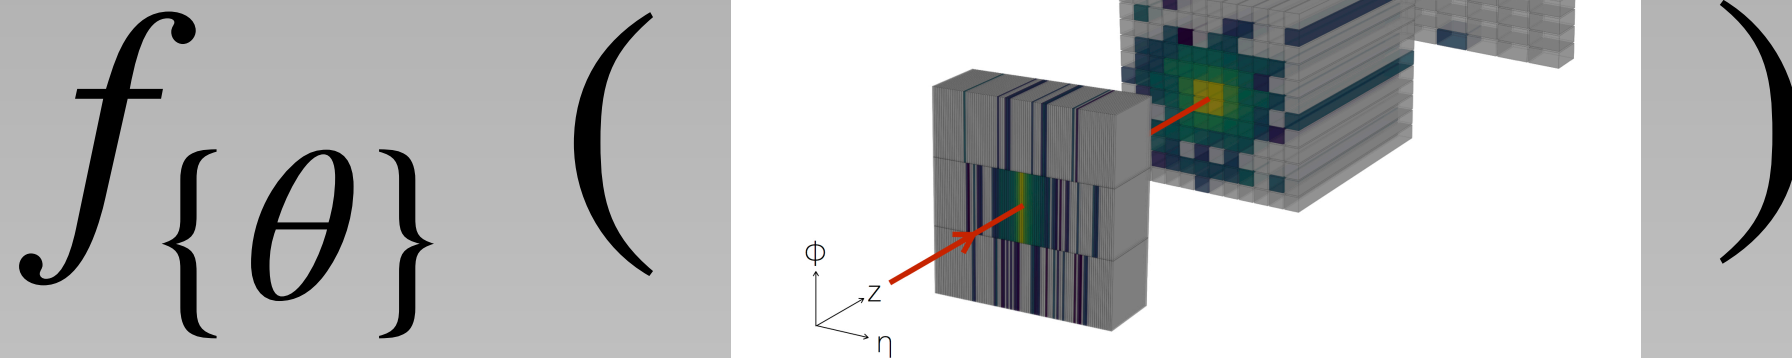


A 3-D view for topoclusters only



8 X 8 Low Res detector

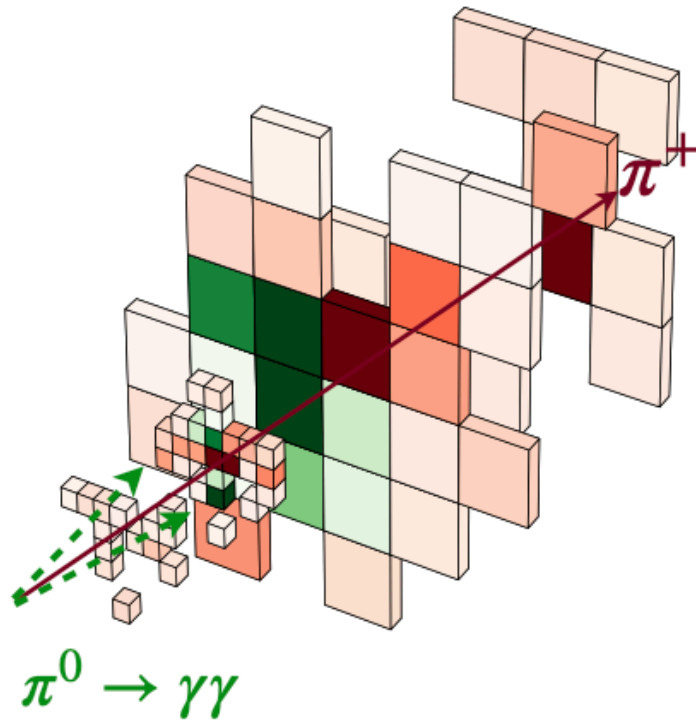

32 X 32 High Res detector

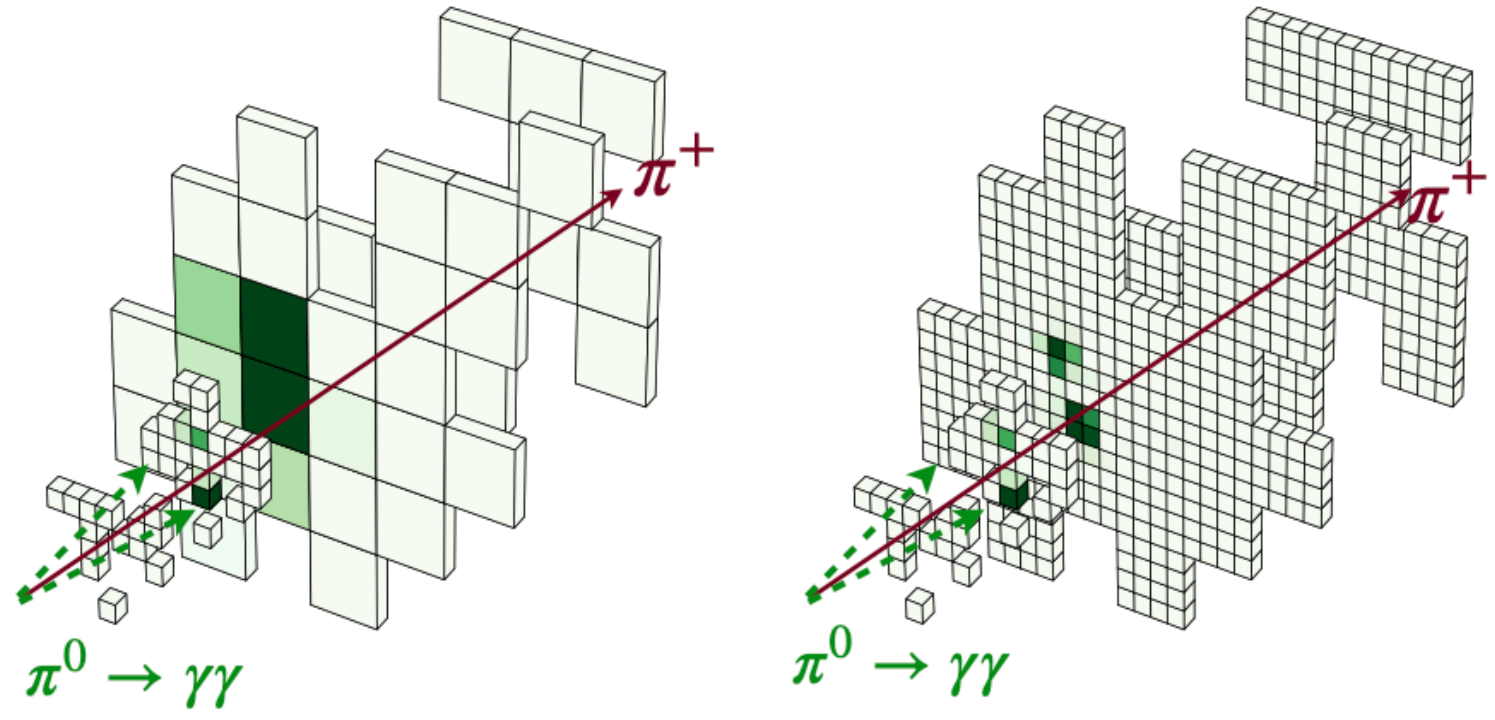

The networks in general have good noise removal abilities.

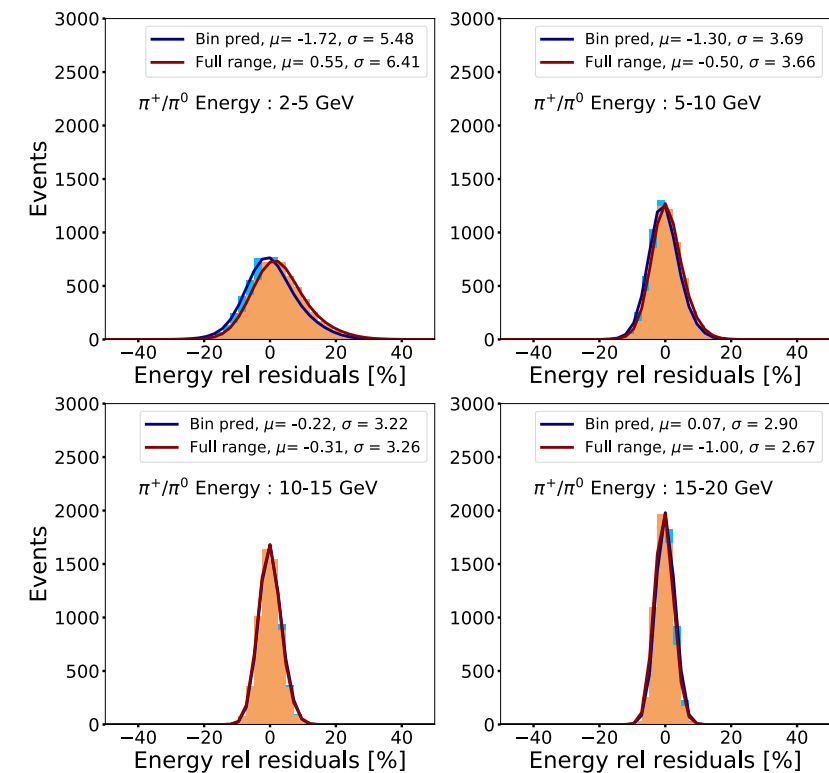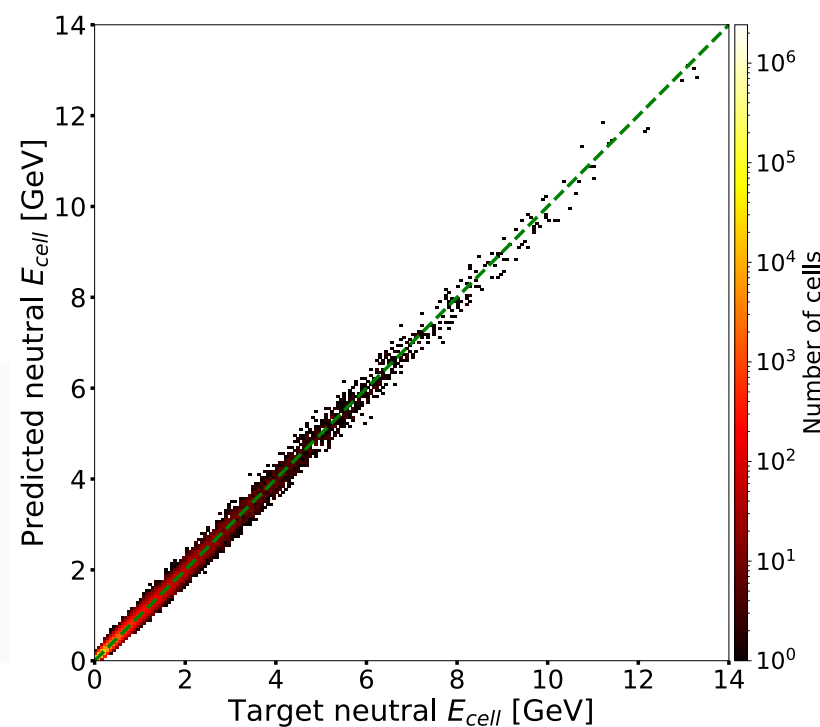


Towards a computer vision particle flow

[Francesco Armando Di Bello](#), [Sanmay Ganguly](#)✉, [Eilam Gross](#), [Marumi Kado](#), [Michael Pitt](#), [Lorenzo Santi](#) & [Jonathan Shlomi](#)

[The European Physical Journal C](#) **81**, Article number: 107 (2021) | [Cite this article](#)


1341 Accesses | 13 Citations | 11 Altmetric | [Metrics](#)

When do intrinsic calorimeter sizes are limiting factors ?




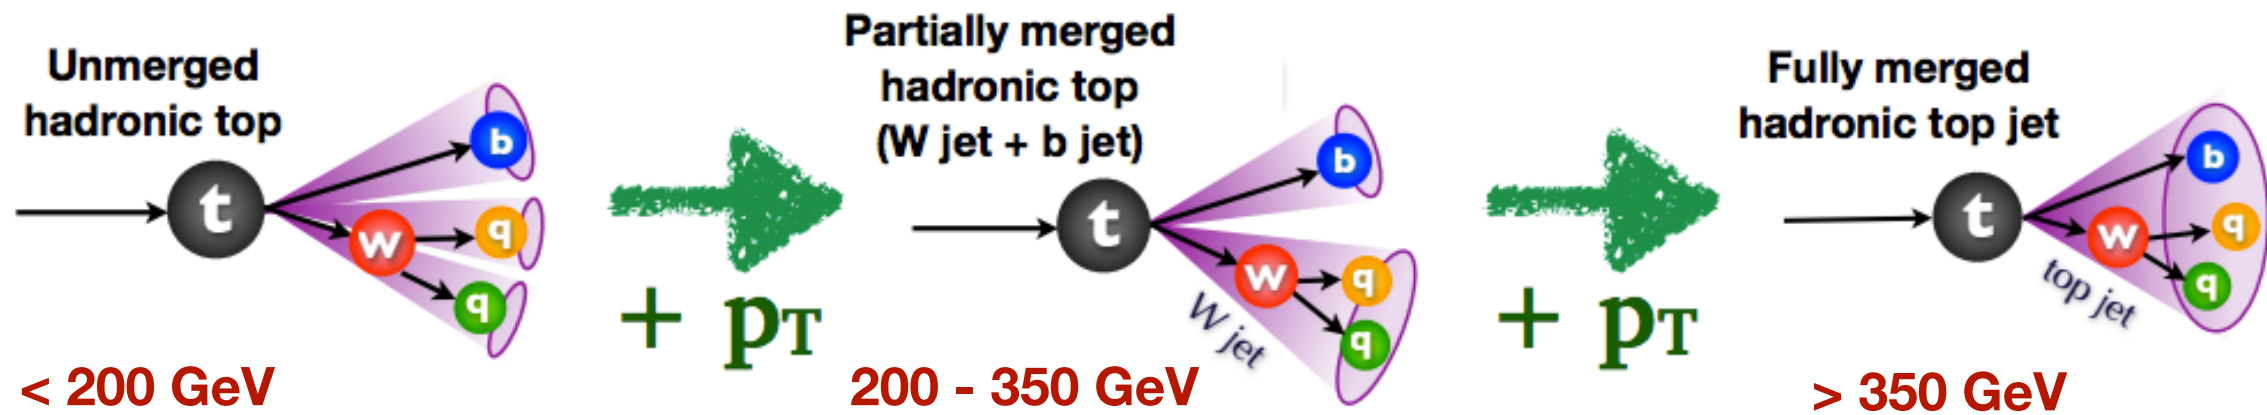


How to identify two or more particles if they all land-up in the same cell ?

The intrinsic detector resolution is a blocker


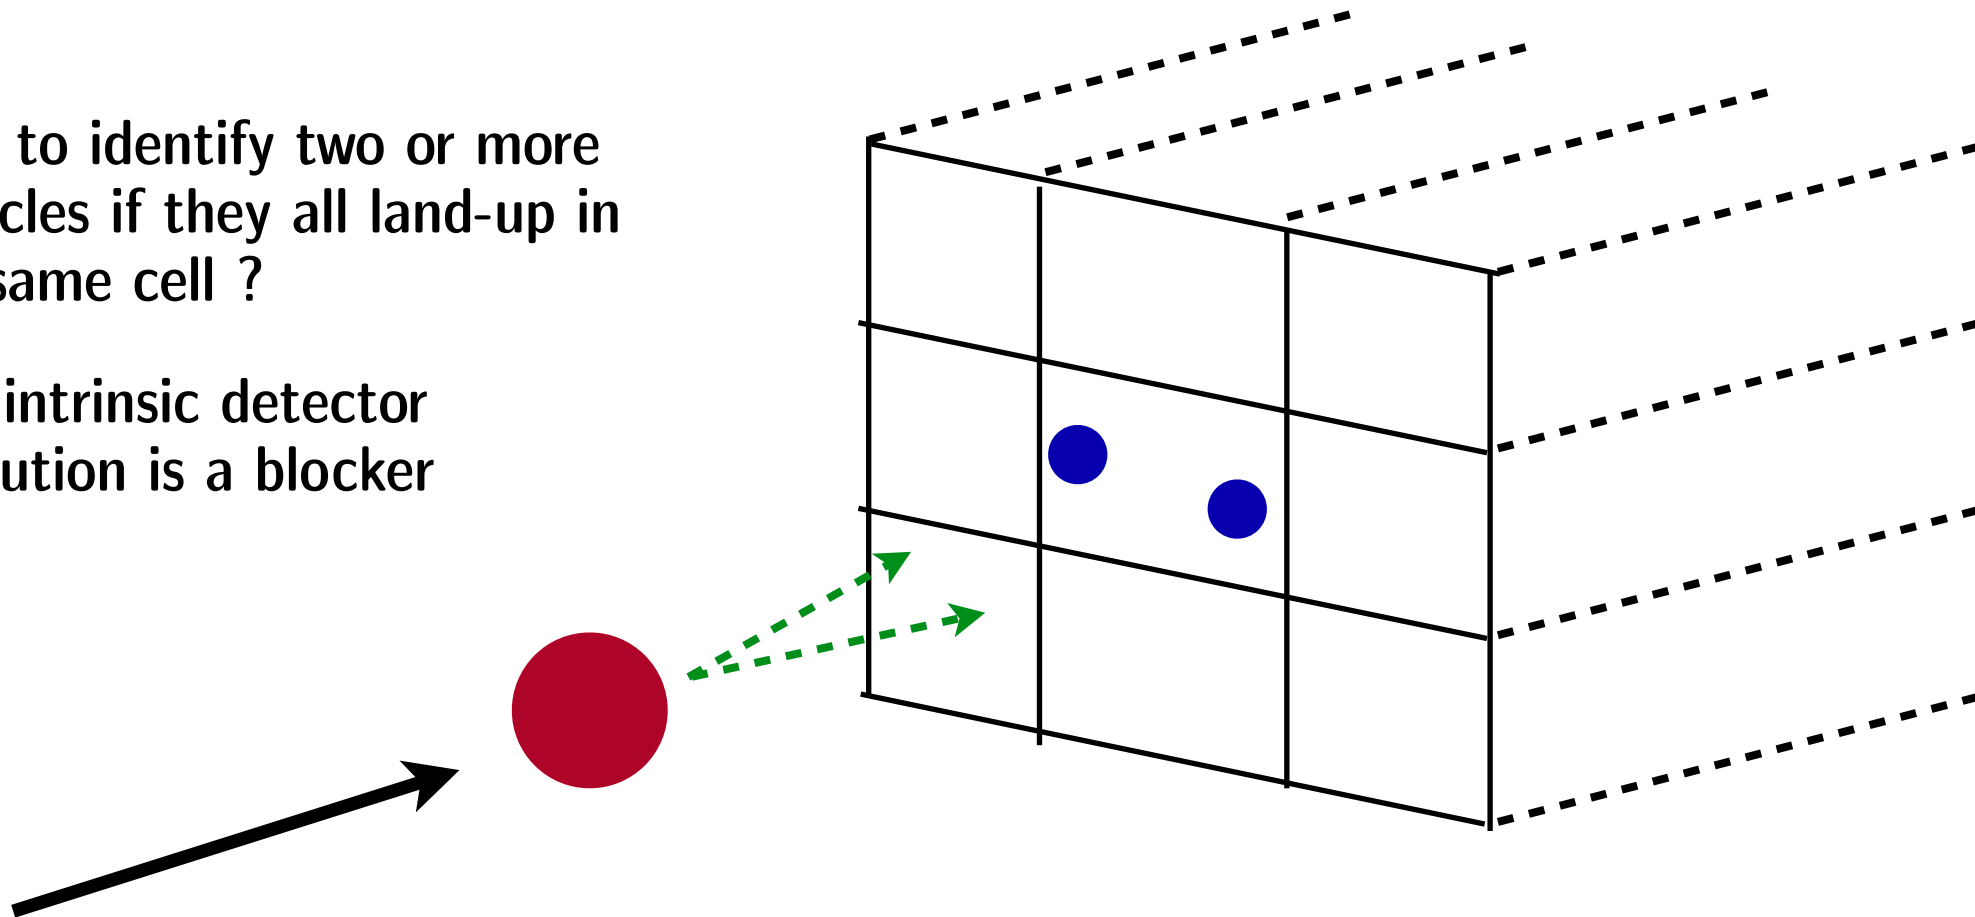


An event display for super-res prediction

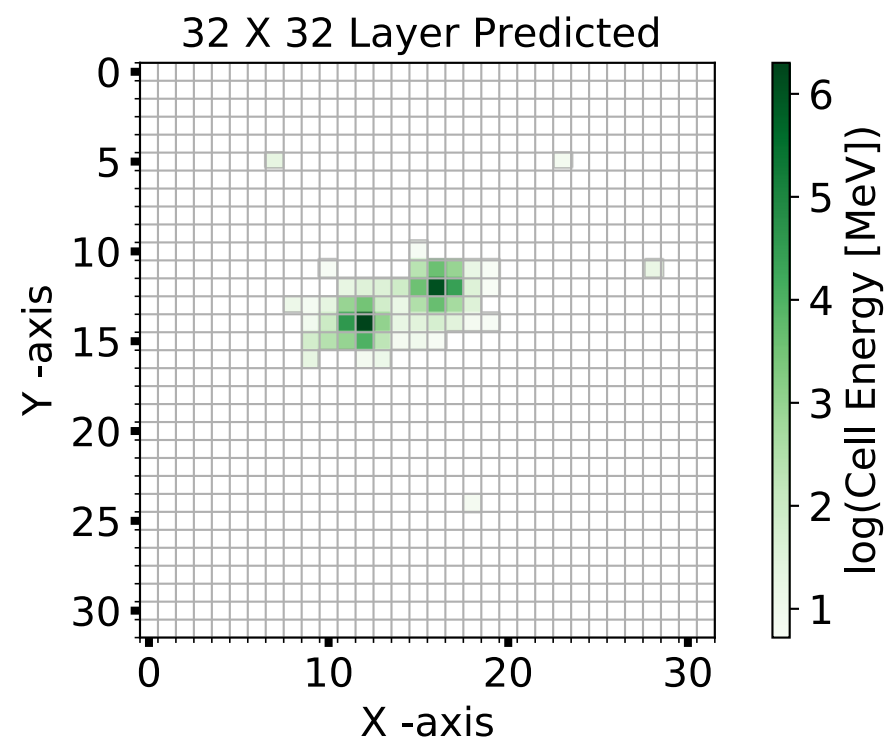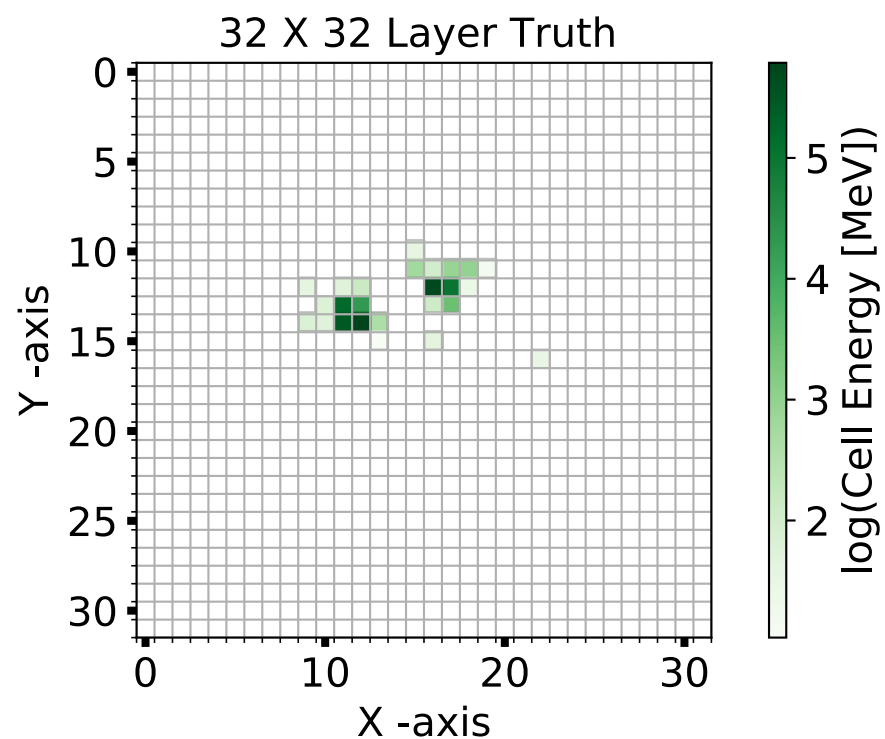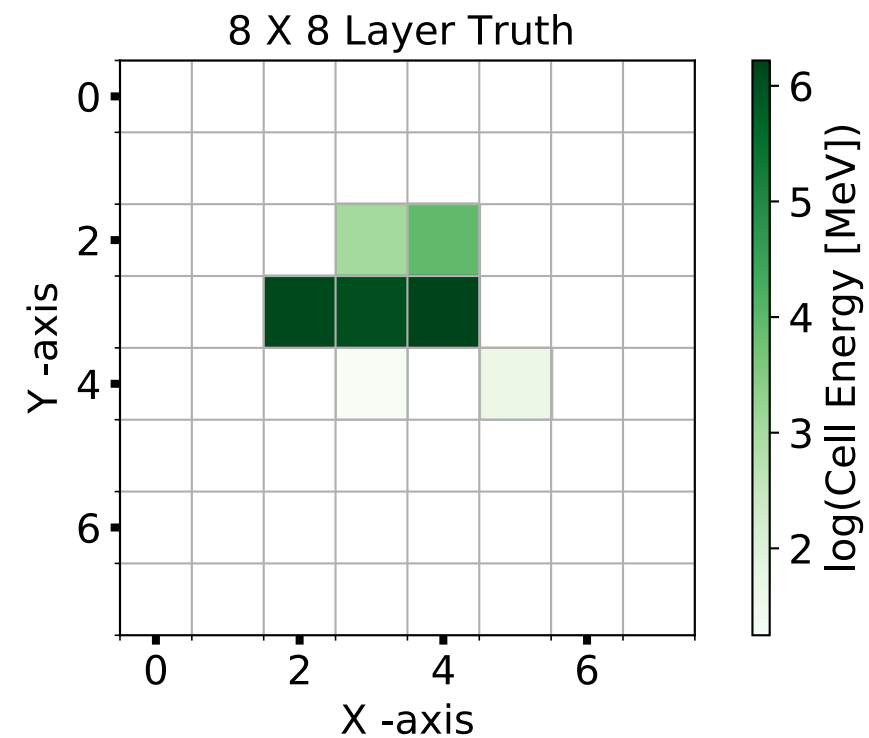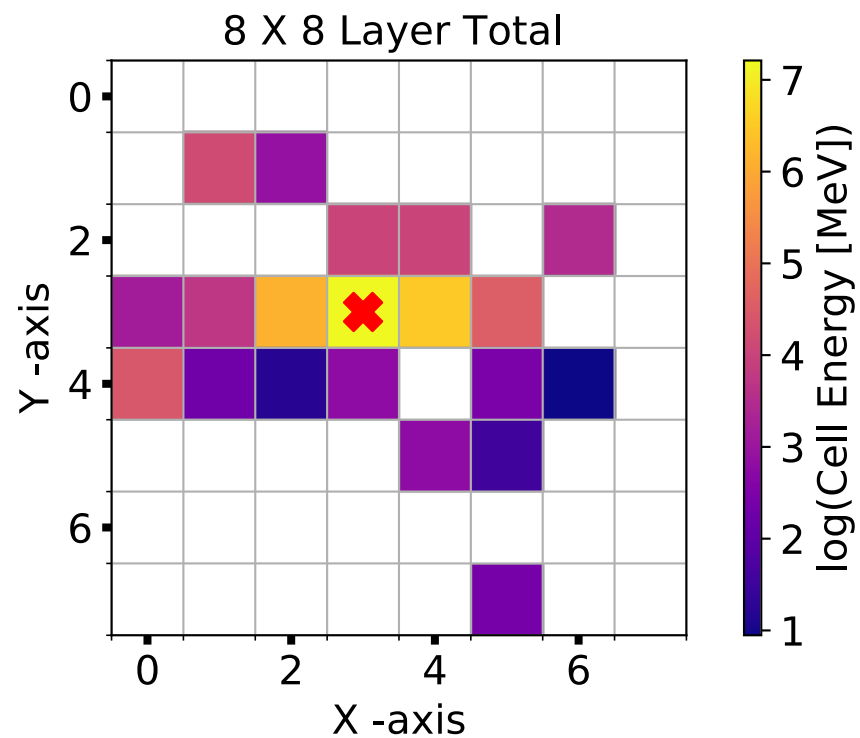

The mass distribution

Invariant mass from
reconstructed 4-vectors.

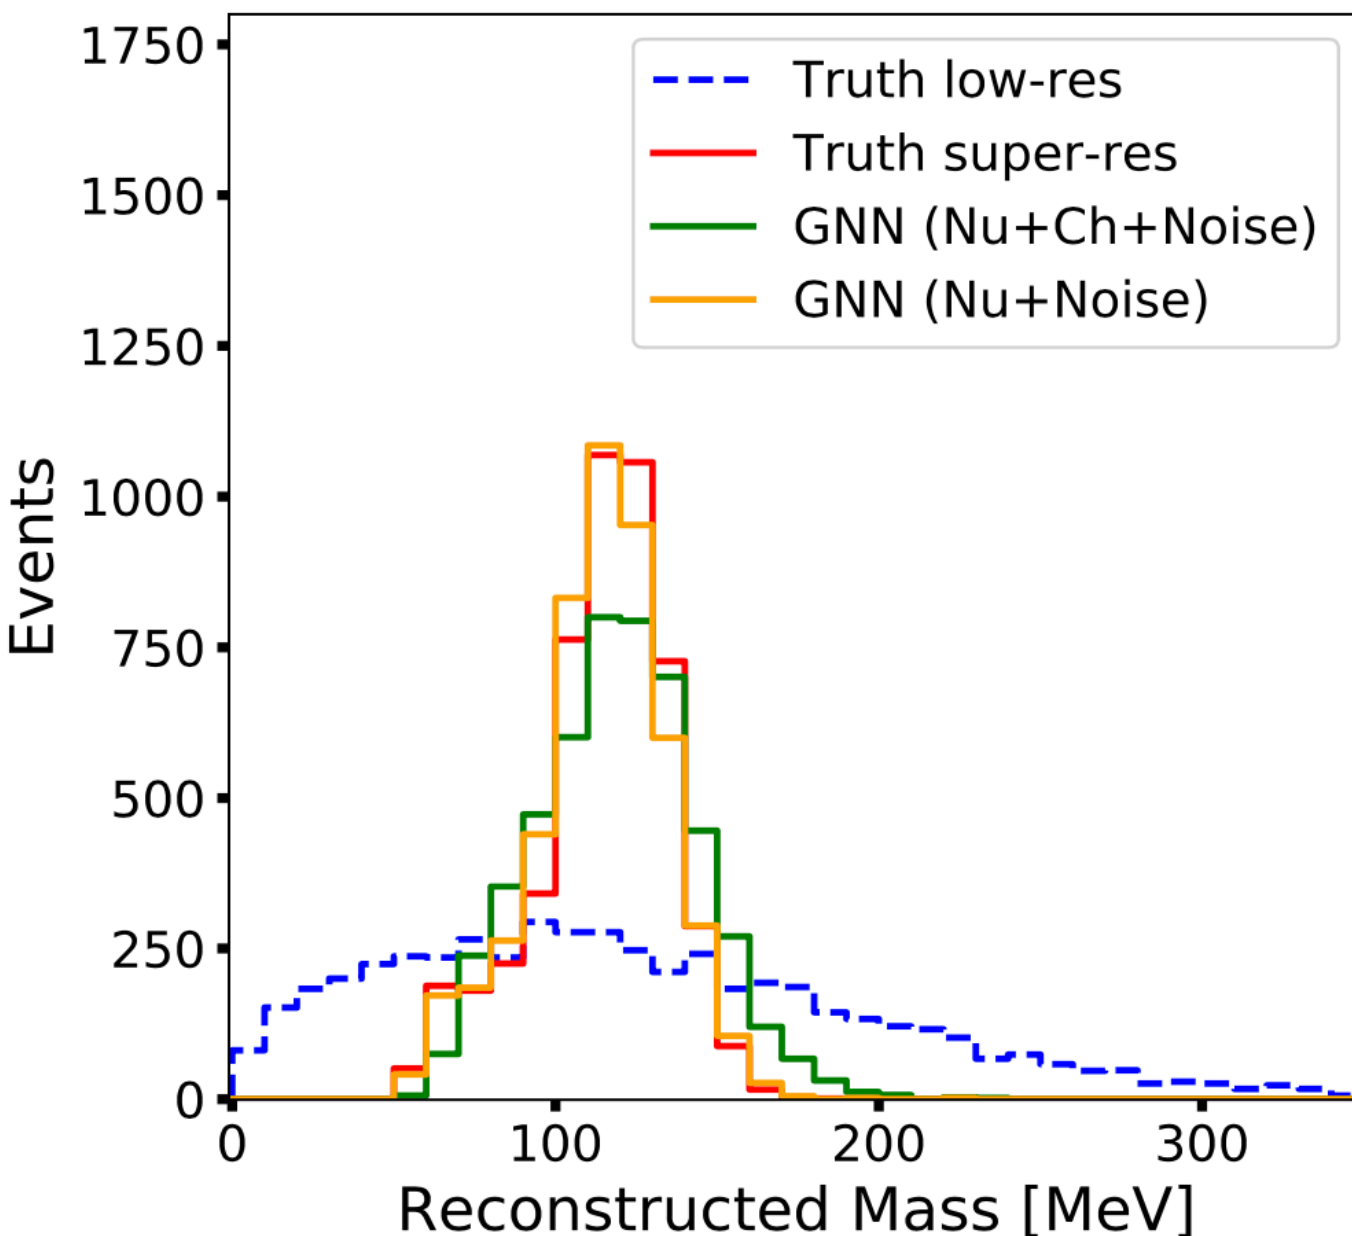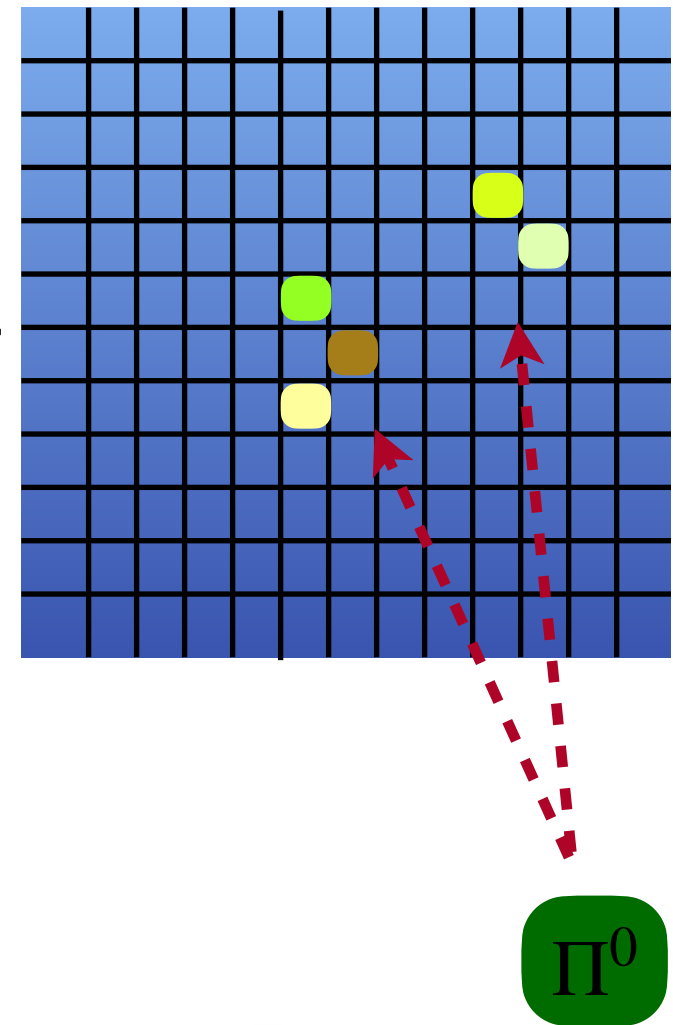

On the use of neural networks for energy reconstruction in high-granularity calorimeters

***JINST* 16 (2021) 12, P12036**

N. Akchurin (Texas Tech.), C. Cowden (Texas Tech.), J. Damgov (Texas Tech.), A. Hussain (Texas Tech.), S. Kunori (Texas Tech.)

How to CAN Higher Jet Resolution
***SciPost Phys.* 13 (2022) 3, 064**

Pierre Baldi¹, Lukas Blecher², Anja Butter², Julian Collado¹, Jessica N. Howard³, Fabian Keilbach², Tilman Plehn², Gregor Kasieczka⁴, and Daniel Whiteson³

Higgs and top physics reconstruction challenges and opportunities at FCC-ee

***Eur.Phys.J.Plus* 137 (2022) 1, 39**

Patrizia Azzi (INFN, Padua and Padua U.), Loukas Gouskos (CERN), Michele Selvaggi (CERN), Frank Simon (Munich, Max Planck Inst.)

Test-beam and simulation studies towards RPWELL-based DHCAL

#13

Dan Shaked-Renous (Weizmann Inst.), Fernando Domingues Amaro (Coimbra U.), Purba Bhattacharya (Weizmann Inst.), Amos Breskin (Weizmann Inst.), Maximilien Chefdeville (Annecy, LAPP) et al. (Aug 26, 2022) ***JINST* 17 (2022) 12, P12008**



A high-granularity calorimeter insert based on SiPM-on-tile technology at the future Electron-Ion Collider ***Nucl.Instrum.Meth.A* 1047 (2023) 167866**

Miguel Arratia (UC, Riverside), Kenneth Barish (UC, Riverside), Liam Blanchard (UC, Riverside), Huan Z. Huang (Southern California U.), Zhongling Ji (Southern California U.) et al. (Aug 10, 2022)

The mass distribution

Invariant mass from
reconstructed 4-vectors.

Let's think how we can bring this in the collimated object
business.

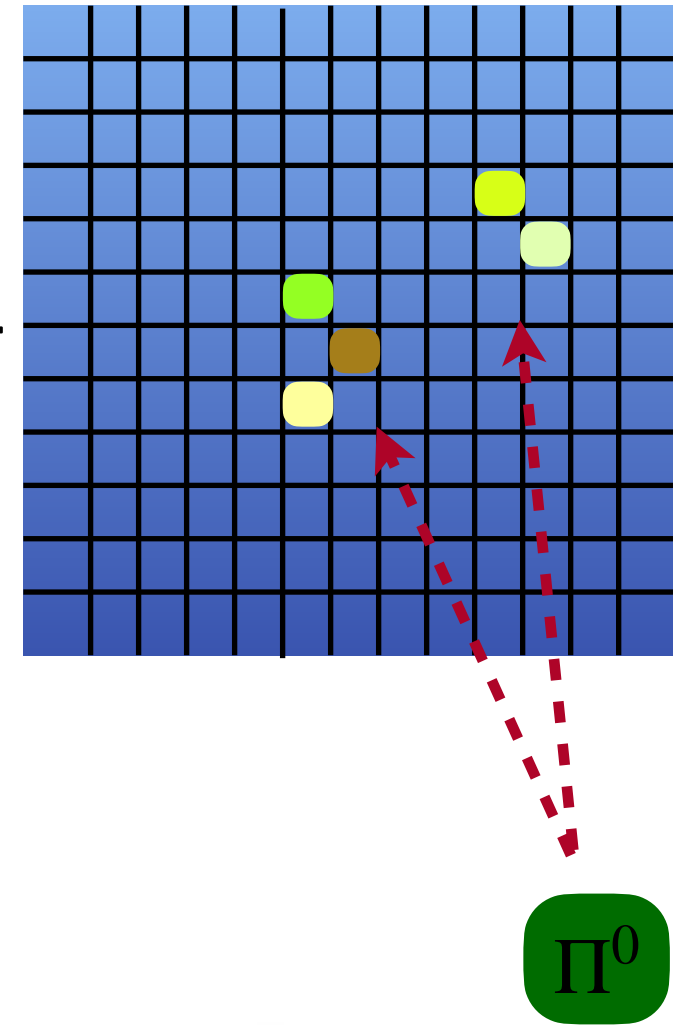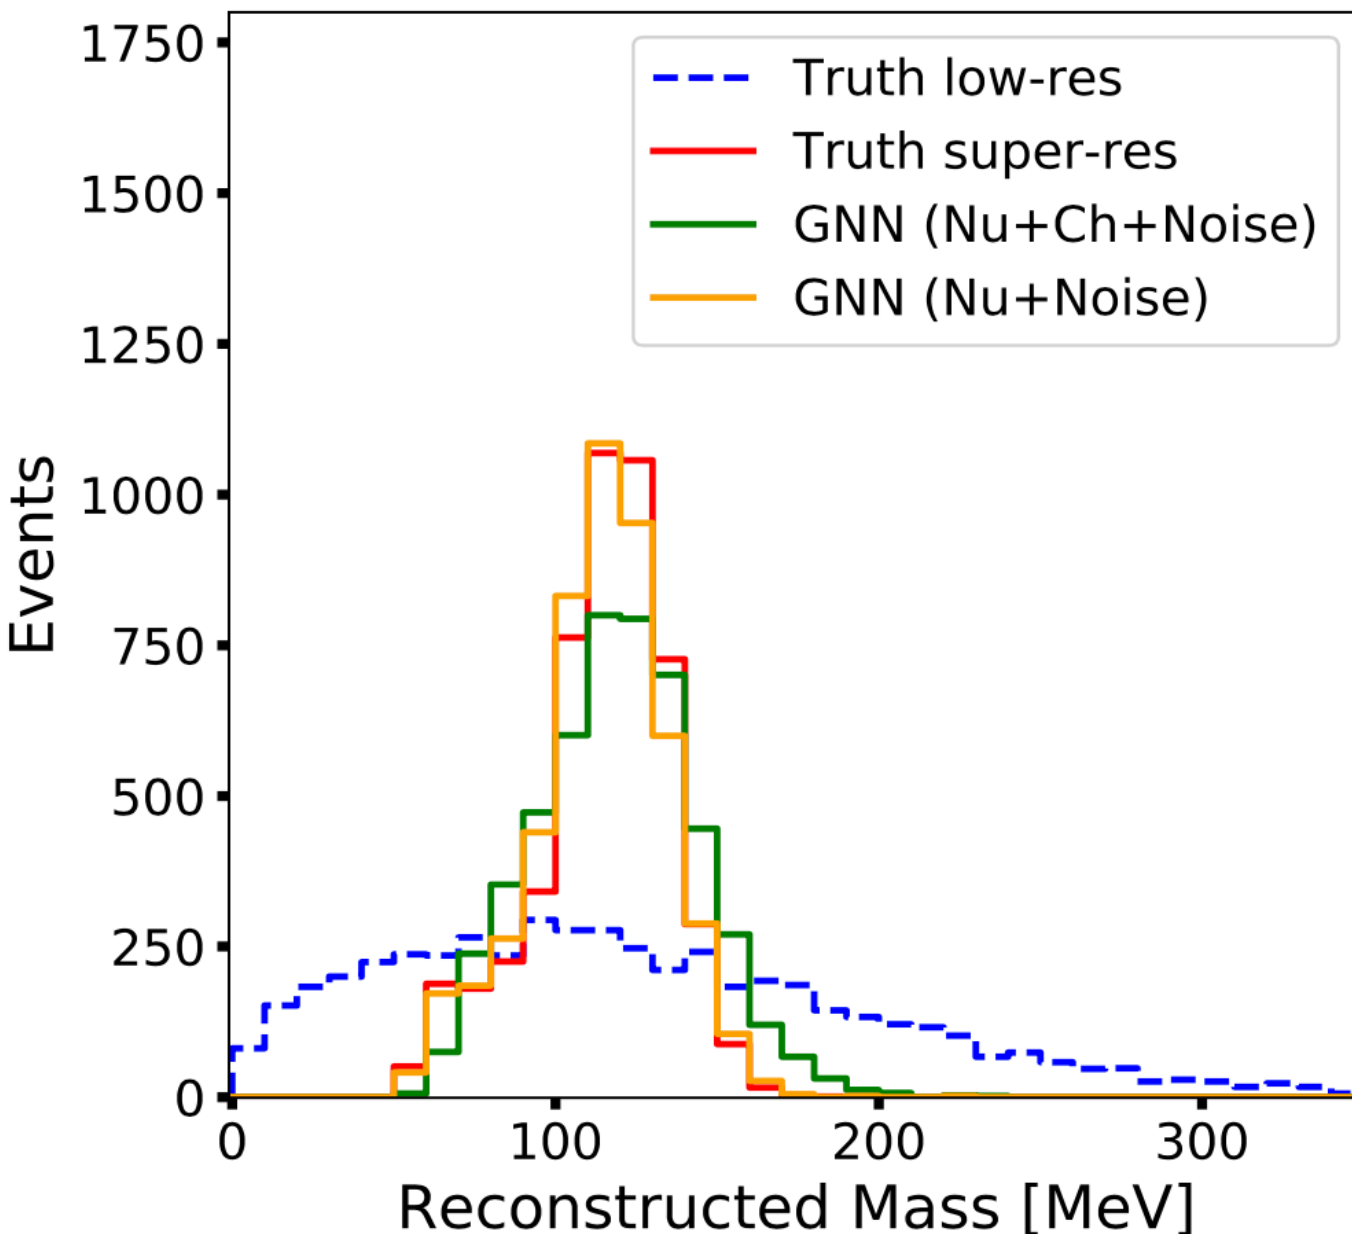

On the use of neural networks for energy reconstruction in high-granularity calorimeters

***JINST* 16 (2021) 12, P12036**

N. Akchurin (Texas Tech.), C. Cowden (Texas Tech.), J. Damgov (Texas Tech.), A. Hussain (Texas Tech.), S. Kunori (Texas Tech.)

How to CAN Higher Jet Resolution
***SciPost Phys.* 13 (2022) 3, 064**

Pierre Baldi¹, Lukas Blecher², Anja Butter², Julian Collado¹, Jessica N. Howard³, Fabian Keilbach², Tilman Plehn², Gregor Kasieczka⁴, and Daniel Whiteson³

Higgs and top physics reconstruction challenges and opportunities at FCC-ee

***Eur.Phys.J.Plus* 137 (2022) 1, 39**

Patrizia Azzi (INFN, Padua and Padua U.), Loukas Gouskos (CERN), Michele Selvaggi (CERN), Frank Simon (Munich, Max Planck Inst.)

Test-beam and simulation studies towards RPWELL-based DHCAL


#13

Dan Shaked-Renous (Weizmann Inst.), Fernando Domingues Amaro (Coimbra U.), Purba Bhattacharya (Weizmann Inst.), Amos Breskin (Weizmann Inst.), Maximilien Chefdeville (Annecy, LAPP) et al. (Aug 26, 2022) ***JINST* 17 (2022) 12, P12008**

A high-granularity calorimeter insert based on SiPM-on-tile technology at the future Electron-Ion Collider ***Nucl.Instrum.Meth.A* 1047 (2023) 167866**

Miguel Arratia (UC, Riverside), Kenneth Barish (UC, Riverside), Liam Blanchard (UC, Riverside), Huan Z. Huang (Southern California U.), Zhongling Ji (Southern California U.) et al. (Aug 10, 2022)


Pion identification within ATLAS

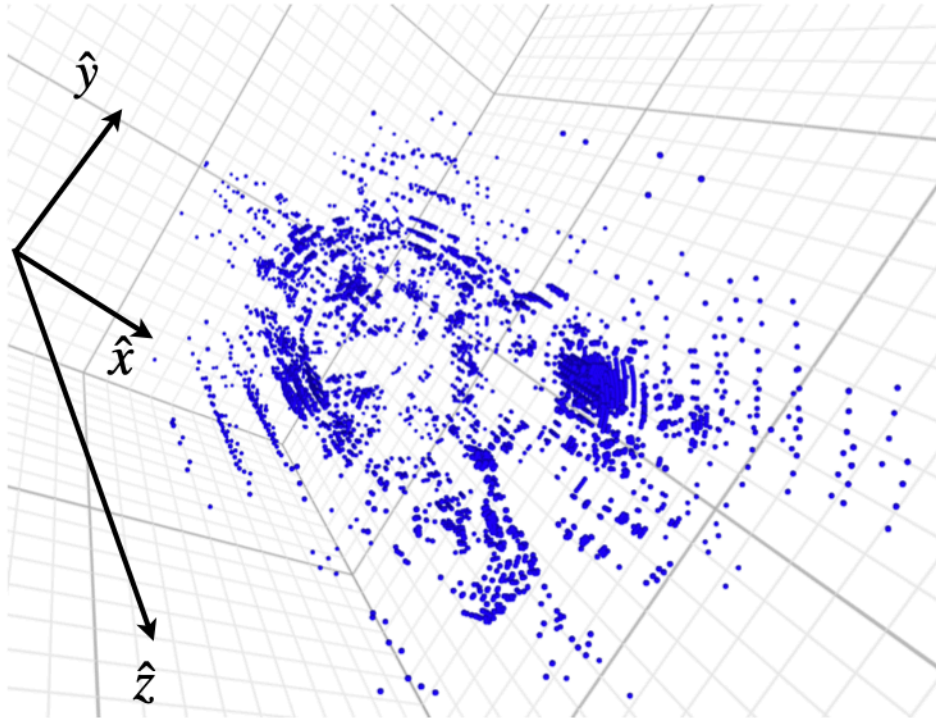



A classification & regression task is tested on ATLAS samples.
The calibrated topocluster cells are used to form images & P.C.

ATL-PHYS-PUB-2020-040


$$\mathcal{L} = (1 - \alpha) \mathcal{L}_{\text{classification}} + \alpha \mathcal{L}_{\text{Regression}}$$

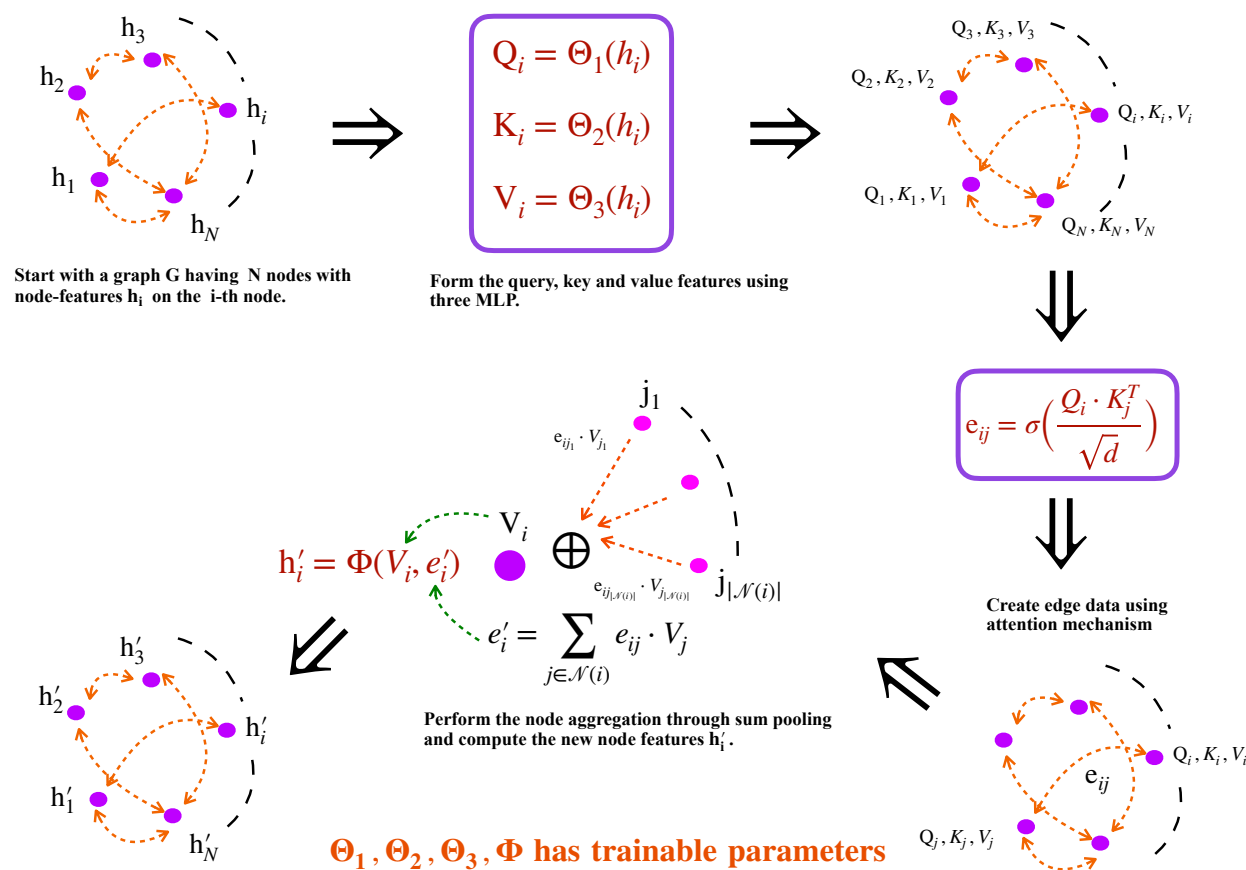





(a) GNN Block

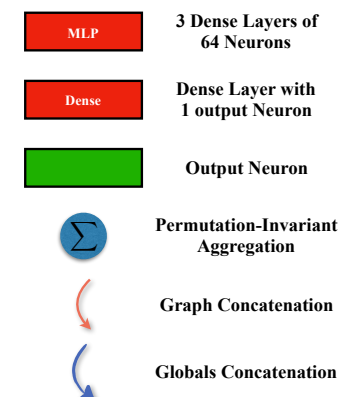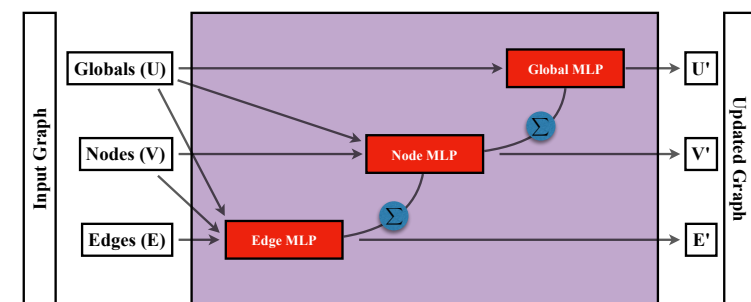





(b) GNN Model

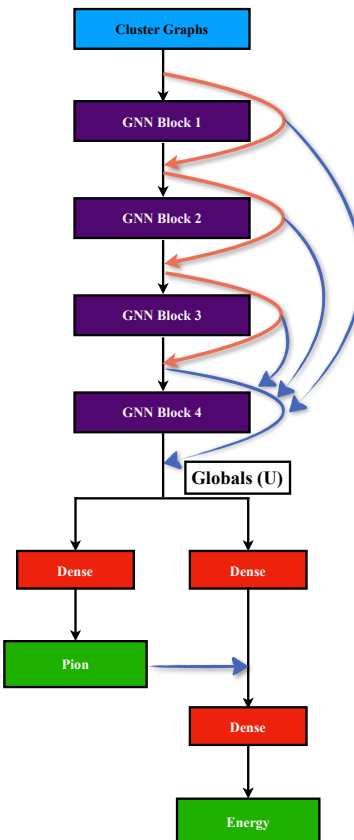



Pion identification within ATLAS

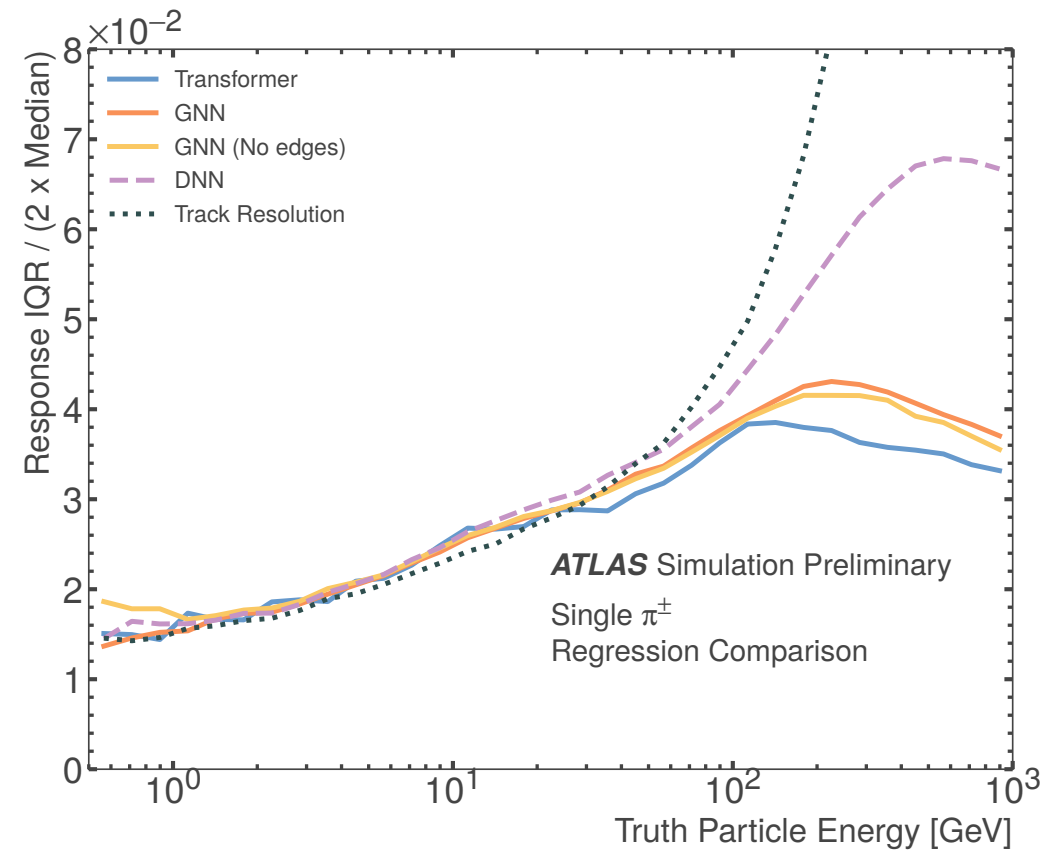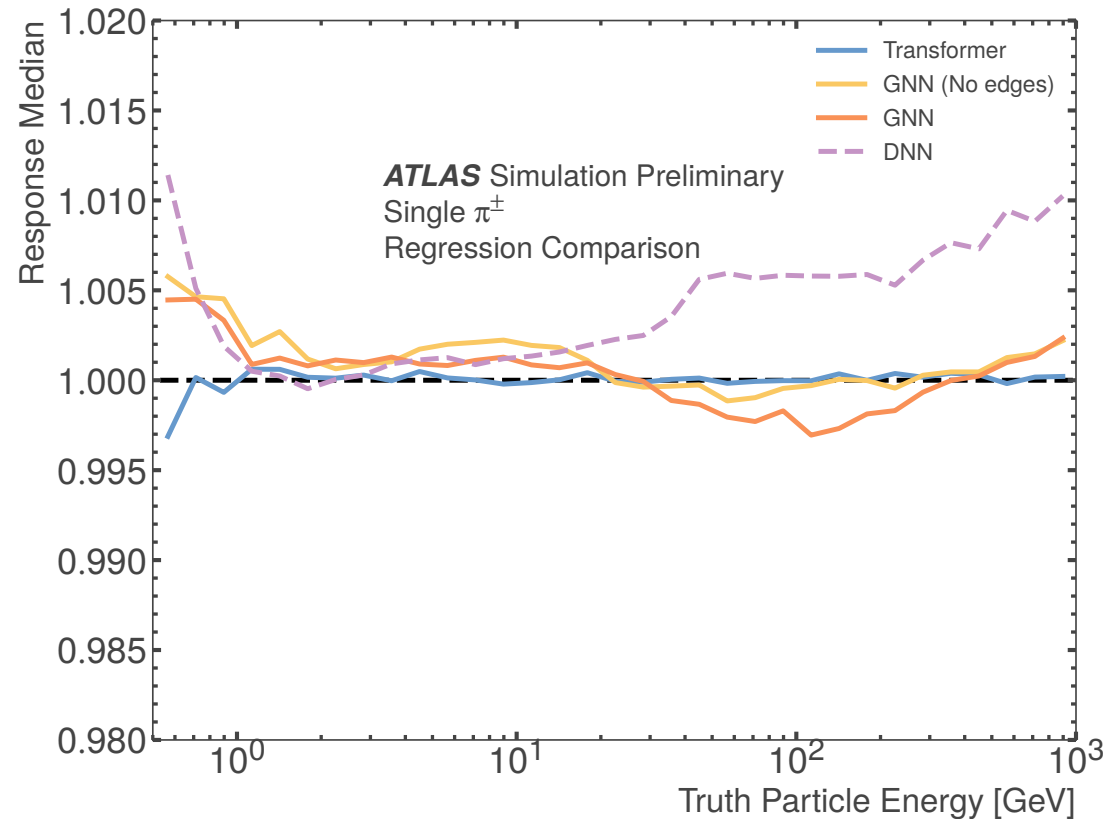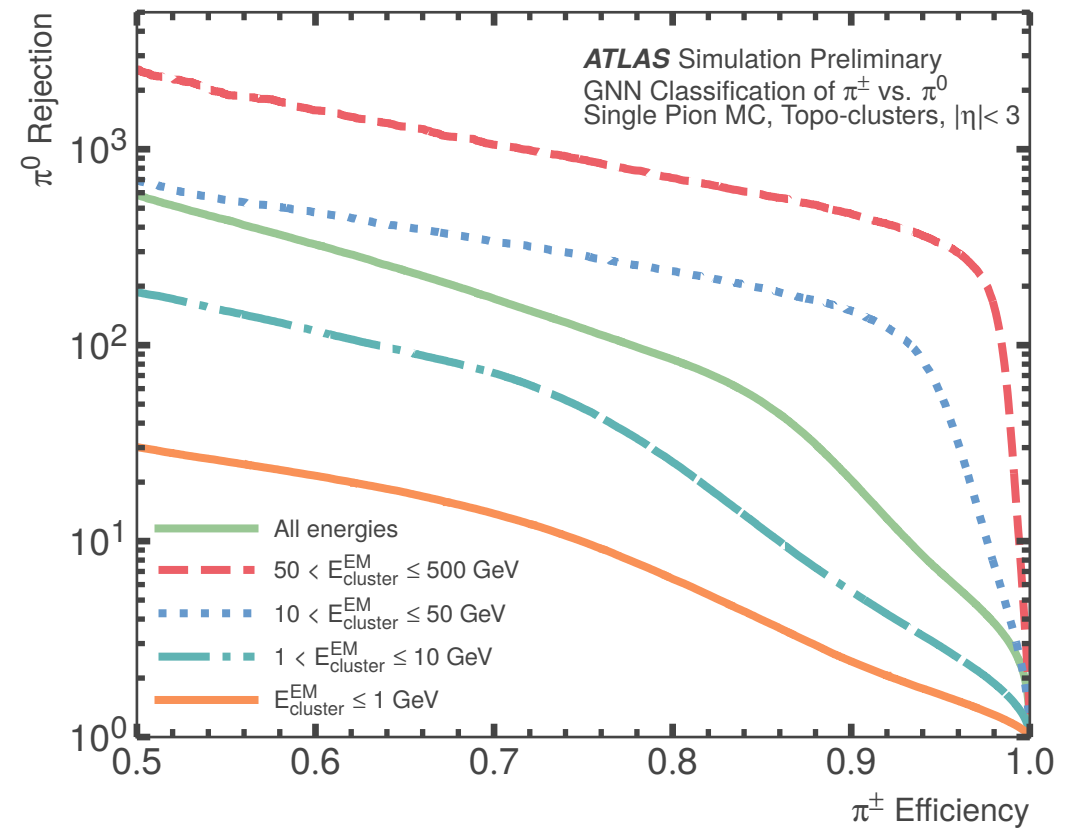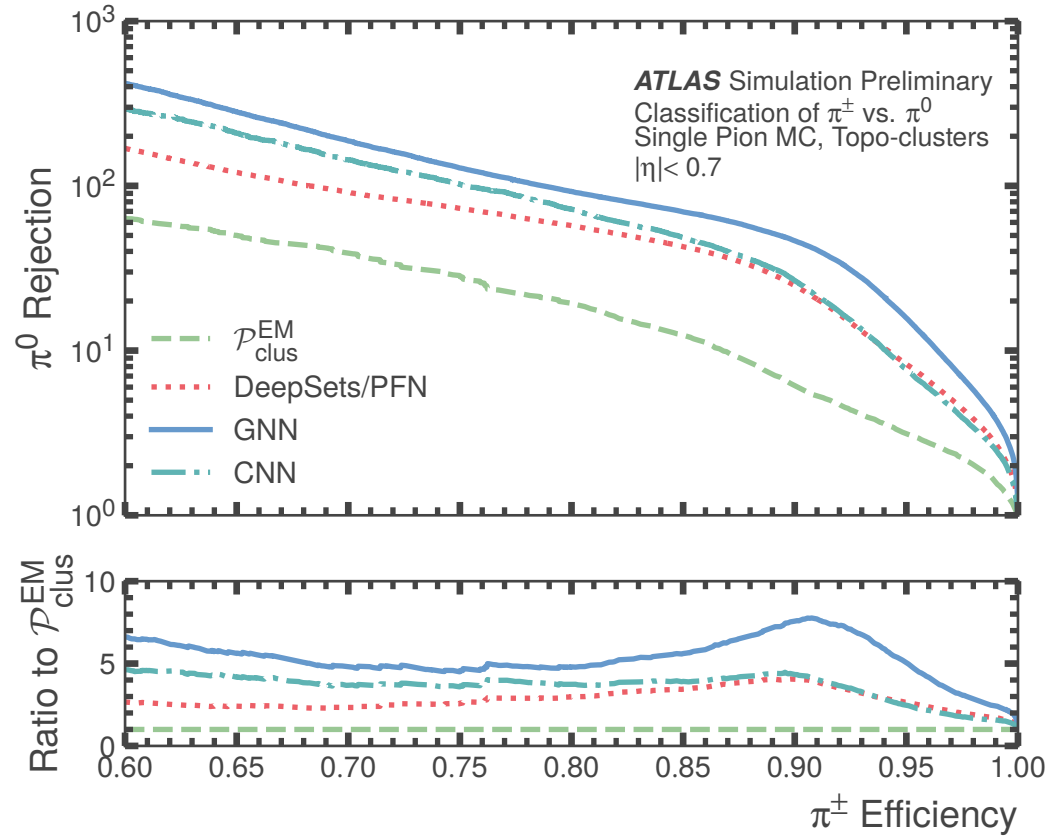

Pion identification within ATLAS

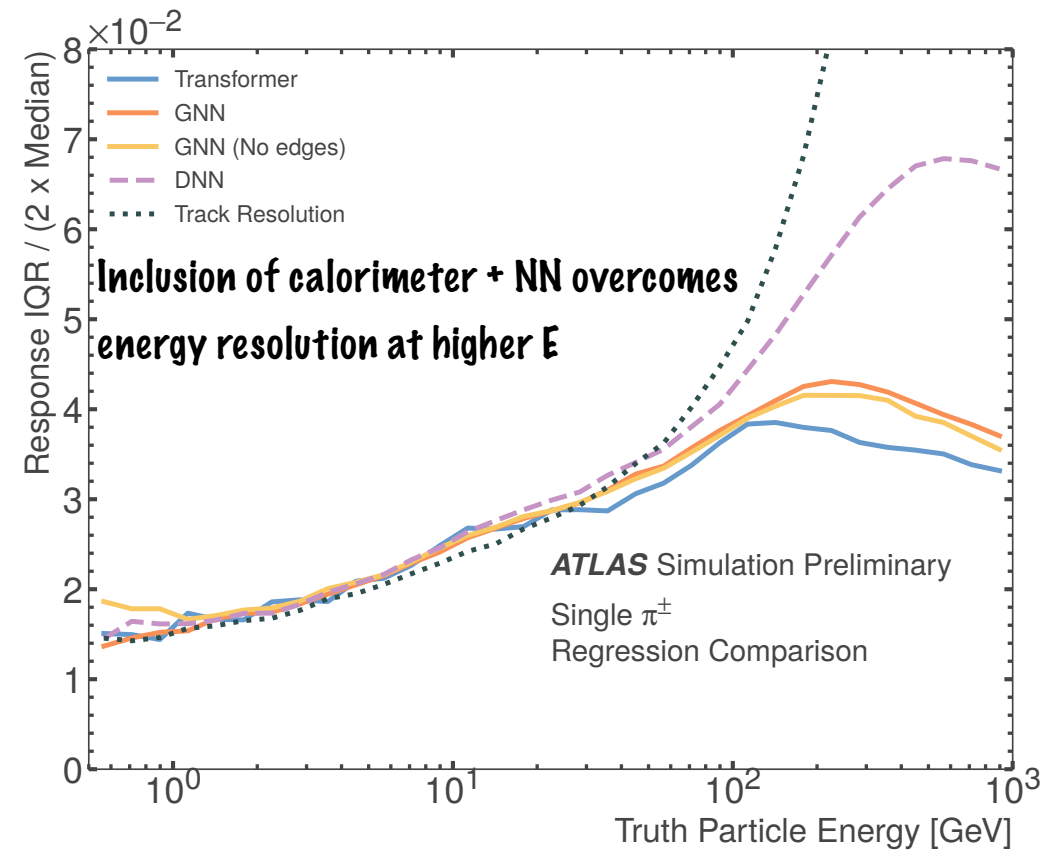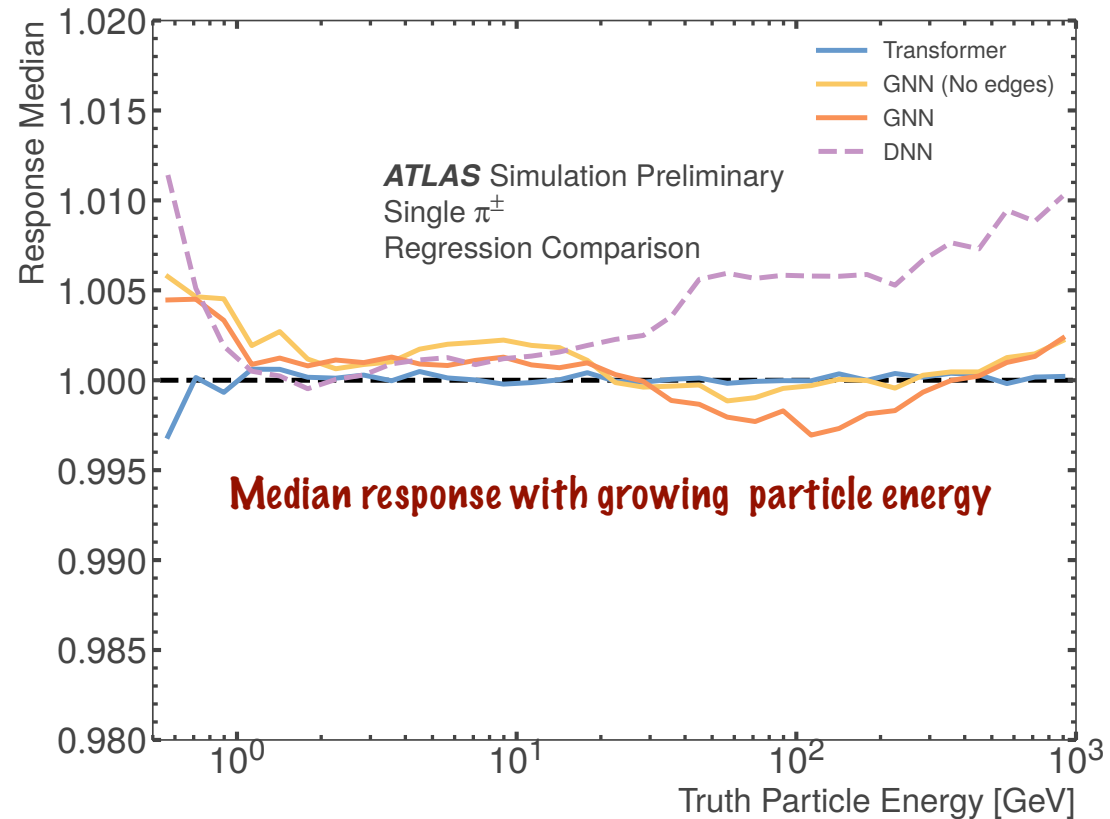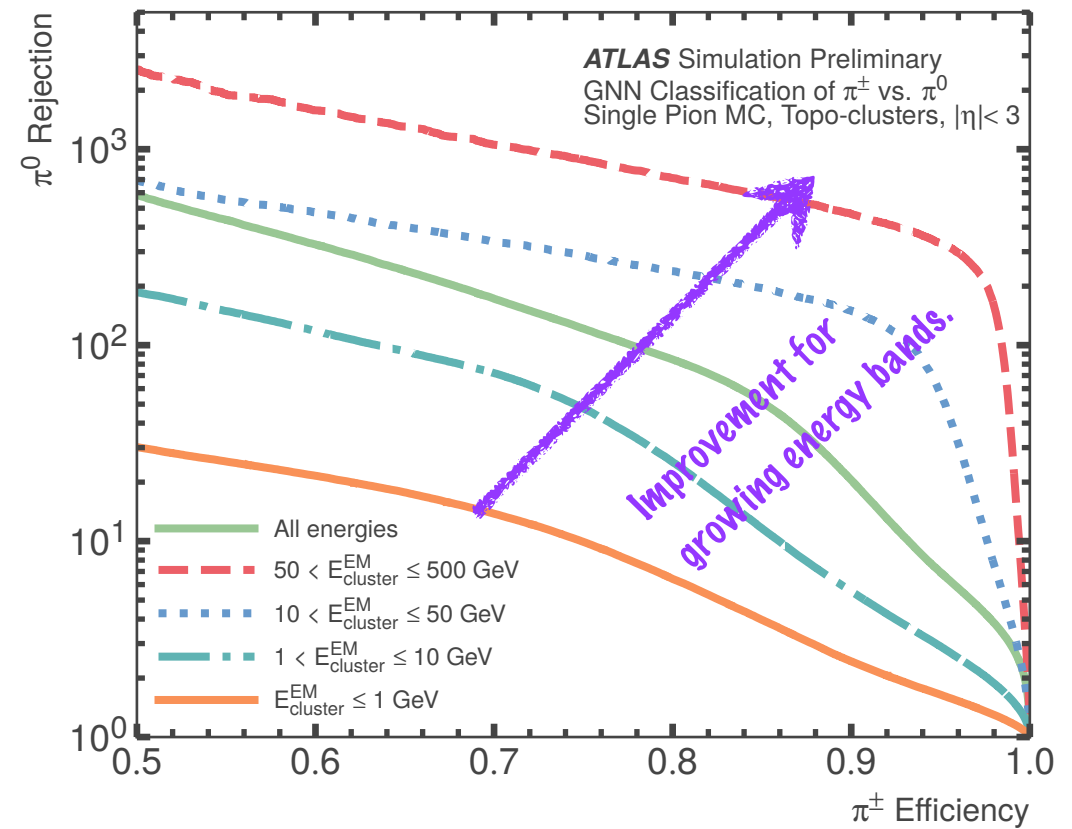
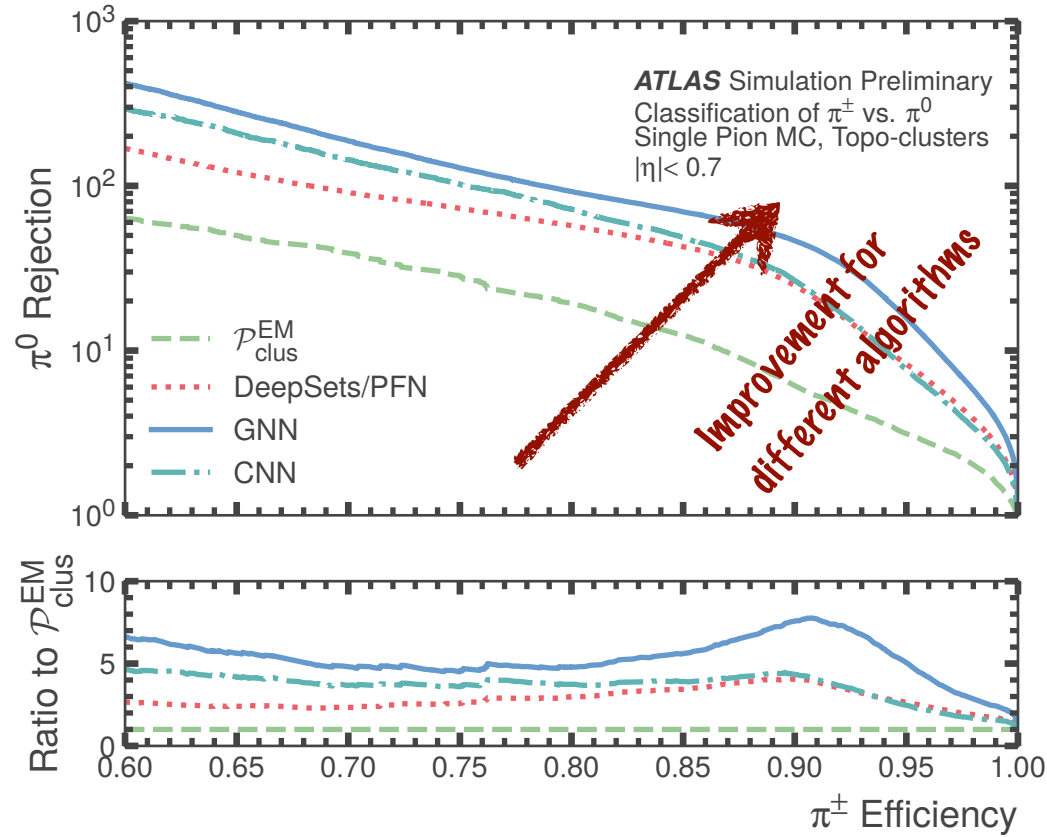


Electron identification within CMS

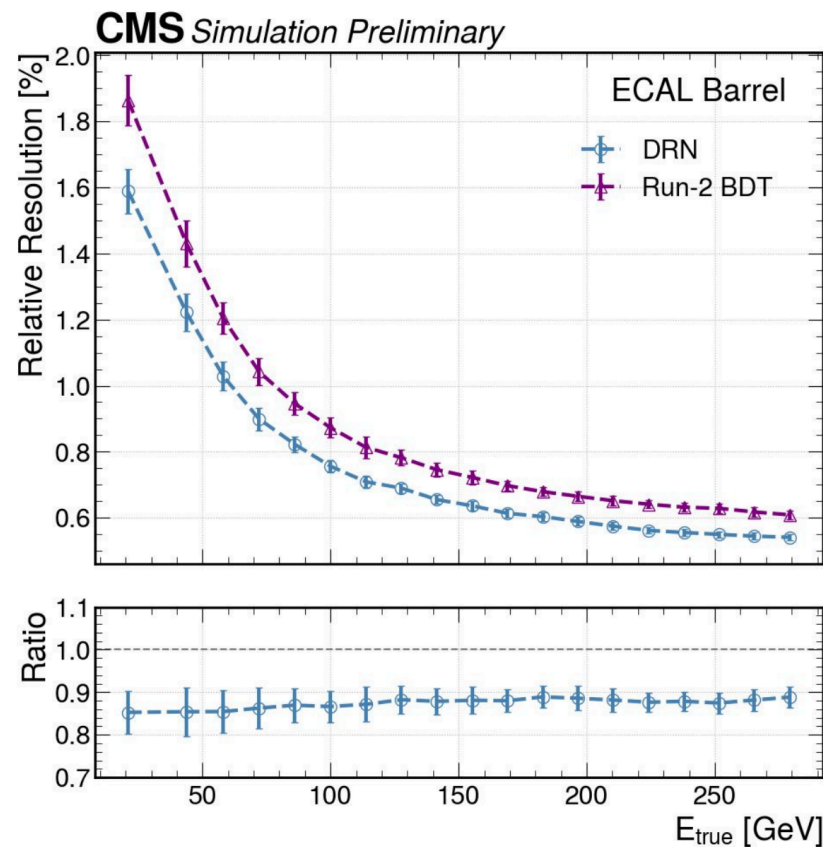
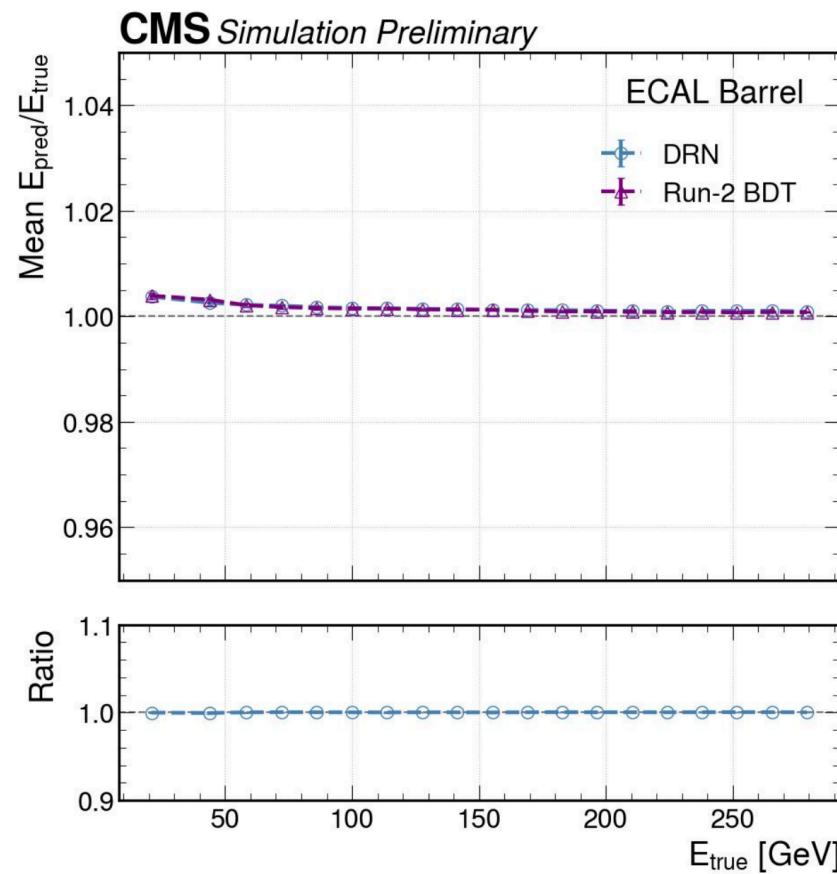


DRN is a dynamic GNN

CMS-DP2022_009

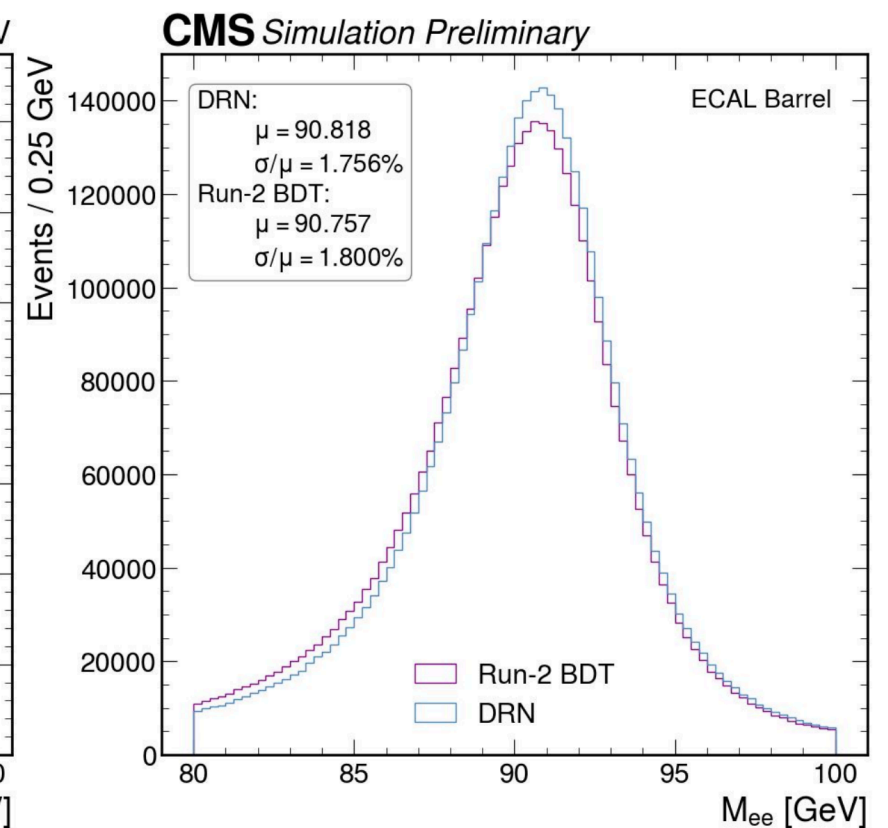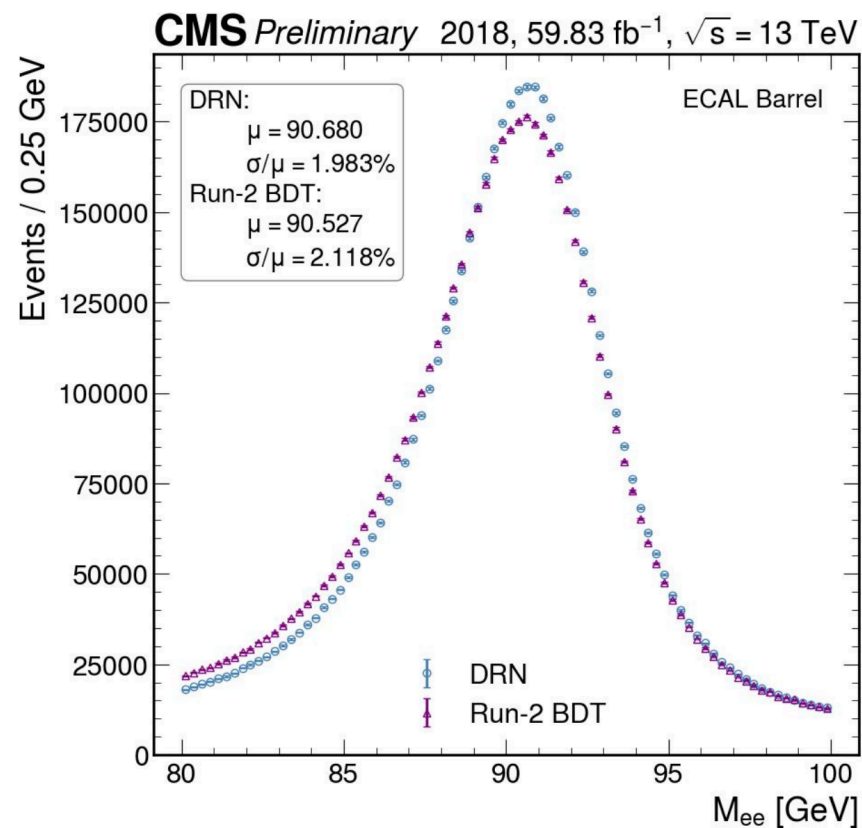



Electron identification within CMS

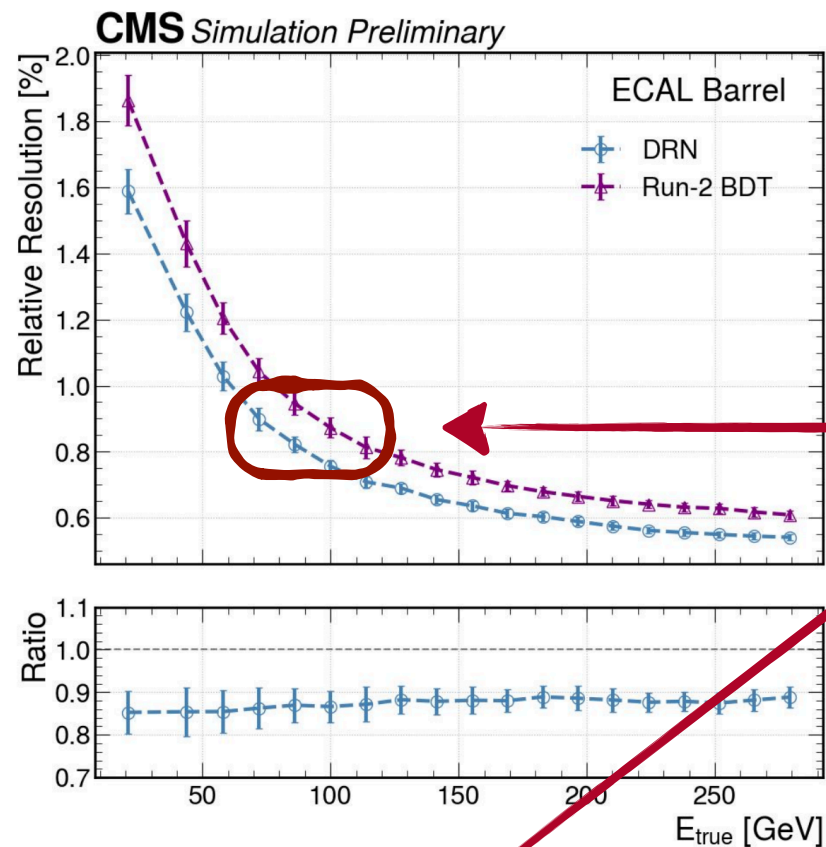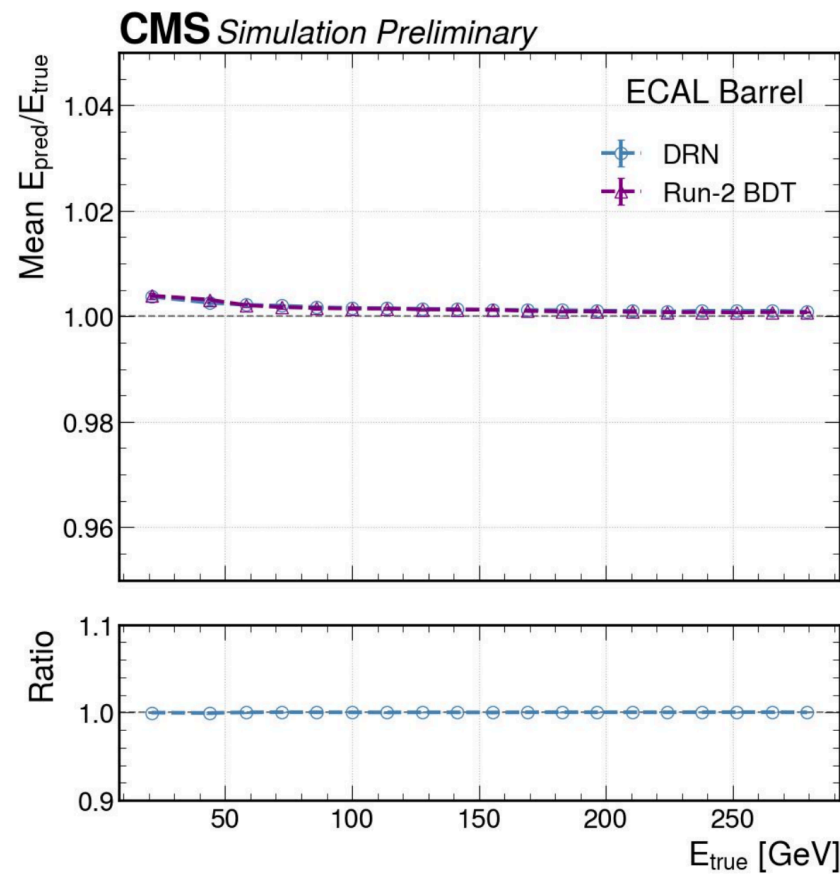

DRN is a dynamic GNN


Improvement from a modern ML algorithm

CMS-DP2022_009

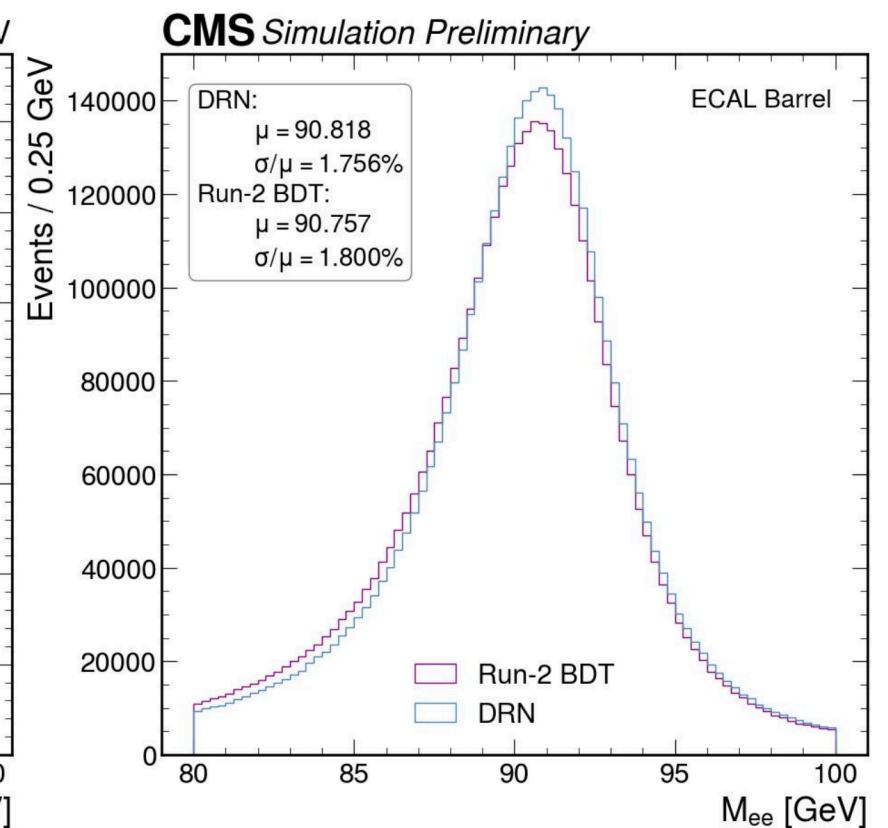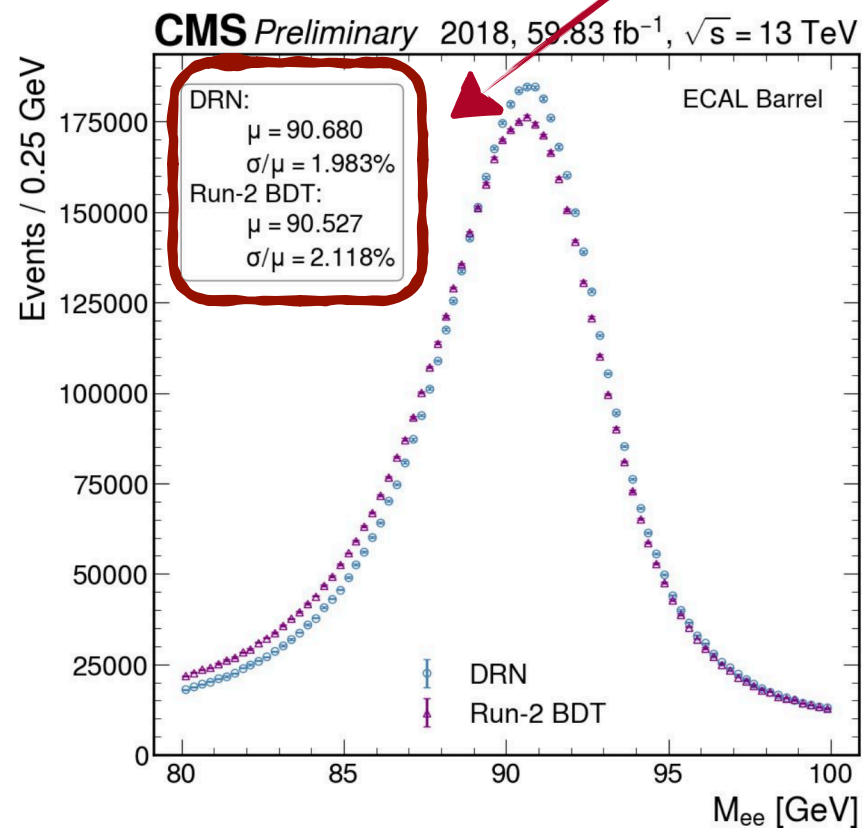


Tracking

$f_{\{\theta\}}$ (


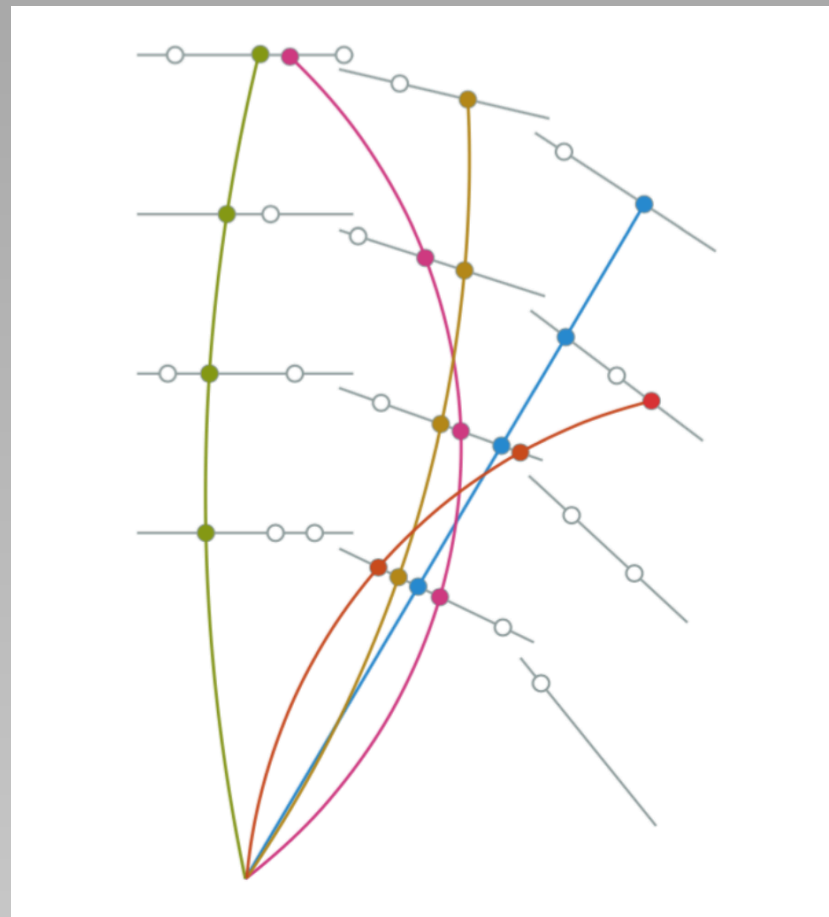


)




Tracking & ML

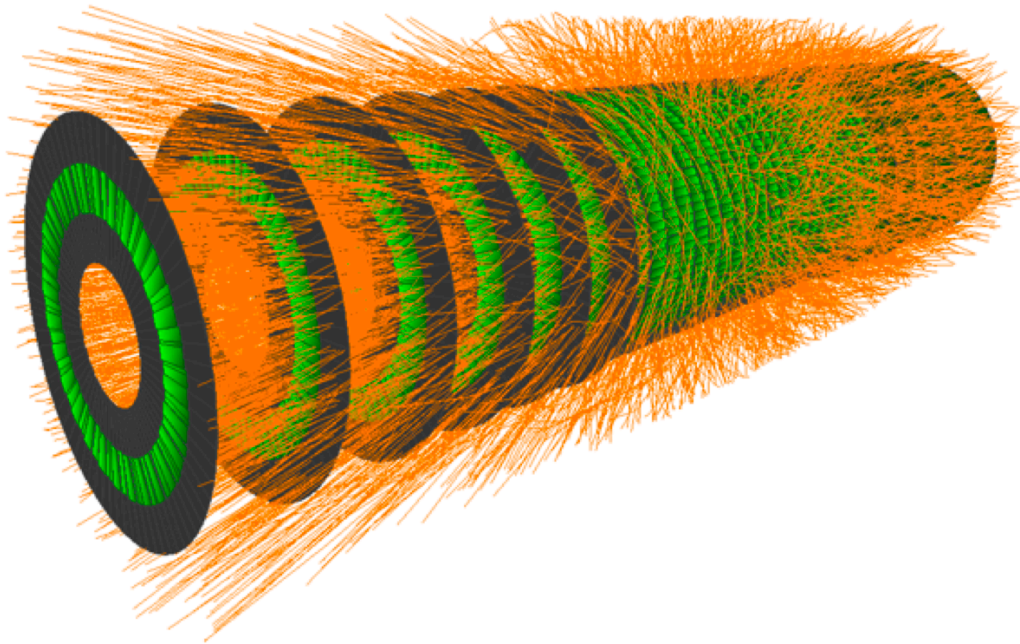

An exponentially large edge finding problem



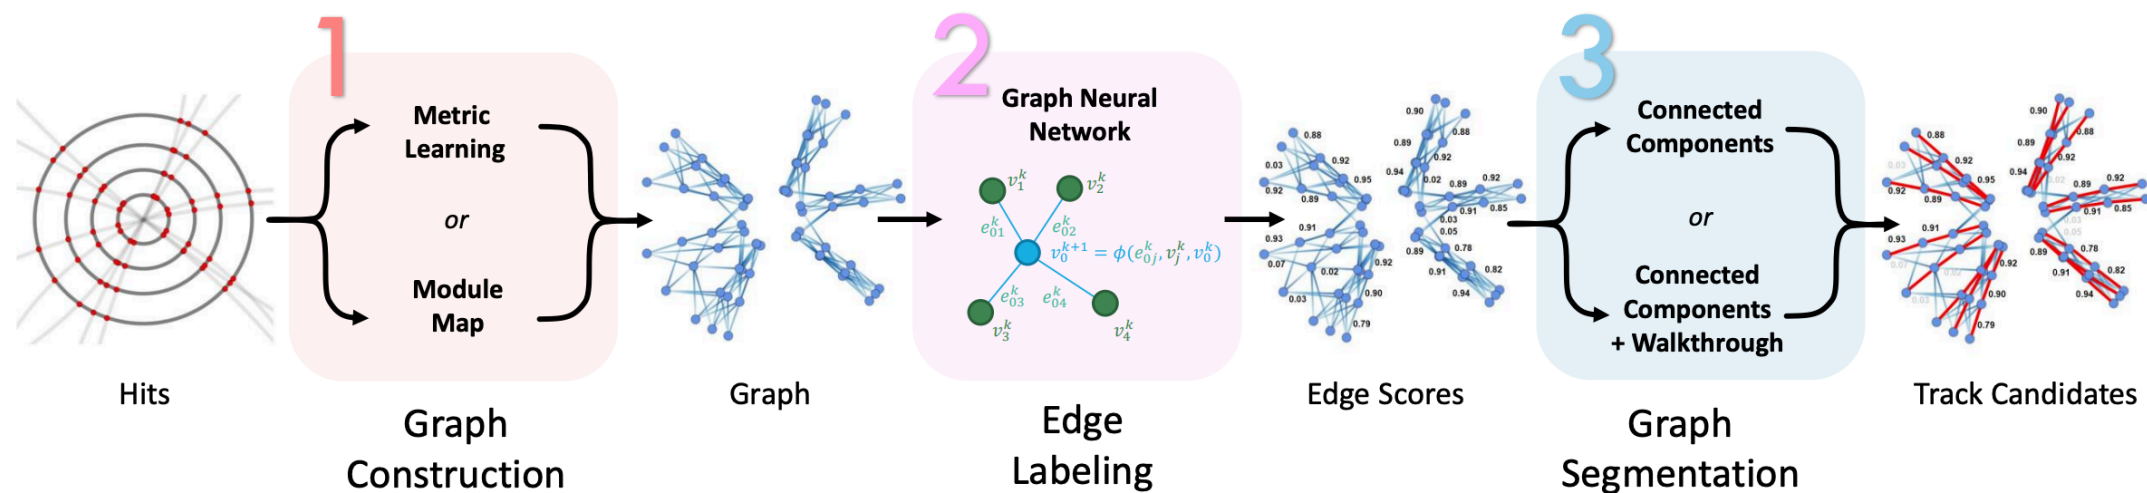
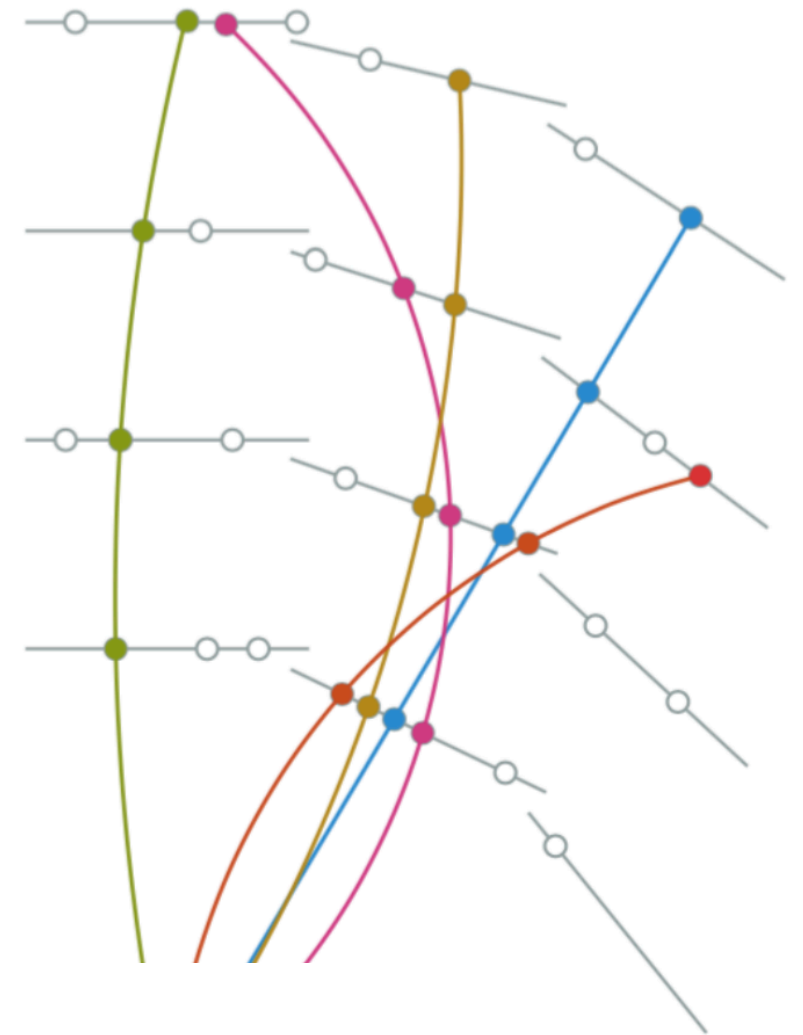


Tracking & ML

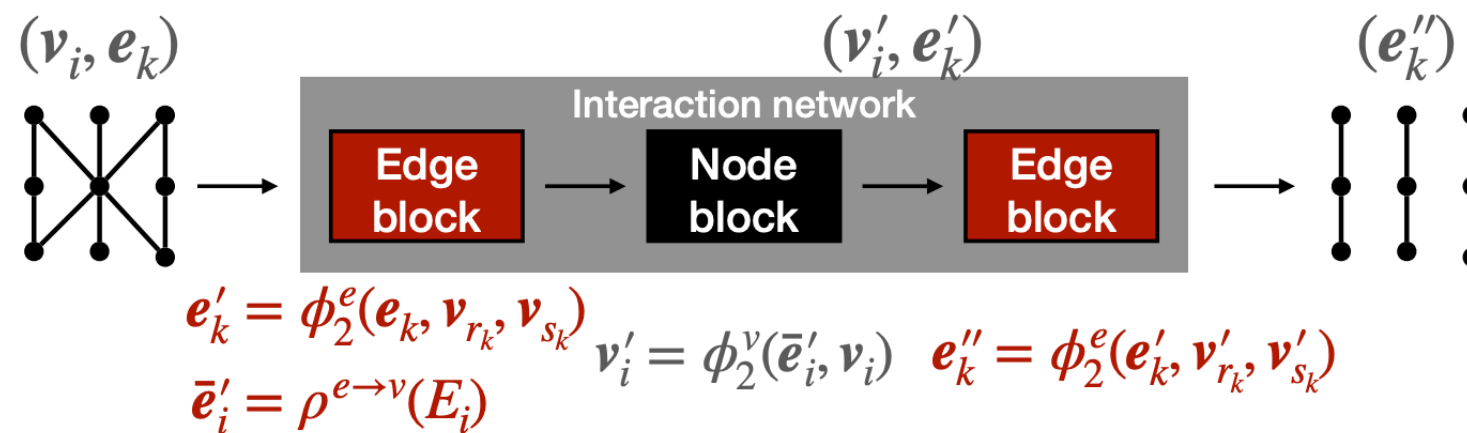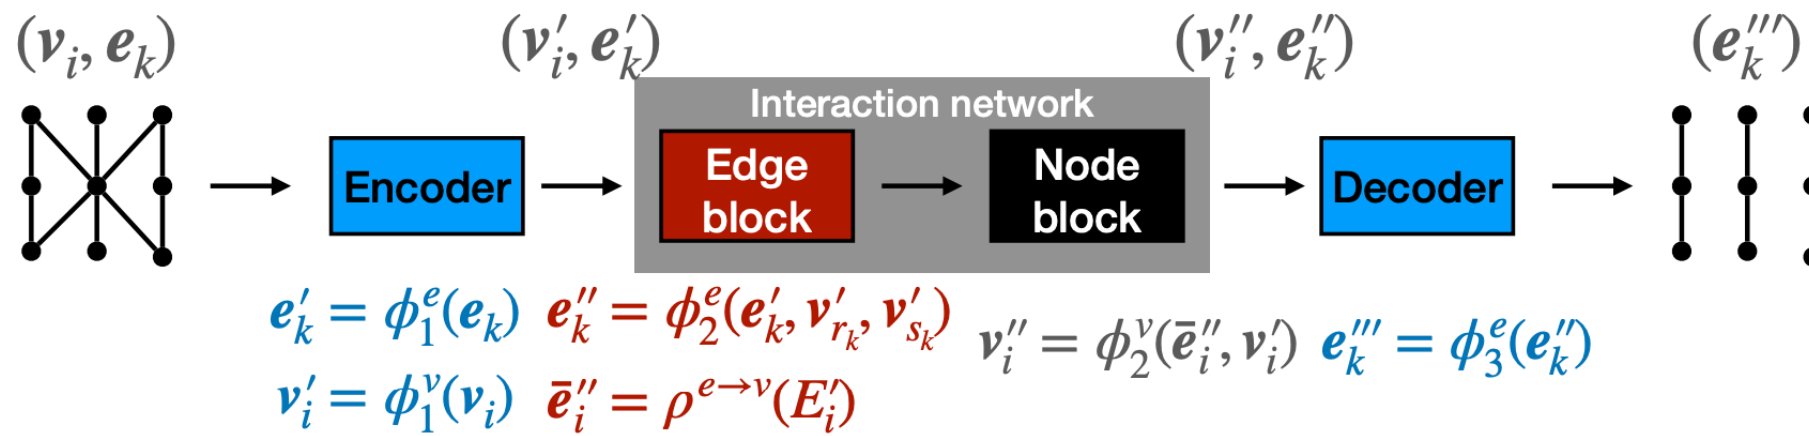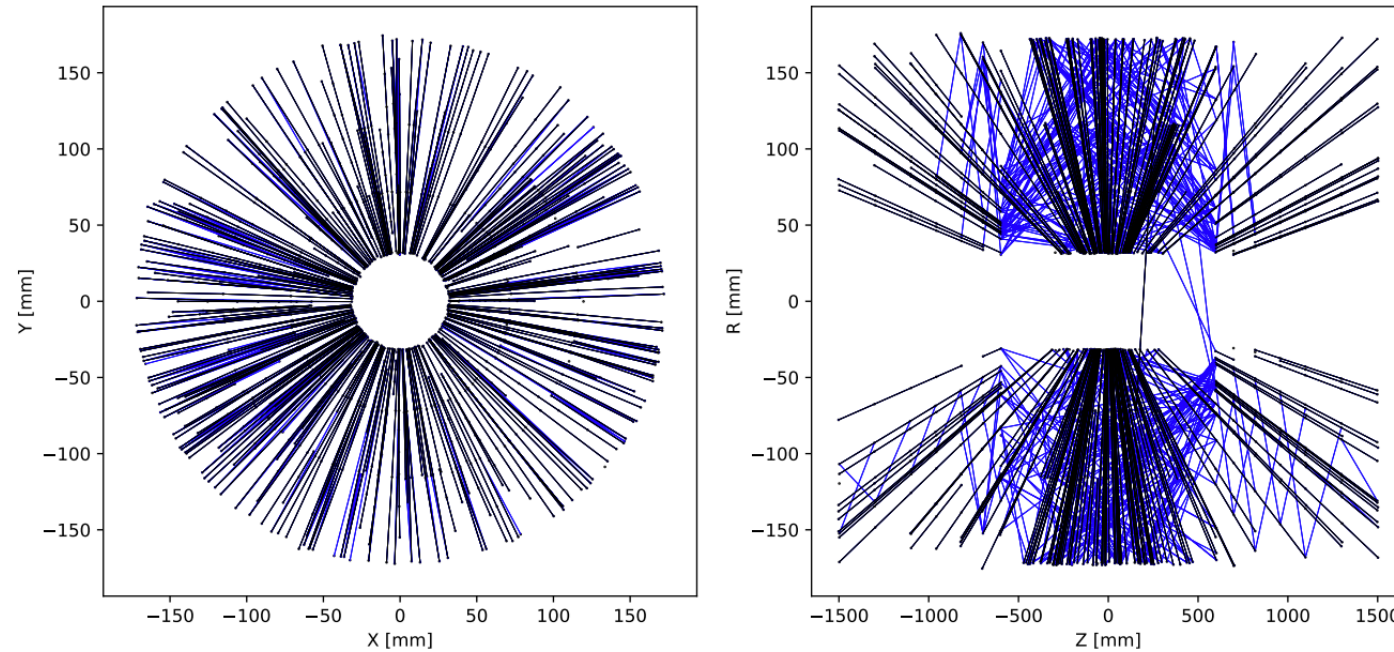





Tracking & ML : ATLAS

ATL-ITK-PROC-2022-006

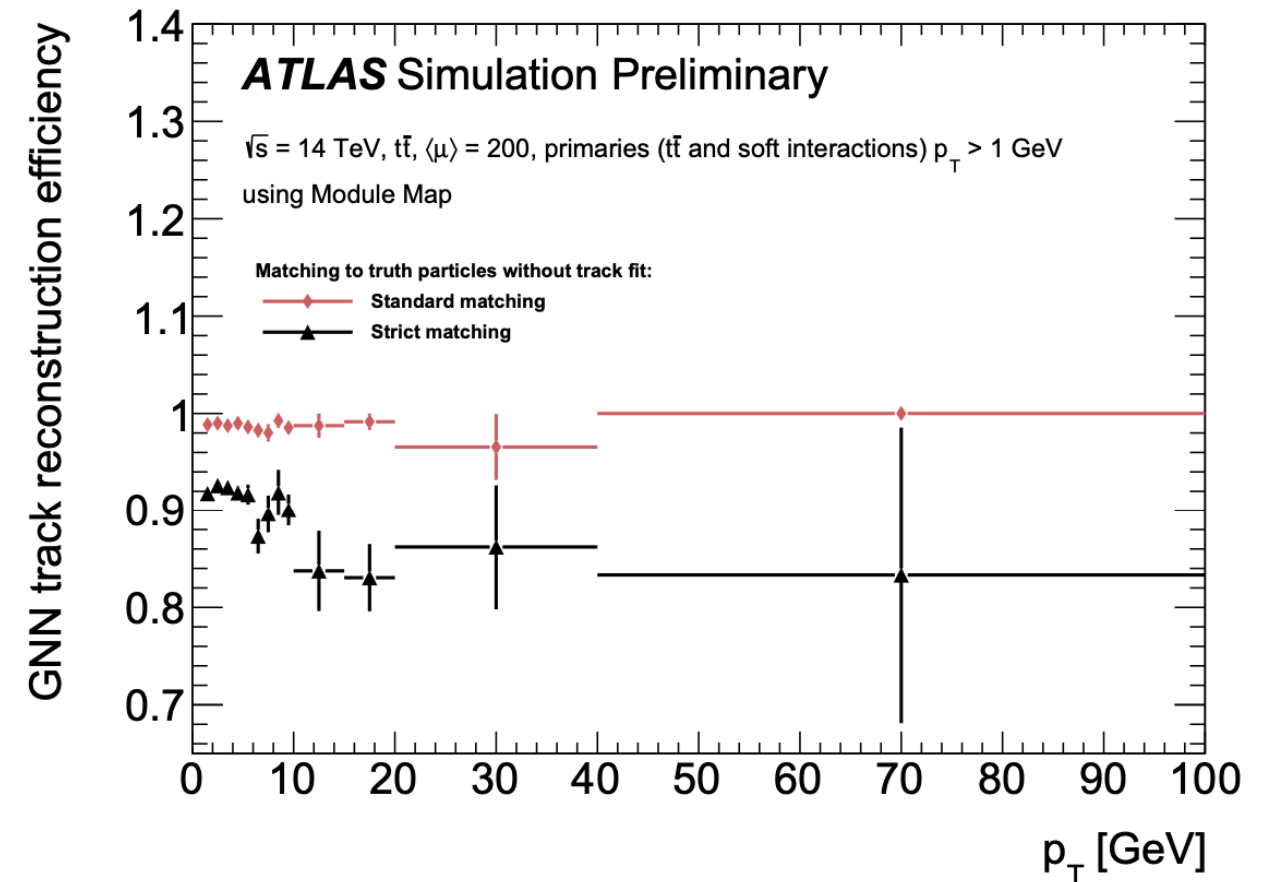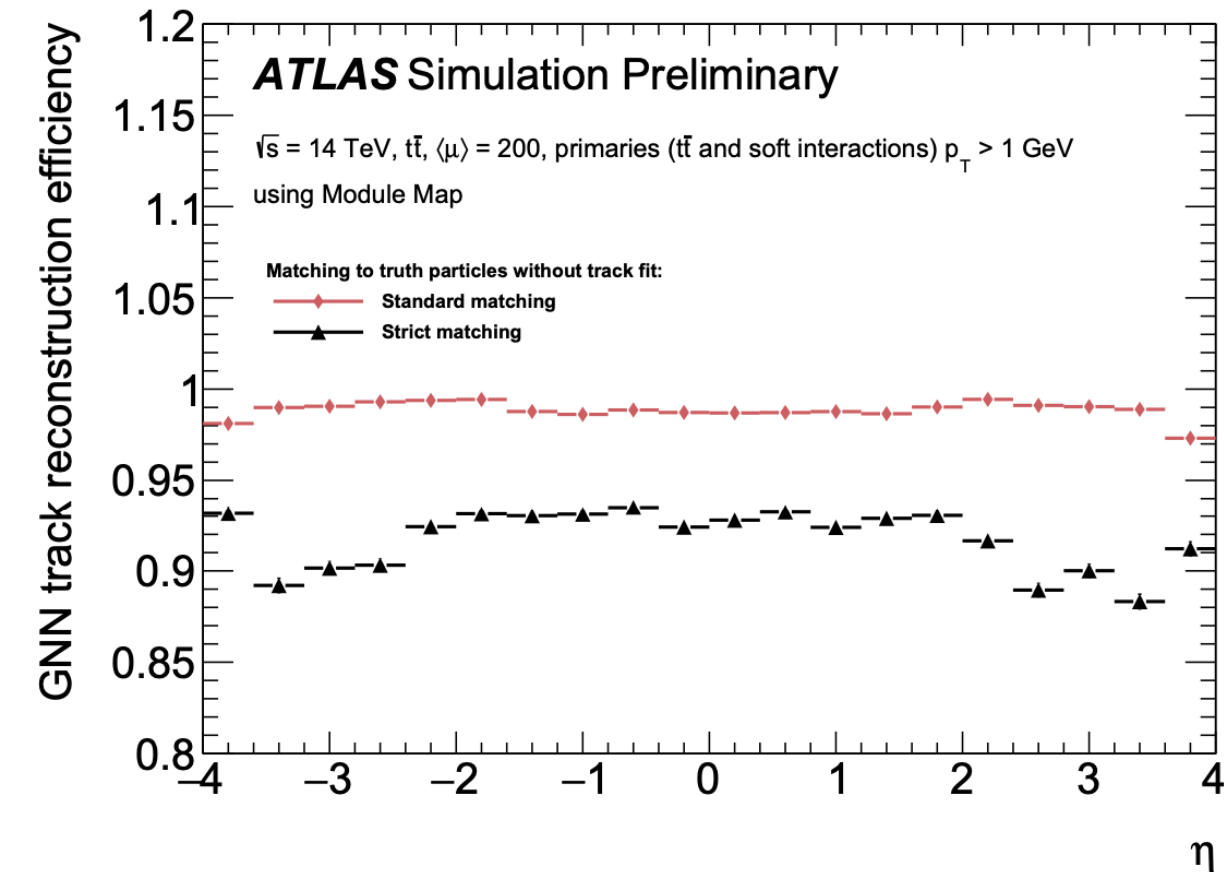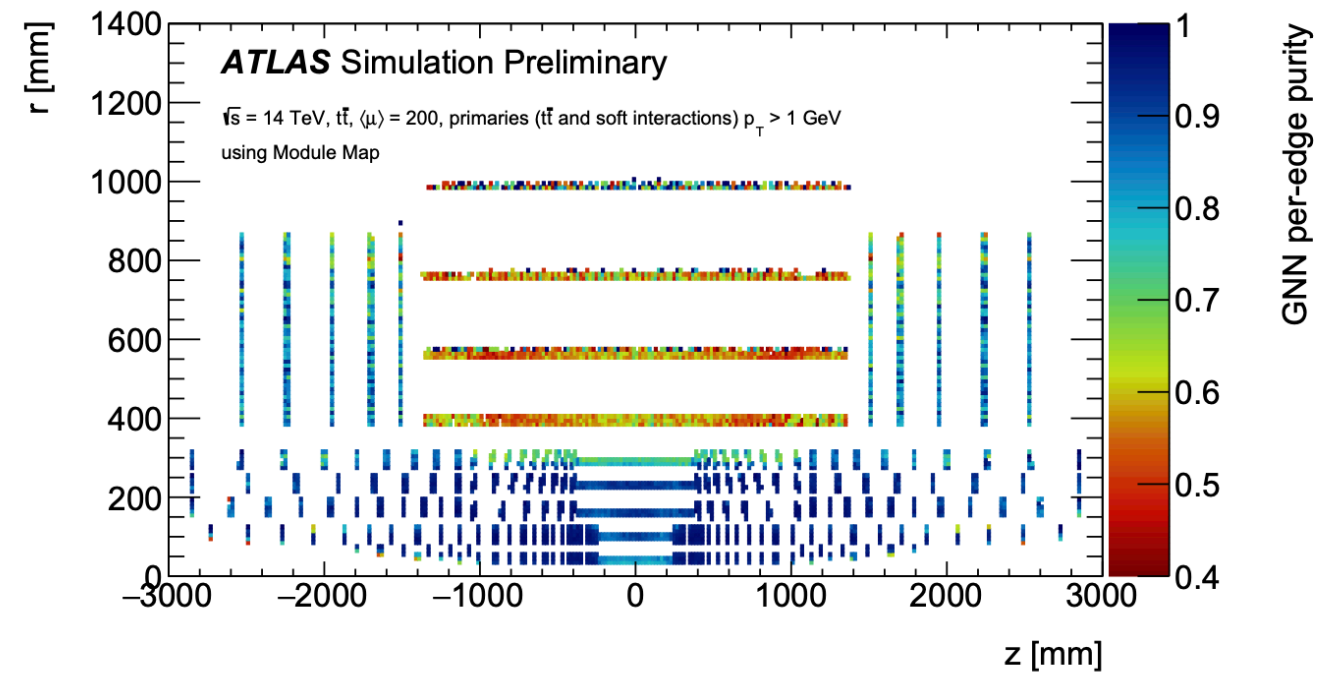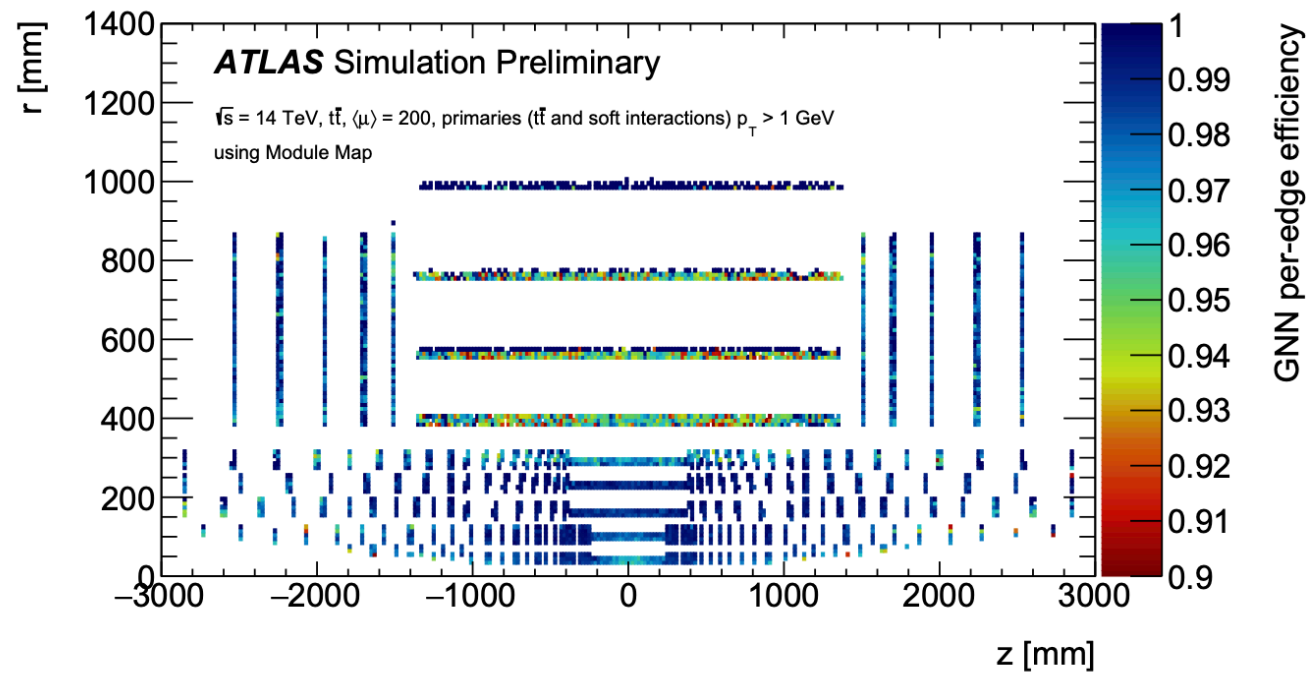


Tracking & ML : CMS


<https://twiki.cern.ch/twiki/bin/view/CMSPublic/TrackingPOGRun3DeepCoreV2>

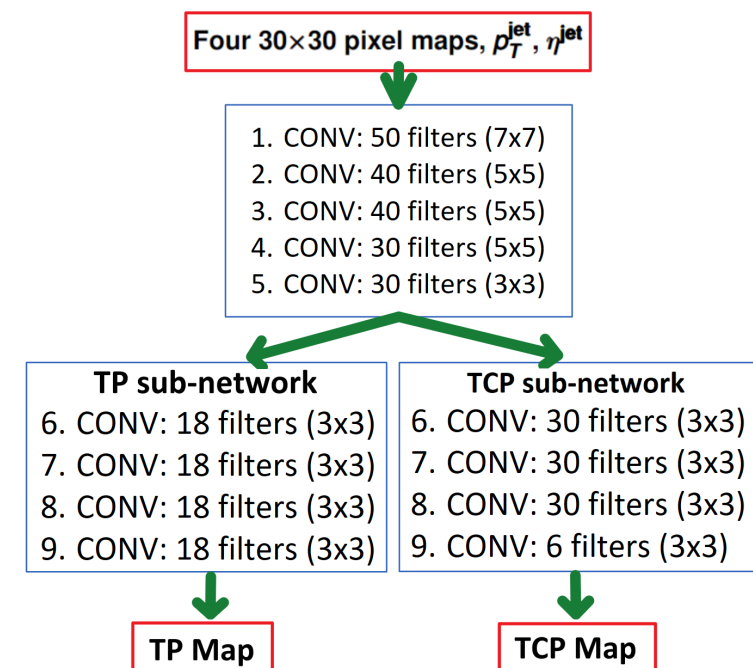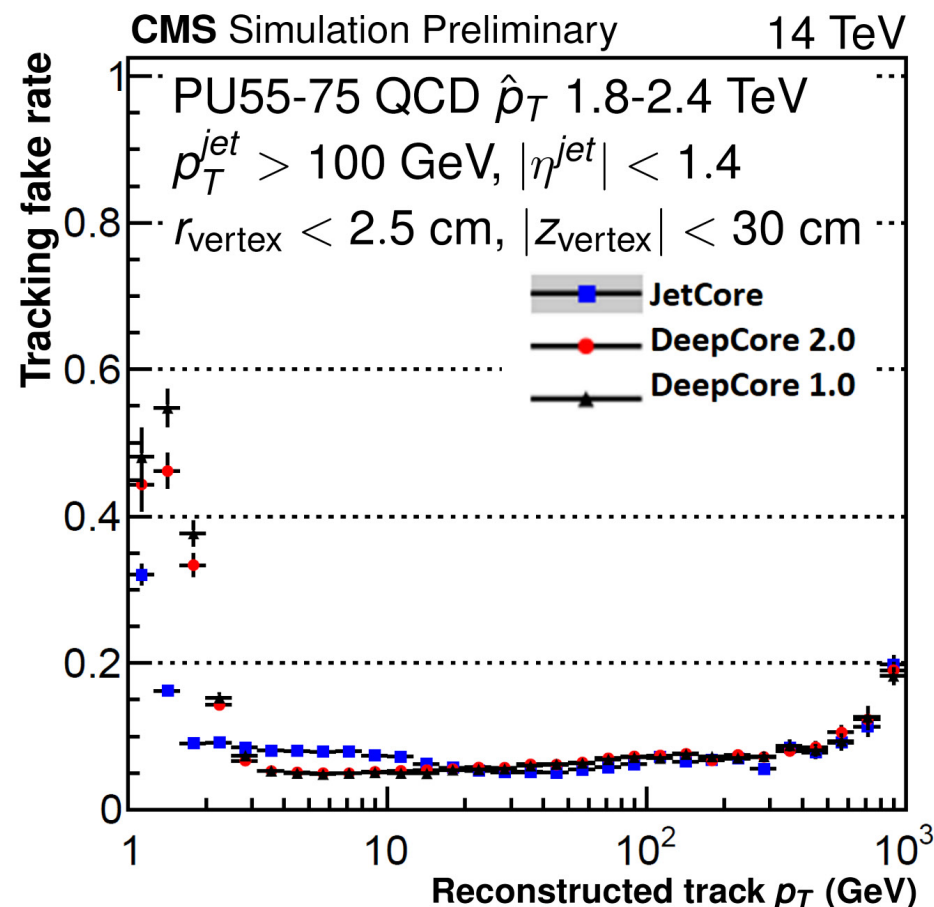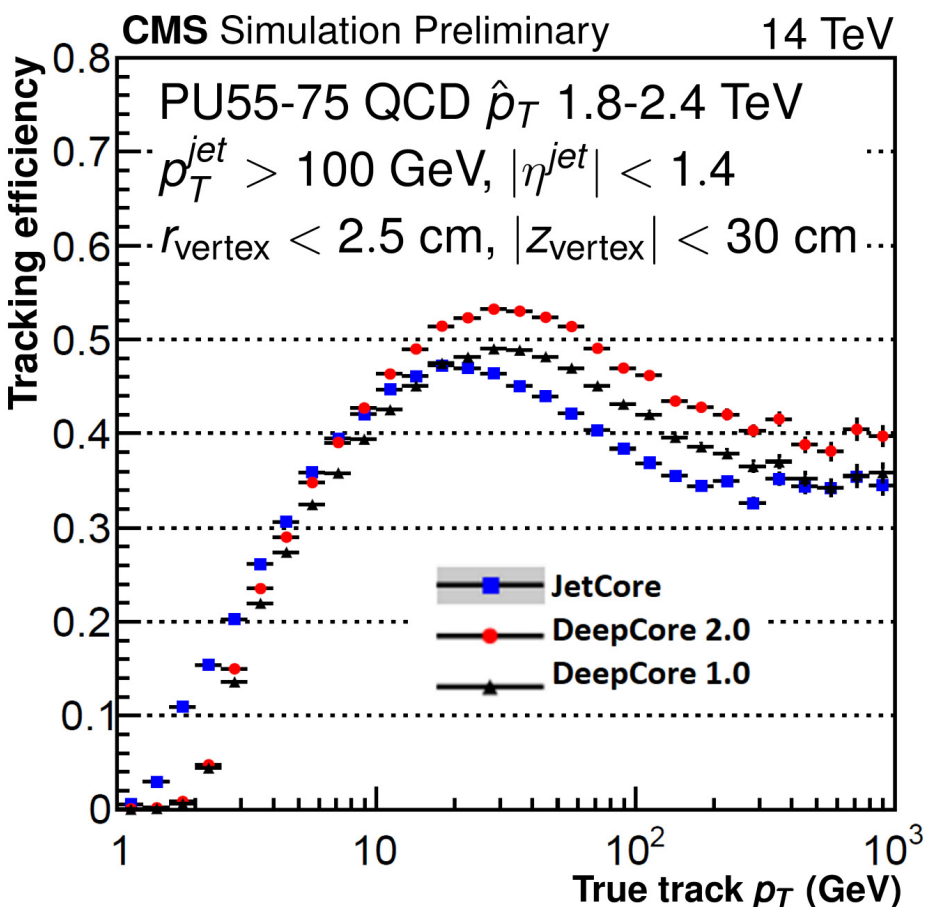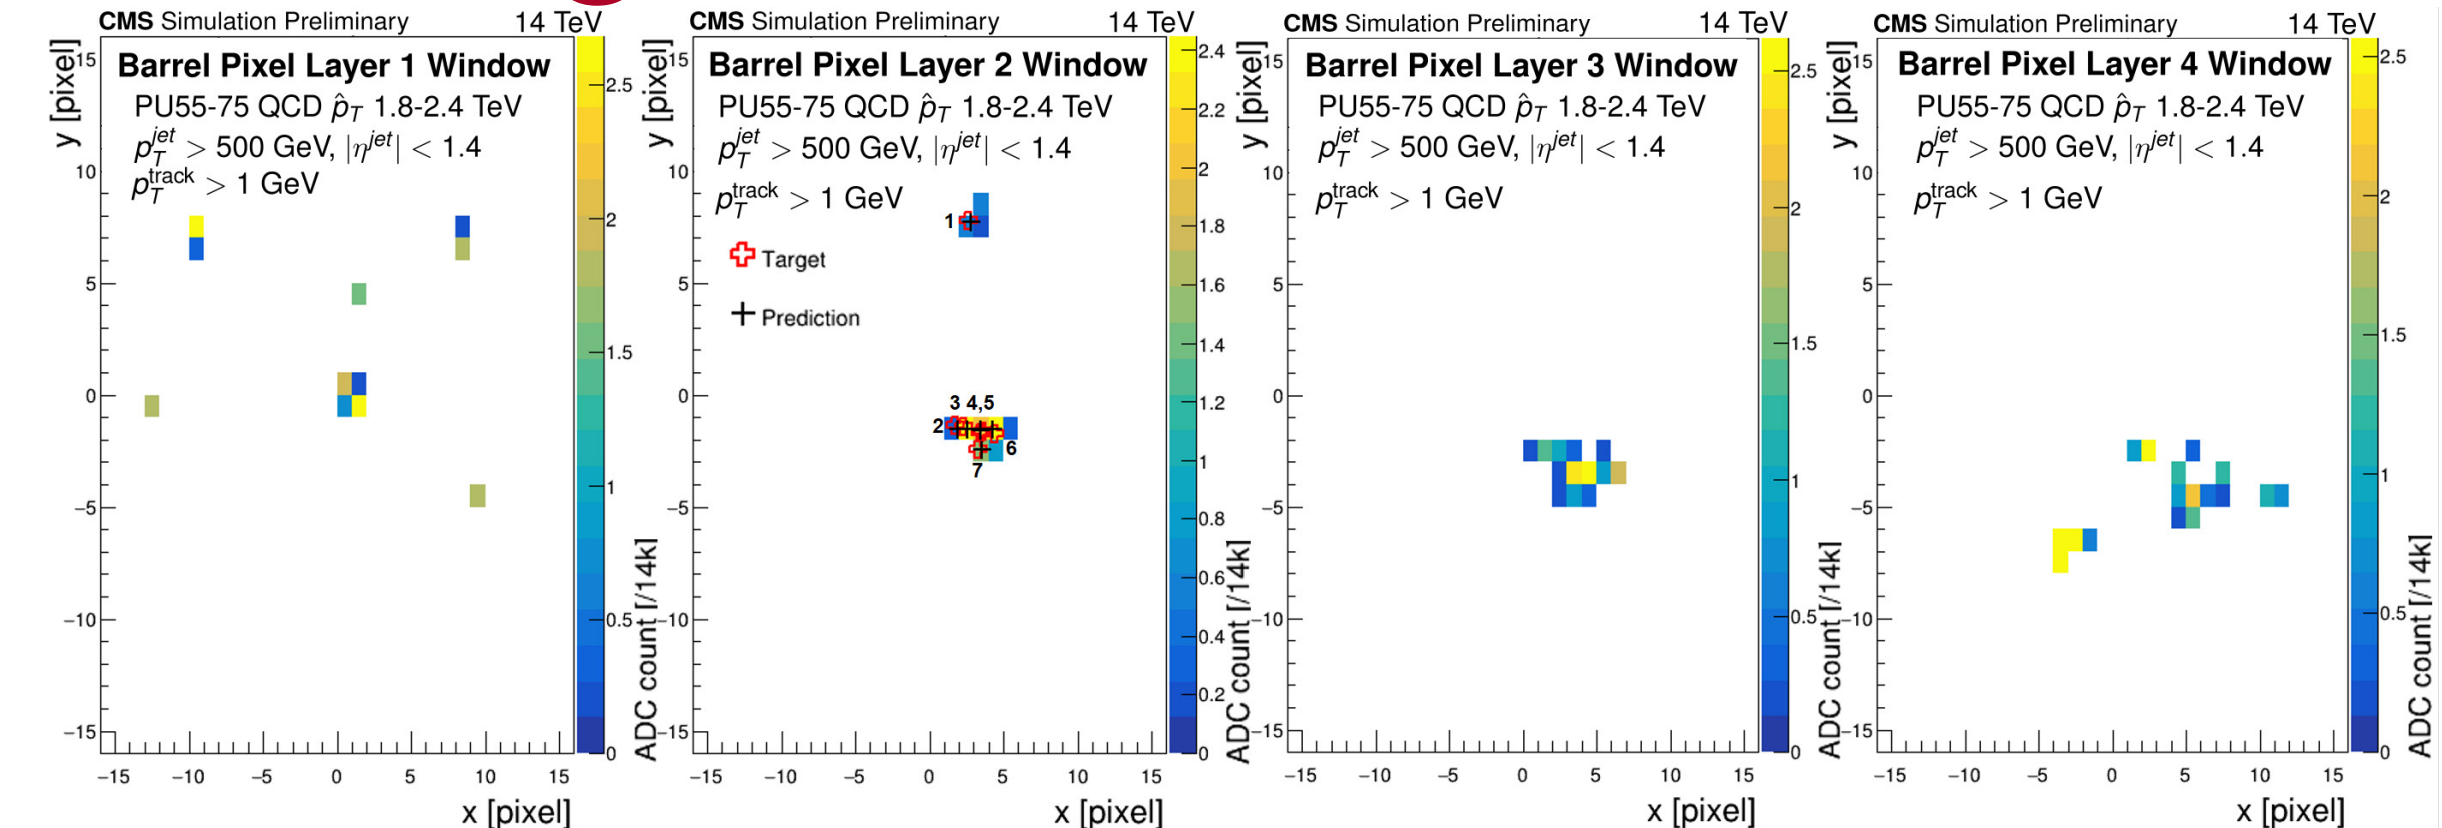

Particle-Flow event reconstruction


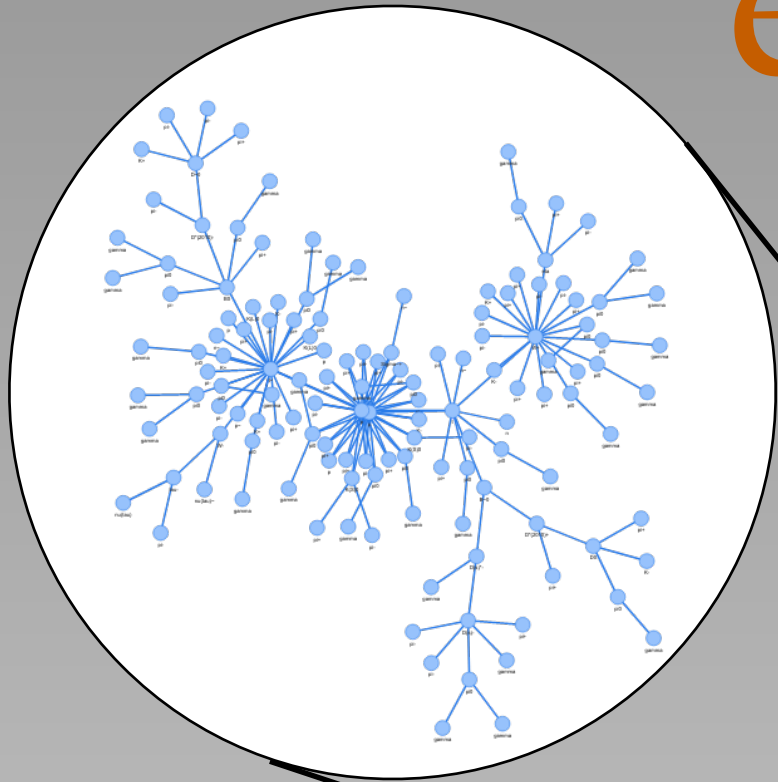


$f_{\{\theta\}}$ (

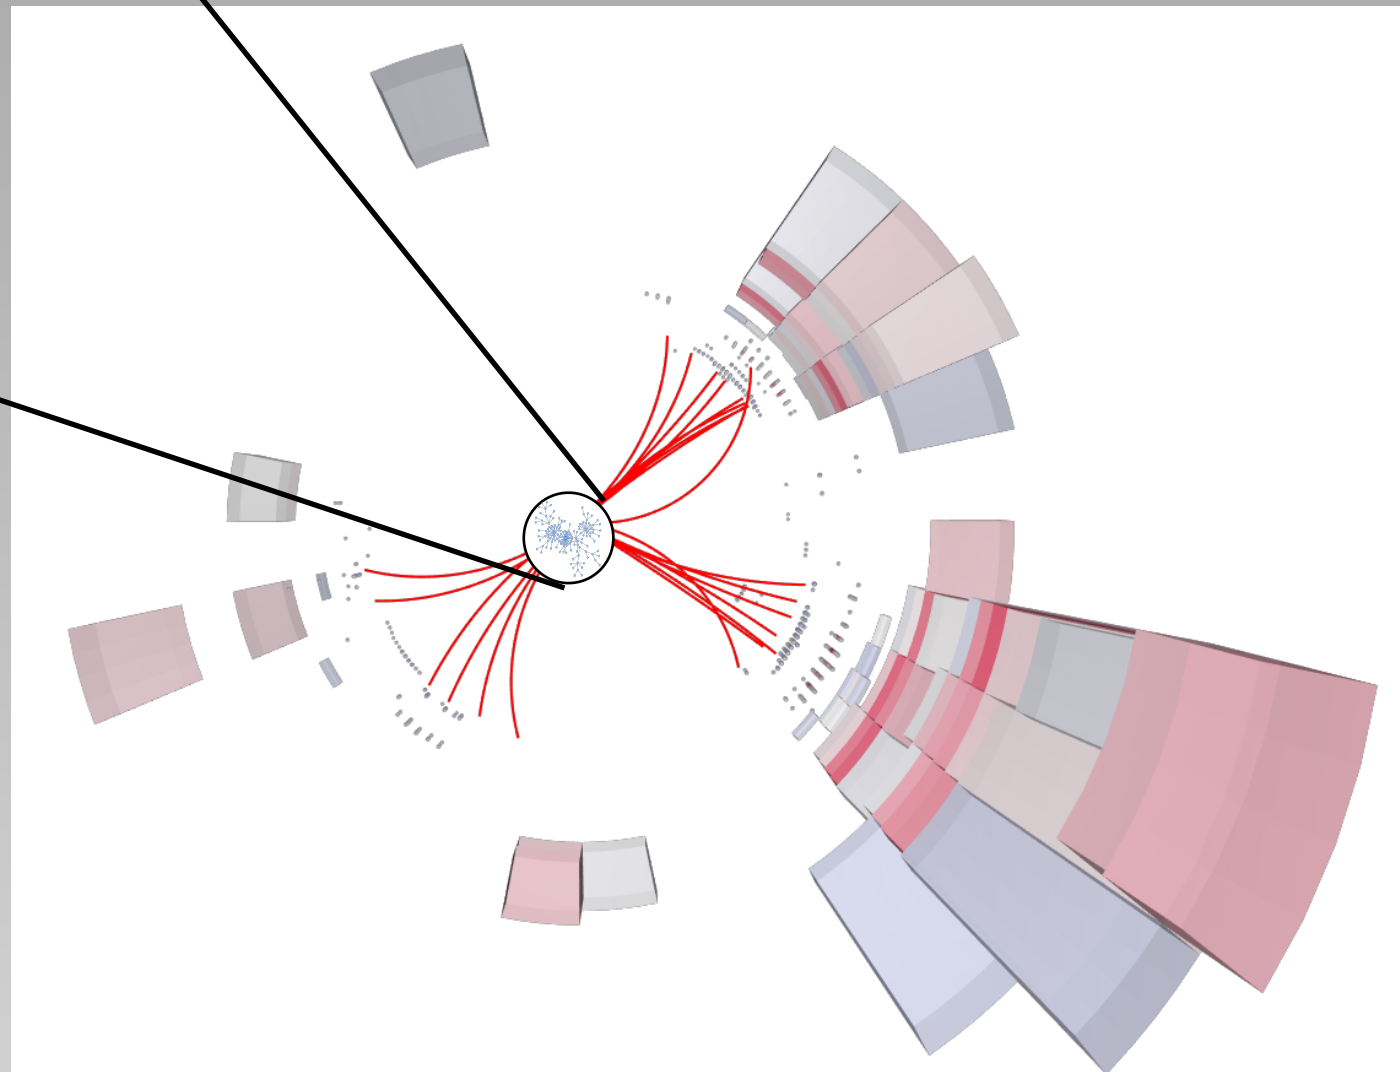

)



Full ML driven PFlow : MLPF

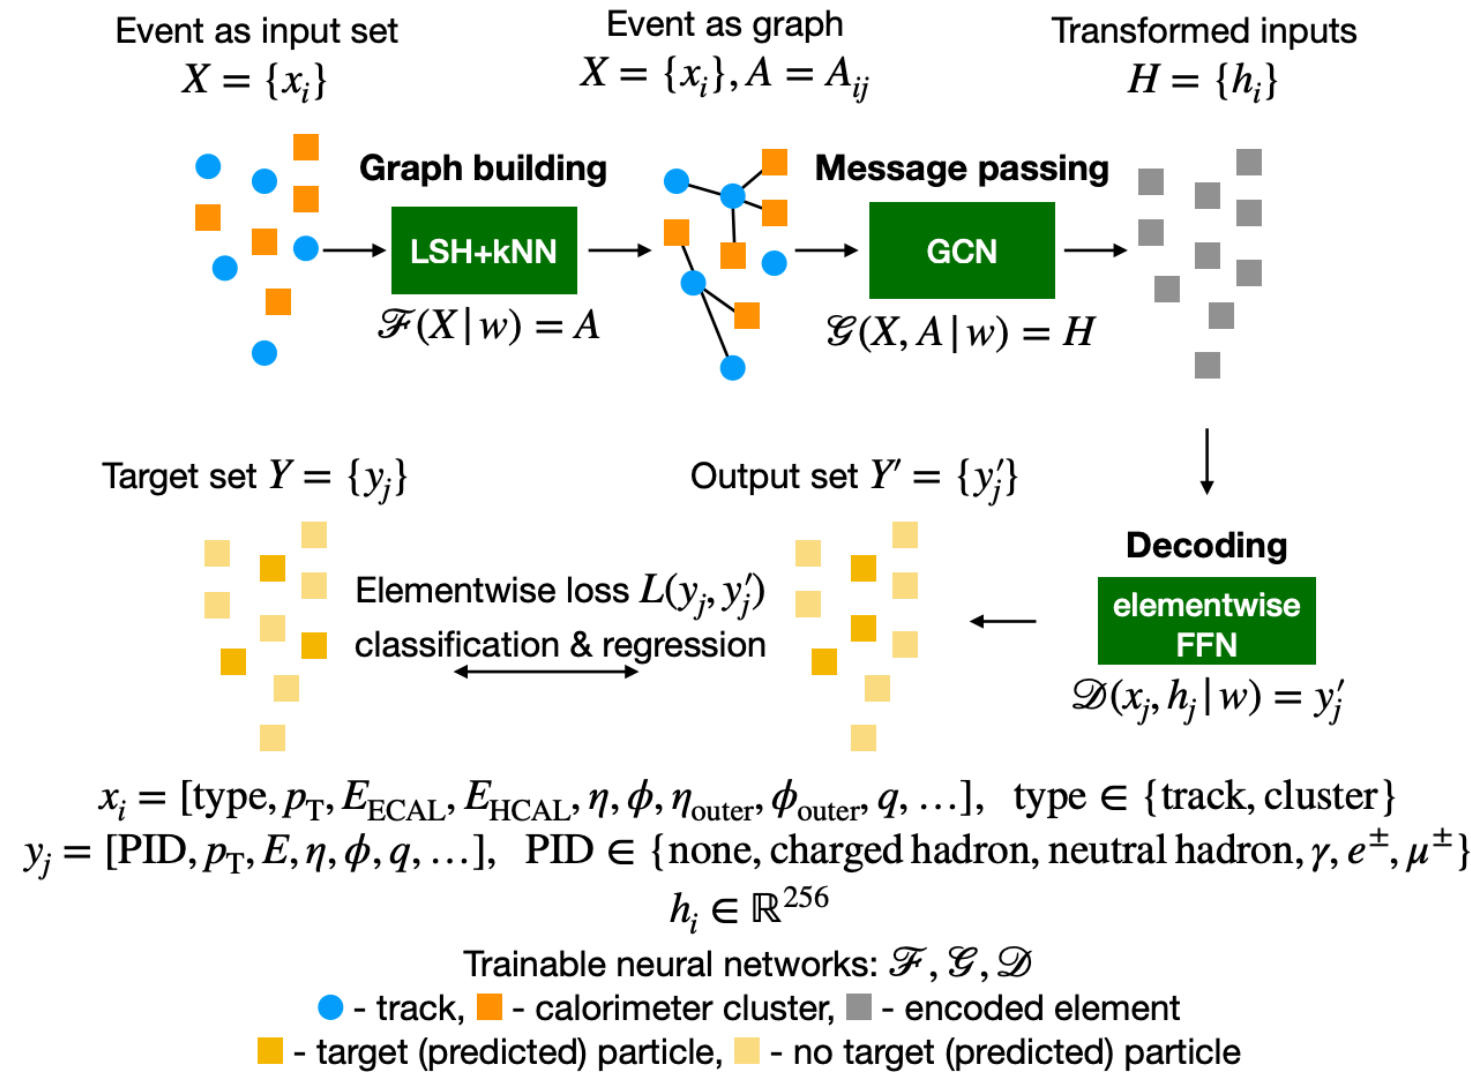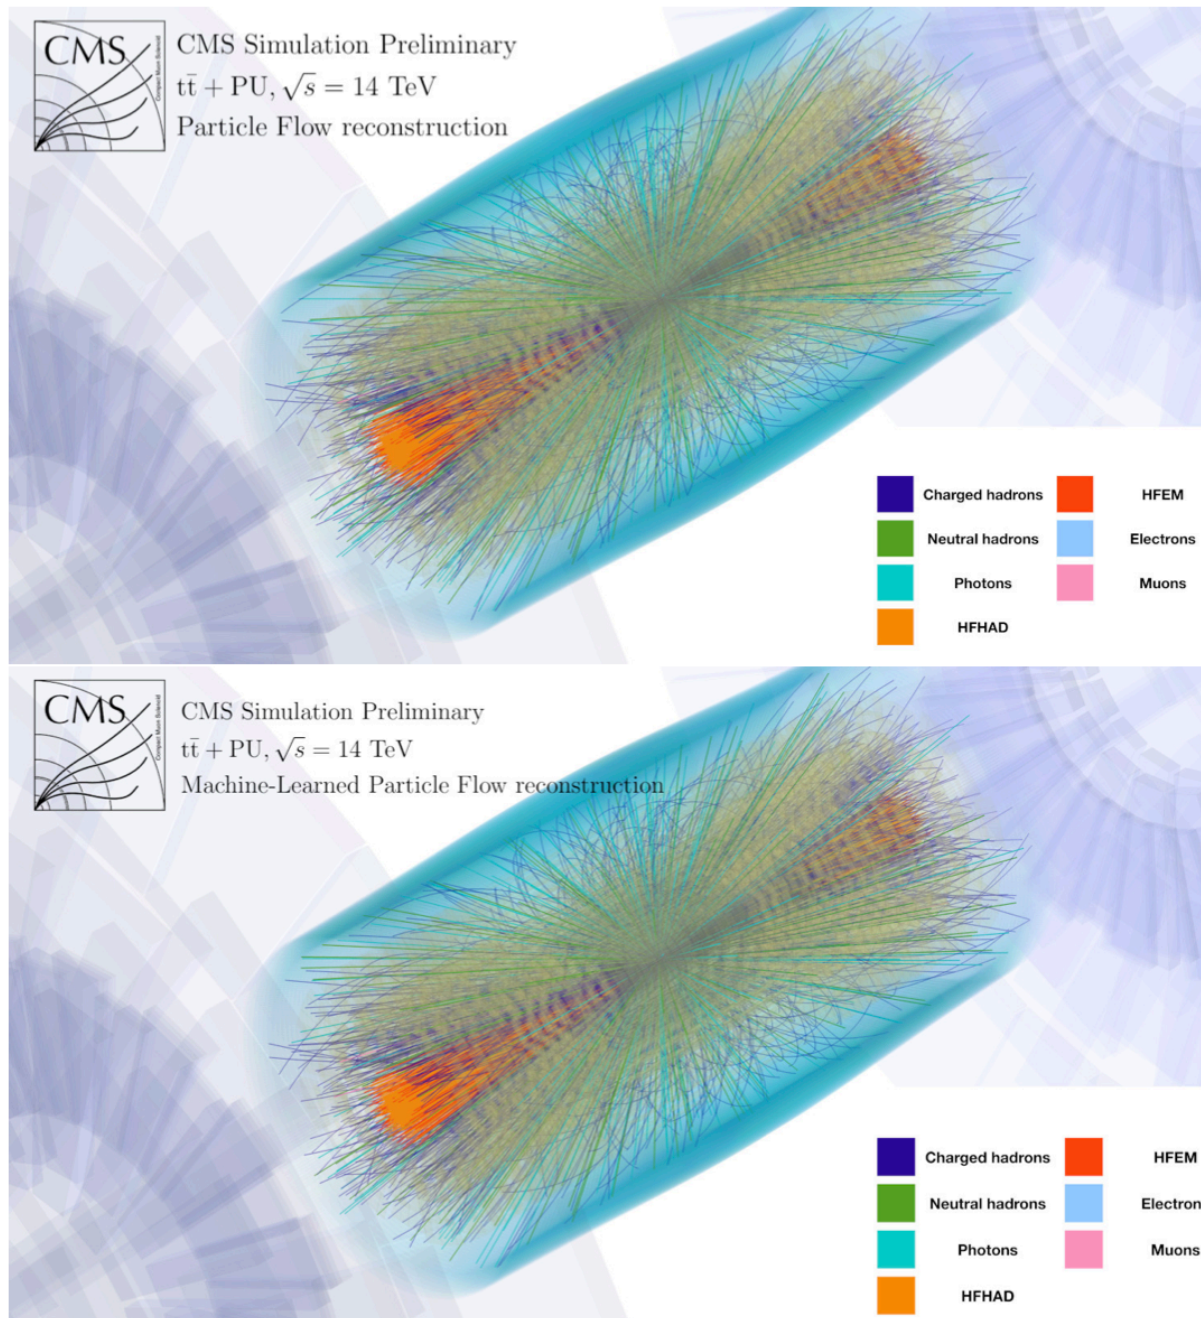







MLPF
Eur. Phys. J. C (2021) 81: 381
 J. Pata et. al.

PF lepton, hadron, photon = F_{PF} (track hits + calo cells)


Combining track + calo for PFlow

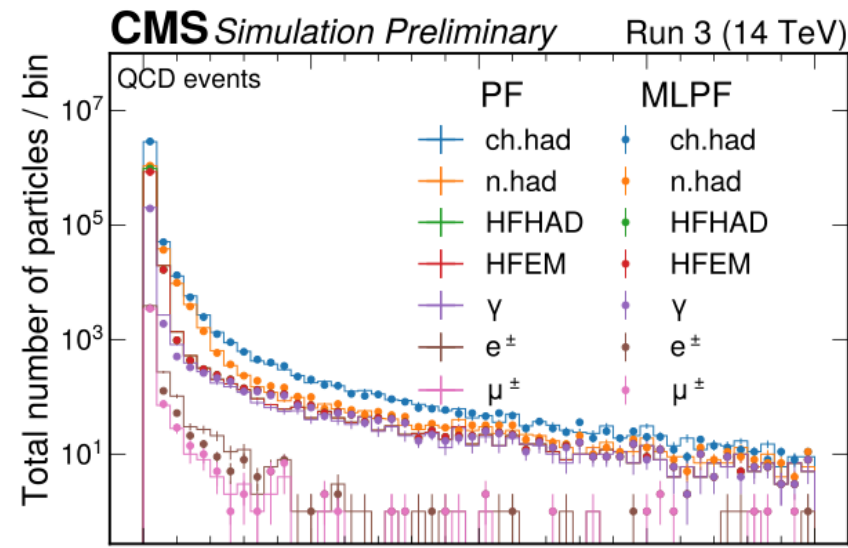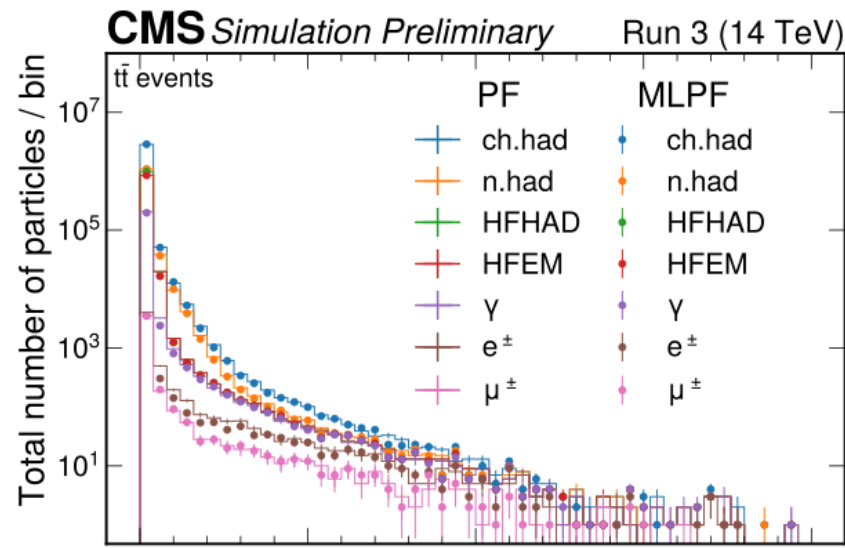

MLPF
arXiv : 2203.00330
J. Pata et. al.

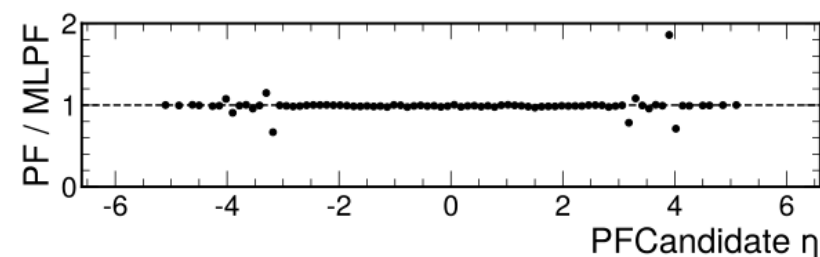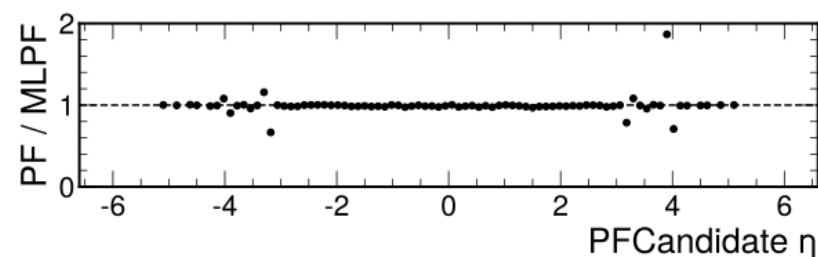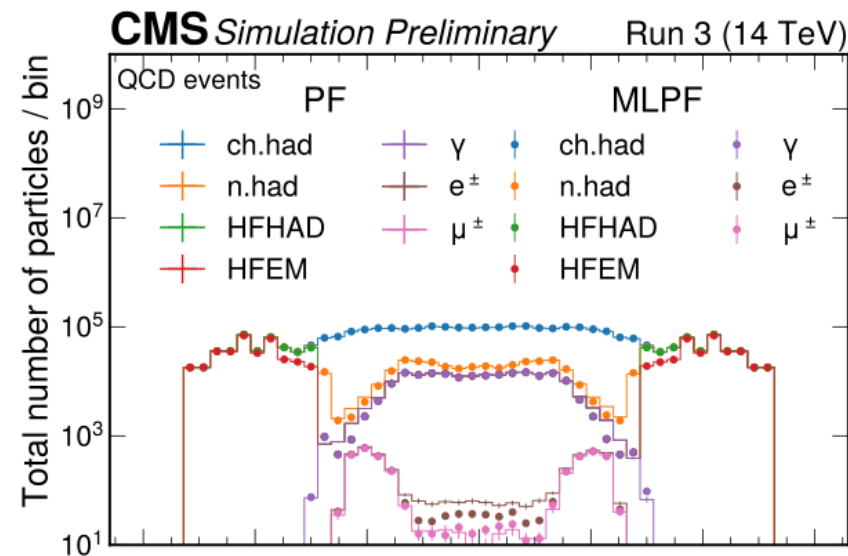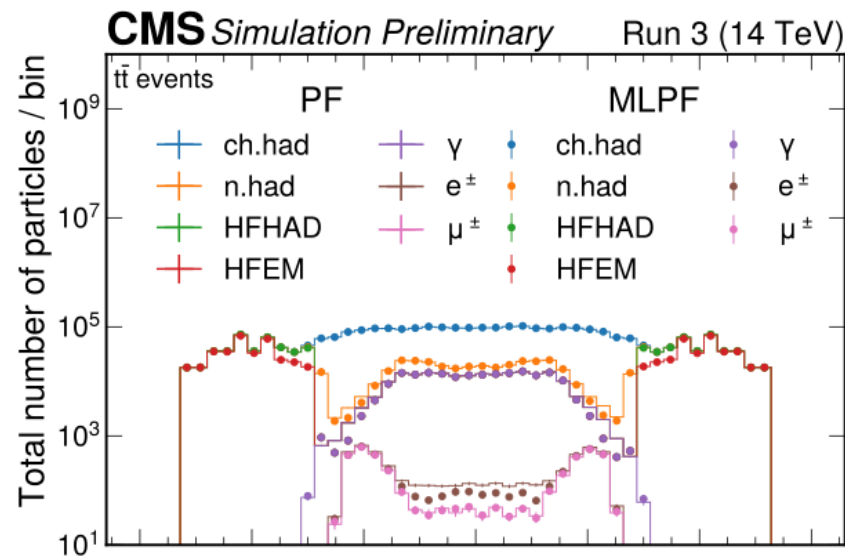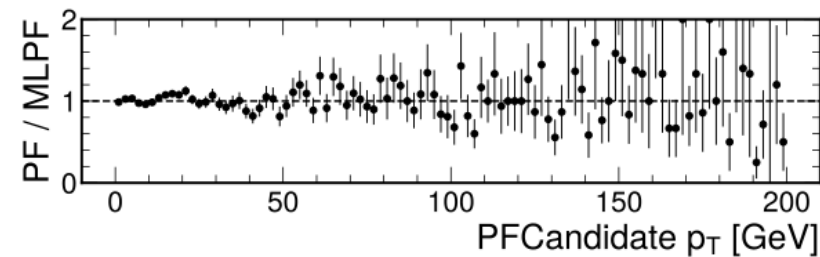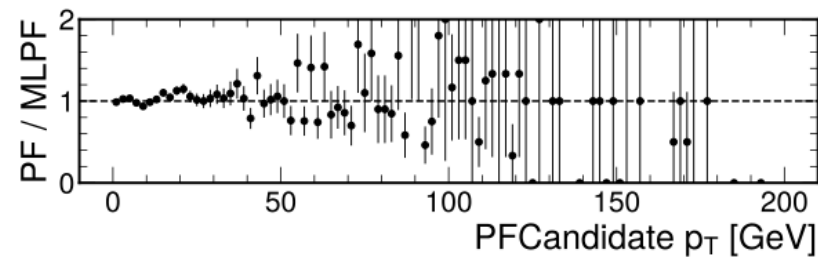

What's the core data structure?

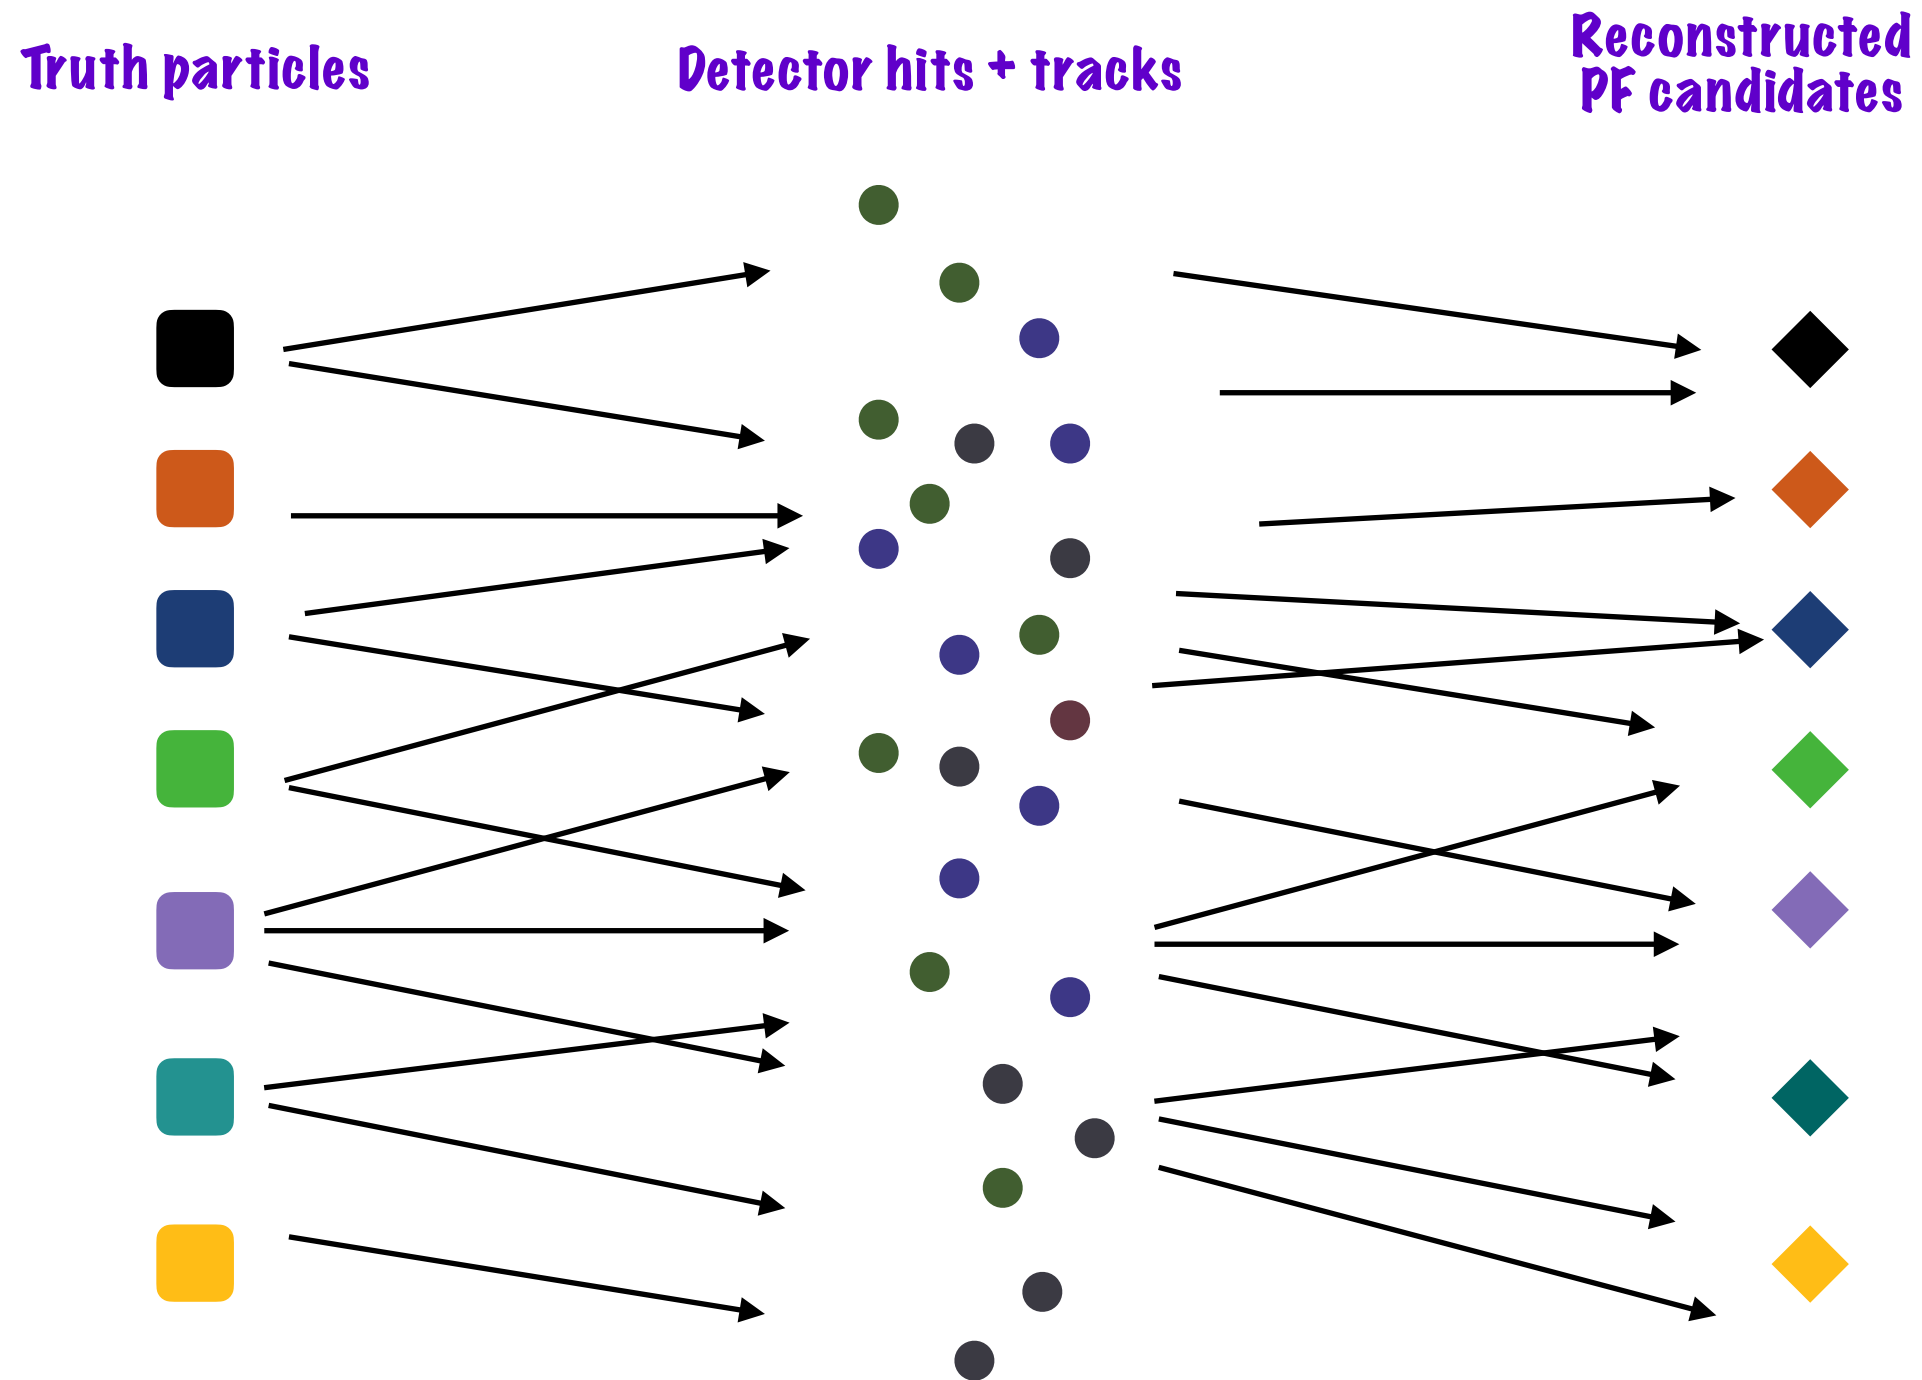


What's the core data structure?

Nodes
(Tracks, topoclusters)


Truth particles

Pflow particles

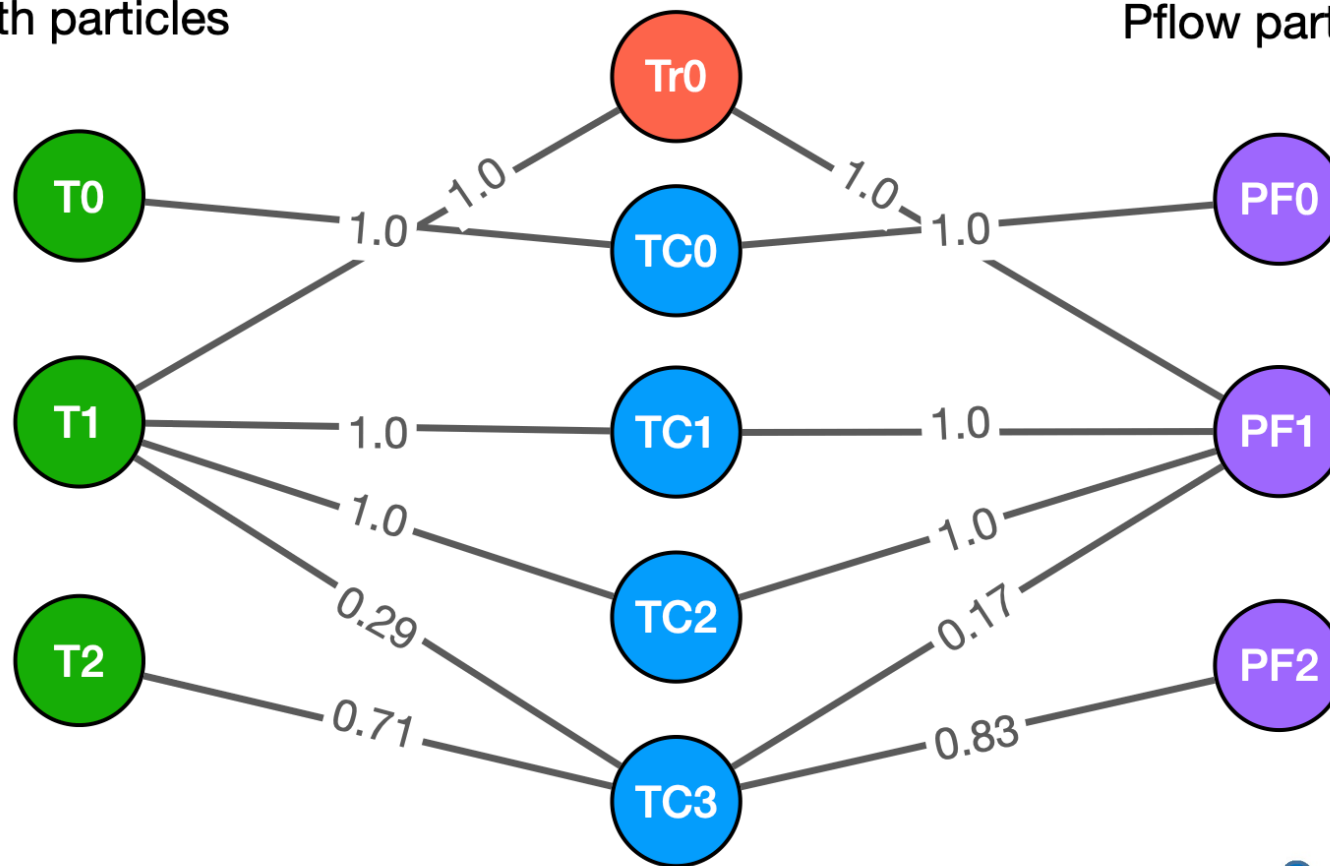


<https://www.mdpi.com/2072-4292/9/5/506>

Learning Flow is essentially learning the incidence matrix of a Hypergraph.

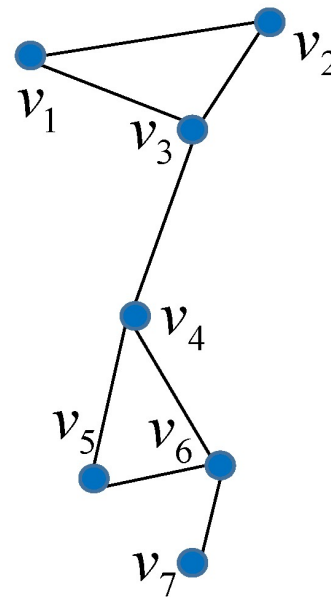

(a) Simple graph

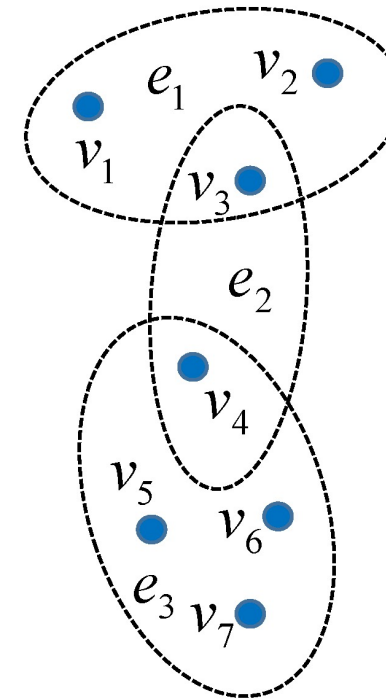

(b) Hypergraph G



	e_1	e_2	e_3
v_1	1	0	0
v_2	1	0	0
v_3	1	1	0
v_4	0	1	1
v_5	0	0	1
v_6	0	0	1
v_7	0	0	1

(c) Incidence matrix H


The new networks we tried

Eur. Phys. J. C (2023) 83:596

SG et al

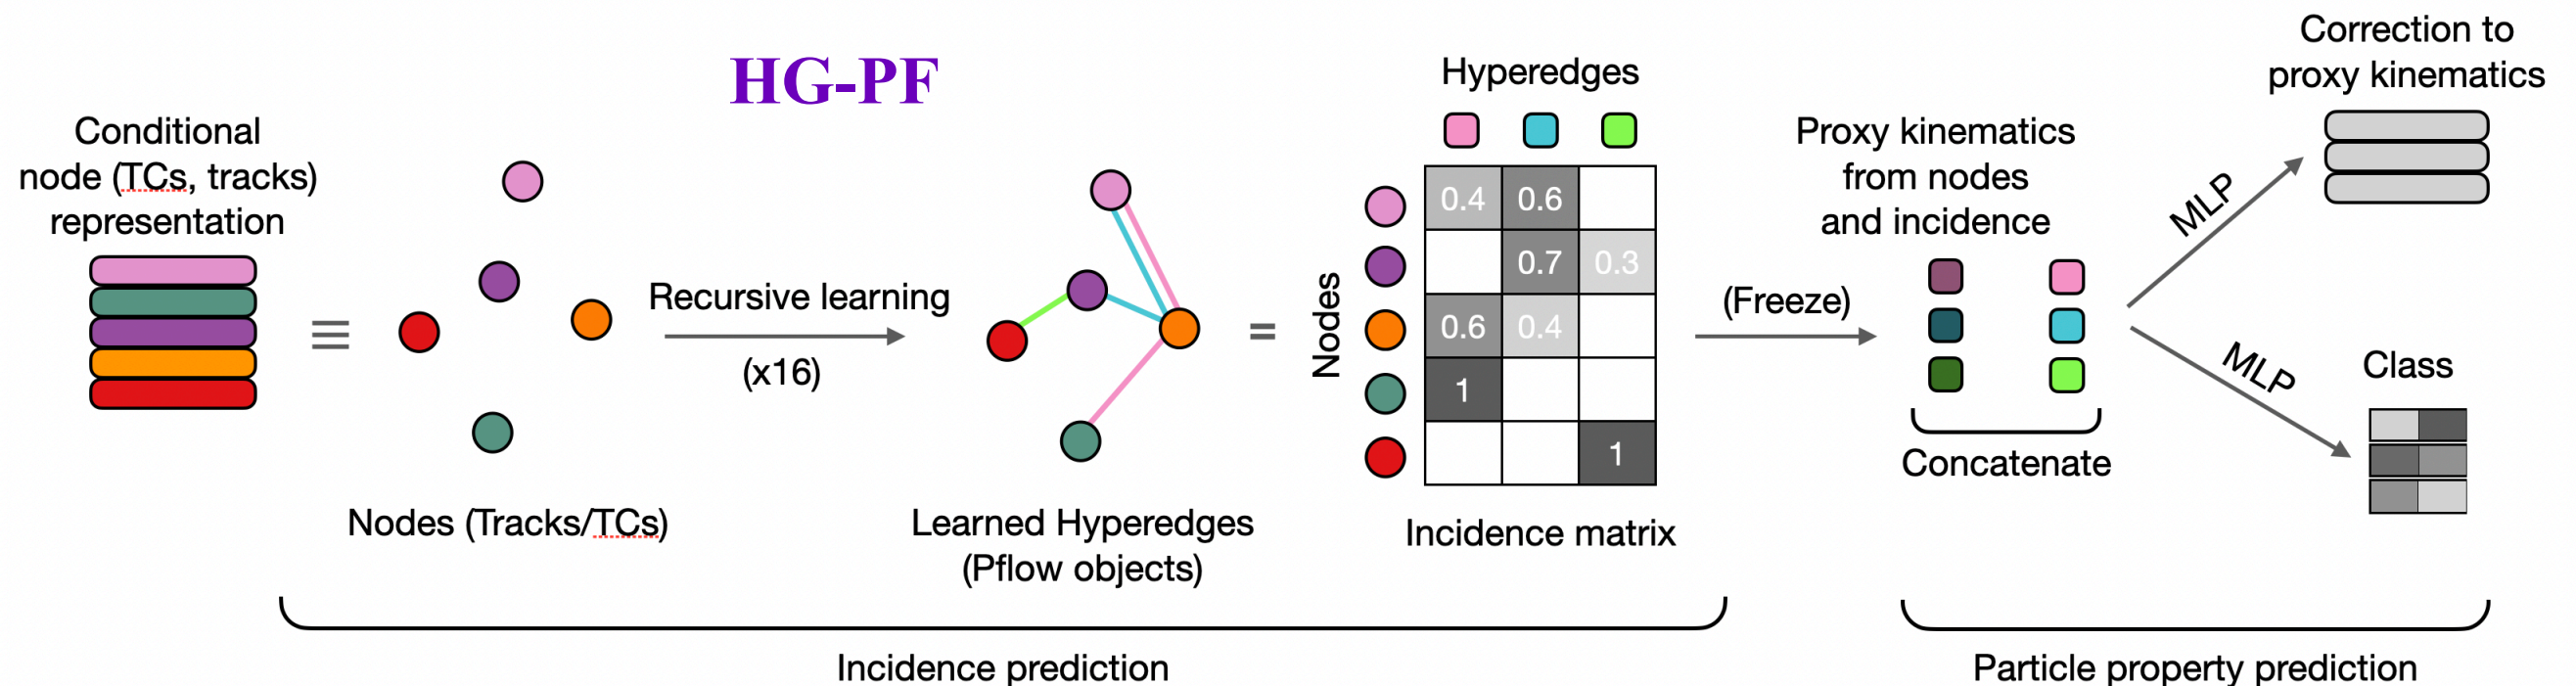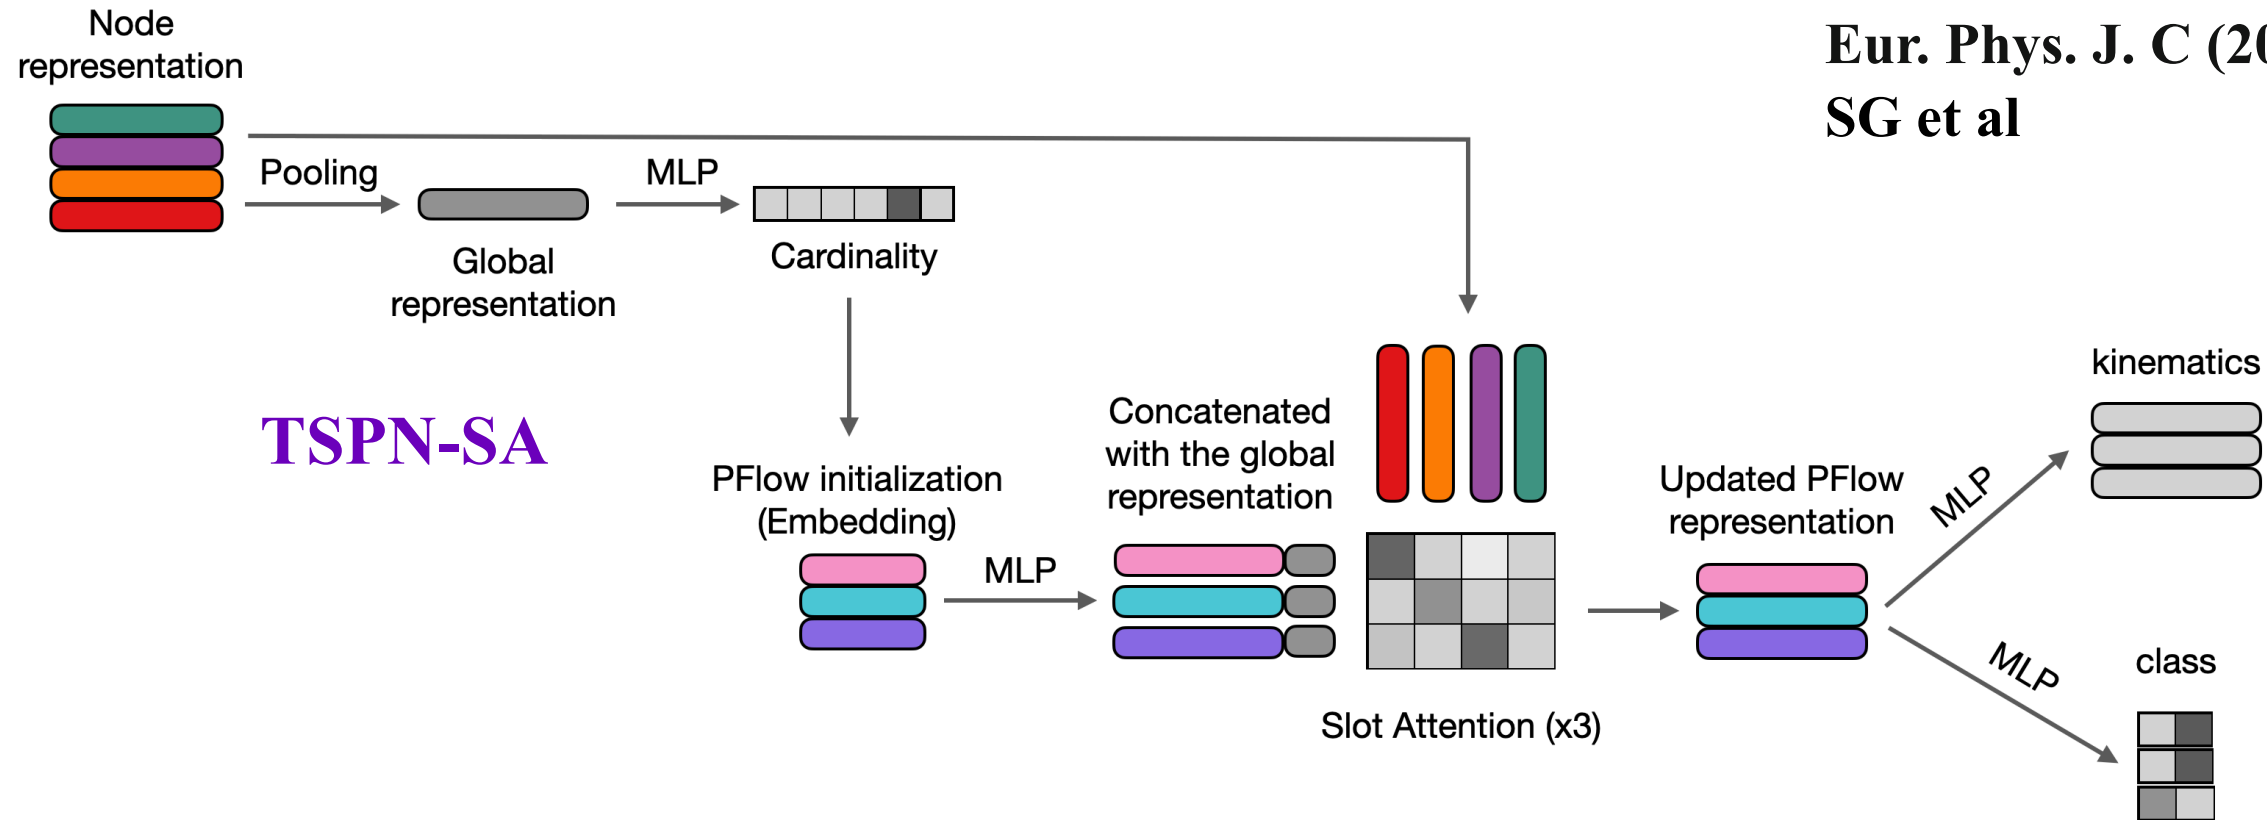

The network flow comparisons

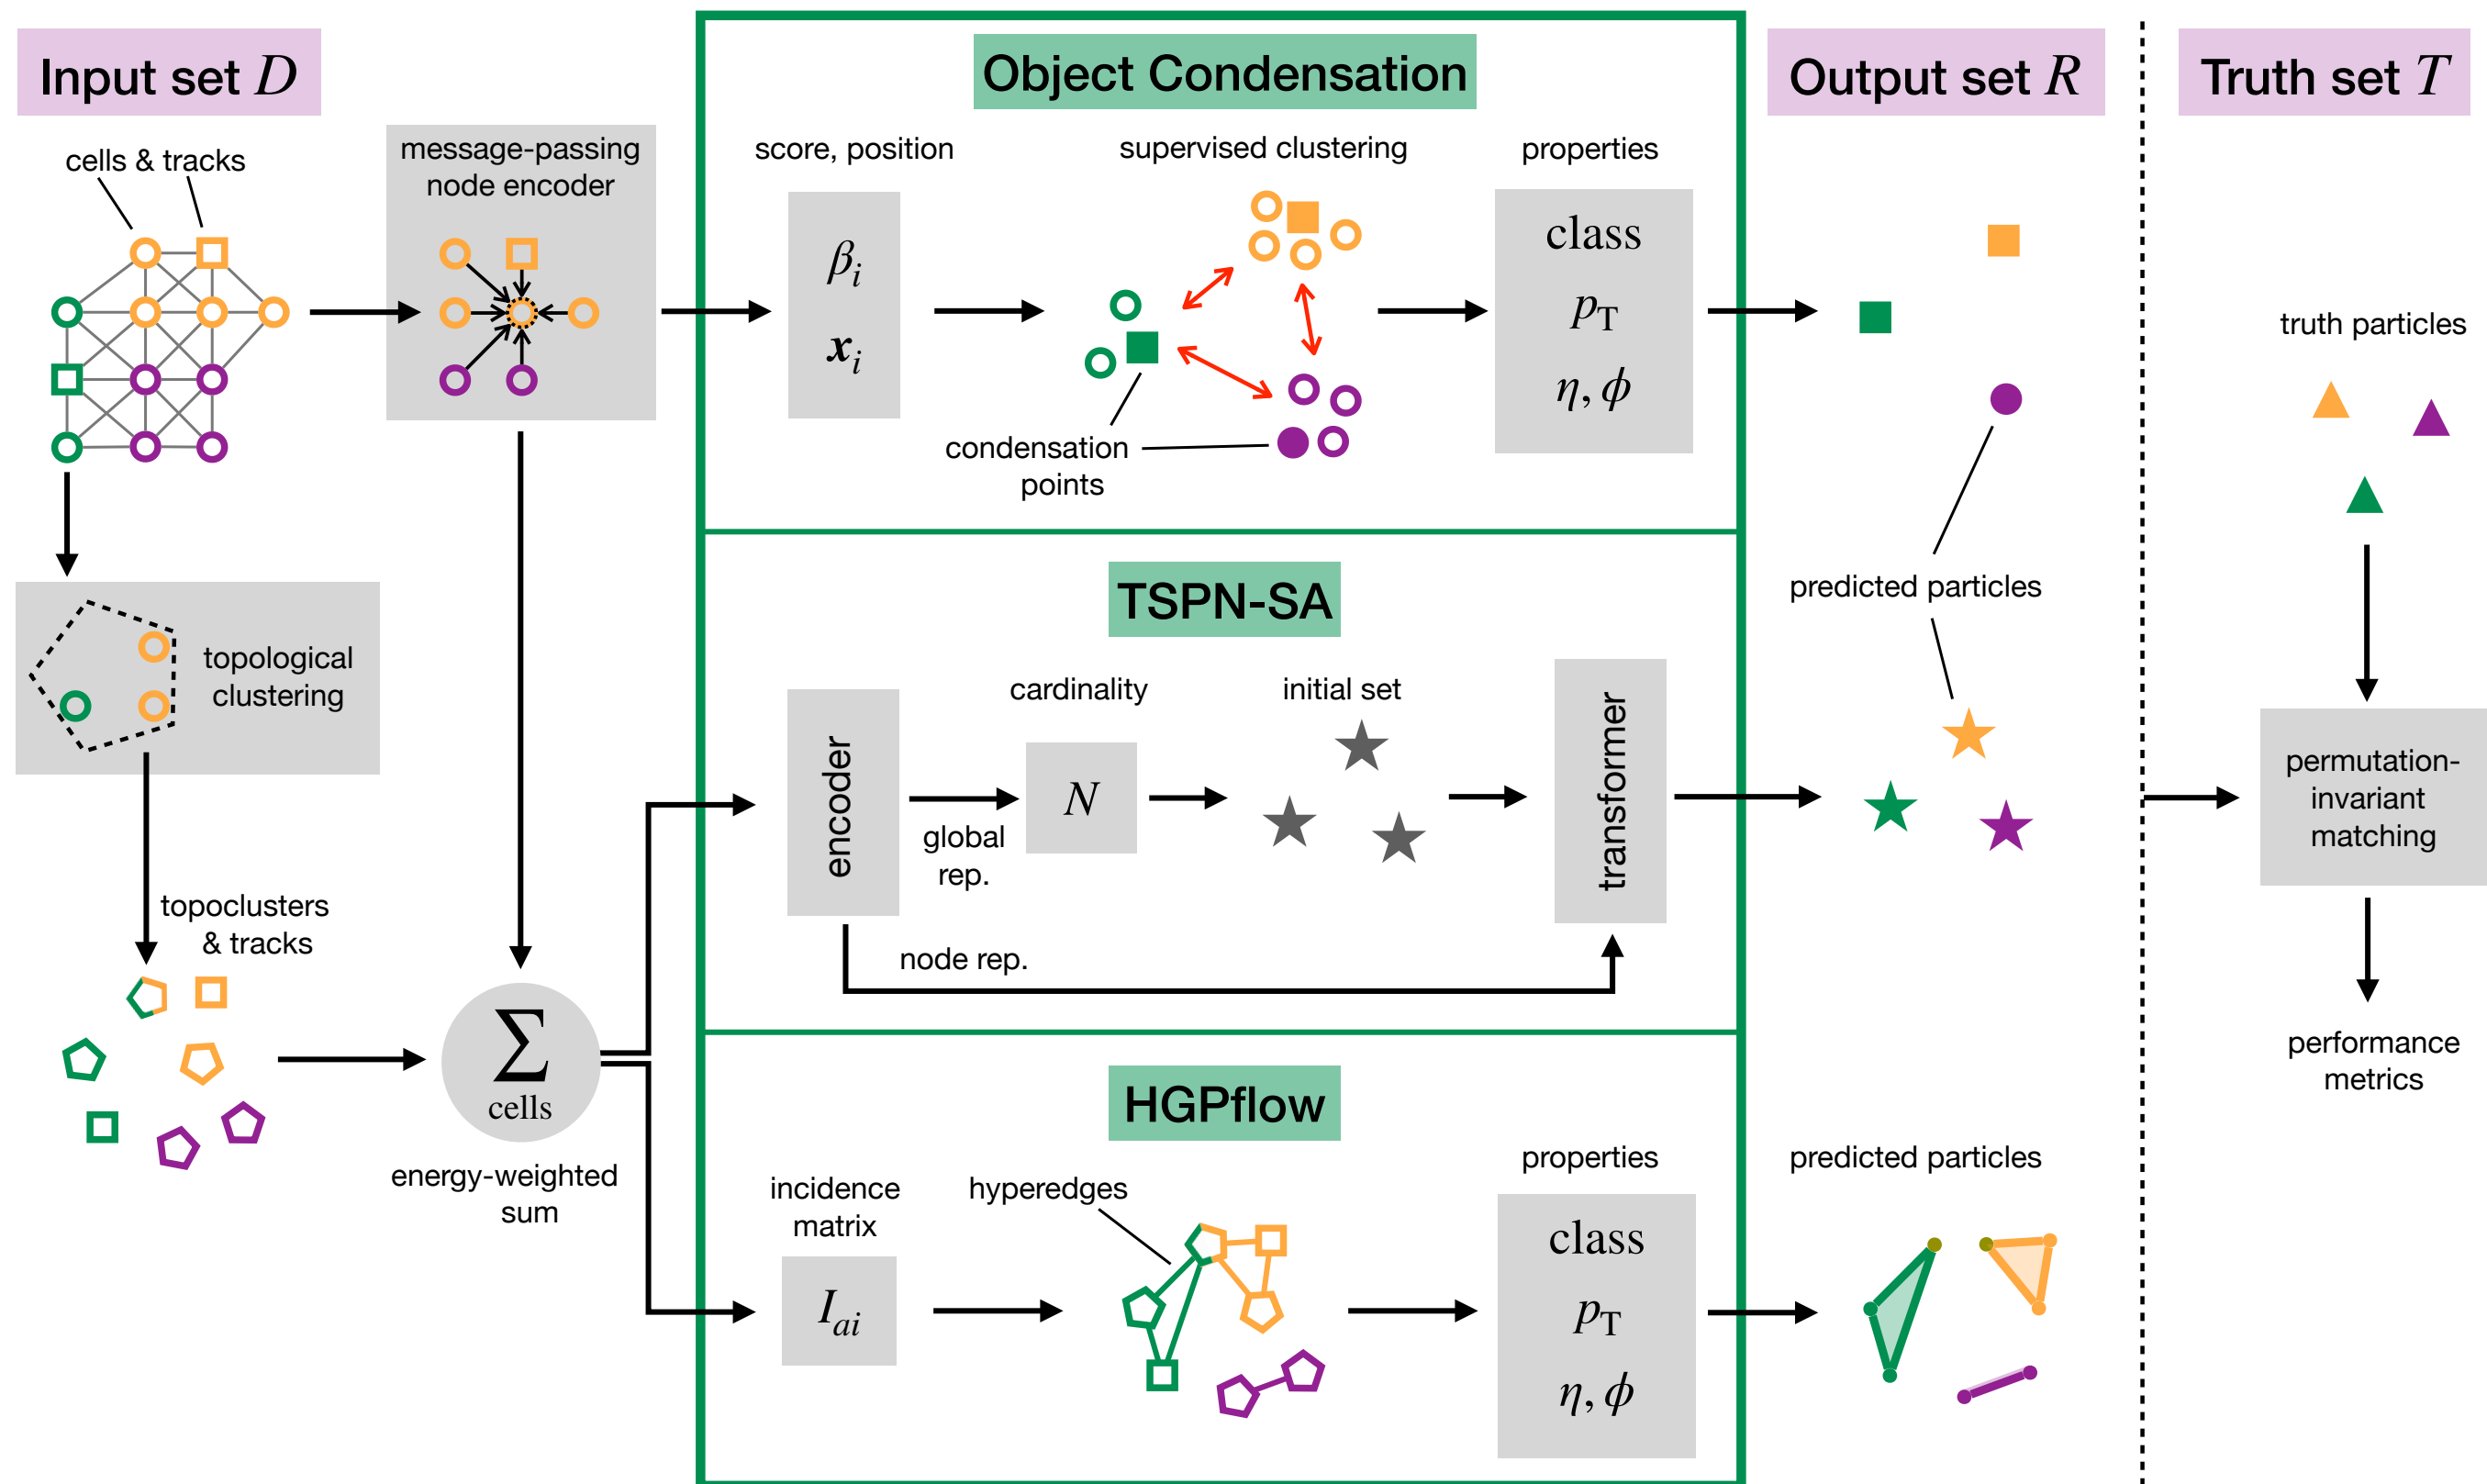

Design of the performance metrics

- Efficiency and fake rate
- Classification purity
- Particle angular and momentum resolution
- Jet-level quantities





The efficiency and fake rate are defined as follows:

$$\varepsilon \equiv \frac{N(\text{matched pred})}{N(\text{targ})}, \quad f \equiv \frac{N(\text{unmatched pred})}{N(\text{pred})}$$


Set-to-set matching is done using the Hungarian distance :

$$\sqrt{c_{p_T}(\Delta p_T/p_T^{\text{truth}})^2 + C_{\Delta R}(\Delta R)^2}$$


$$\mathcal{L}_{\text{hung}}(A, B) = \min_{\pi \in P} \sum_{a_i \in A} d(a_i, b_{\pi(i)})$$

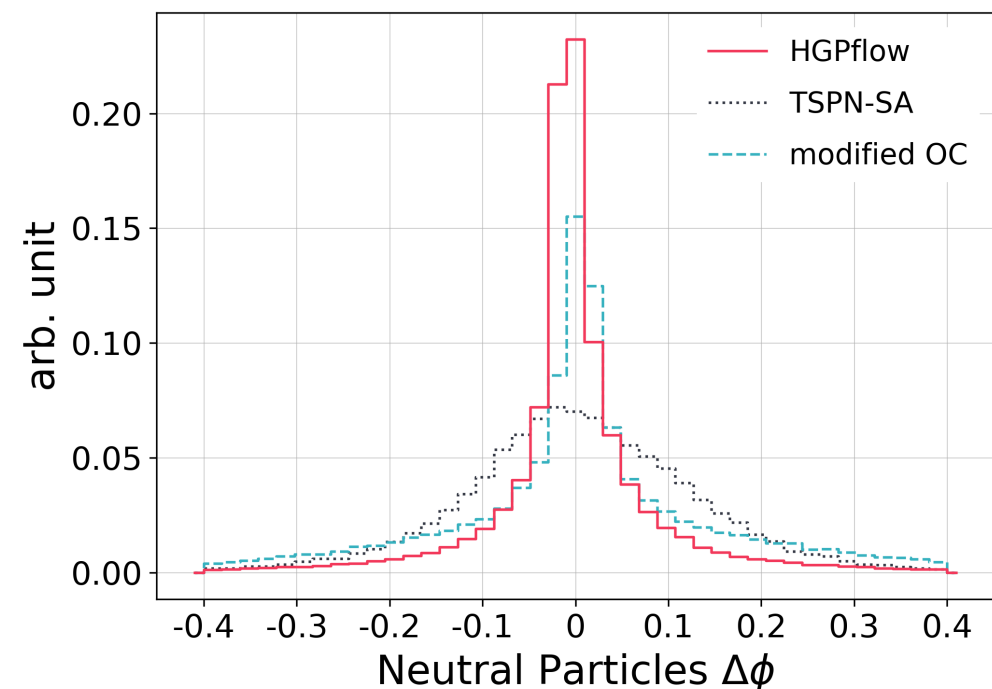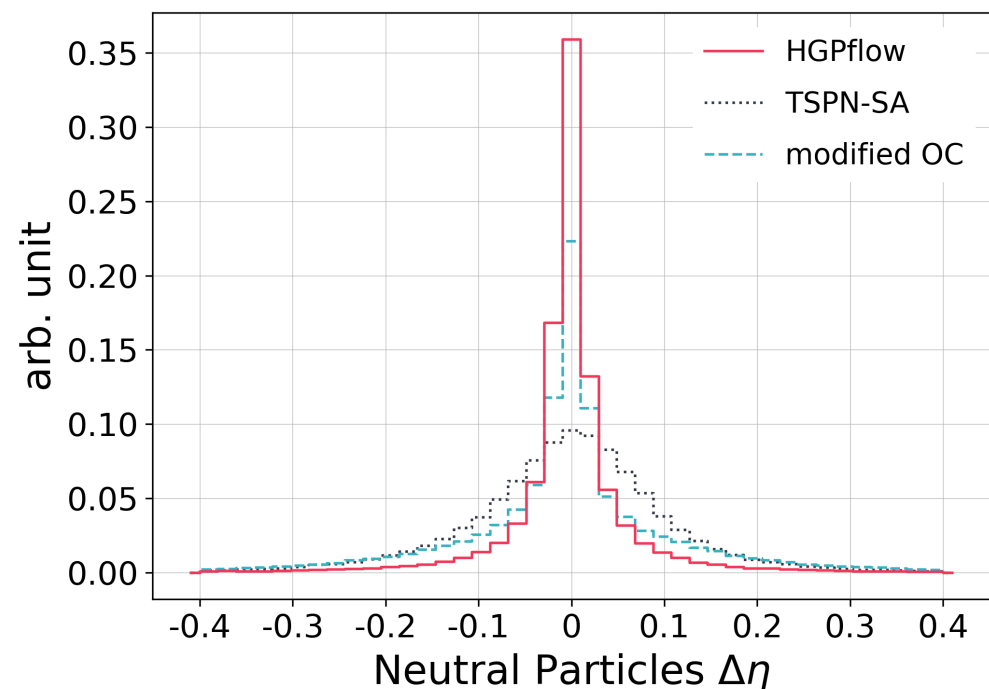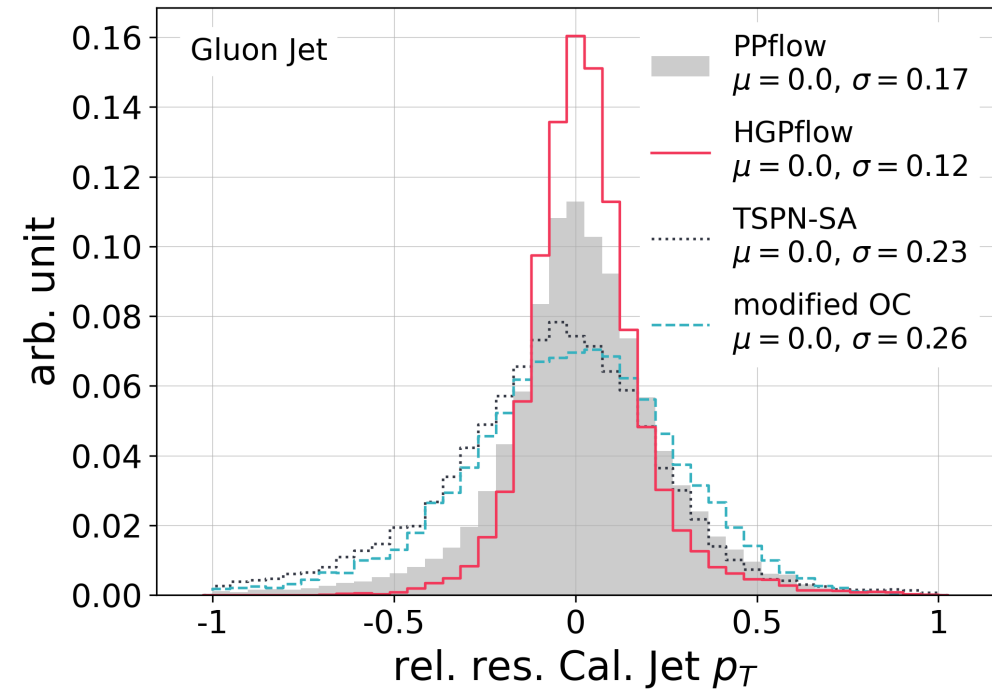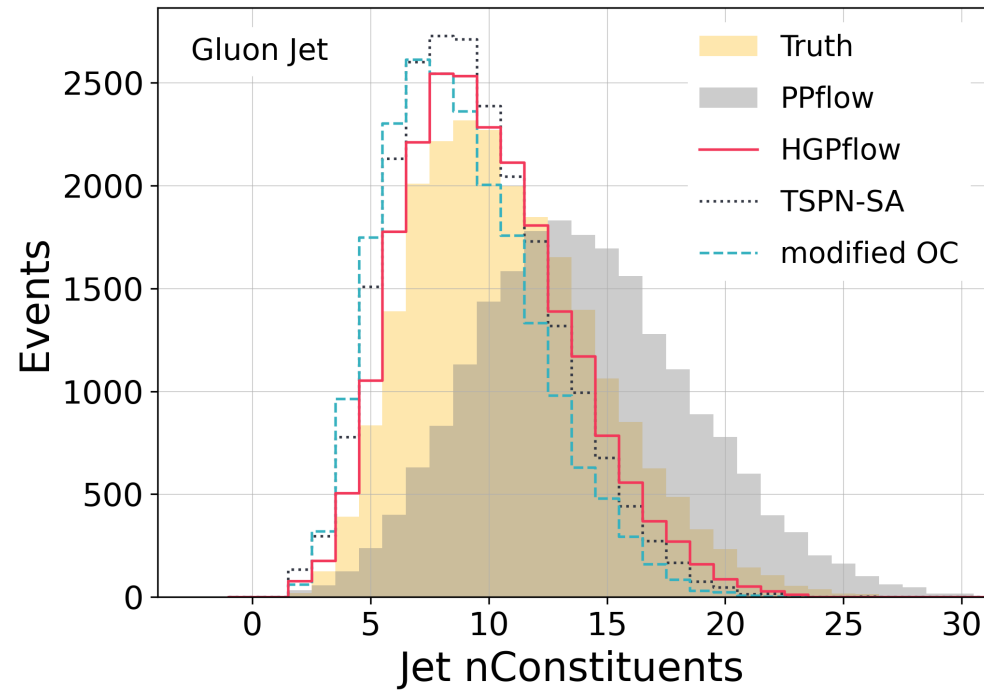


Data complexity & sample output

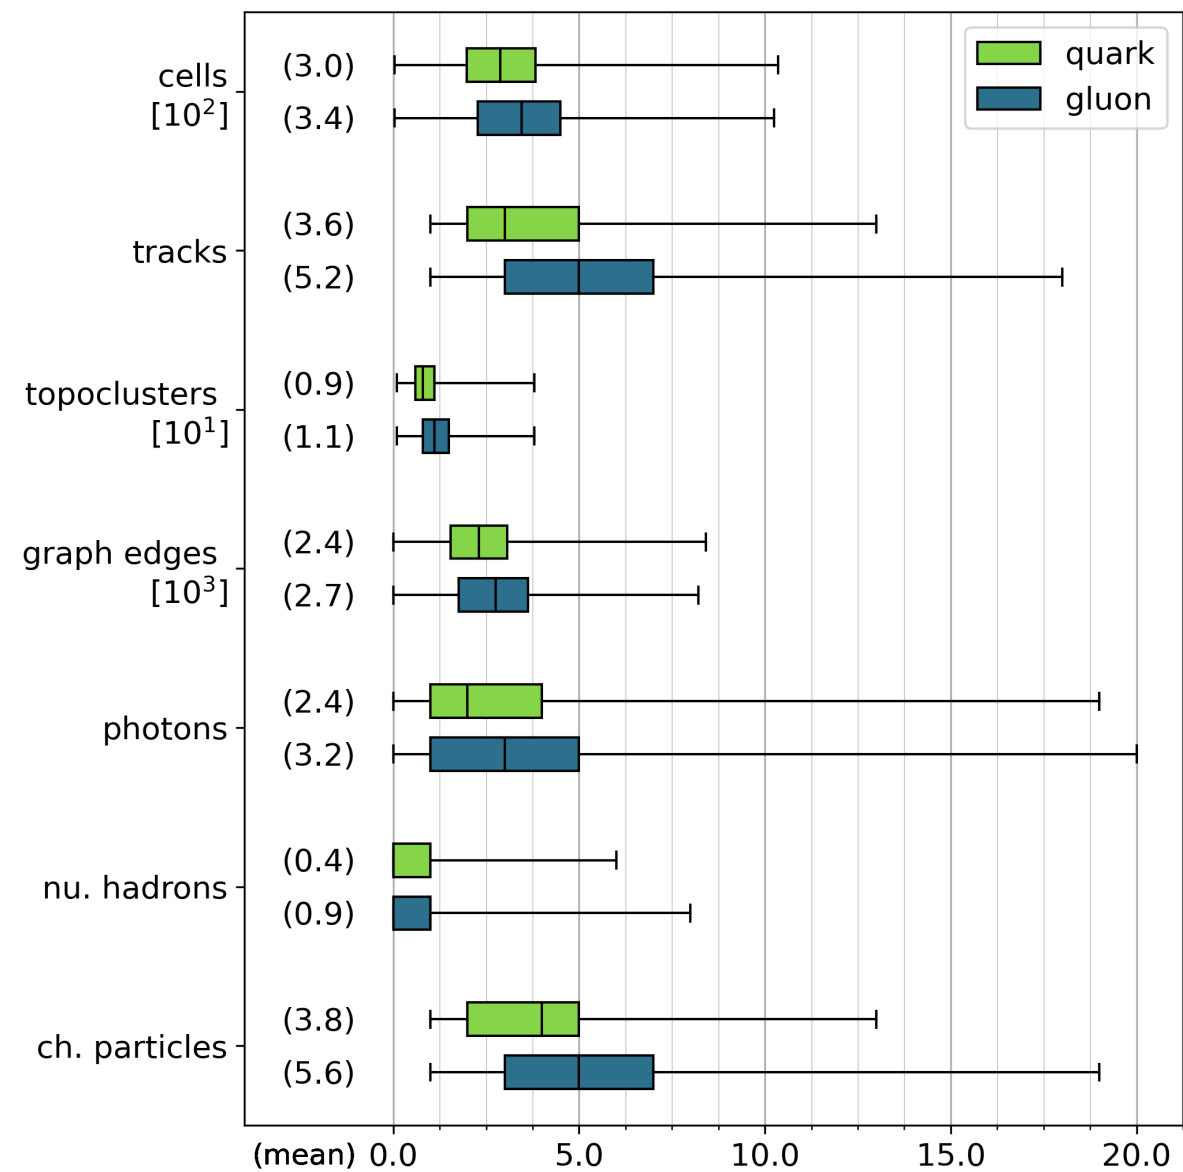




HG-PFlow seems to be doing a better job among the compared methods

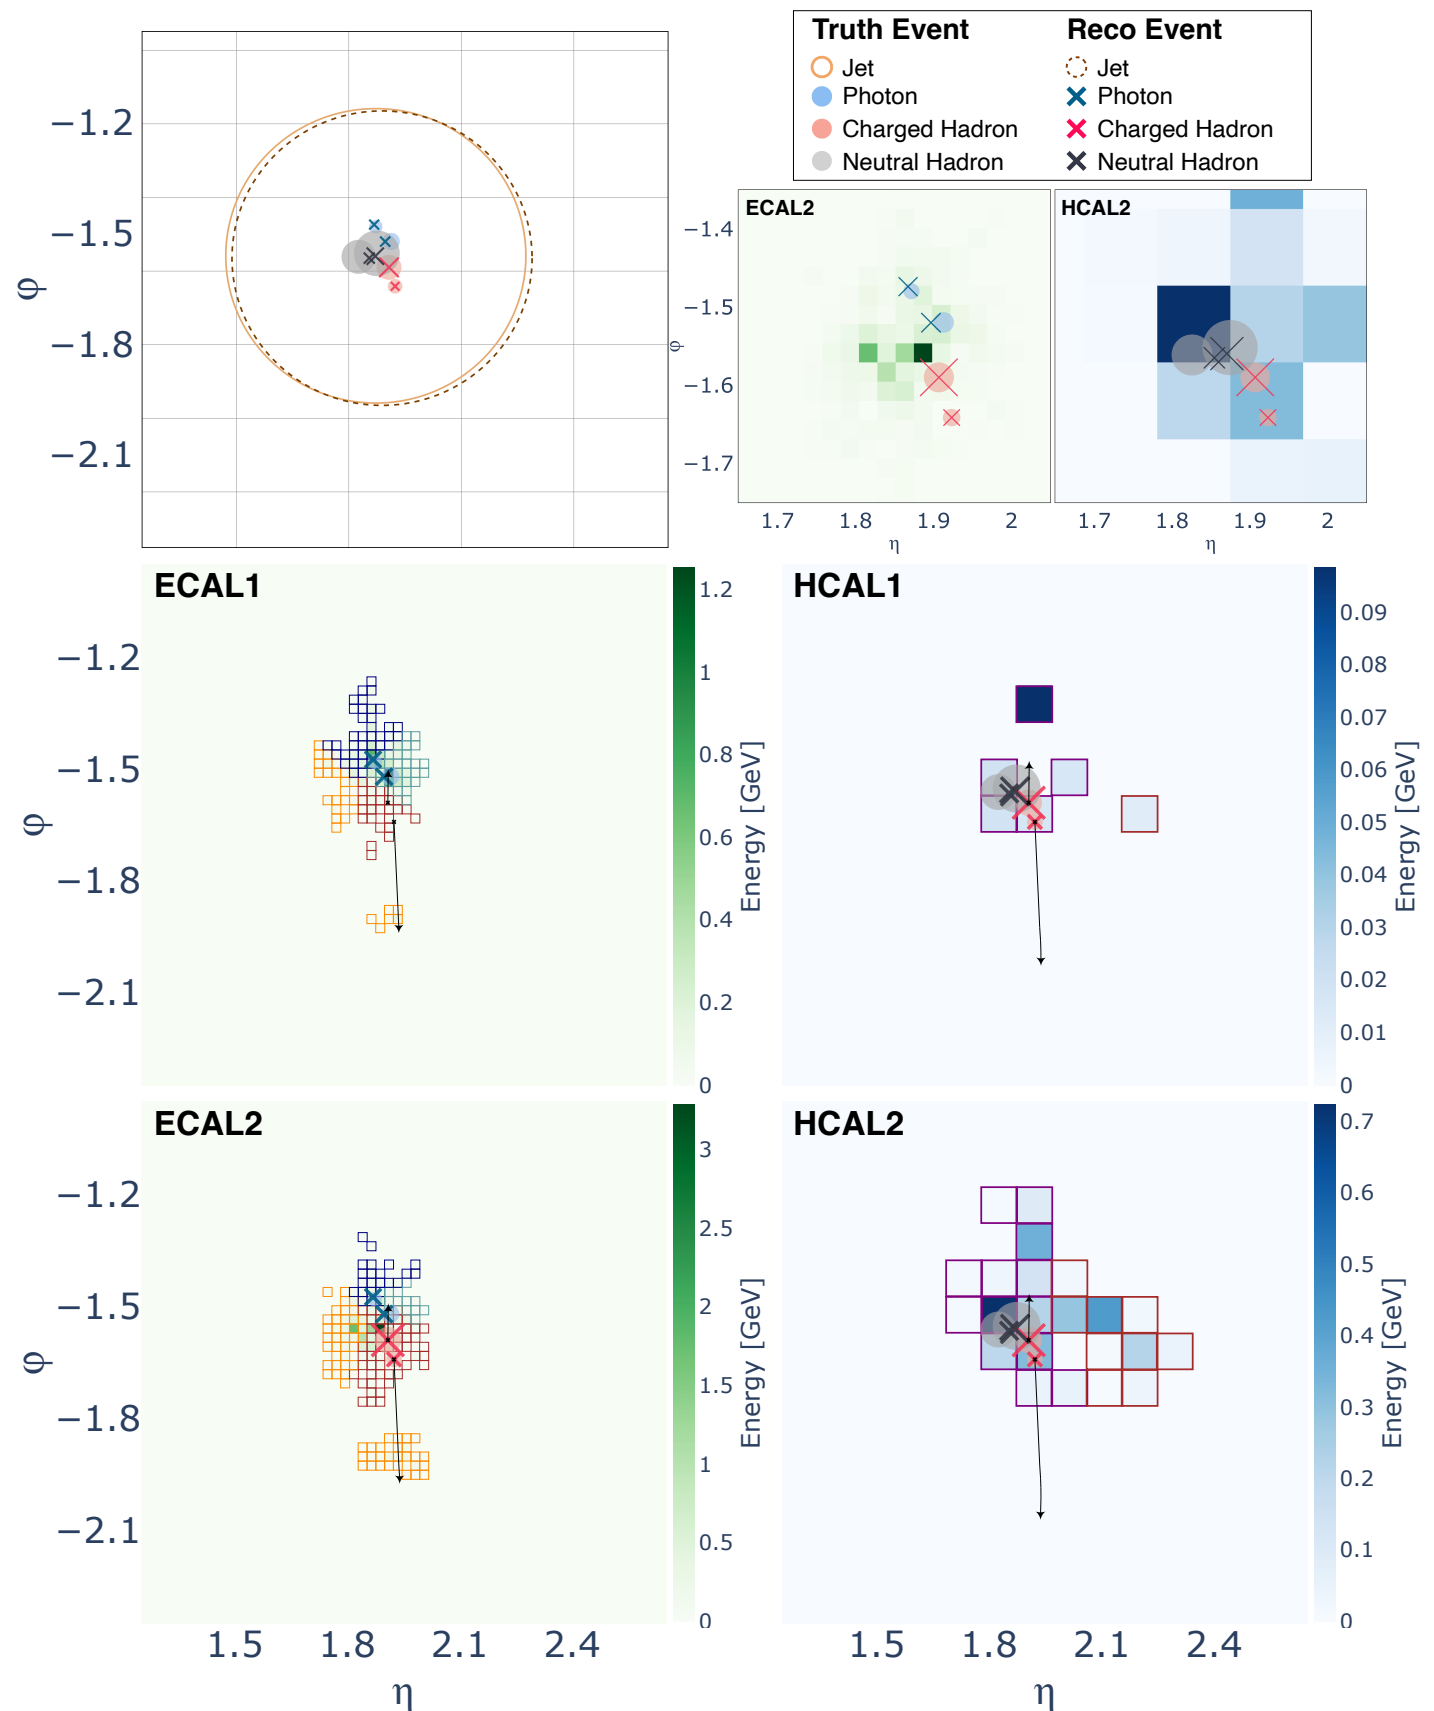

Physics motivated ML: B-tagging


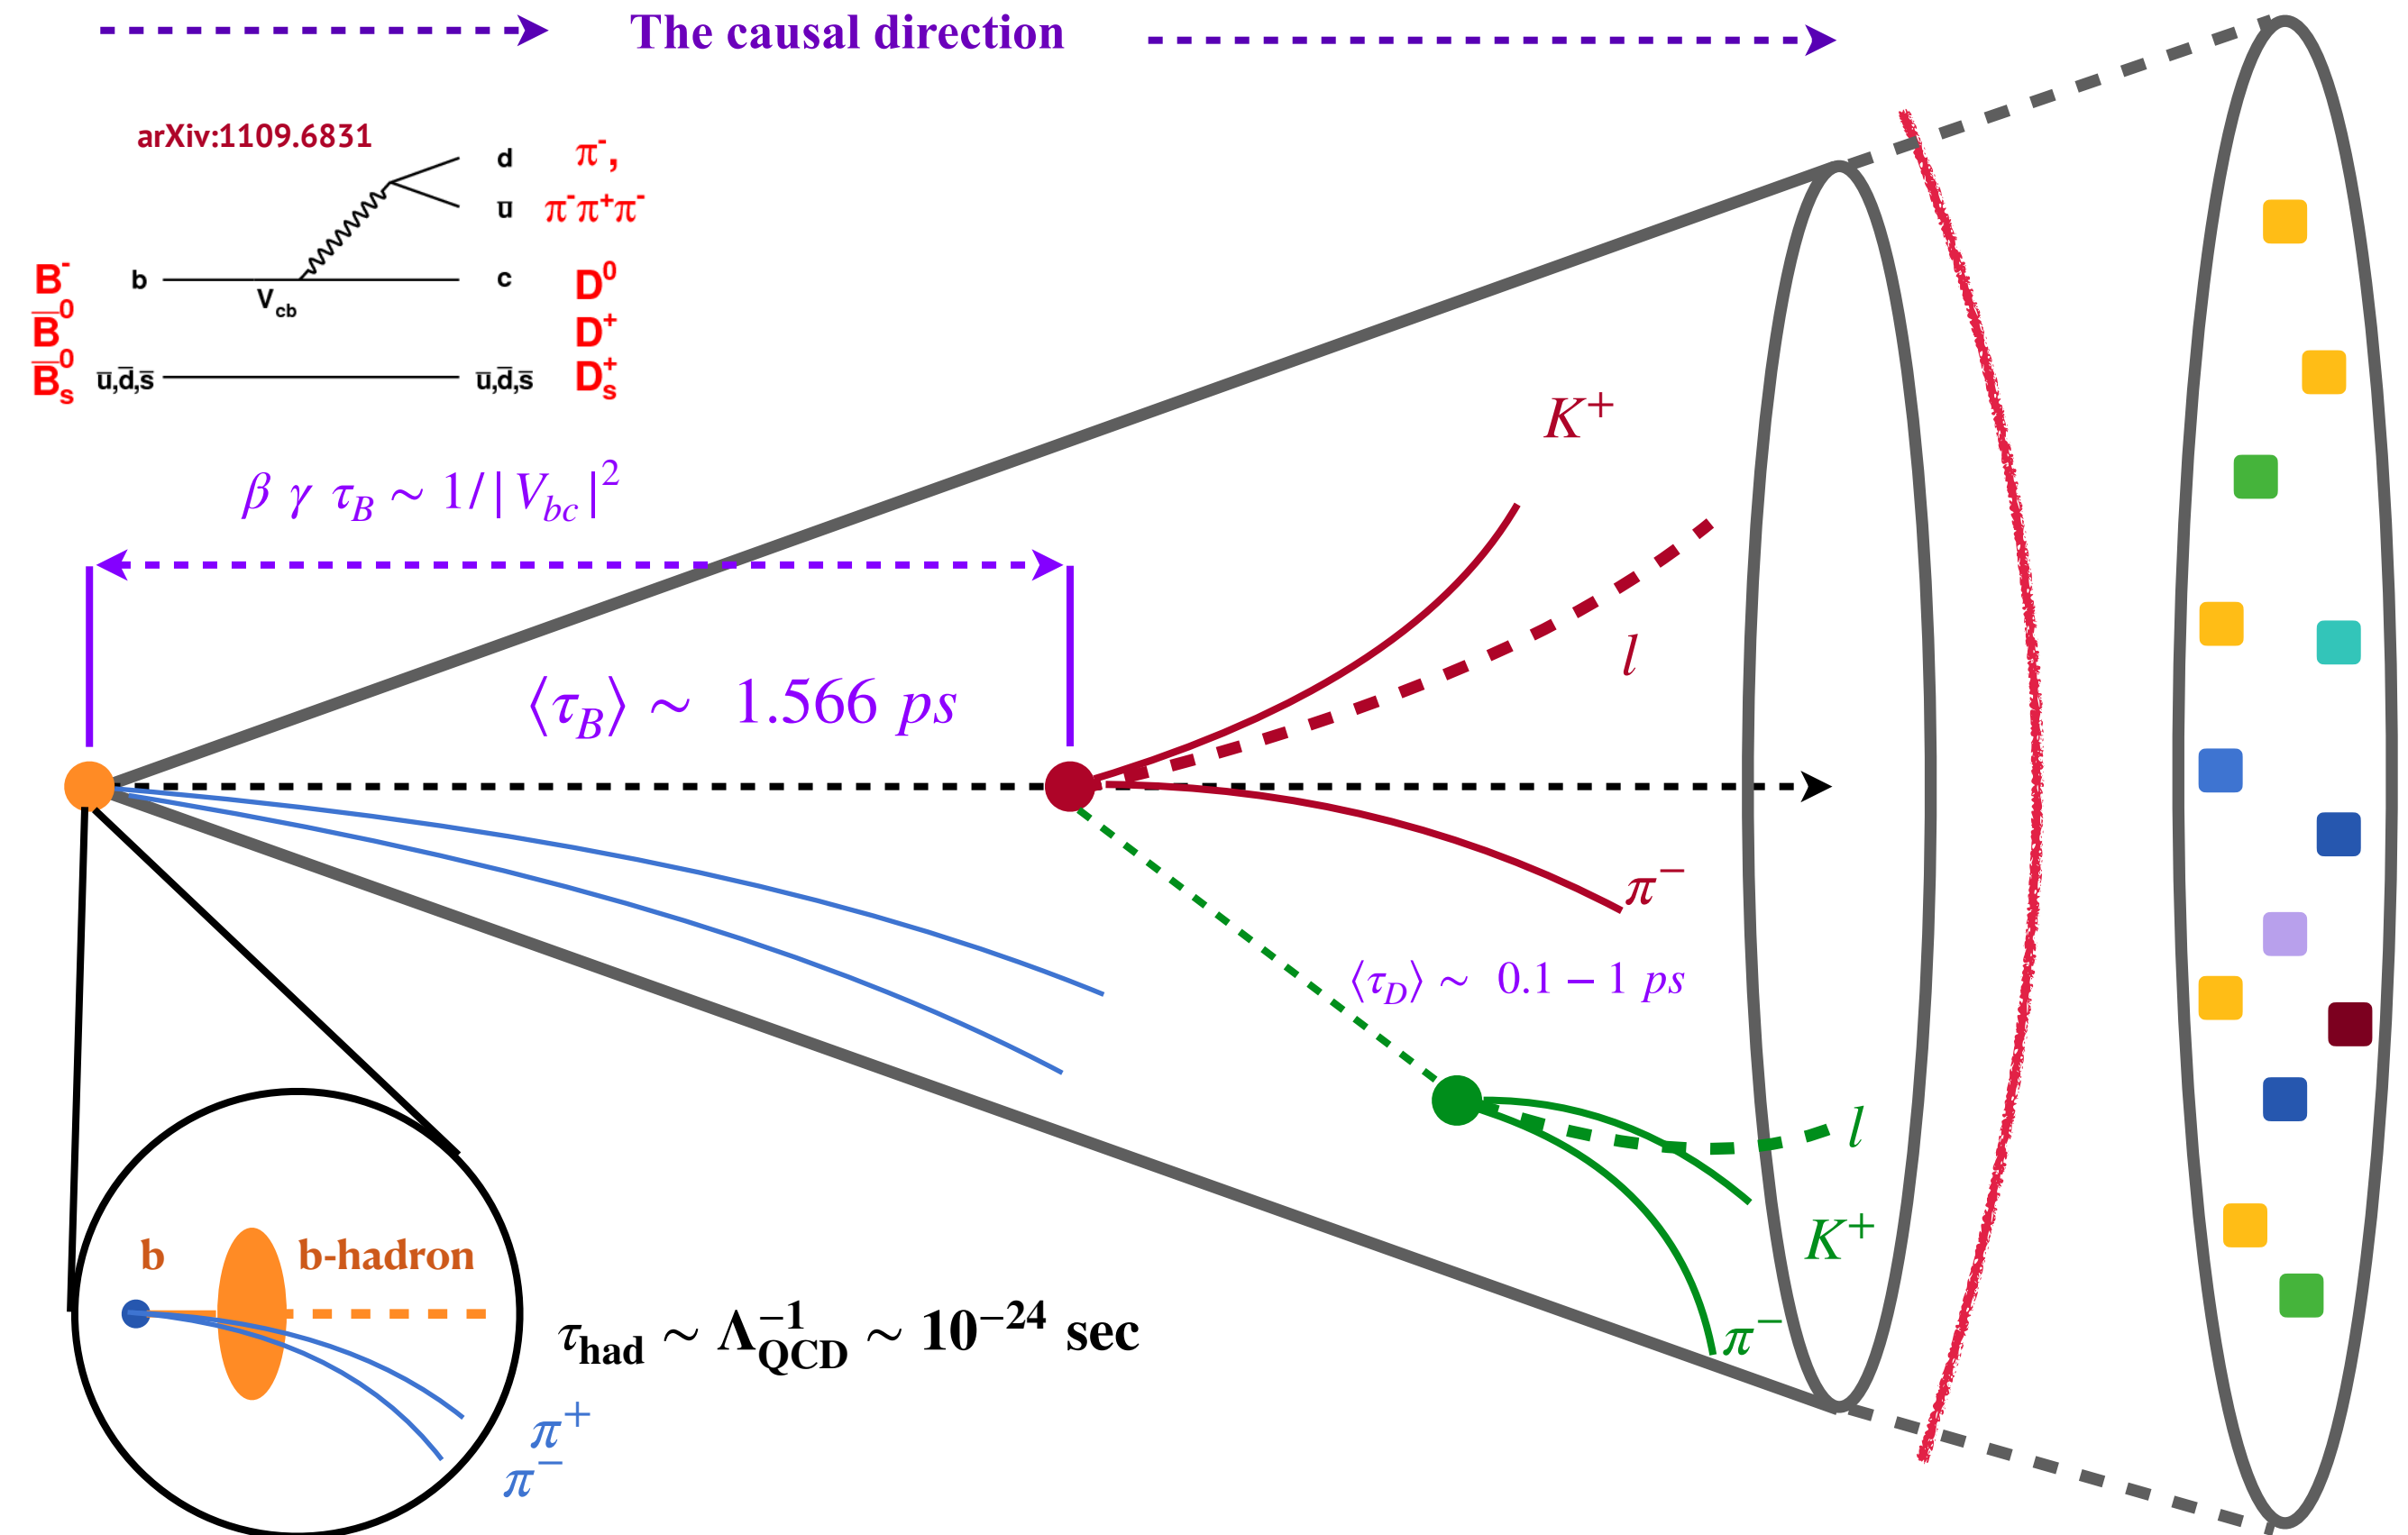


Set2Graph proposal for flavor-tagging

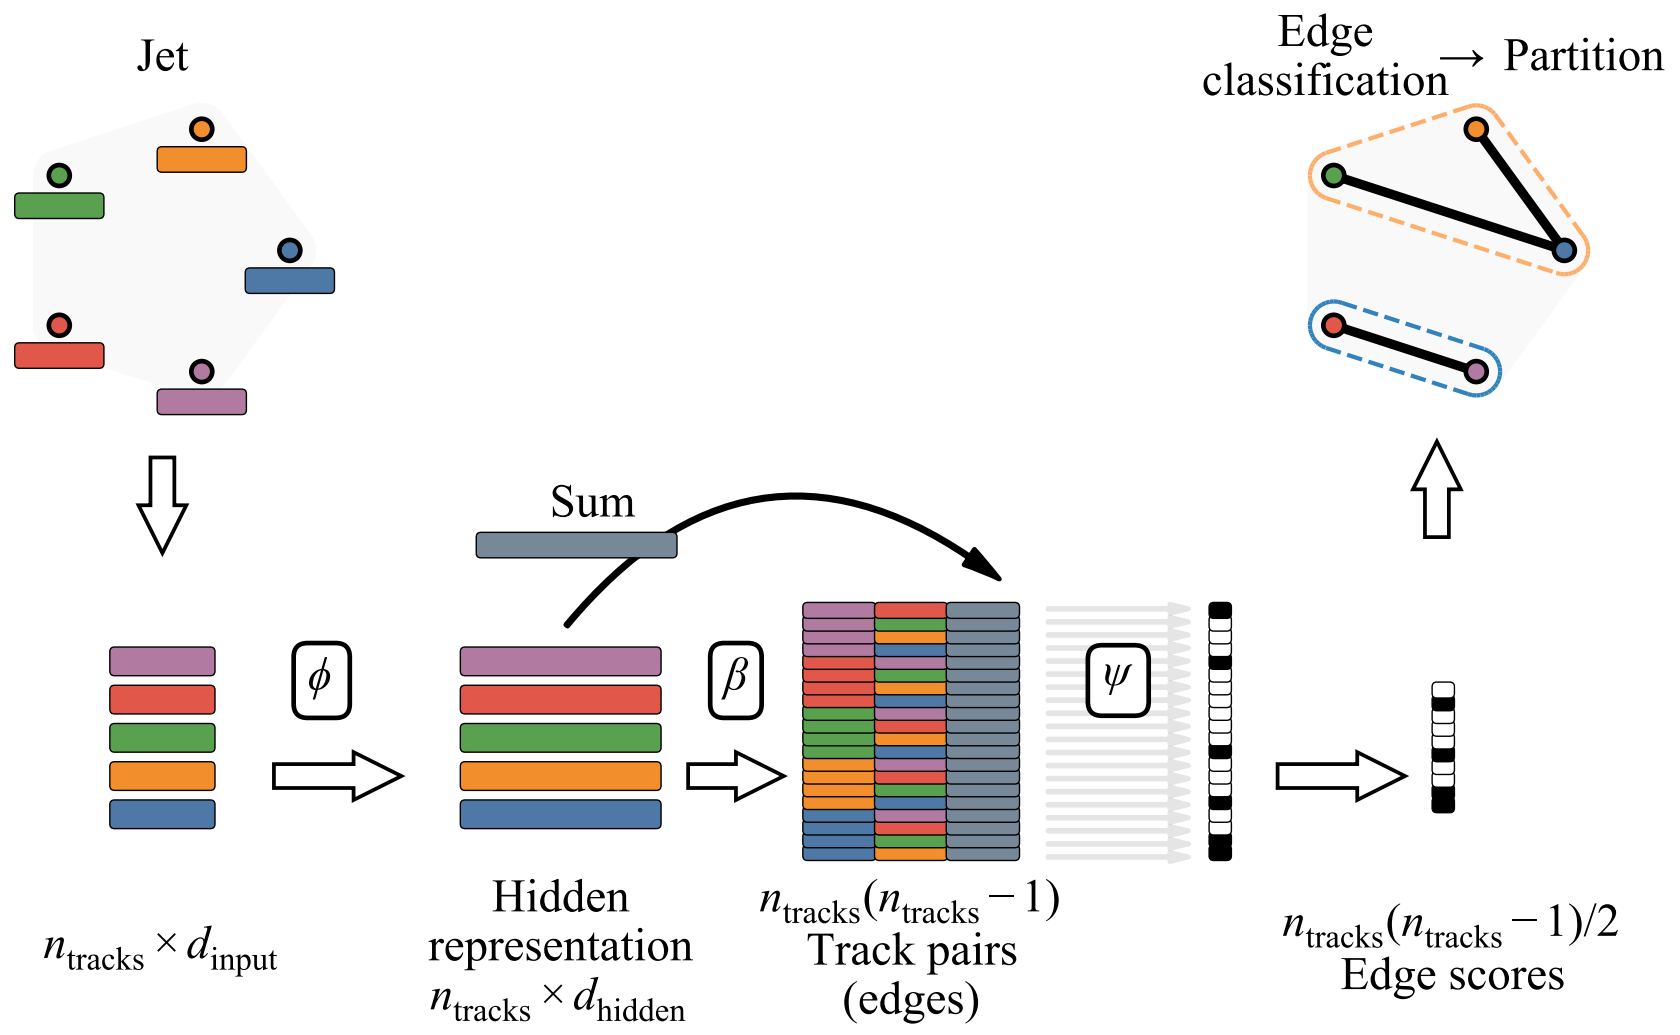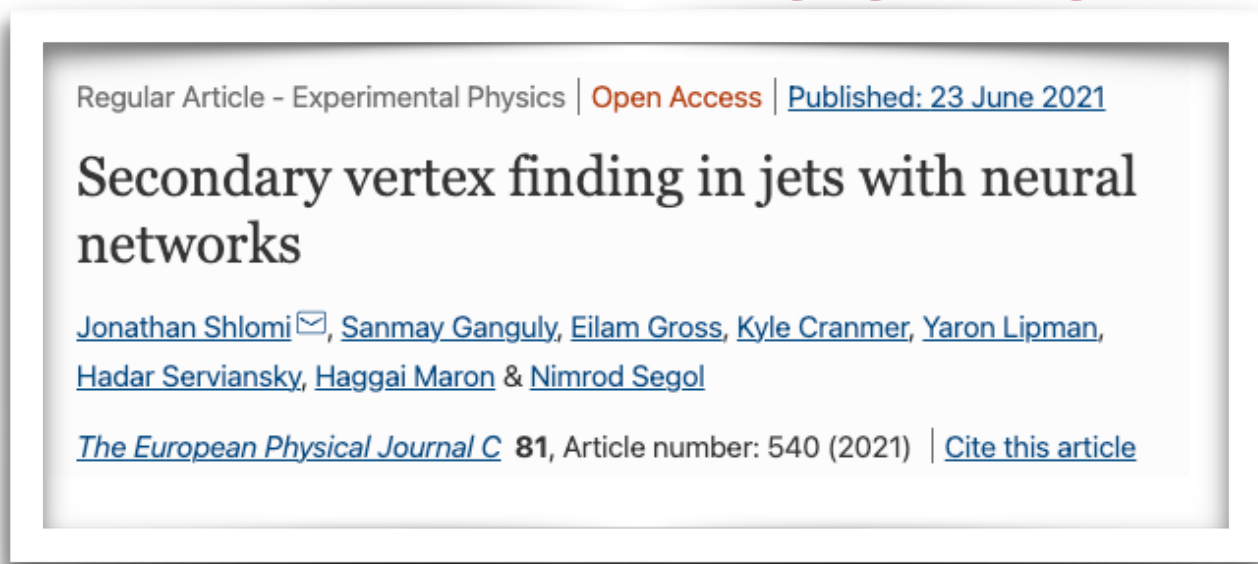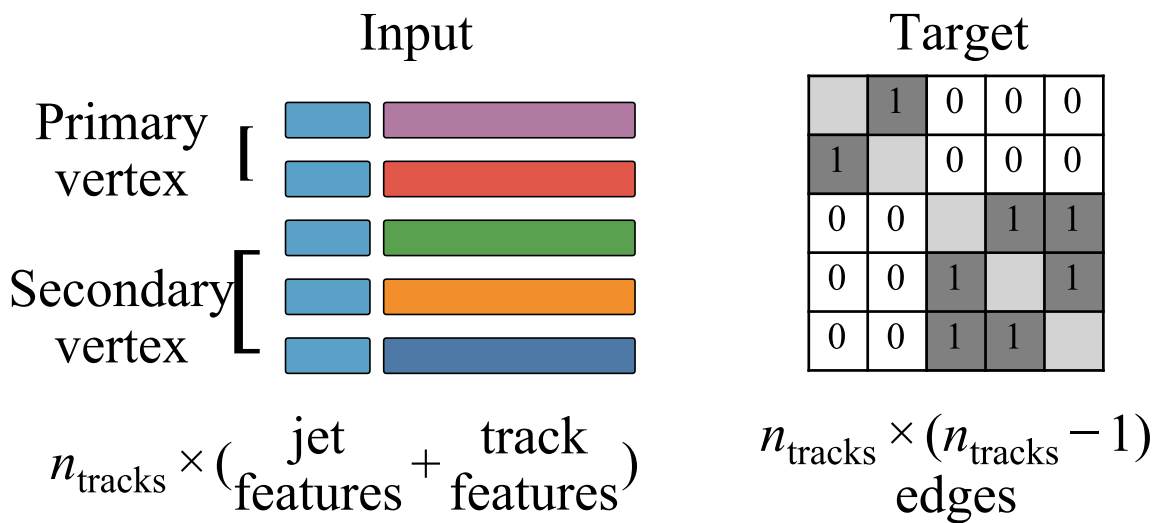

Set2Graph model within ATLAS

FTAG-2023-001

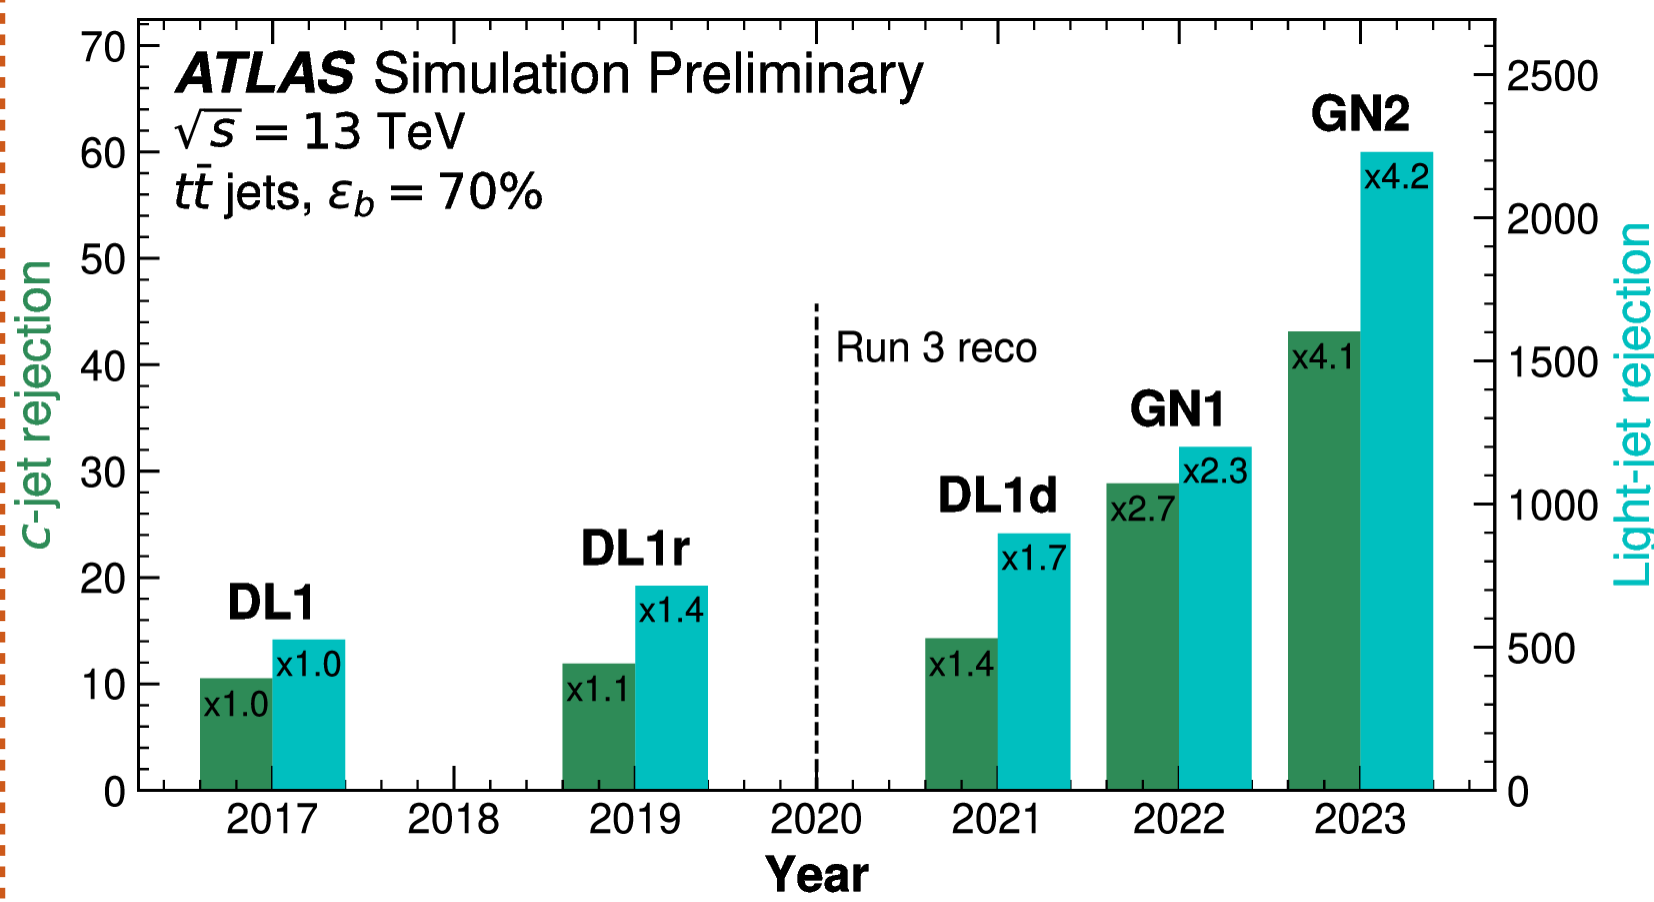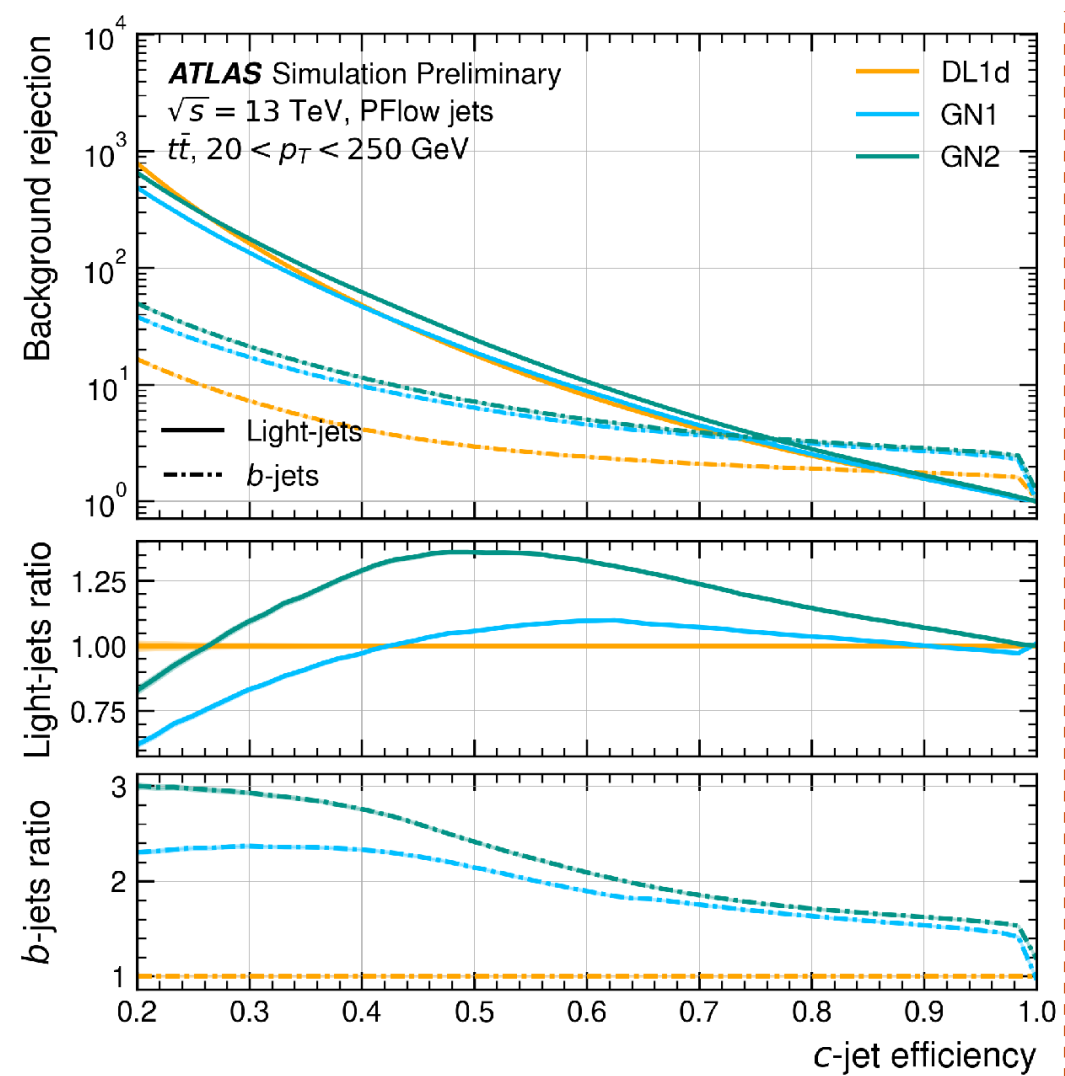


Sizable improvement over the current DL1r algorithm.

For a c-tagging working point $\sim 30\%$, a significant gain in Rejection rate is obtained.


ATLAS Simulation Preliminary
 $\sqrt{s} = 13$ TeV
 $t\bar{t}$ jets

Truth b -jet
 $p_T = 134.1$ GeV
 $p_b = 0.995$
 $p_c = 0.005$
 $p_u = 0.000$

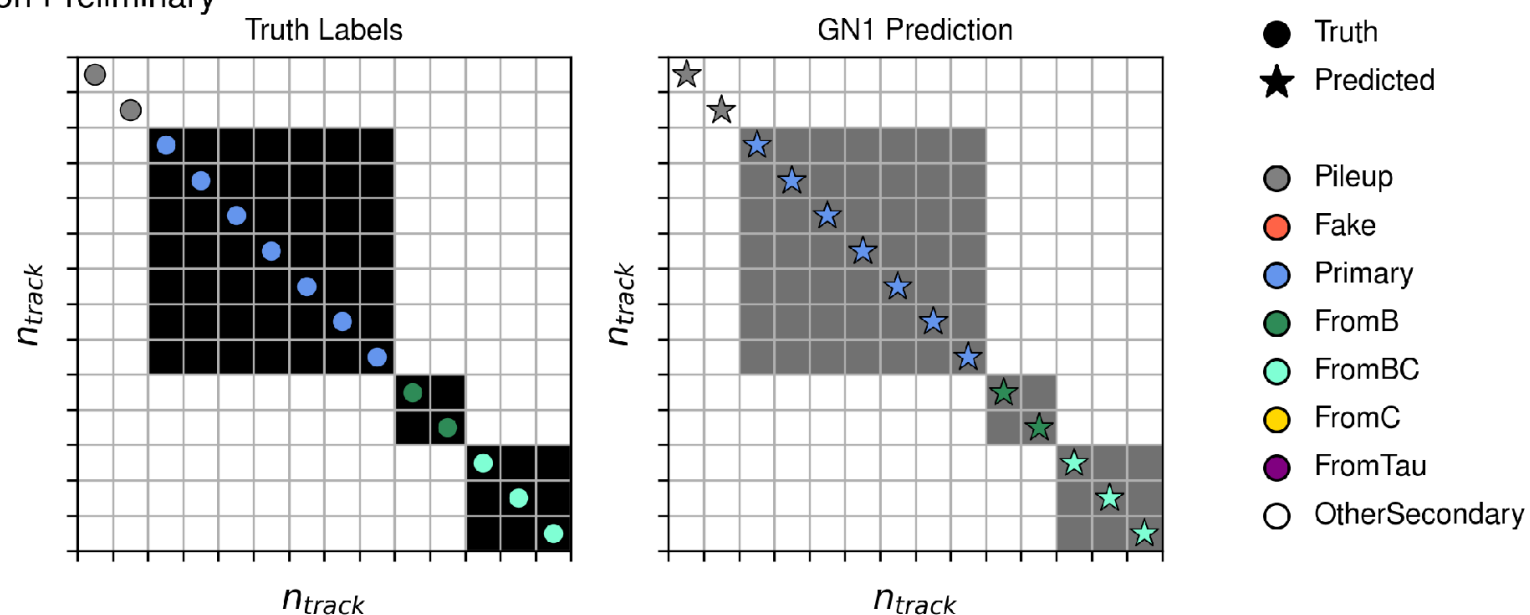


Direct physics application of the taggers

Eur. Phys. J. C (2022) 82:717

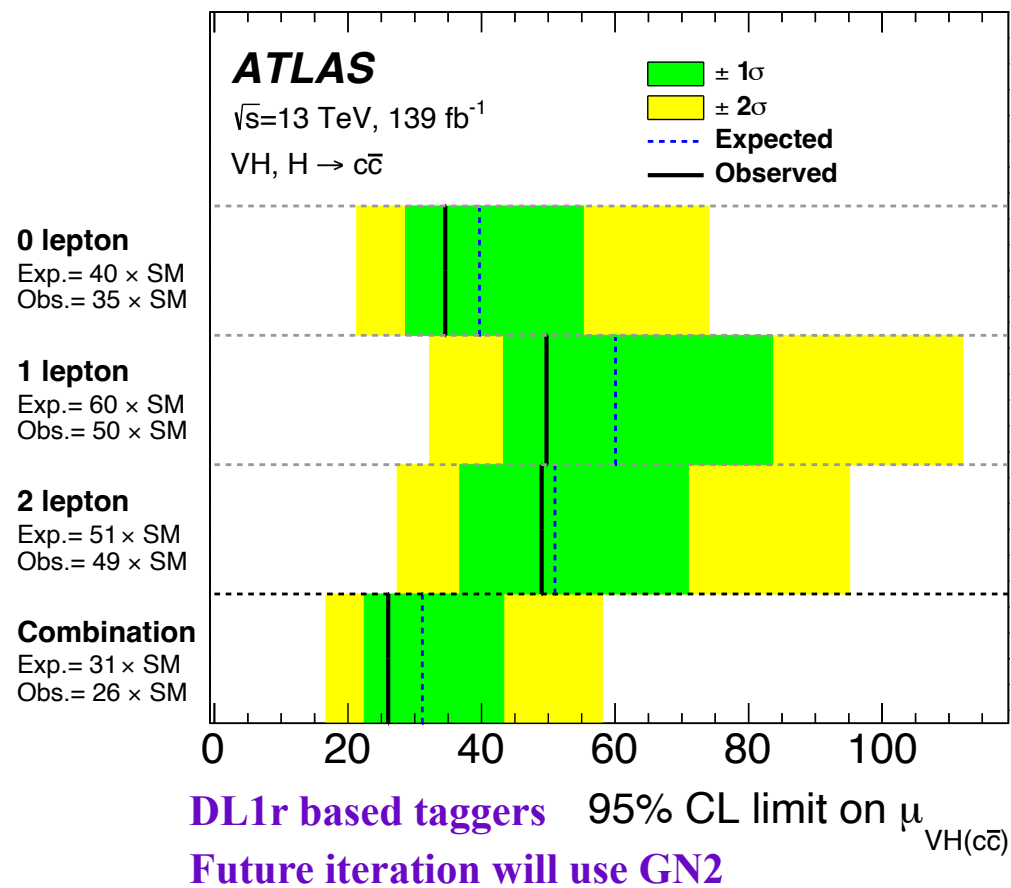

Phys. Rev. Lett. 131 (2023) 061801

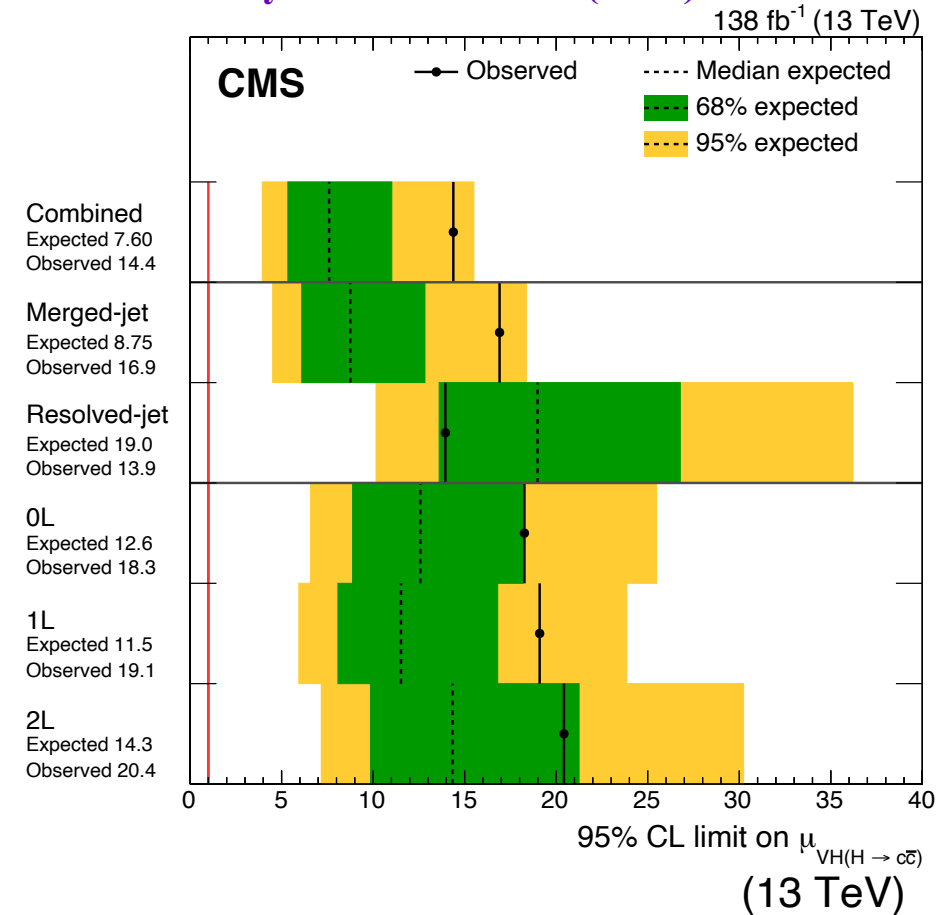


ATLAS bound : $|\kappa_c| < 8.5$

CMS bound : $1.1 < |\kappa_c| < 5.5$

Future direction of tagger improvement:

1. Explainable taggers on heterogeneous pc
2. A systematic uncertainty extraction.
3. How much universal taggers can be made across topologies?

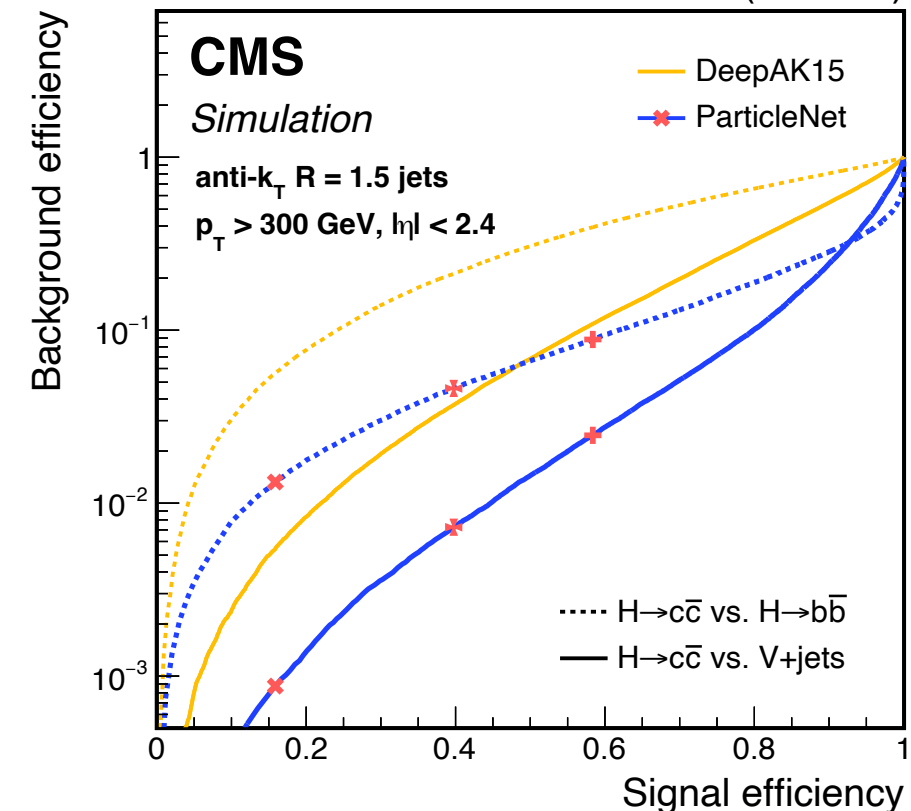

Some other examples of physics injection


arXiv > hep-ph > arXiv:2204.12231
 High Energy Physics – Phenomenology

[Submitted on 26 Apr 2022 (v1), last revised 31 Jul 2022 (this version, v2)]

IRC-safe Graph Autoencoder for unsupervised anomaly detection


Oliver Atkinson, Akanksha Bhardwaj, Christoph Englert, Partha Konar, Vishal S. Ngairangbam, Michael Spannowsky

$$\omega_q^{(\mathcal{N}[i])} \hat{\Phi}^{(0)}(\hat{p}_i, \hat{p}_q) = \omega_r^{(\mathcal{N}[i])} \hat{\Phi}^{(0)}(\hat{p}_i, \hat{p}_r) + \omega_s^{(\mathcal{N}[i])} \hat{\Phi}^{(0)}(\hat{p}_i, \hat{p}_s) .$$

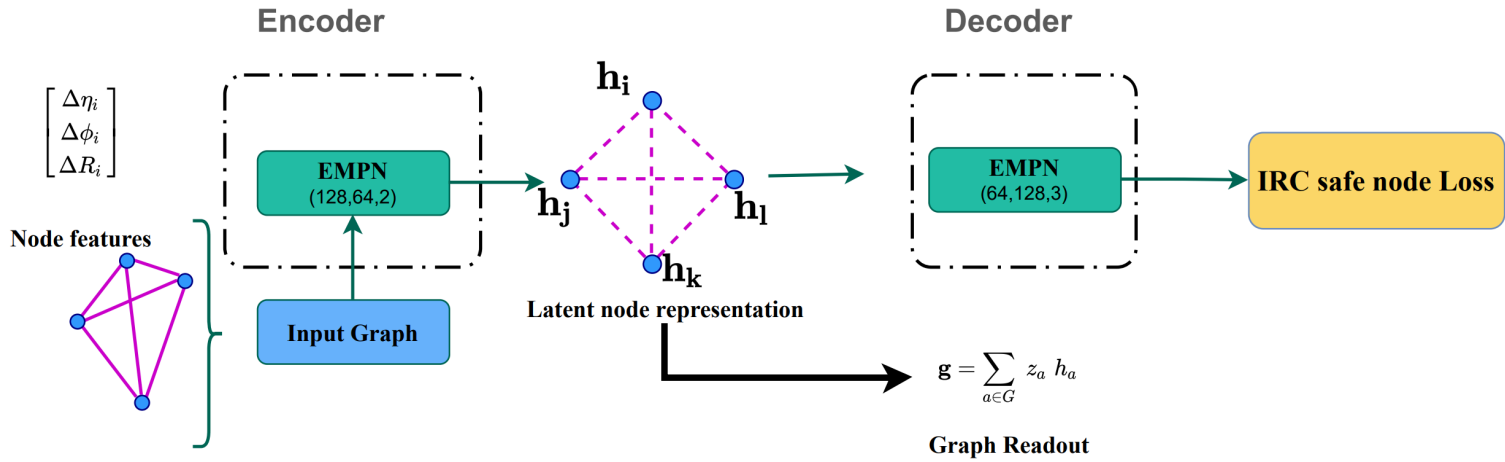

arXiv:2006.04780 : A Bogatskiy et al


arXiv:2203.06153 : SG et al

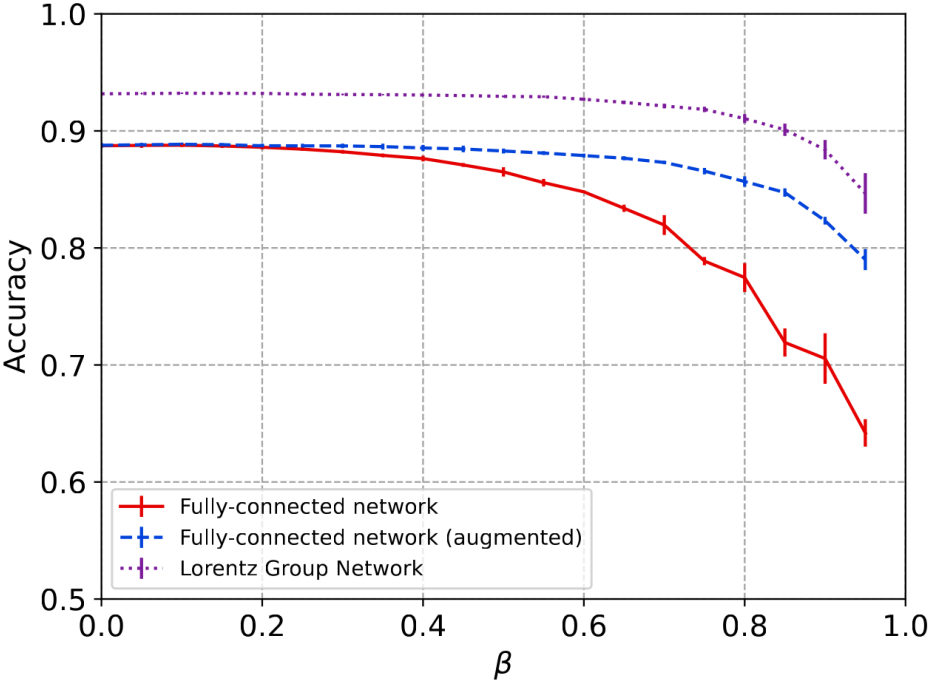


$$m_{ij}^l = \phi_e \left(h_i^l, h_j^l, \psi(\|x_i^l - x_j^l\|^2), \psi(\langle x_i^l, x_j^l \rangle) \right)$$

$$h_i^{l+1} = h_i^l + \phi_h \left(h_i^l, \sum_{j \in [N]} w_{ij} m_{ij}^l \right),$$


The path we will take

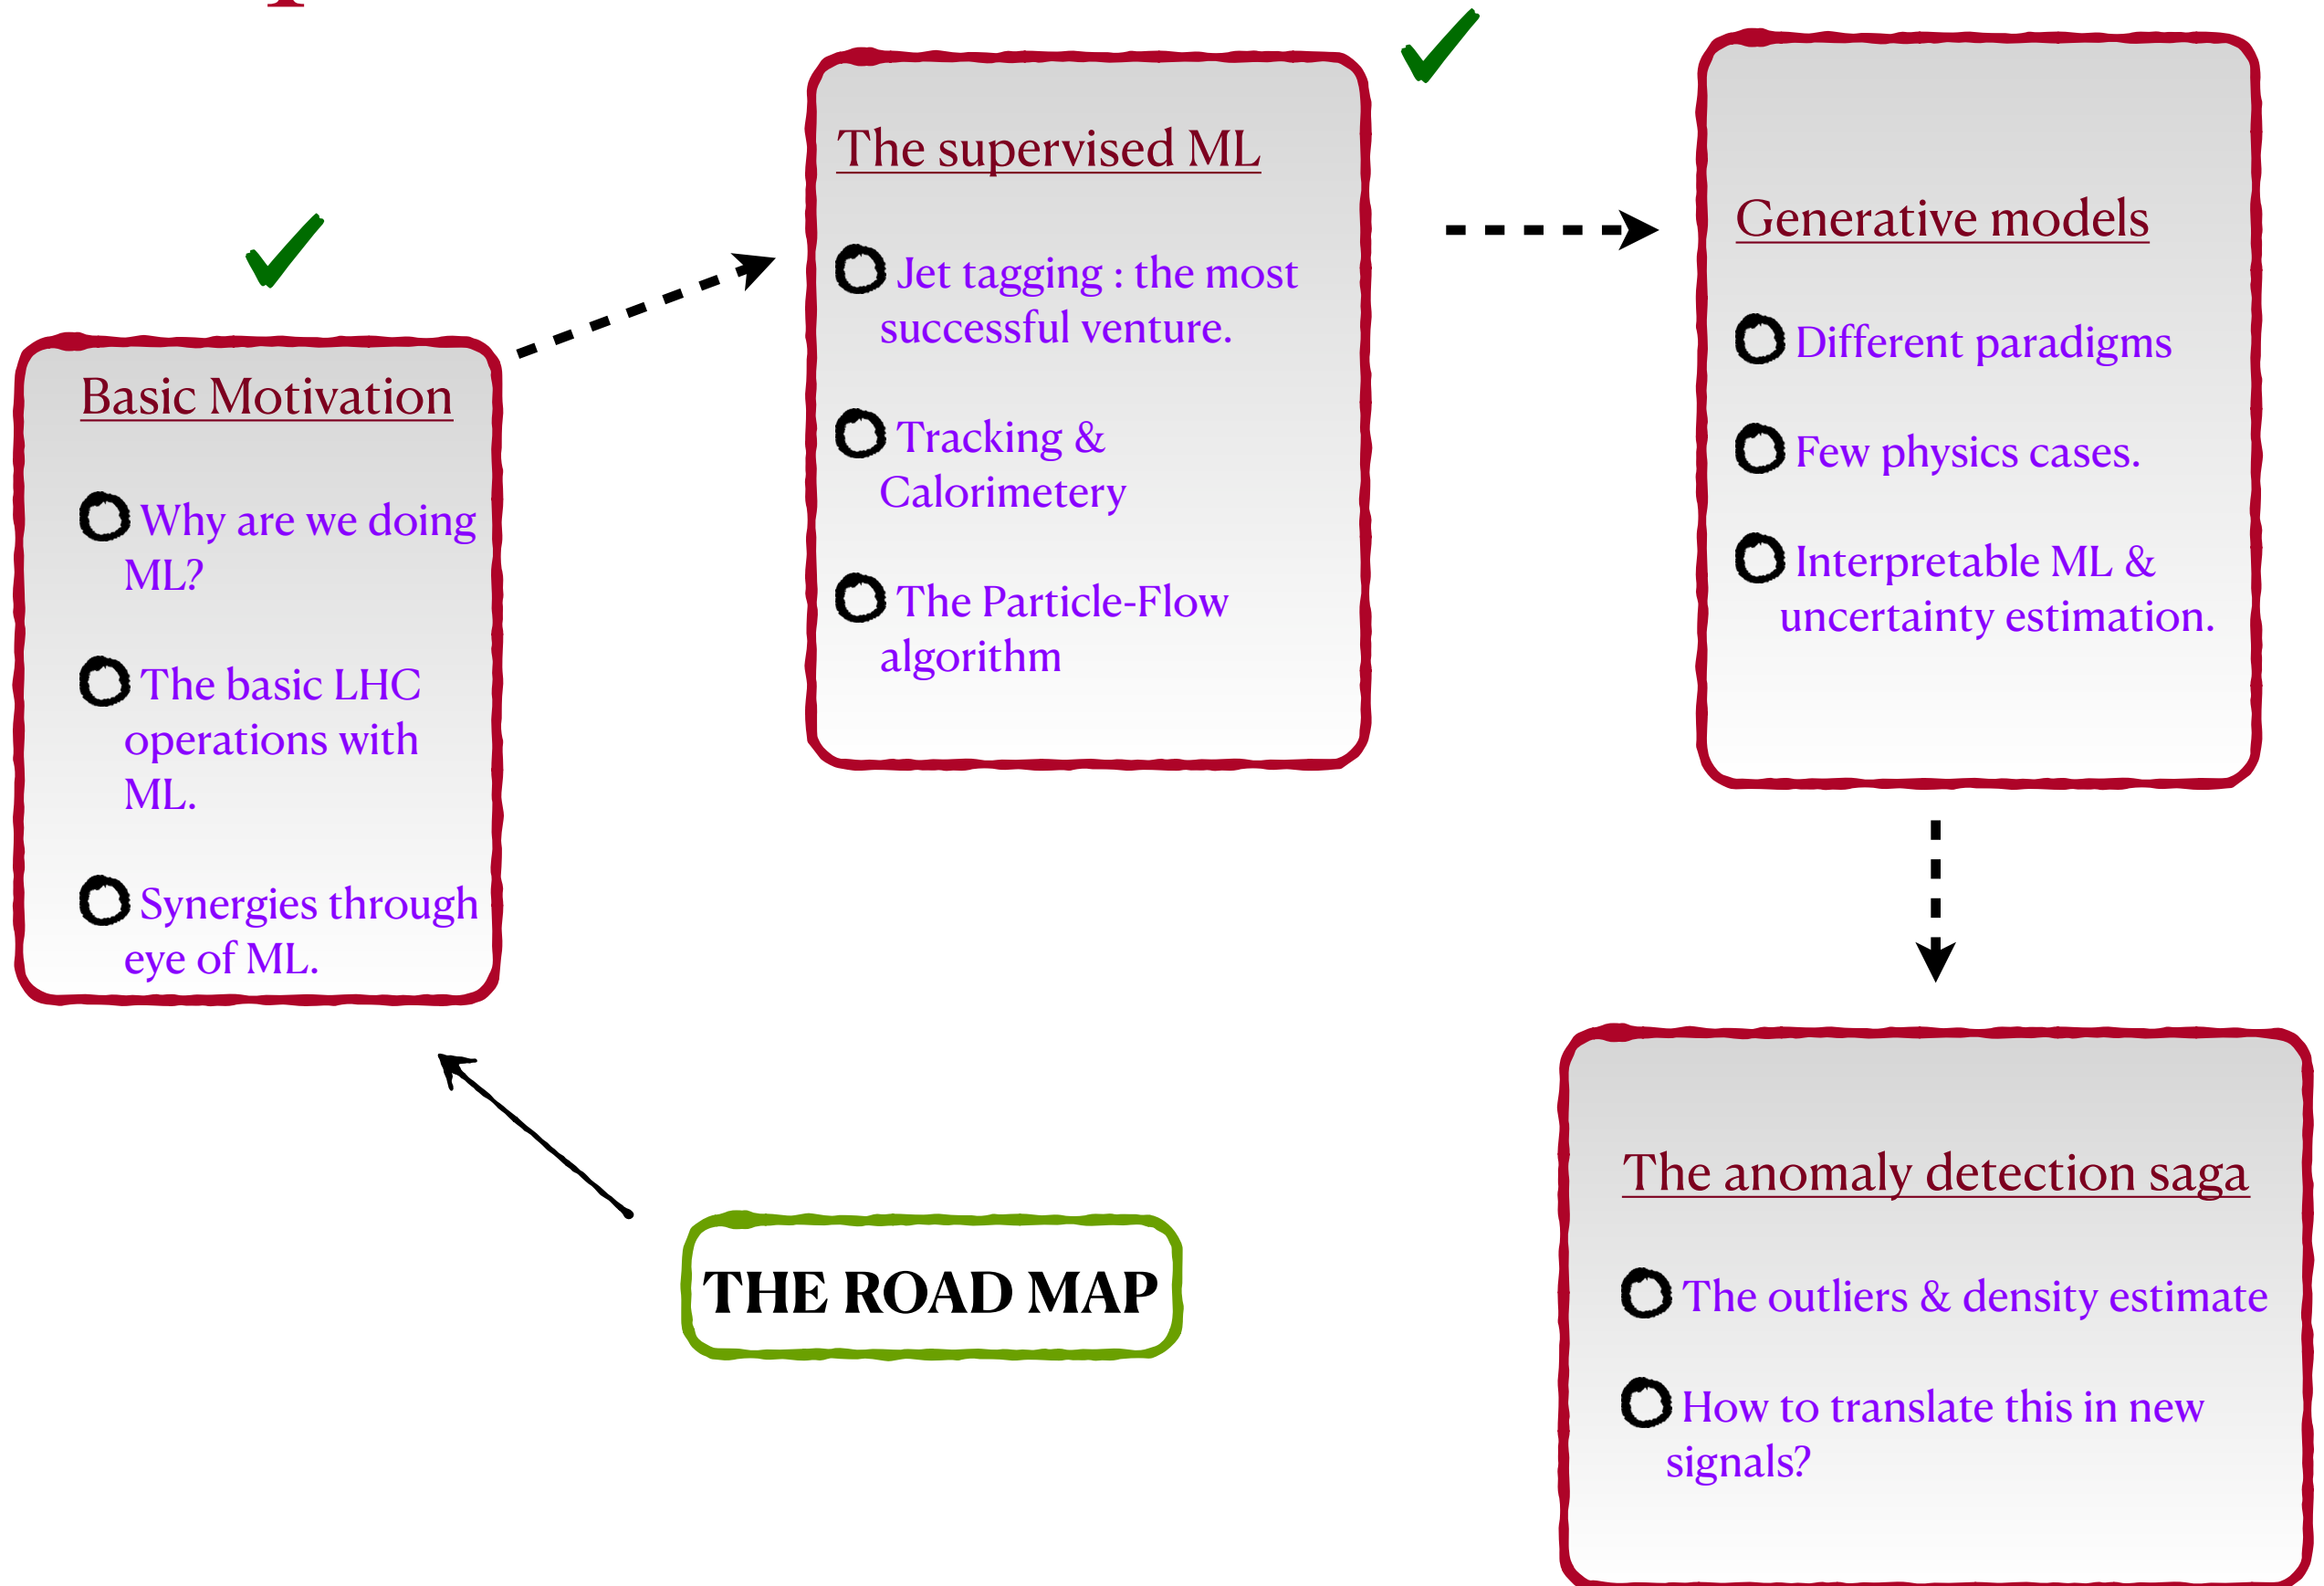


Generative models : what are they?

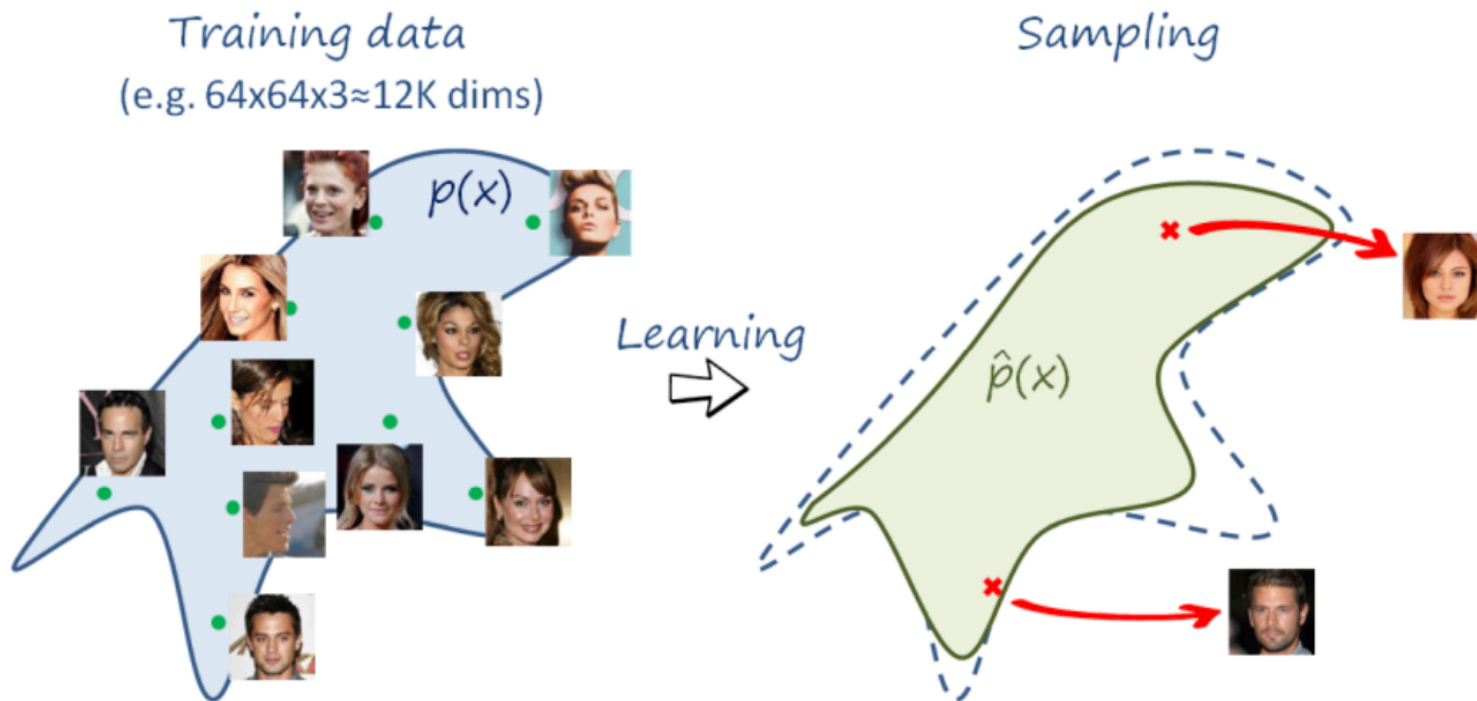



Generative models : what are they?

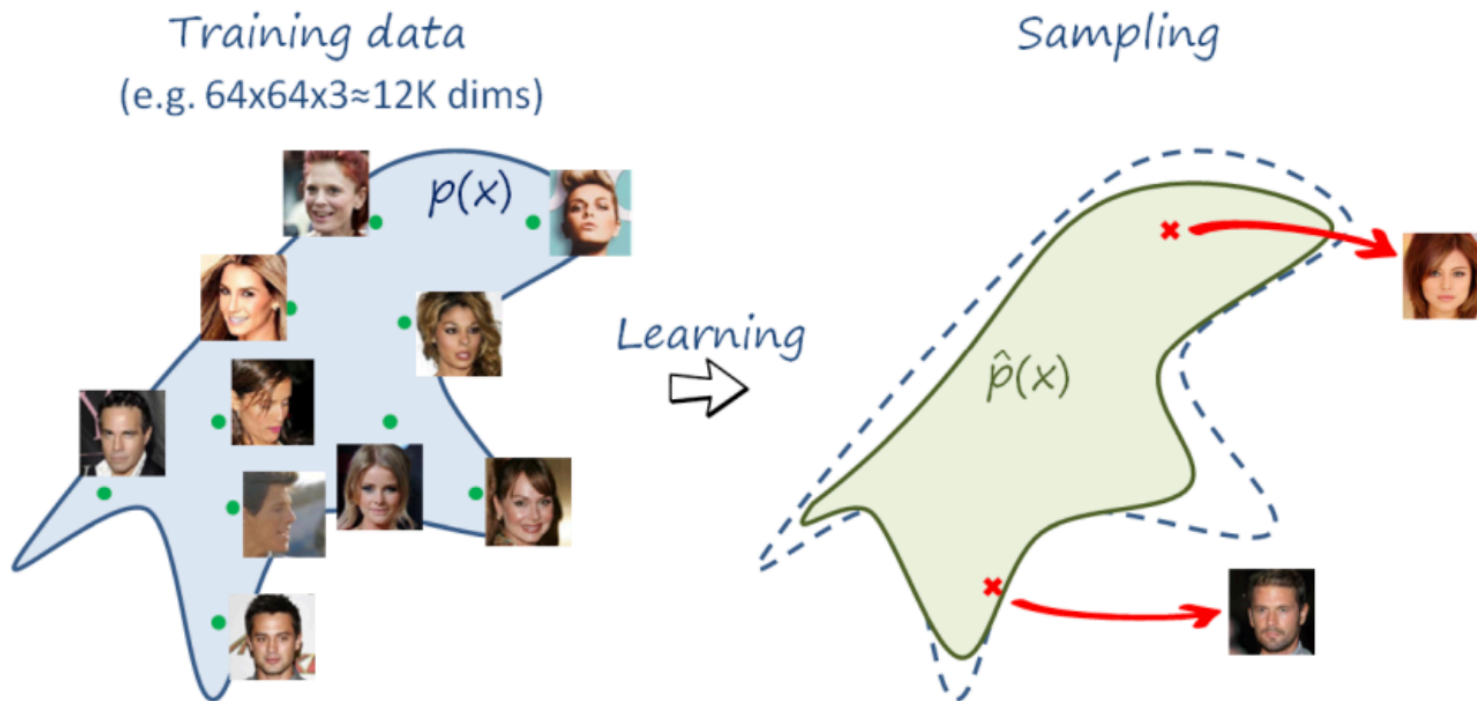


$$\min_{\theta_g} \max_{\theta_d} [\mathbb{E}_{x \sim p_{data}(x)} \log D_{\theta_d}(x) + \mathbb{E}_{z \sim p(z)} \log (1 - D_{\theta_d}(G_{\theta_g}(z)))]$$

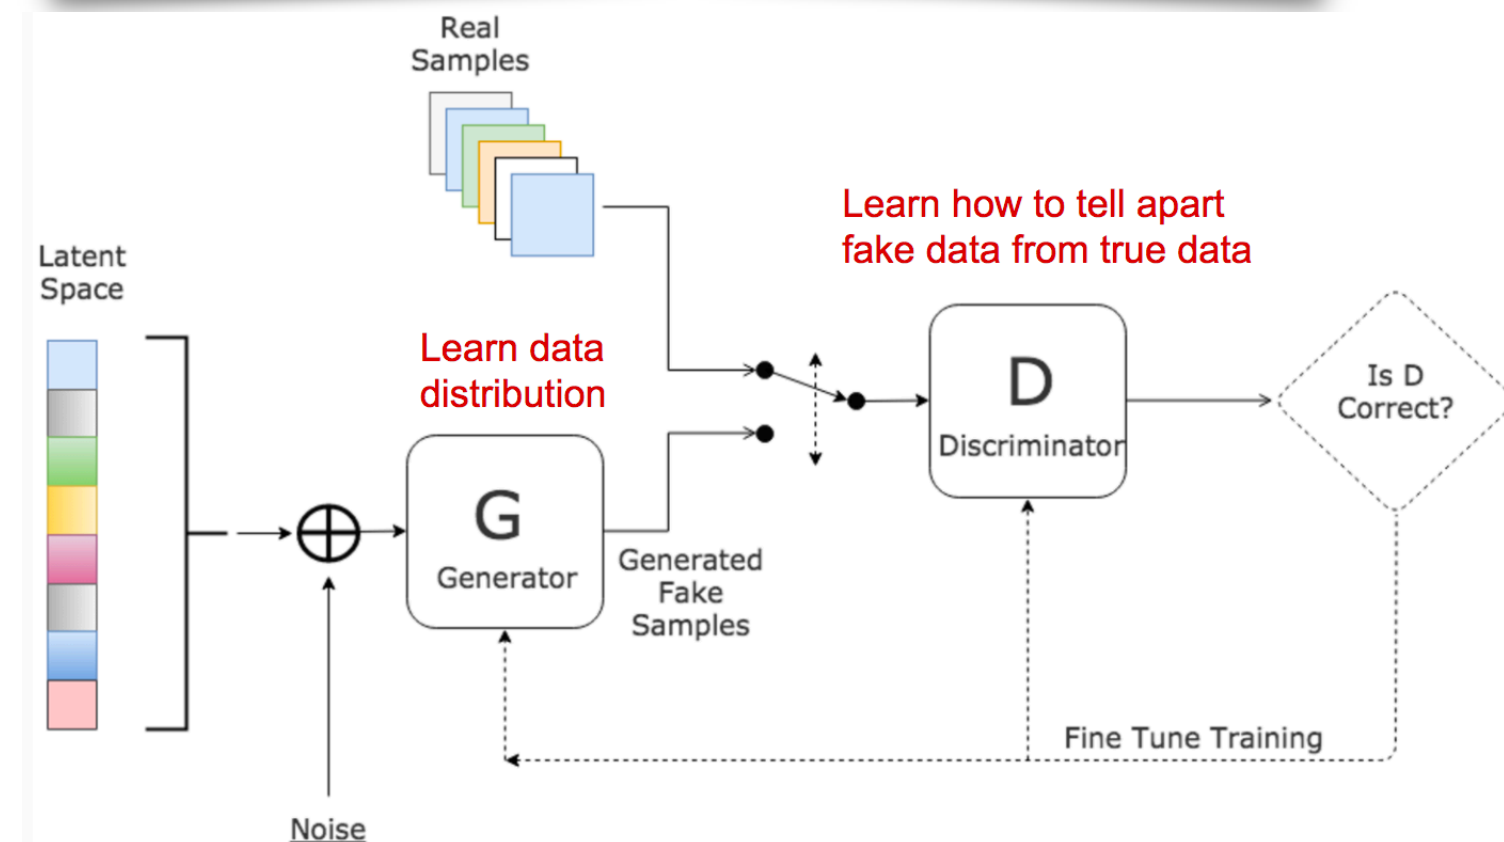



Generative models : what are they?

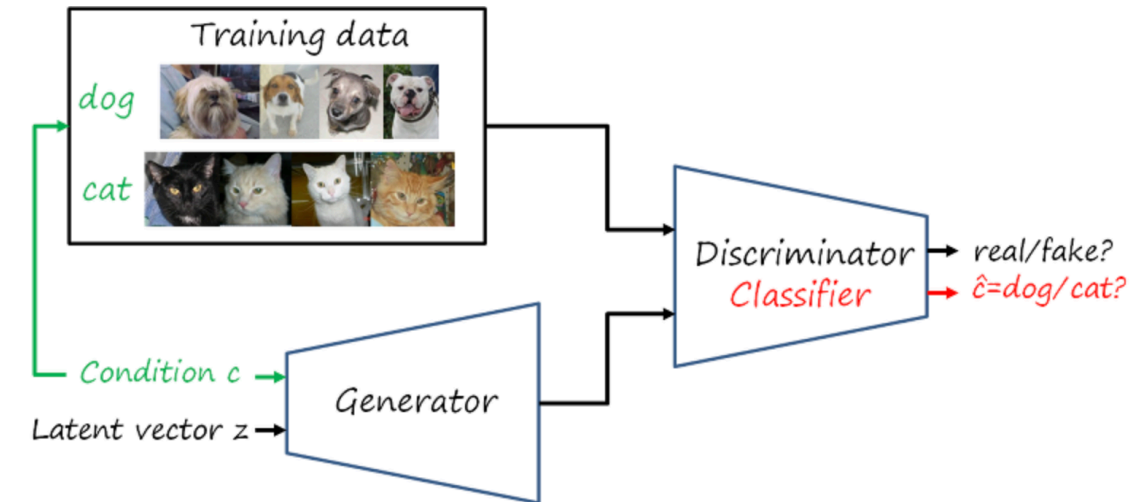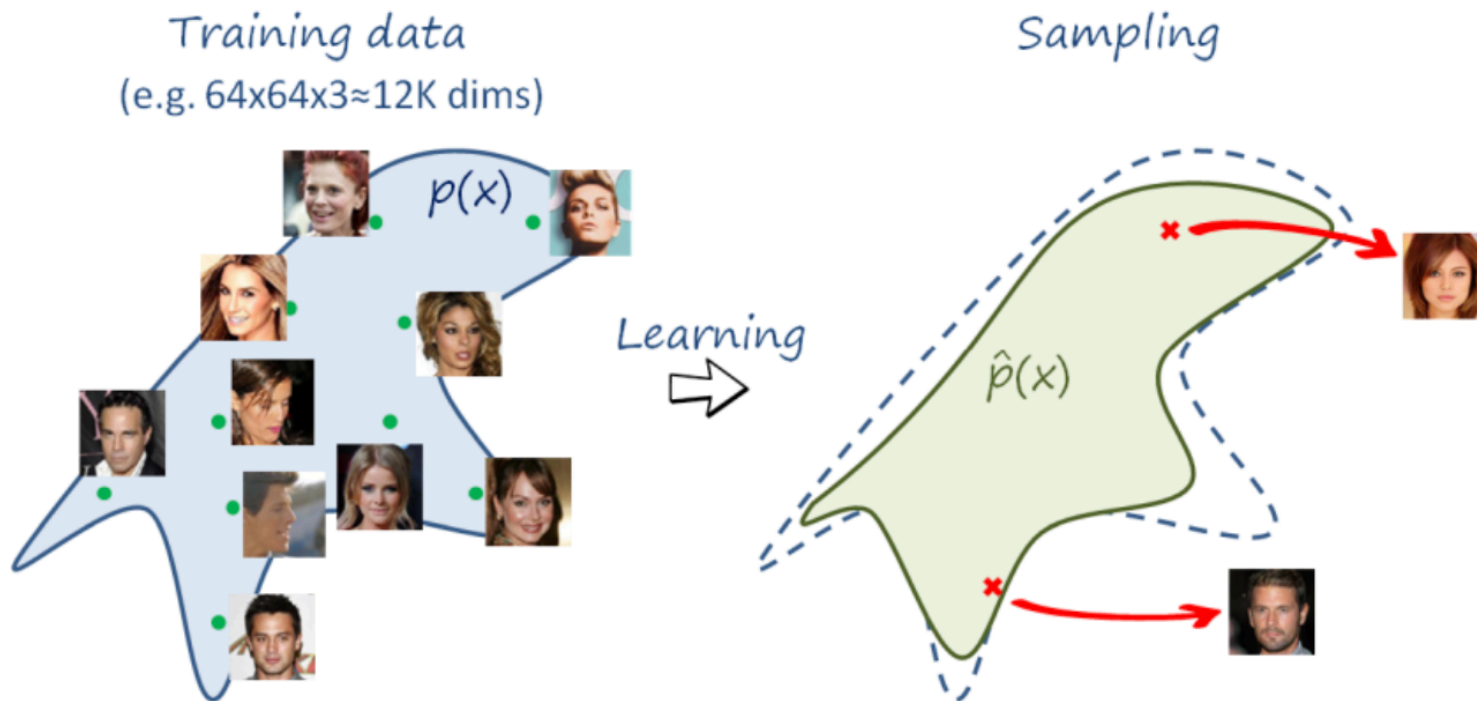

$$\min_{\theta_g} \max_{\theta_d} [\mathbb{E}_{x \sim p_{data}(x)} \log D_{\theta_d}(x) + \mathbb{E}_{z \sim p(z)} \log (1 - D_{\theta_d}(G_{\theta_g}(z)))]$$

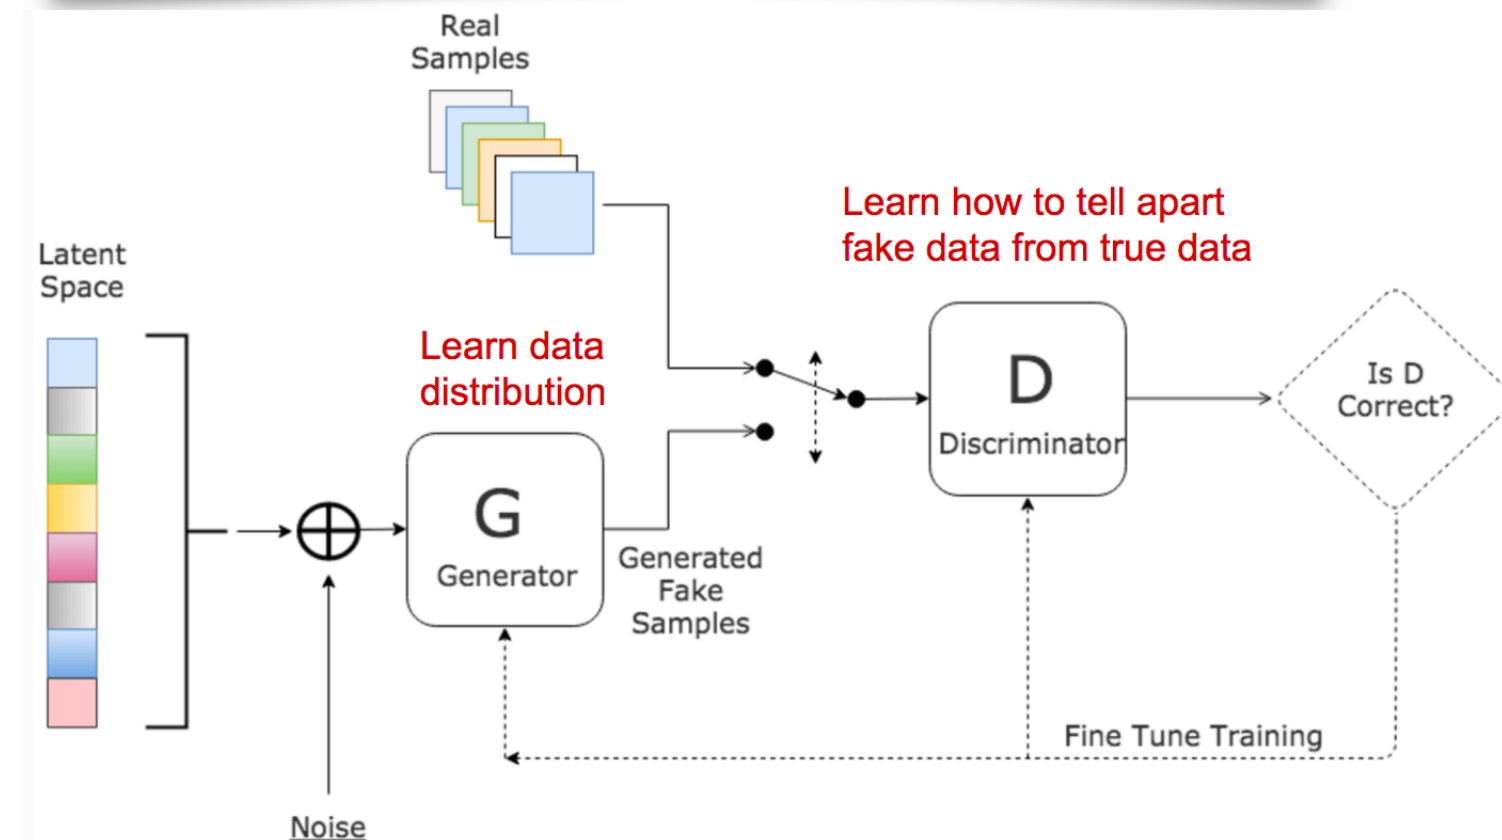


Generative models : what are they?

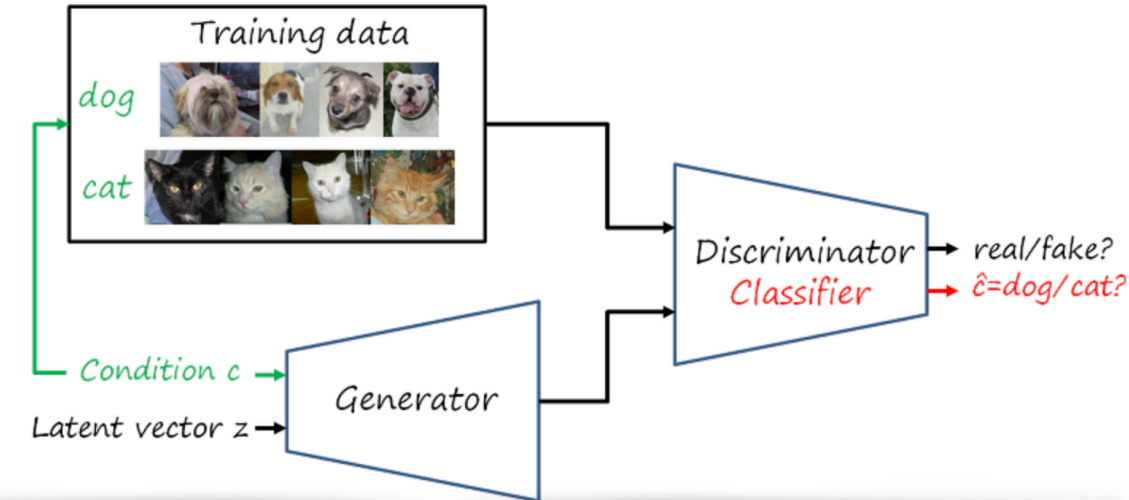
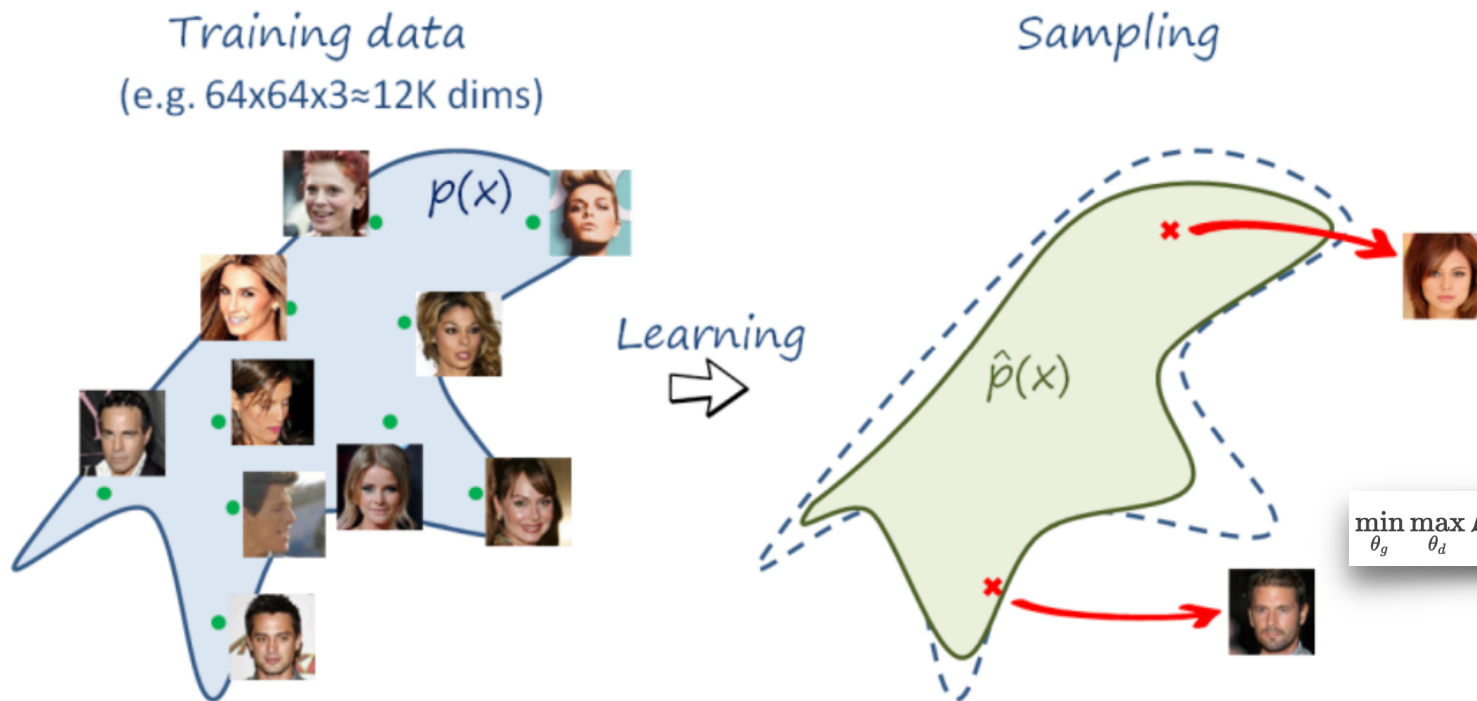


$$\min_{\theta_g} \max_{\theta_d} \mathcal{L}_{\text{cGAN}}(\theta_g, \theta_d) = \min_{\theta_g} \max_{\theta_d} [\mathbb{E}_{c, x \sim p_{\text{data}}(c, x)} \log D_{\theta_d}(c, x) + \mathbb{E}_{c \sim p_{\text{data}}(c), z \sim p_z(z)} \log (1 - D_{\theta_d}(c, G_{\theta_g}(c, z)))]$$

$$\min_{\theta_g} \max_{\theta_d} [\mathbb{E}_{x \sim p_{\text{data}}(x)} \log D_{\theta_d}(x) + \mathbb{E}_{z \sim p(z)} \log (1 - D_{\theta_d}(G_{\theta_g}(z)))]$$

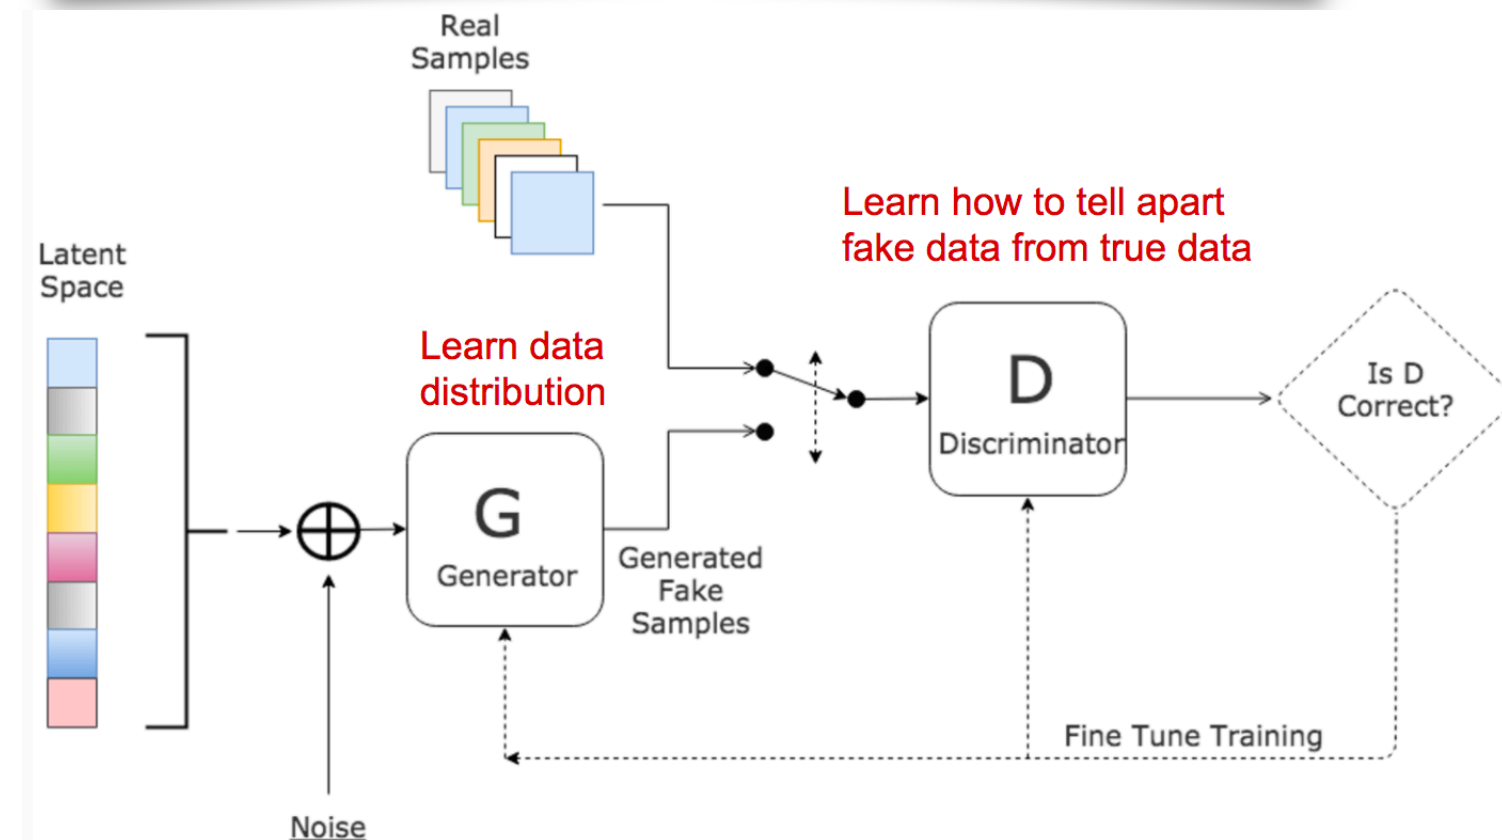


Generative models : what are they?

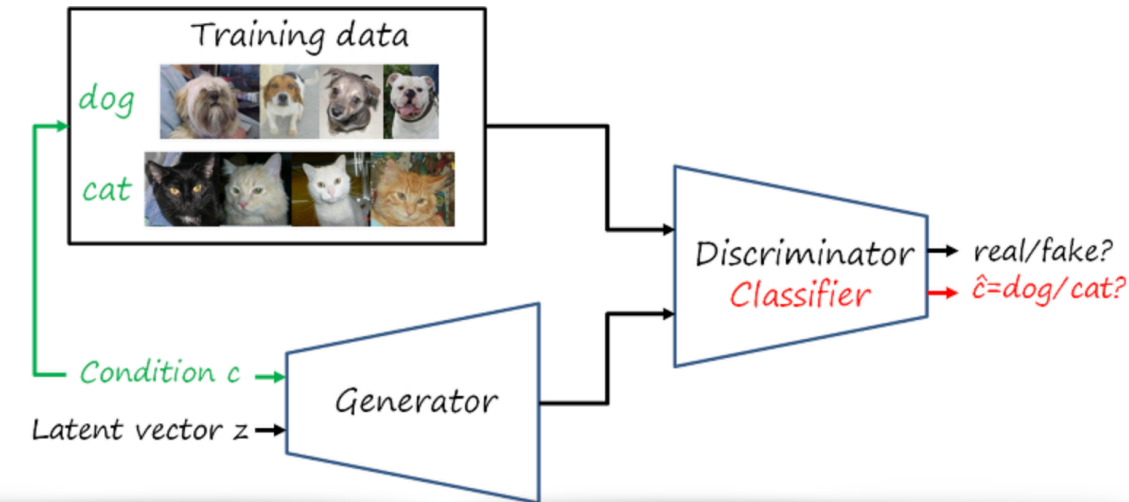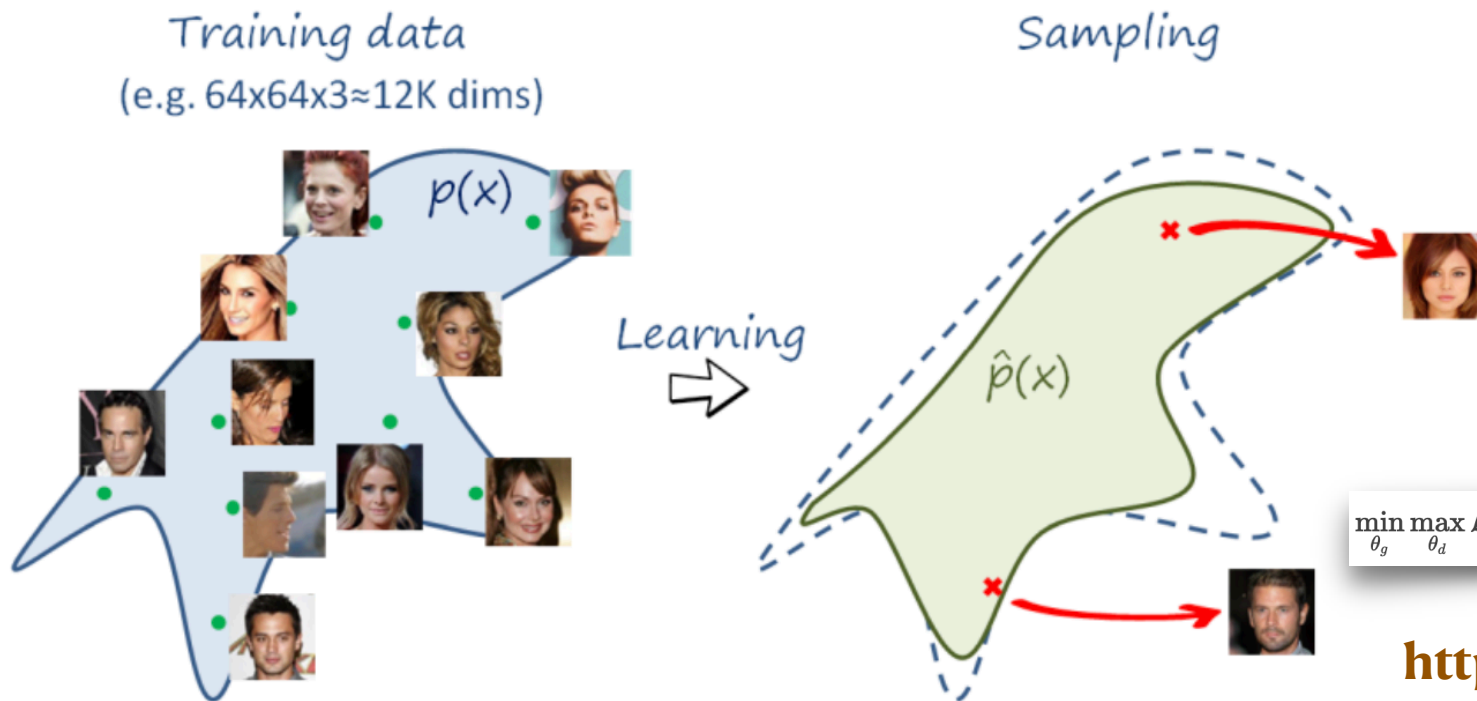



$$\min_{\theta_g} \max_{\theta_d} \mathcal{L}_{\text{cGAN}}(\theta_g, \theta_d) = \min_{\theta_g} \max_{\theta_d} [\mathbb{E}_{c, x \sim p_{\text{data}}(c, x)} \log D_{\theta_d}(c, x) + \mathbb{E}_{c \sim p_{\text{data}}(c), z \sim p_z(z)} \log (1 - D_{\theta_d}(c, G_{\theta_g}(c, z)))]$$

<http://www.lherranz.org/2018/08/07/imagetranslation/>

$$\min_{\theta_g} \max_{\theta_d} [\mathbb{E}_{x \sim p_{\text{data}}(x)} \log D_{\theta_d}(x) + \mathbb{E}_{z \sim p(z)} \log (1 - D_{\theta_d}(G_{\theta_g}(z)))]$$

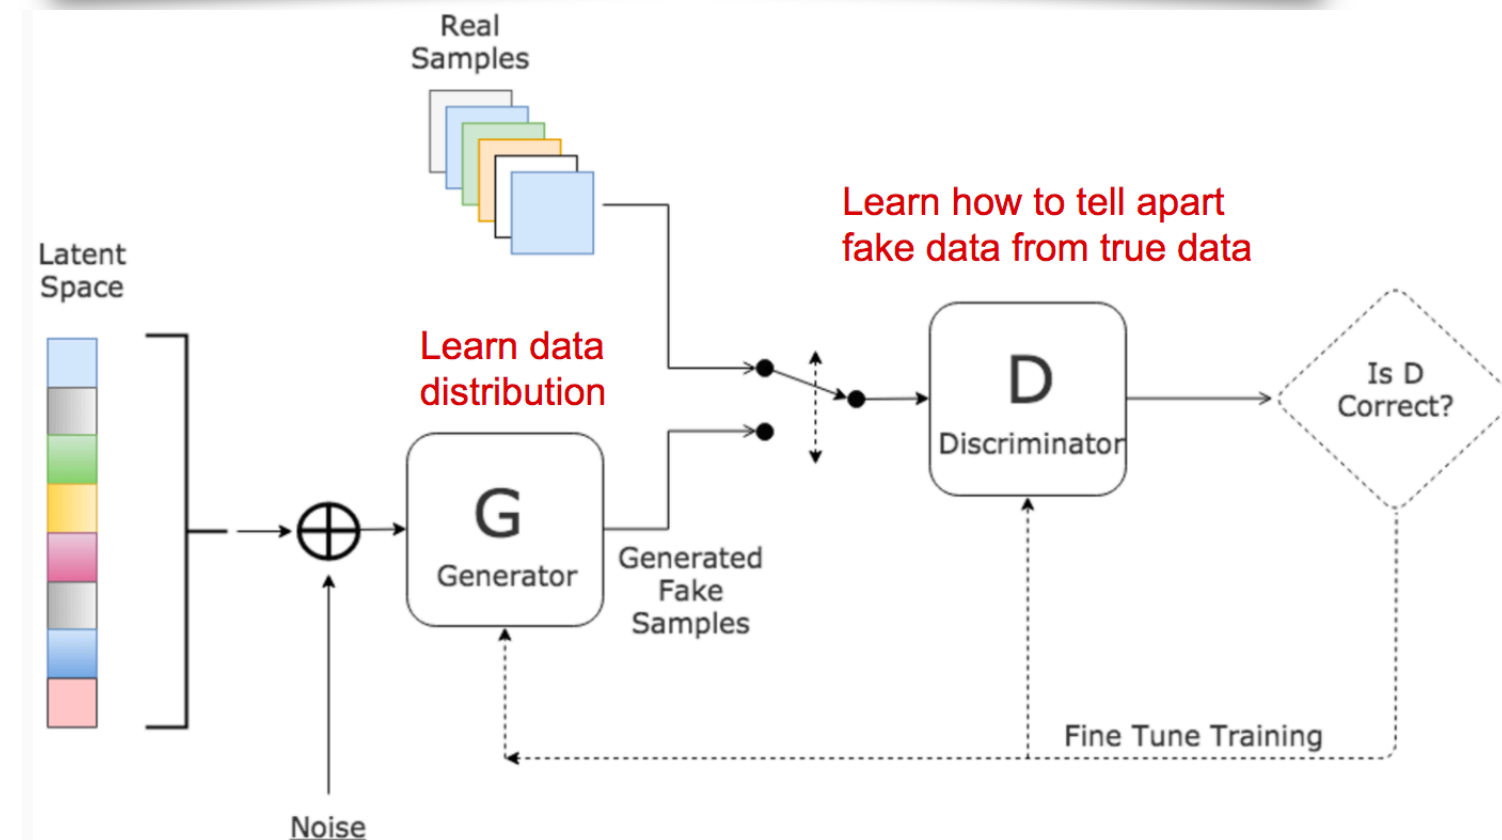



Generative models : what are they?

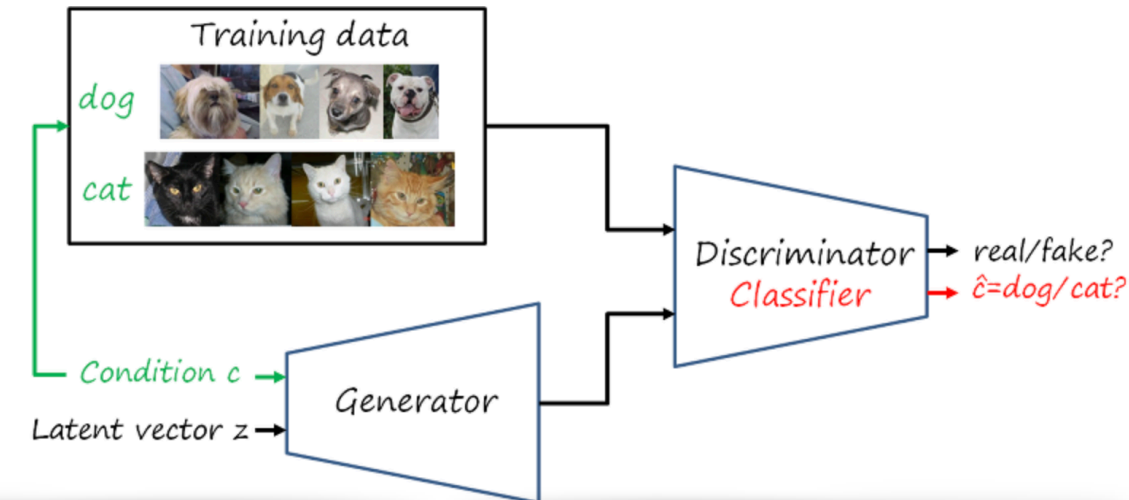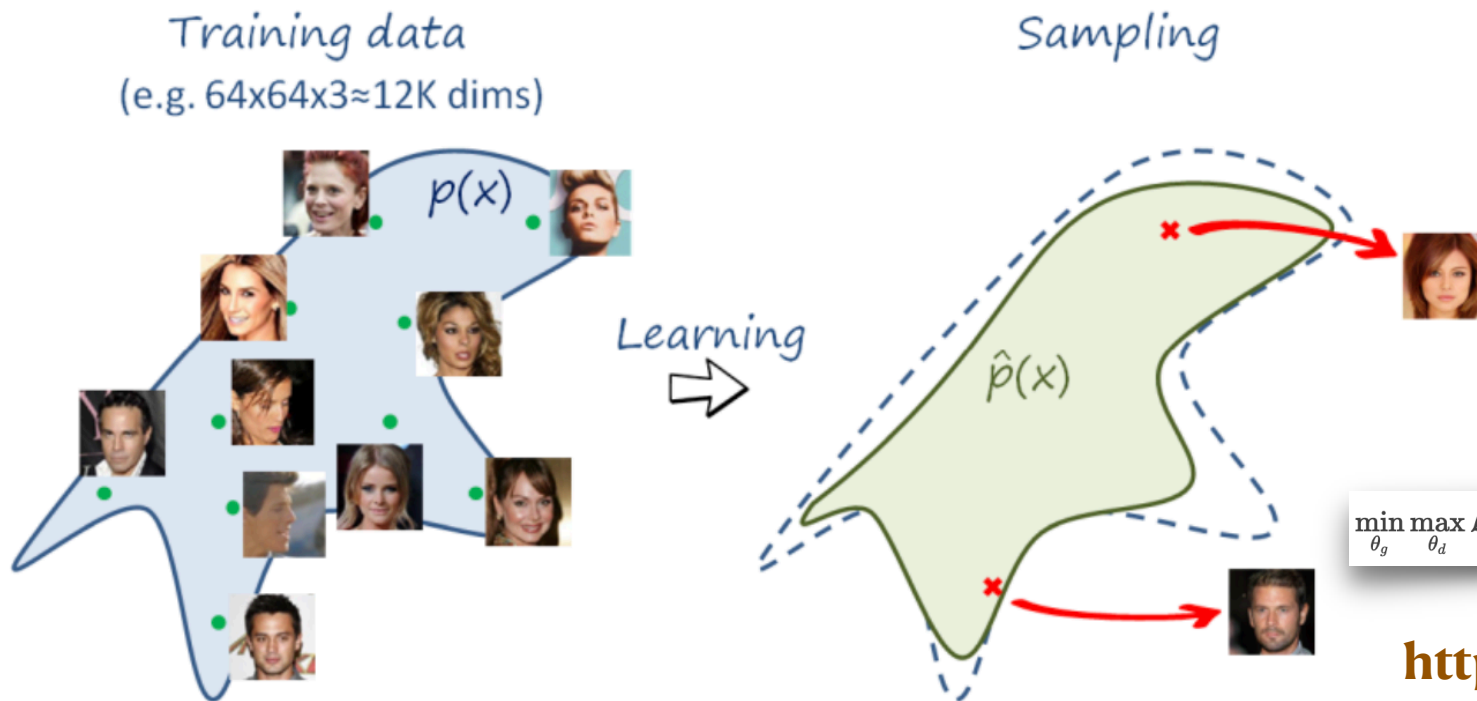

$$\min_{\theta_g} \max_{\theta_d} \mathcal{L}_{\text{cGAN}}(\theta_g, \theta_d) = \min_{\theta_g} \max_{\theta_d} [\mathbb{E}_{c, x \sim p_{\text{data}}(c, x)} \log D_{\theta_d}(c, x) + \mathbb{E}_{c \sim p_{\text{data}}(c), z \sim p_z(z)} \log (1 - D_{\theta_d}(c, G_{\theta_g}(c, z)))]$$



<http://www.lherranz.org/2018/08/07/imagetranslation/>

$$\min_{\theta_g} \max_{\theta_d} [\mathbb{E}_{x \sim p_{\text{data}}(x)} \log D_{\theta_d}(x) + \mathbb{E}_{z \sim p(z)} \log (1 - D_{\theta_d}(G_{\theta_g}(z)))]$$

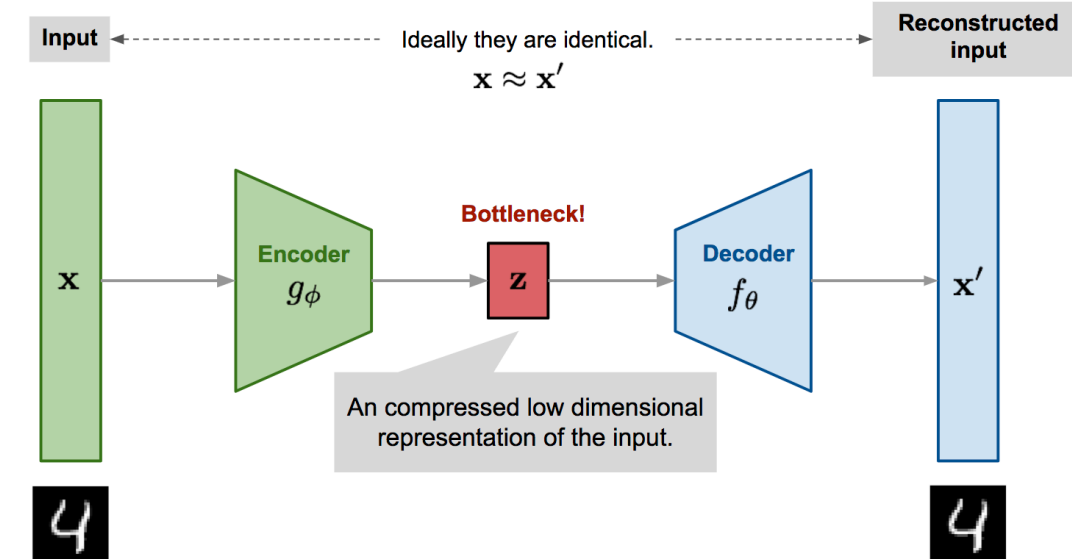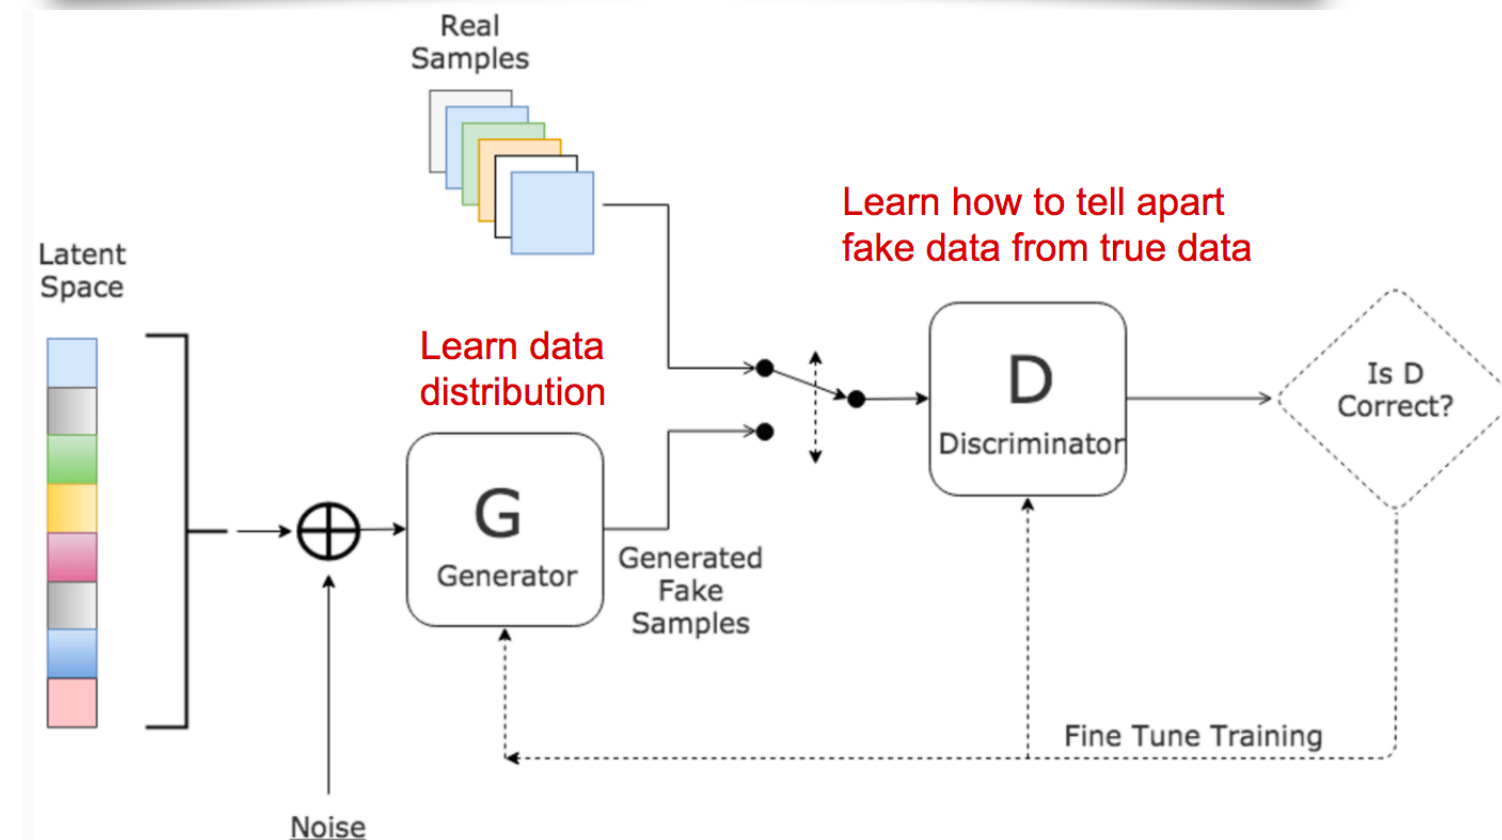

$$L_{\text{AE}}(\theta, \phi) = \frac{1}{n} \sum_{i=1}^n (\mathbf{x}^{(i)} - f_\theta(g_\phi(\mathbf{x}^{(i)})))^2$$



Generative models : what are they?

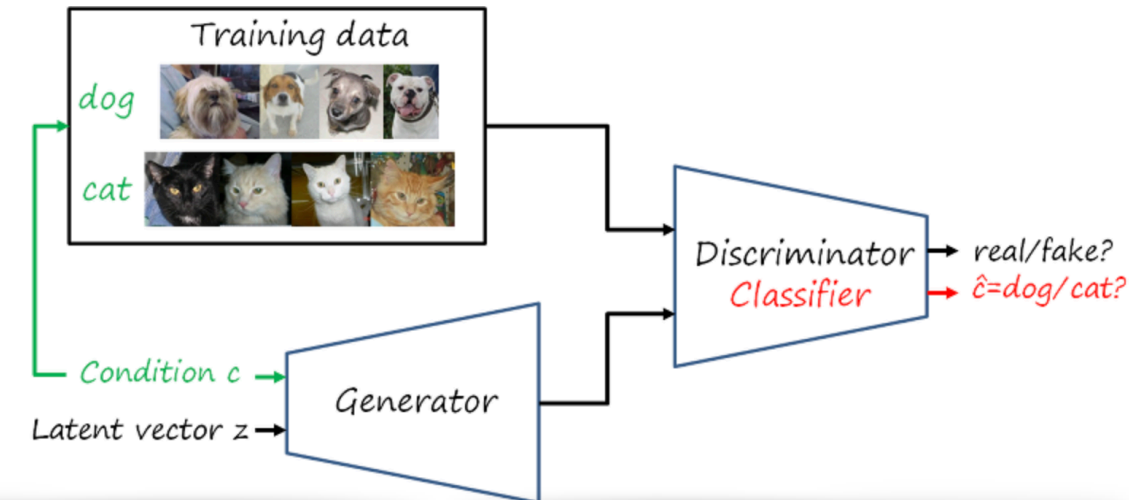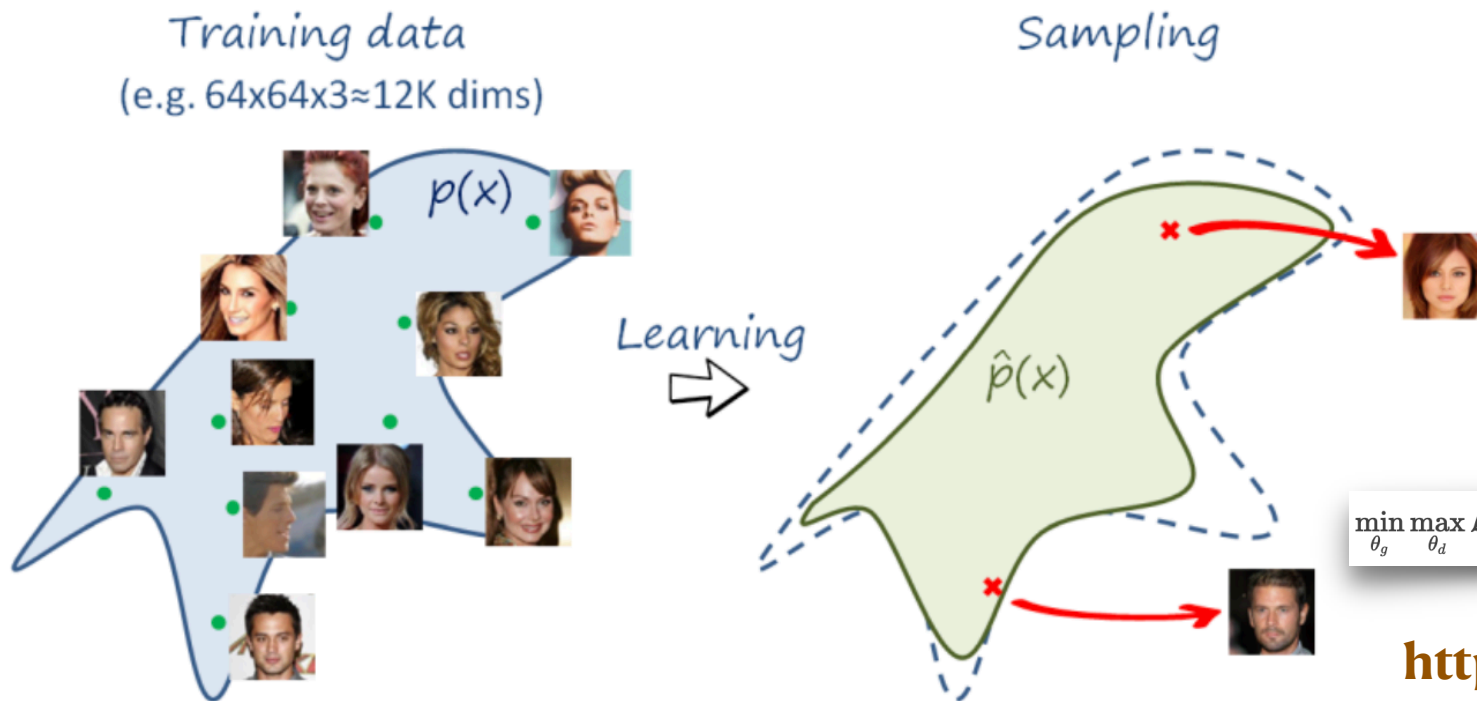

$$\min_{\theta_g} \max_{\theta_d} \mathcal{L}_{\text{cGAN}}(\theta_g, \theta_d) = \min_{\theta_g} \max_{\theta_d} [\mathbb{E}_{c, x \sim p_{\text{data}}(c, x)} \log D_{\theta_d}(c, x) + \mathbb{E}_{c \sim p_{\text{data}}(c), z \sim p_z(z)} \log (1 - D_{\theta_d}(c, G_{\theta_g}(c, z)))]$$

<http://www.lherranz.org/2018/08/07/imagetranslation/>


$$\min_{\theta_g} \max_{\theta_d} [\mathbb{E}_{x \sim p_{\text{data}}(x)} \log D_{\theta_d}(x) + \mathbb{E}_{z \sim p(z)} \log (1 - D_{\theta_d}(G_{\theta_g}(z)))]$$

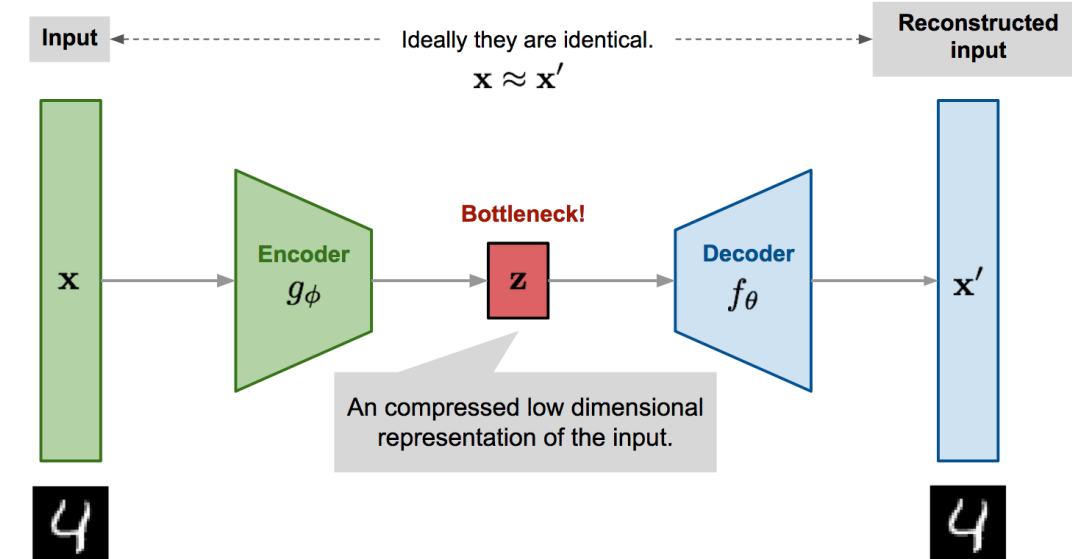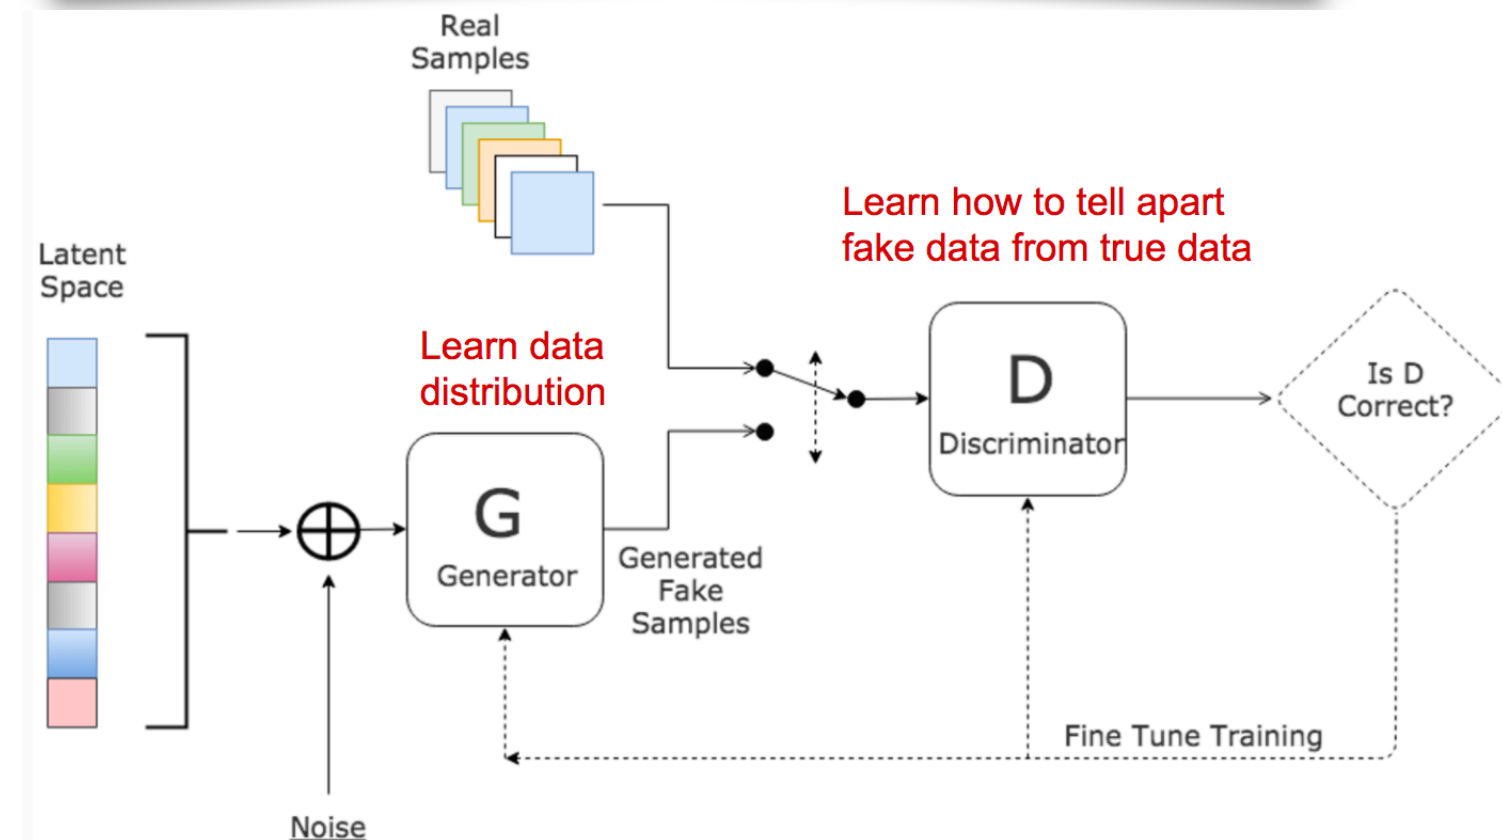

$$L_{\text{AE}}(\theta, \phi) = \frac{1}{n} \sum_{i=1}^n (\mathbf{x}^{(i)} - f_\theta(g_\phi(\mathbf{x}^{(i)})))^2$$

<https://lilianweng.github.io/posts/>

Learn the PDF through bijections

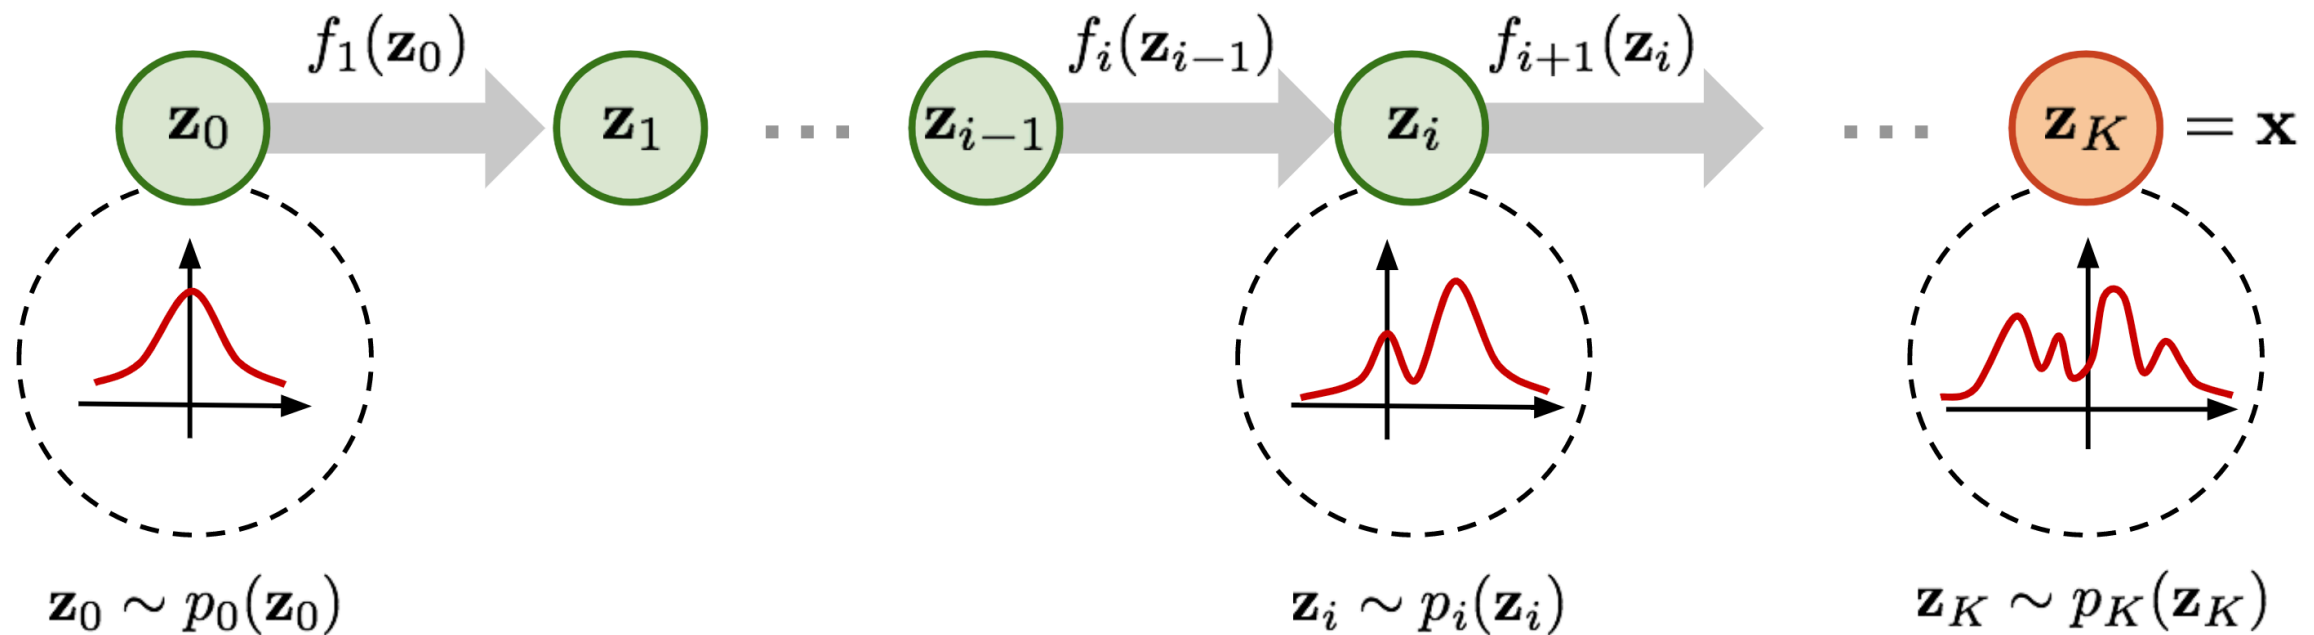

$$\mathbf{z} \sim \pi(\mathbf{z}), \mathbf{x} = f(\mathbf{z}), \mathbf{z} = f^{-1}(\mathbf{x})$$

$$p(\mathbf{x}) = \pi(\mathbf{z}) \left| \det \frac{d\mathbf{z}}{d\mathbf{x}} \right| = \pi(f^{-1}(\mathbf{x})) \left| \det \frac{df^{-1}}{d\mathbf{x}} \right|$$

$$p_i(\mathbf{z}_i) = p_{i-1}(f_i^{-1}(\mathbf{z}_i)) \left| \det \frac{df_i^{-1}}{d\mathbf{z}_i} \right|$$

$$= p_{i-1}(\mathbf{z}_{i-1}) \left| \det \left(\frac{df_i}{d\mathbf{z}_{i-1}} \right)^{-1} \right|$$

$$= p_{i-1}(\mathbf{z}_{i-1}) \left| \det \frac{df_i}{d\mathbf{z}_{i-1}} \right|^{-1}$$

$$\log p_i(\mathbf{z}_i) = \log p_{i-1}(\mathbf{z}_{i-1}) - \log \left| \det \frac{df_i}{d\mathbf{z}_{i-1}} \right|$$

$$\mathbf{x} = \mathbf{z}_K = f_K \circ f_{K-1} \circ \dots \circ f_1(\mathbf{z}_0)$$


$$\log p(\mathbf{x}) = \log \pi_K(\mathbf{z}_K) = \log \pi_{K-1}(\mathbf{z}_{K-1}) - \log \left| \det \frac{df_K}{d\mathbf{z}_{K-1}} \right|$$

$$= \log \pi_{K-2}(\mathbf{z}_{K-2}) - \log \left| \det \frac{df_{K-1}}{d\mathbf{z}_{K-2}} \right| - \log \left| \det \frac{df_K}{d\mathbf{z}_{K-1}} \right|$$

$$= \dots$$

$$= \log \pi_0(\mathbf{z}_0) - \sum_{i=1}^K \log \left| \det \frac{df_i}{d\mathbf{z}_{i-1}} \right|$$

How about create some noise & do it?

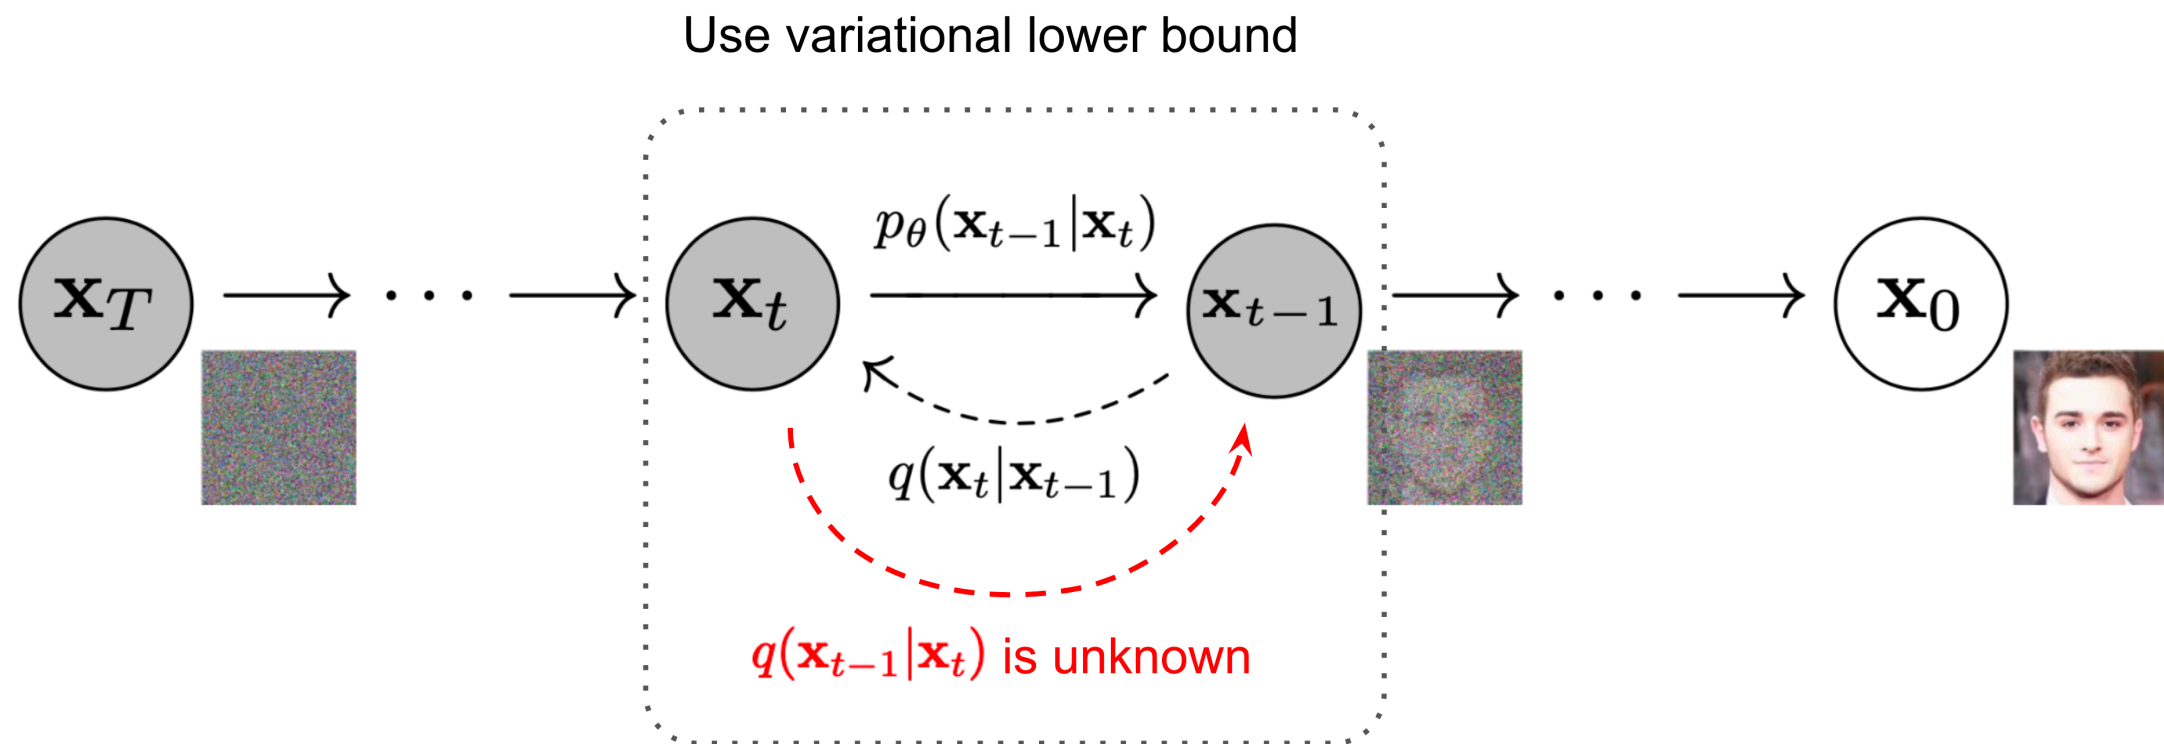

Forward diffusion

$$q(\mathbf{x}_t|\mathbf{x}_{t-1}) = \mathcal{N}(\mathbf{x}_t; \sqrt{1 - \beta_t}\mathbf{x}_{t-1}, \beta_t\mathbf{I}) \quad q(\mathbf{x}_{1:T}|\mathbf{x}_0) = \prod_{t=1}^T q(\mathbf{x}_t|\mathbf{x}_{t-1})$$

Reverse diffusion

$$p_\theta(\mathbf{x}_{0:T}) = p(\mathbf{x}_T) \prod_{t=1}^T p_\theta(\mathbf{x}_{t-1}|\mathbf{x}_t) \quad p_\theta(\mathbf{x}_{t-1}|\mathbf{x}_t) = \mathcal{N}(\mathbf{x}_{t-1}; \boldsymbol{\mu}_\theta(\mathbf{x}_t, t), \boldsymbol{\Sigma}_\theta(\mathbf{x}_t, t))$$

Generative models : the popular species



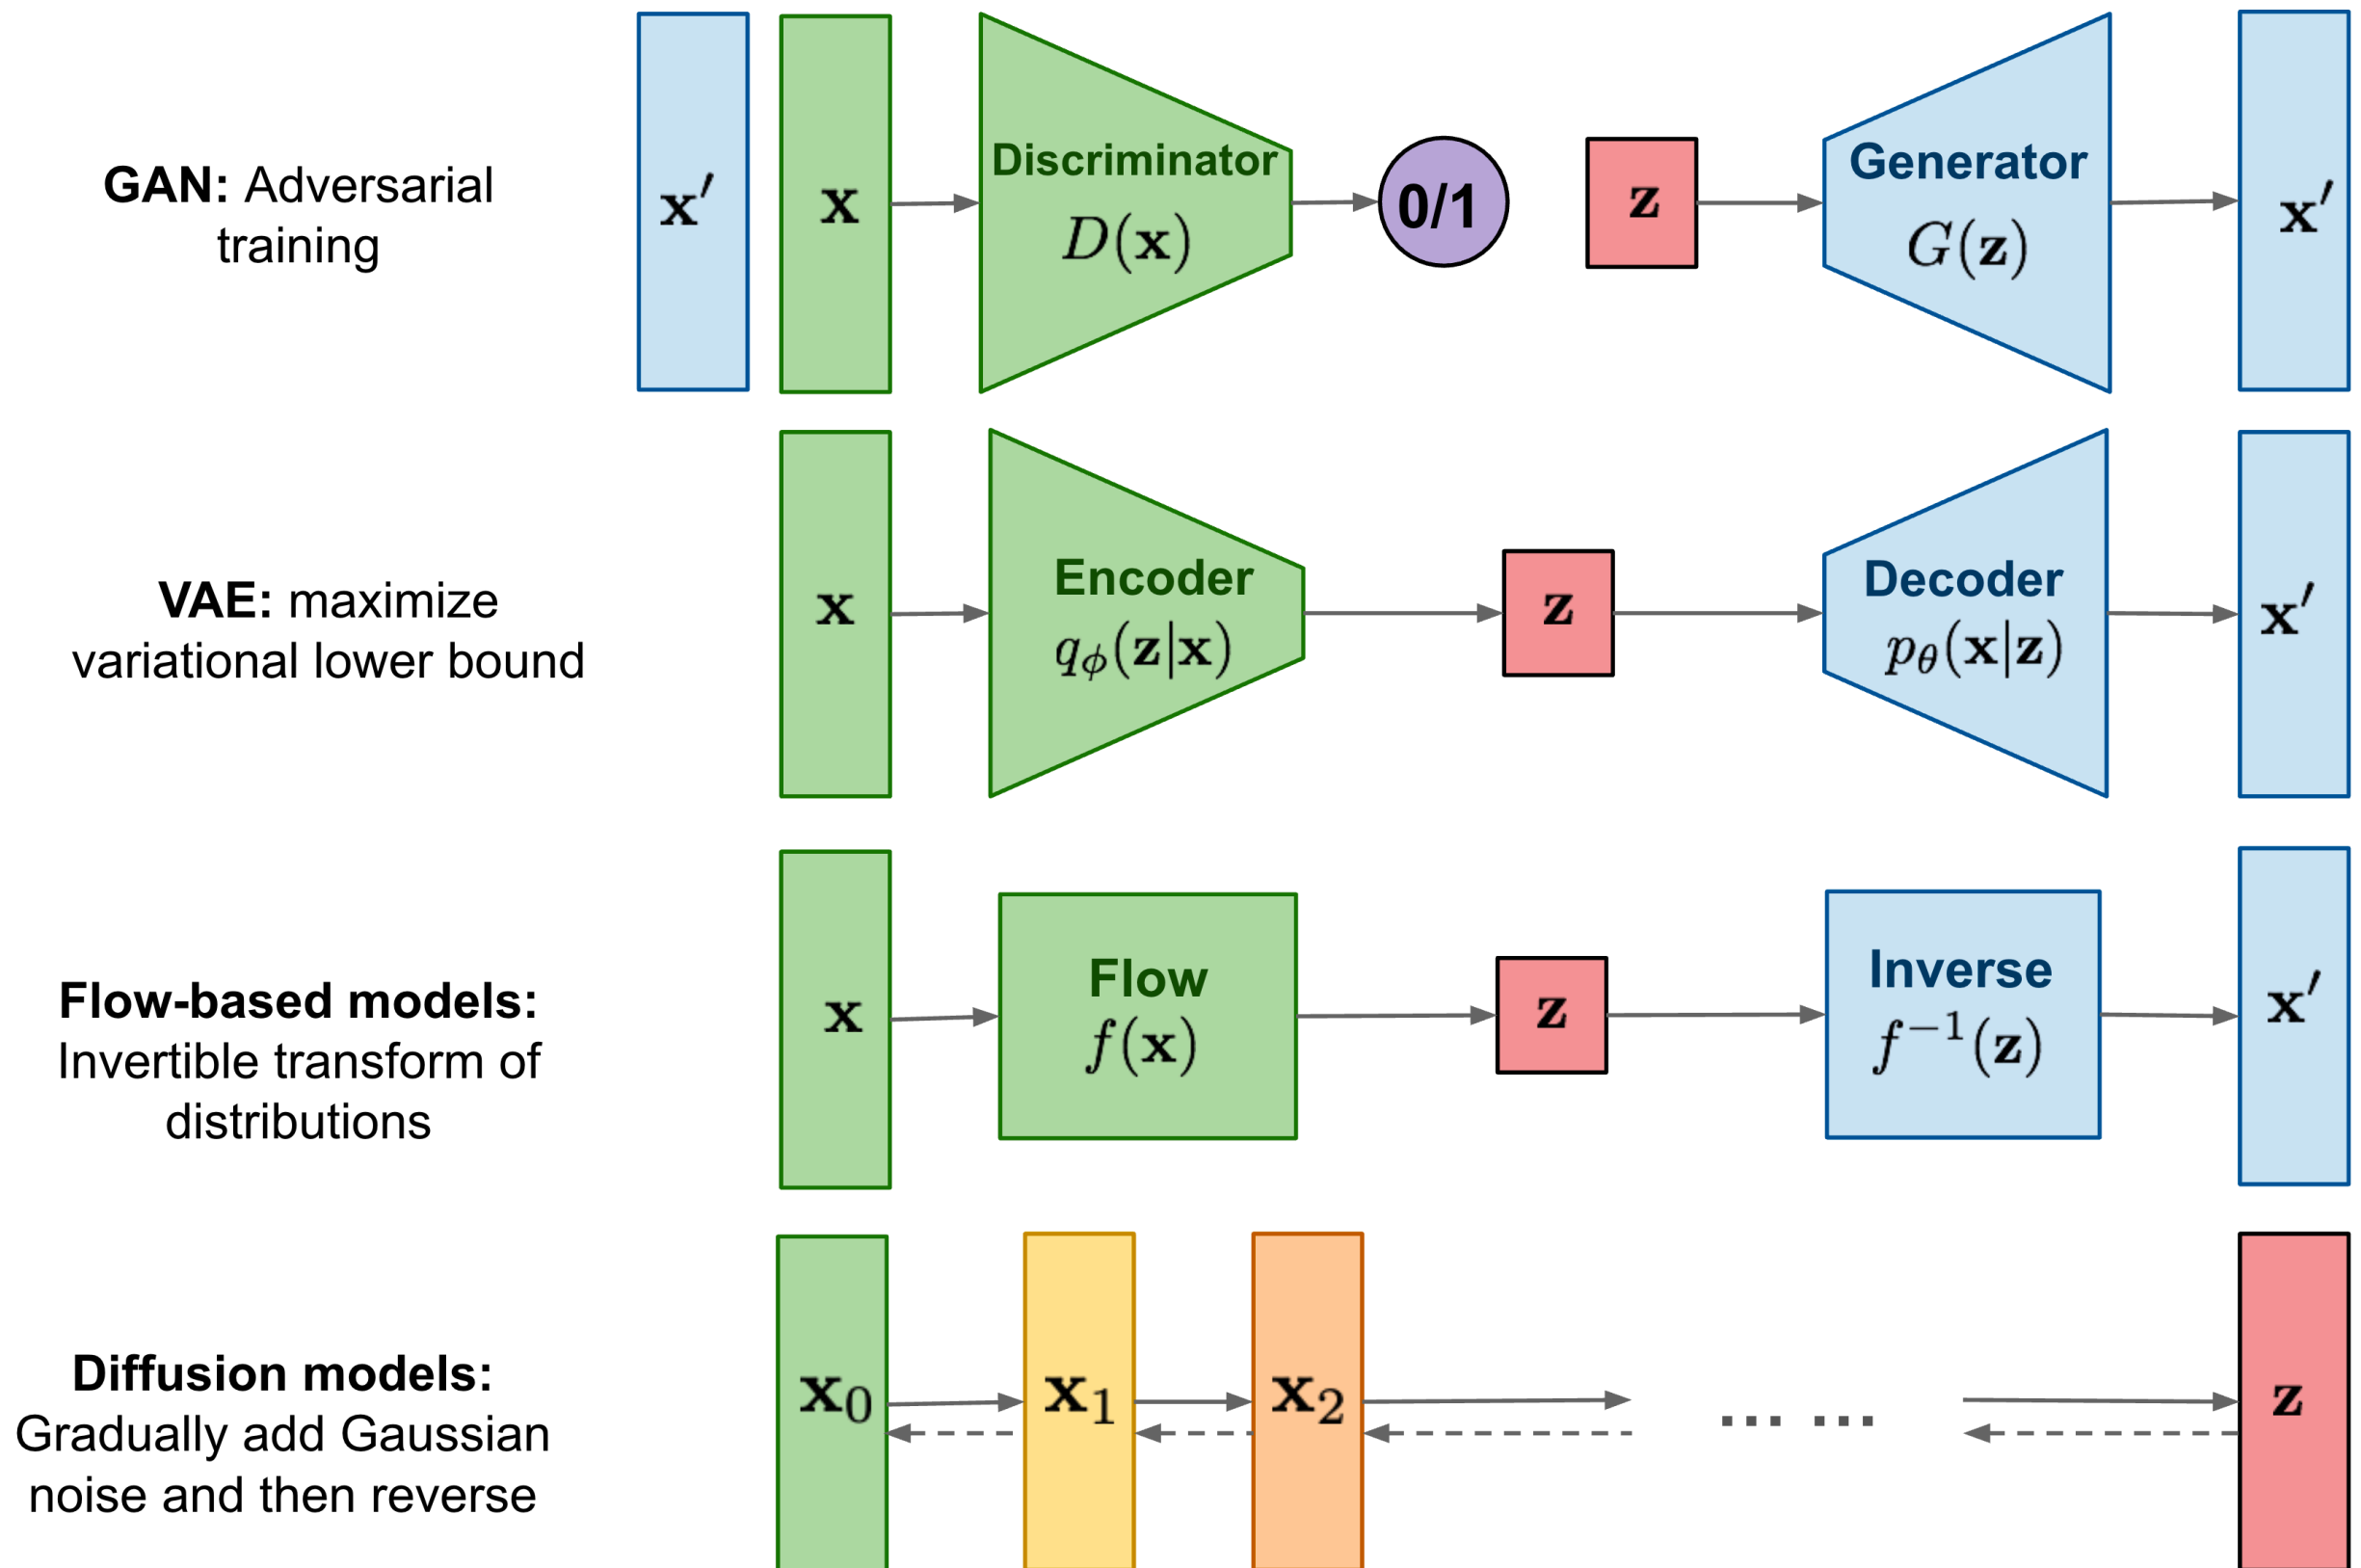


Fig from : <https://lilianweng.github.io/posts/2021-07-11-diffusion-models/>


Generative models for calorimeter simulations

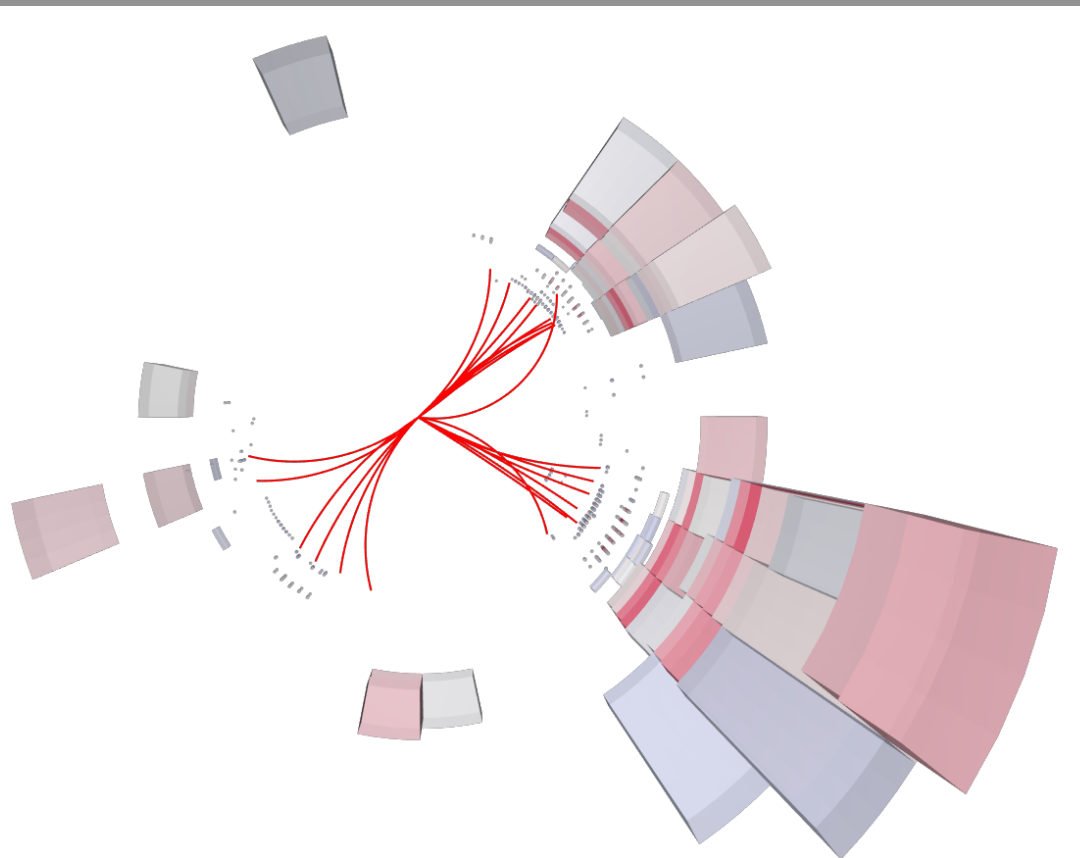

$$f_{\{\theta\}} (\text{ , } z)$$


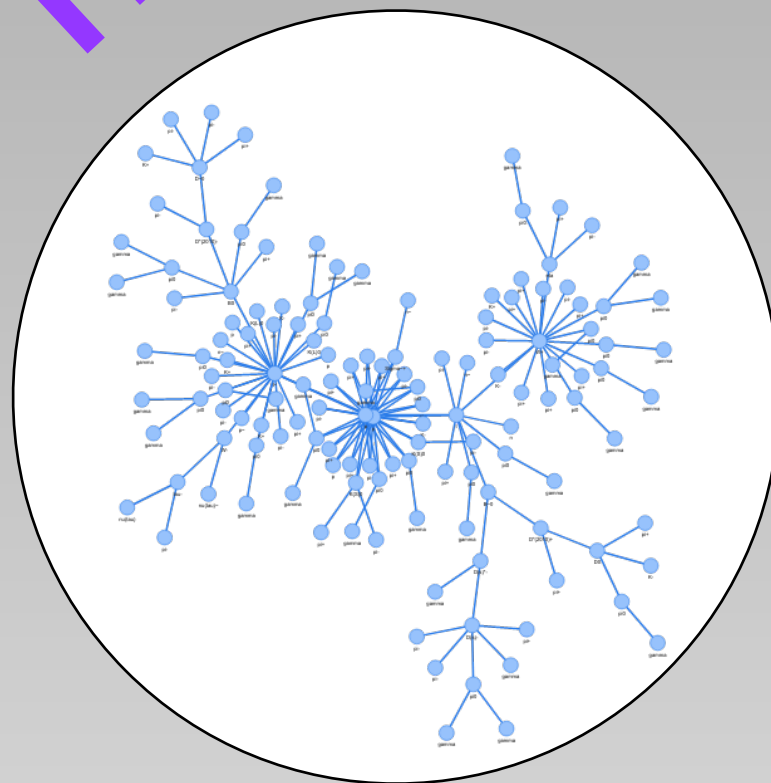


Detector simulation using ML

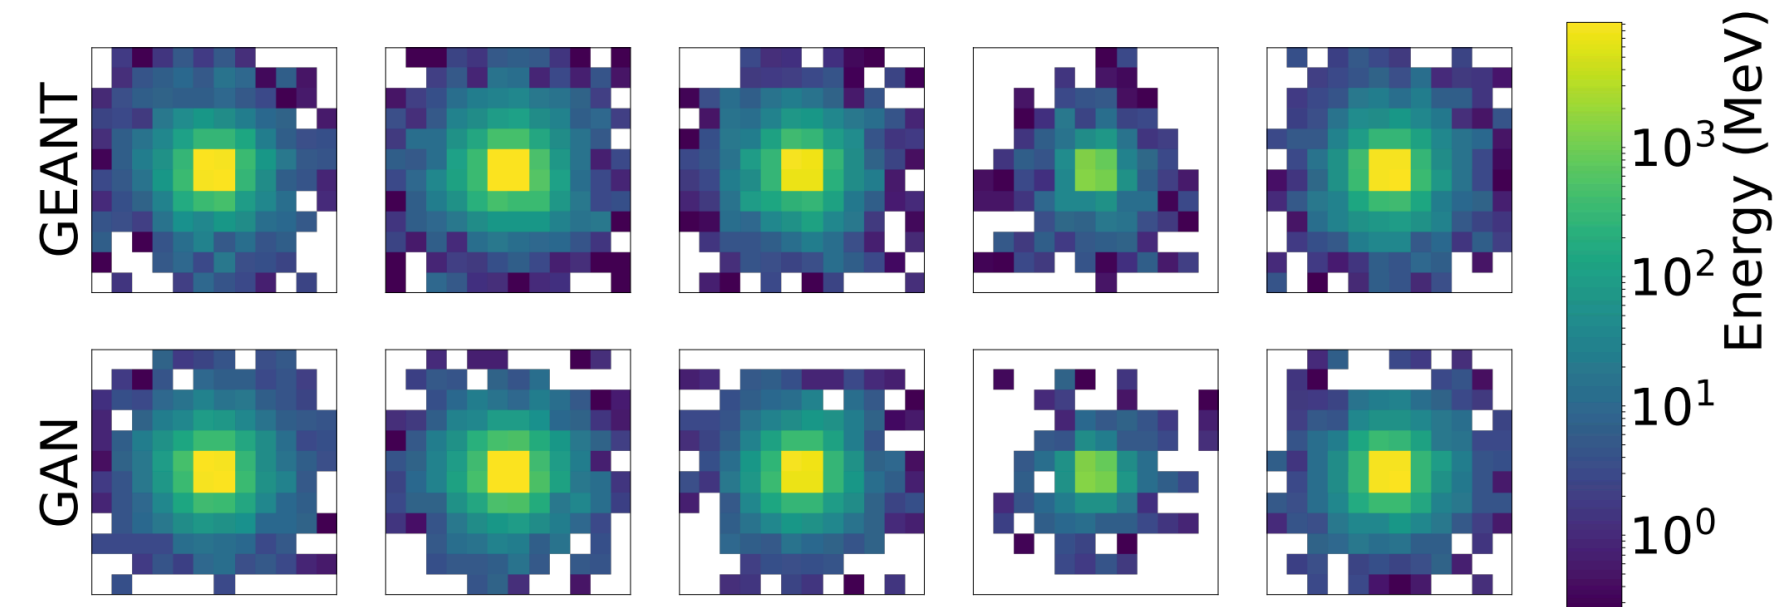


CaloGAN 1705.02355

[Michela Paganini](#), [Luke de Oliveira](#), [Benjamin Nachman](#)

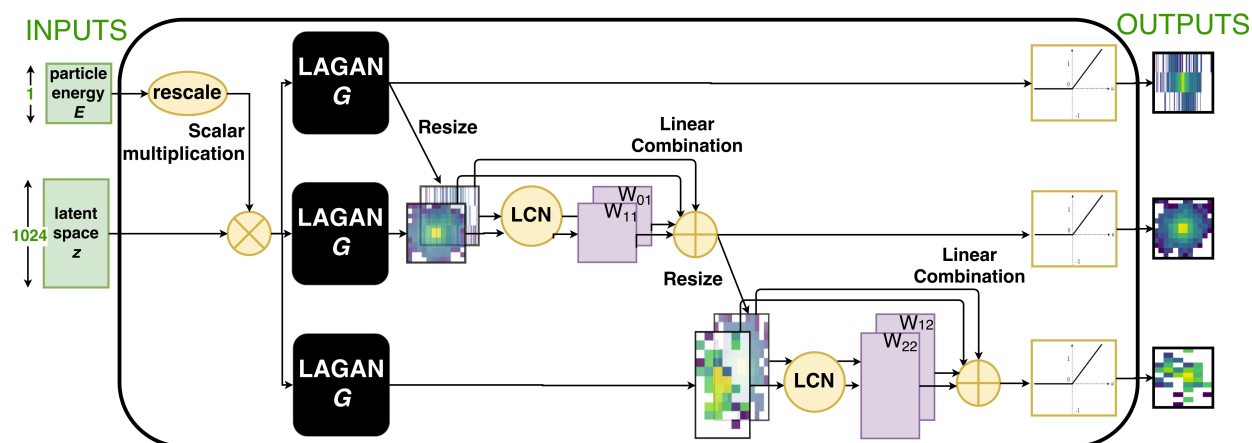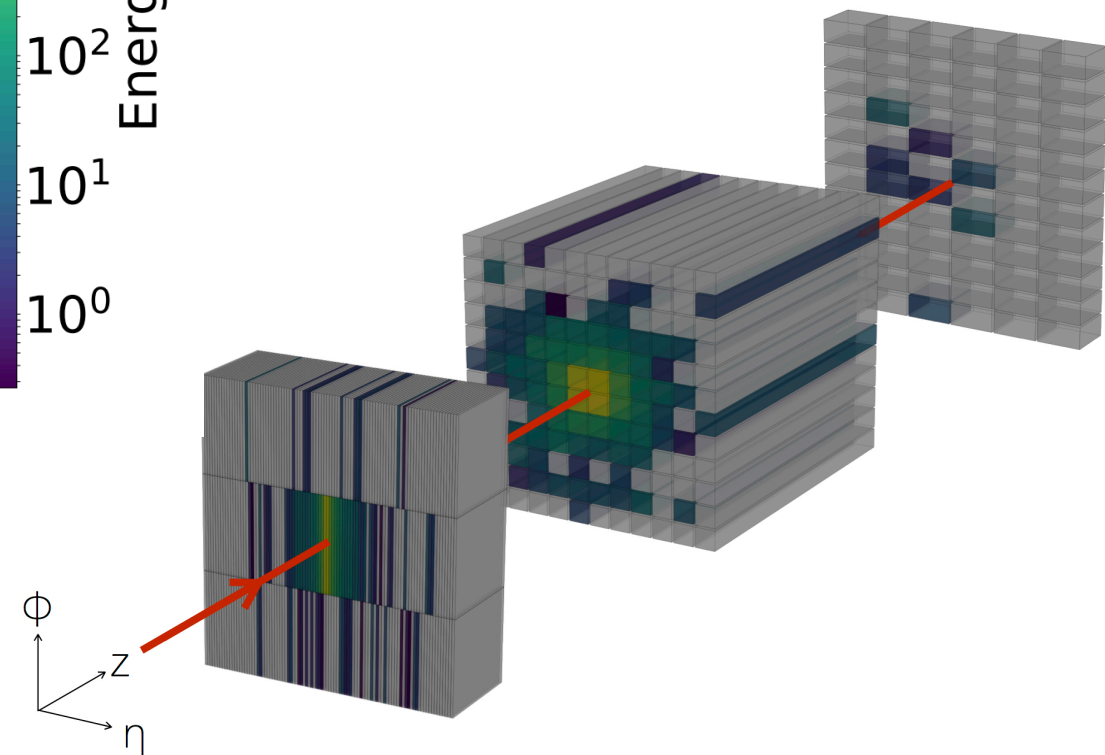


Generator

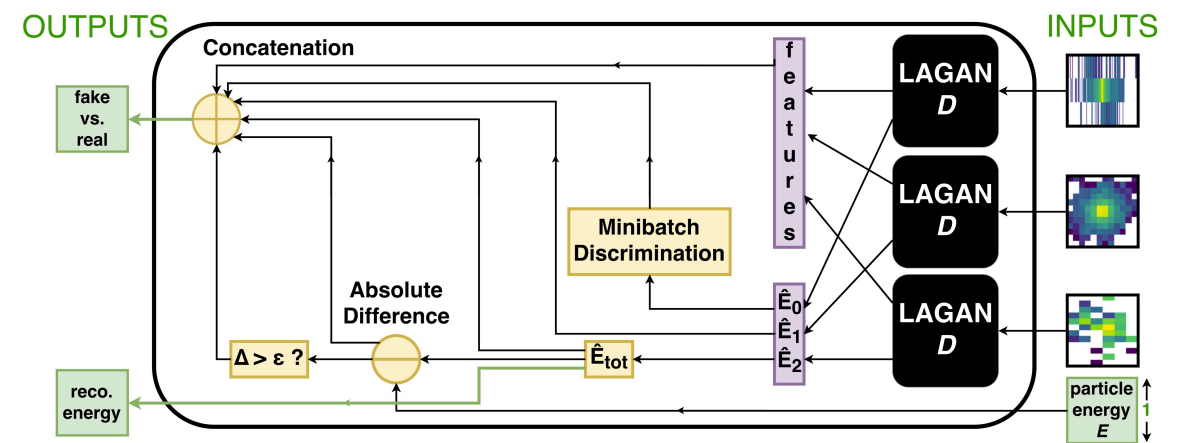


Discriminator

Detector simulation using ML

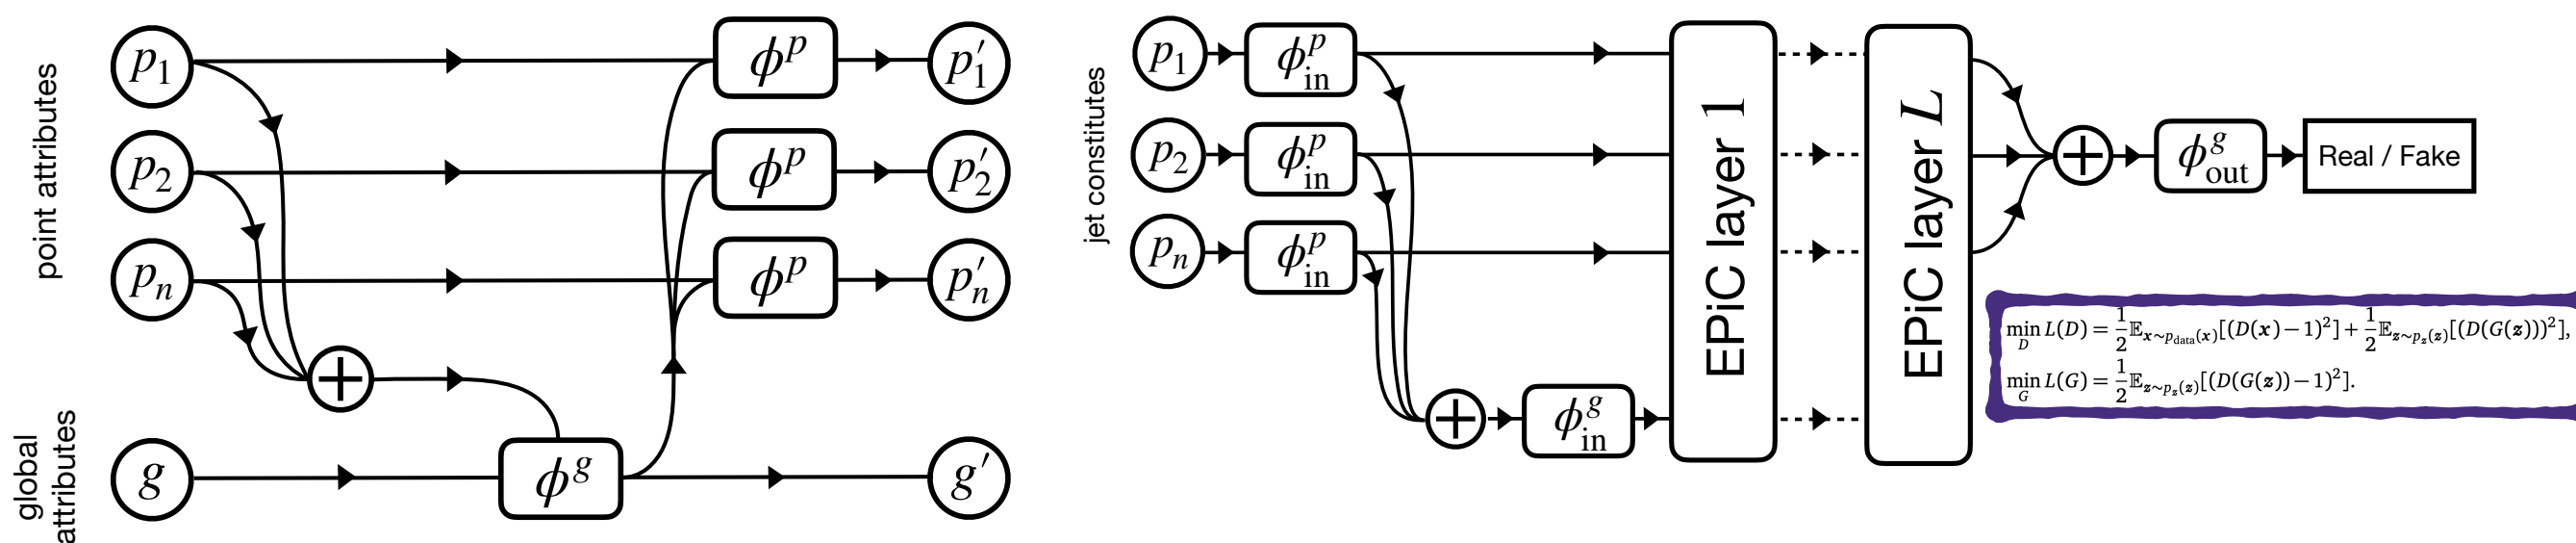


EPiC-GAN : SciPost Phys. 15, 130 (2023) [Erik Buhmann](#), [Gregor Kasieczka](#), [Jesse Thaler](#)

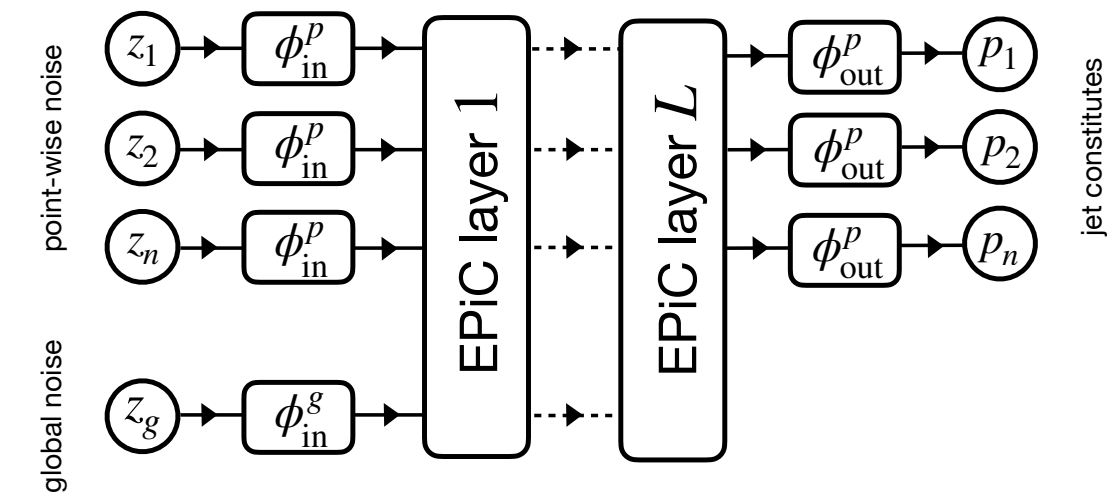

2305.10475




Jet Diffusion versus JetGPT — Modern Networks for the LHC

Anja Butter^{1,2}, Nathan Huetsch¹, Sofia Palacios Schweitzer¹,
Tilman Plehn¹, Peter Sorrenson³, and Jonas Spinner¹

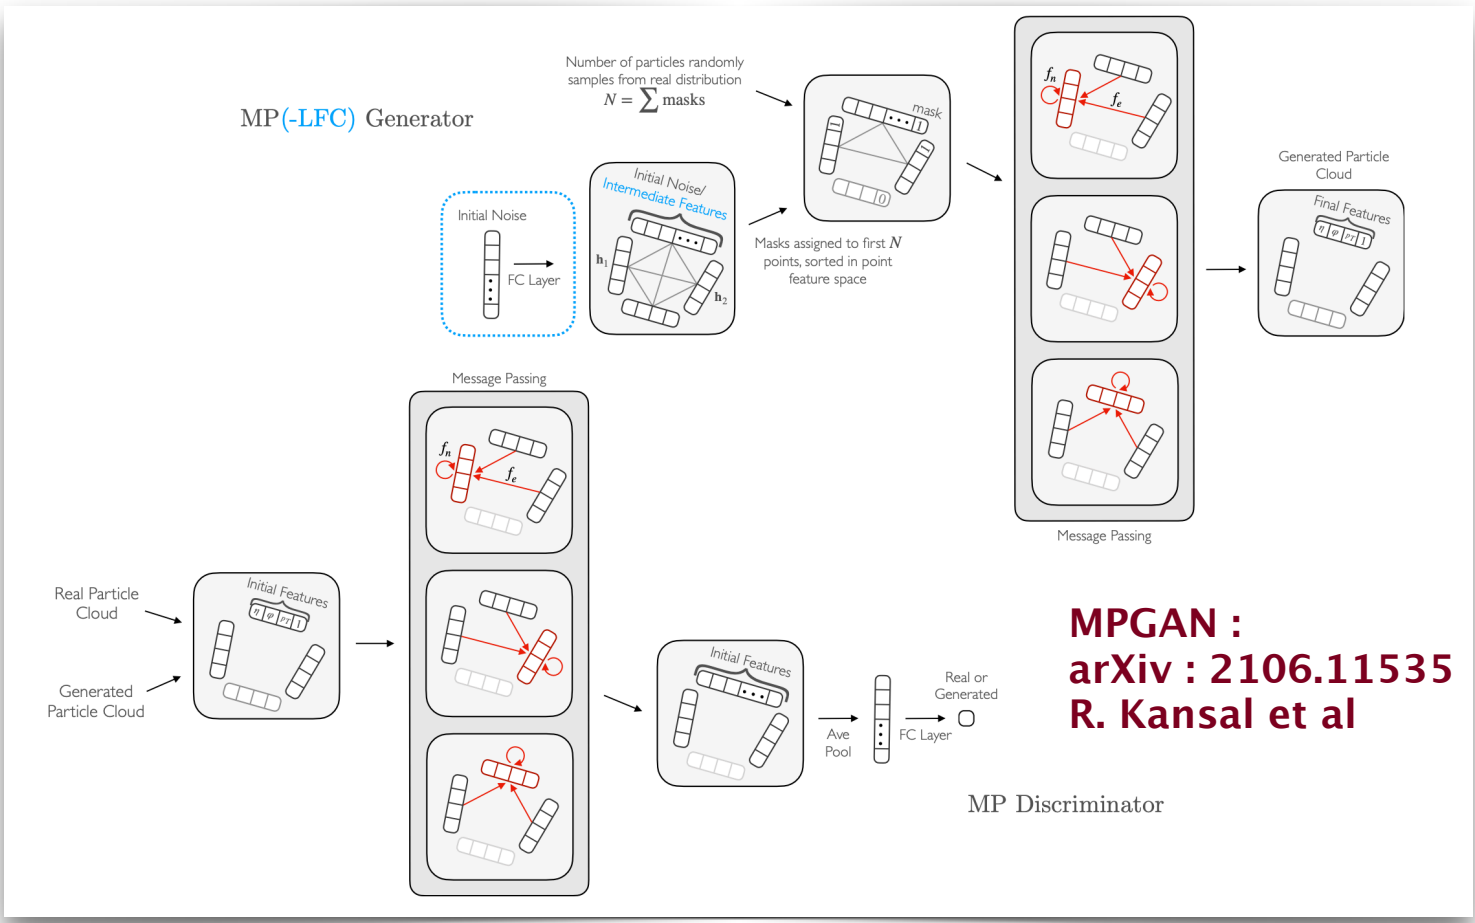


MPGAN :
arXiv : 2106.11535
R. Kansal et al

The major gain

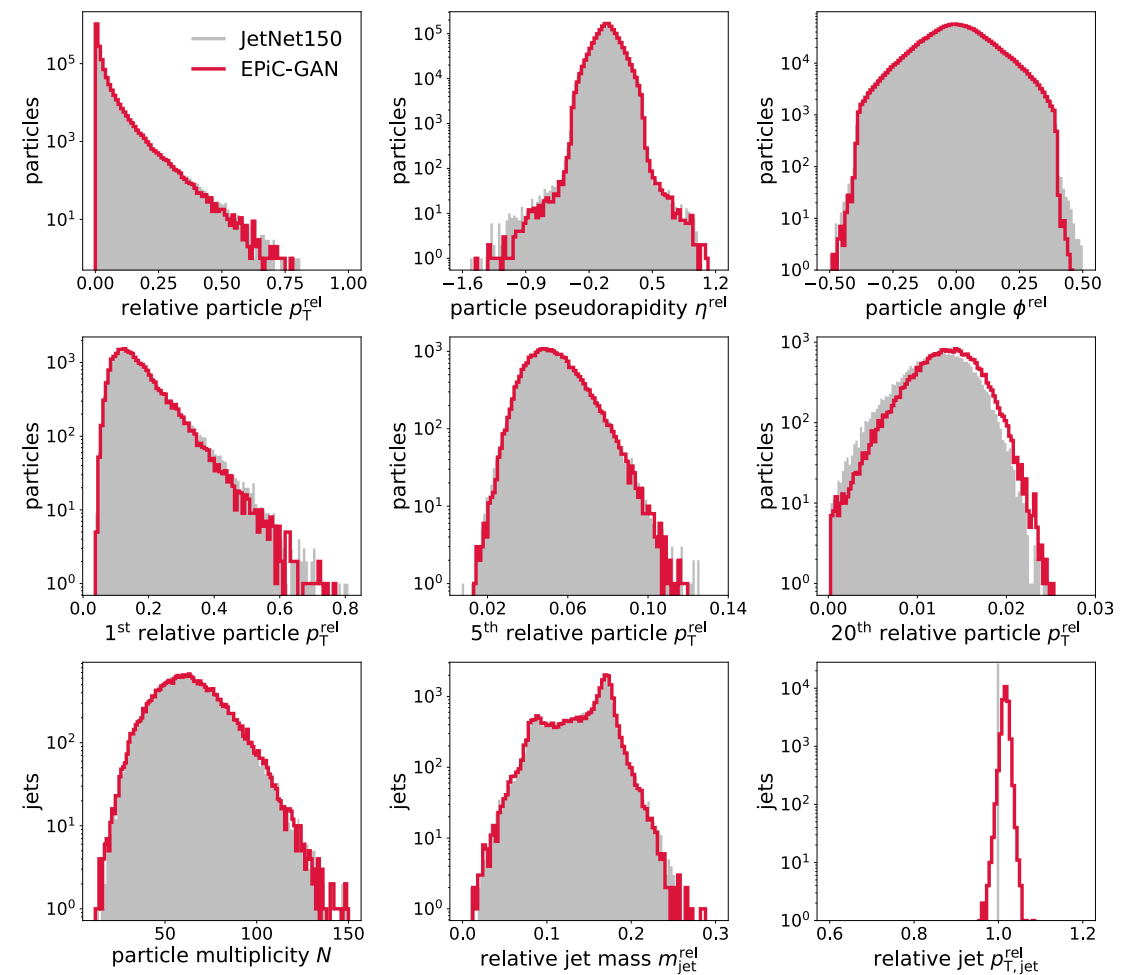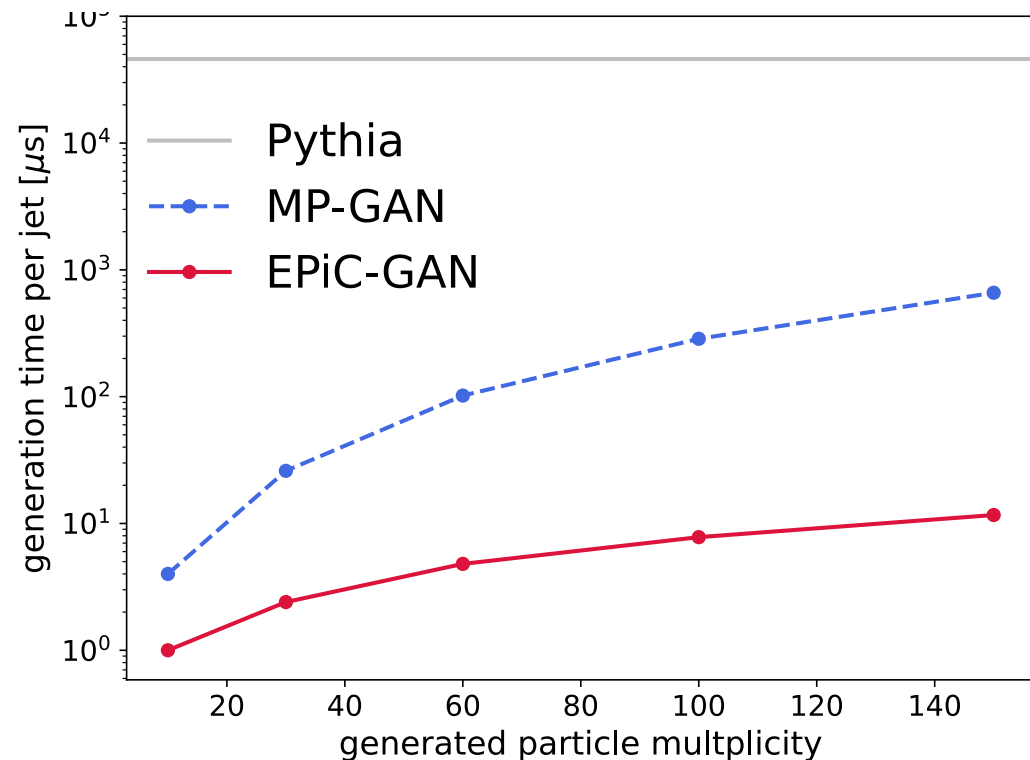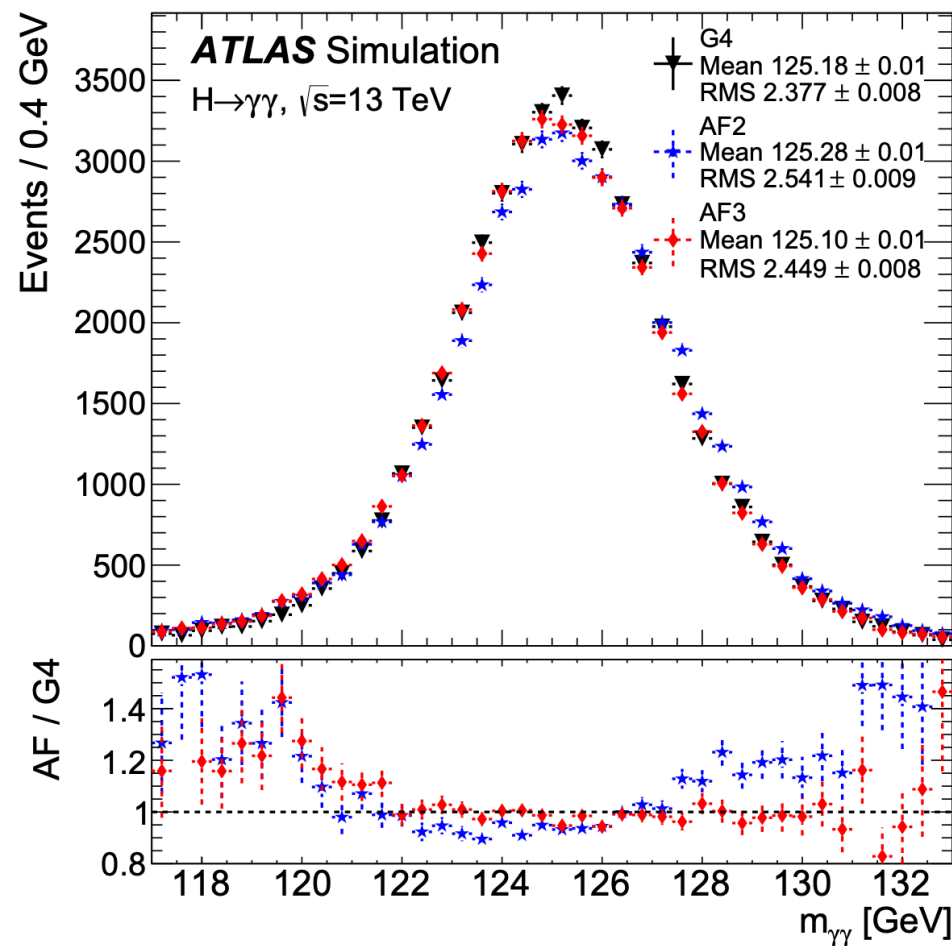


arXiv : 2109.02551

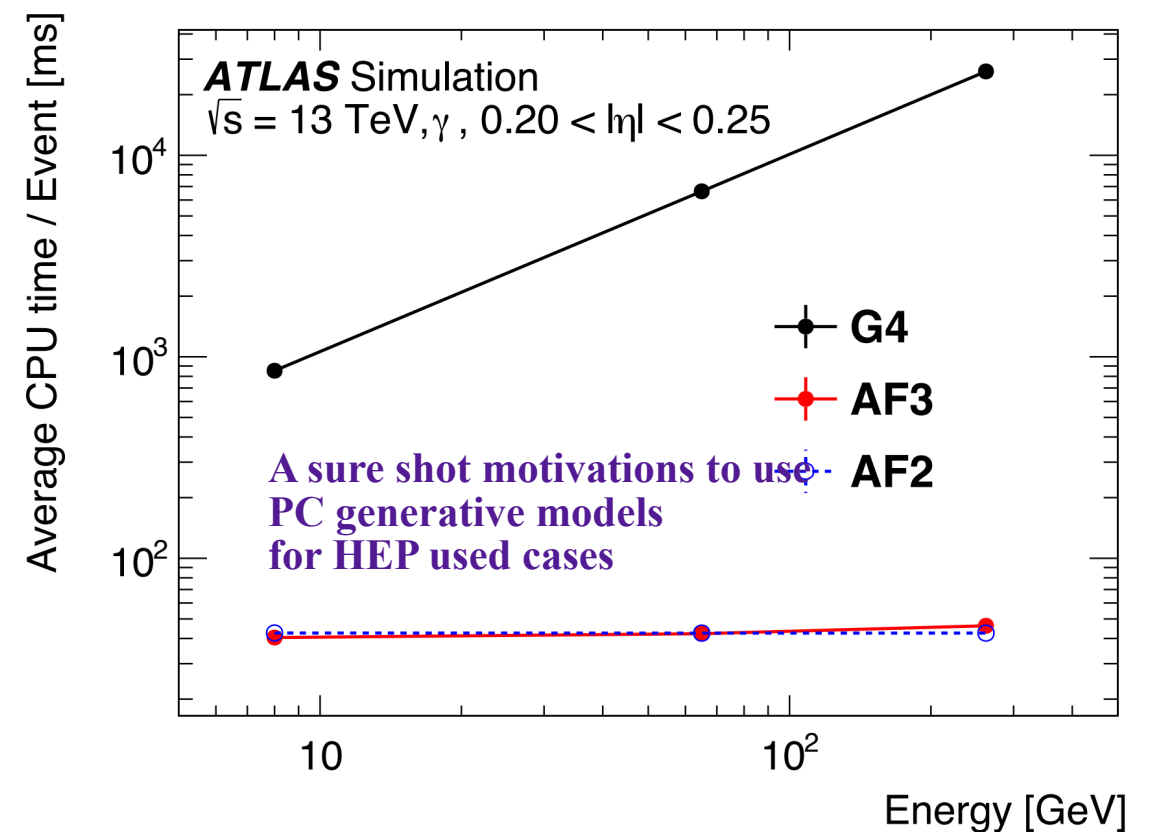

A generative model for Particle-flow

Mach. Learn.: Sci. Technol. 4 (2023) 045036


SG et al

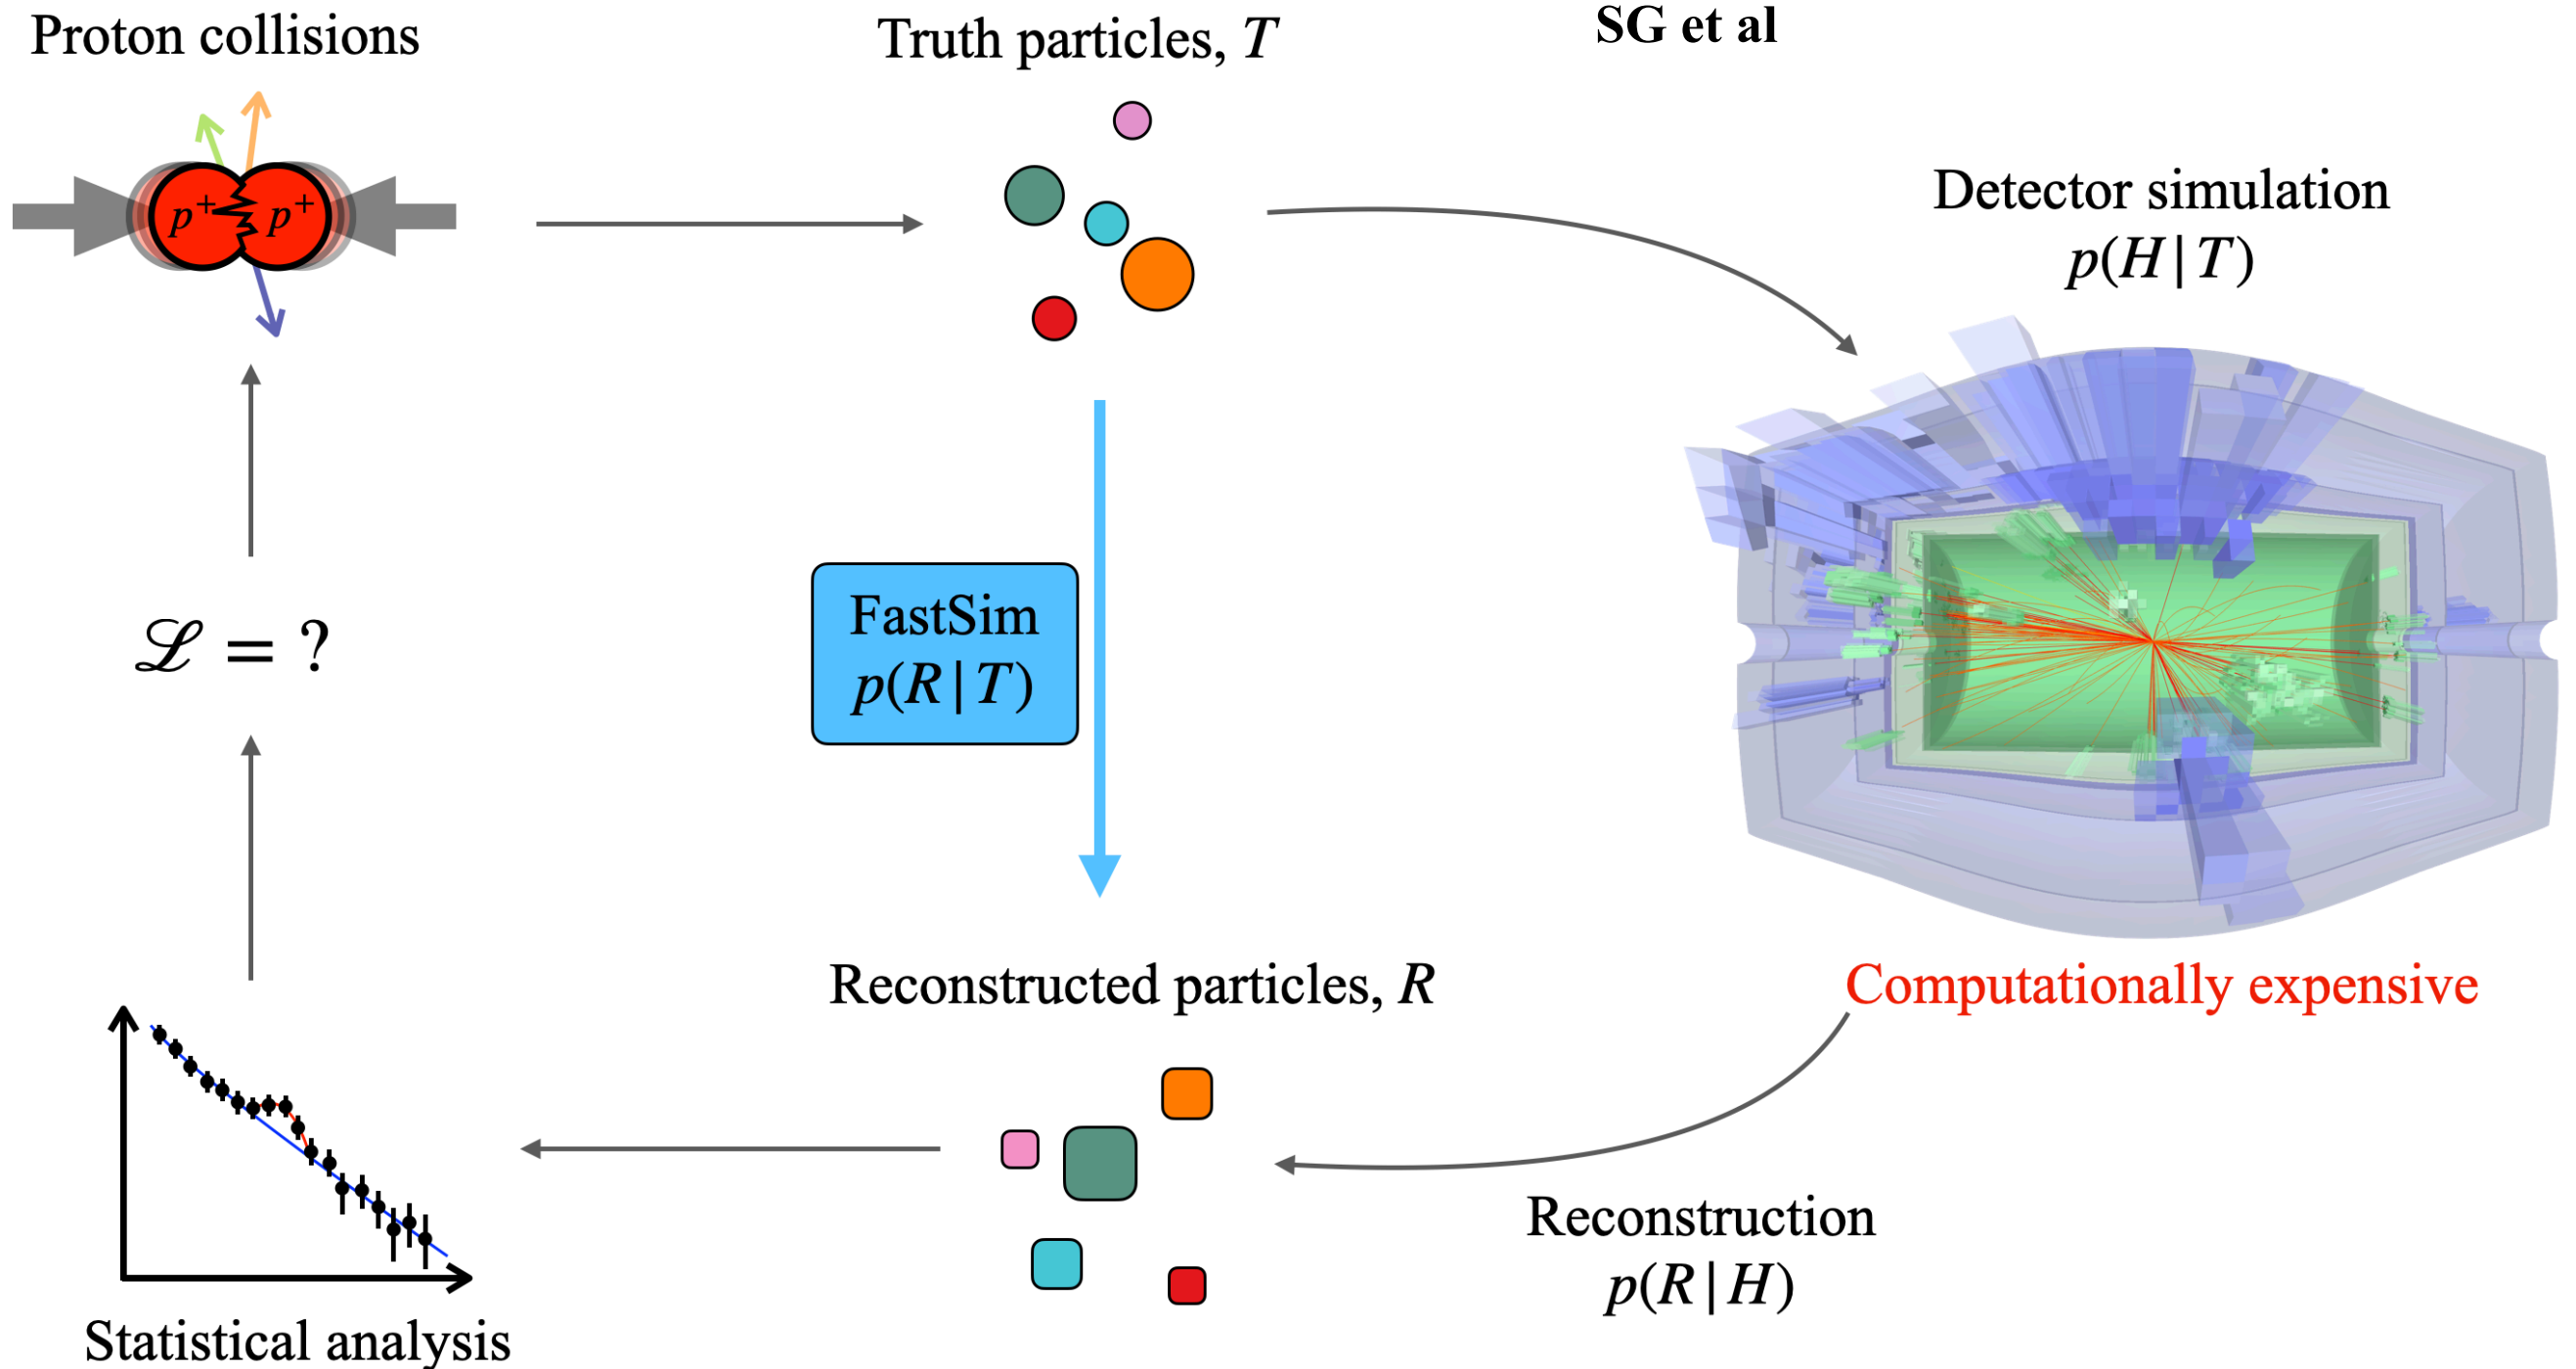

$$R \sim p(R|T) = \int dH \delta(R(H) - R) p_{\text{sim}}(H|T).$$

The task of constrained set generation

$$\mathbf{q}_{\theta}(\mathbf{R} | \mathbf{T}) \sim \mathbf{q}_{\theta_1}(\mathbf{N}_R | \mathbf{T}) \mathbf{q}_{\theta_2}(\mathbf{R} | \mathbf{N}_R, \mathbf{T})$$

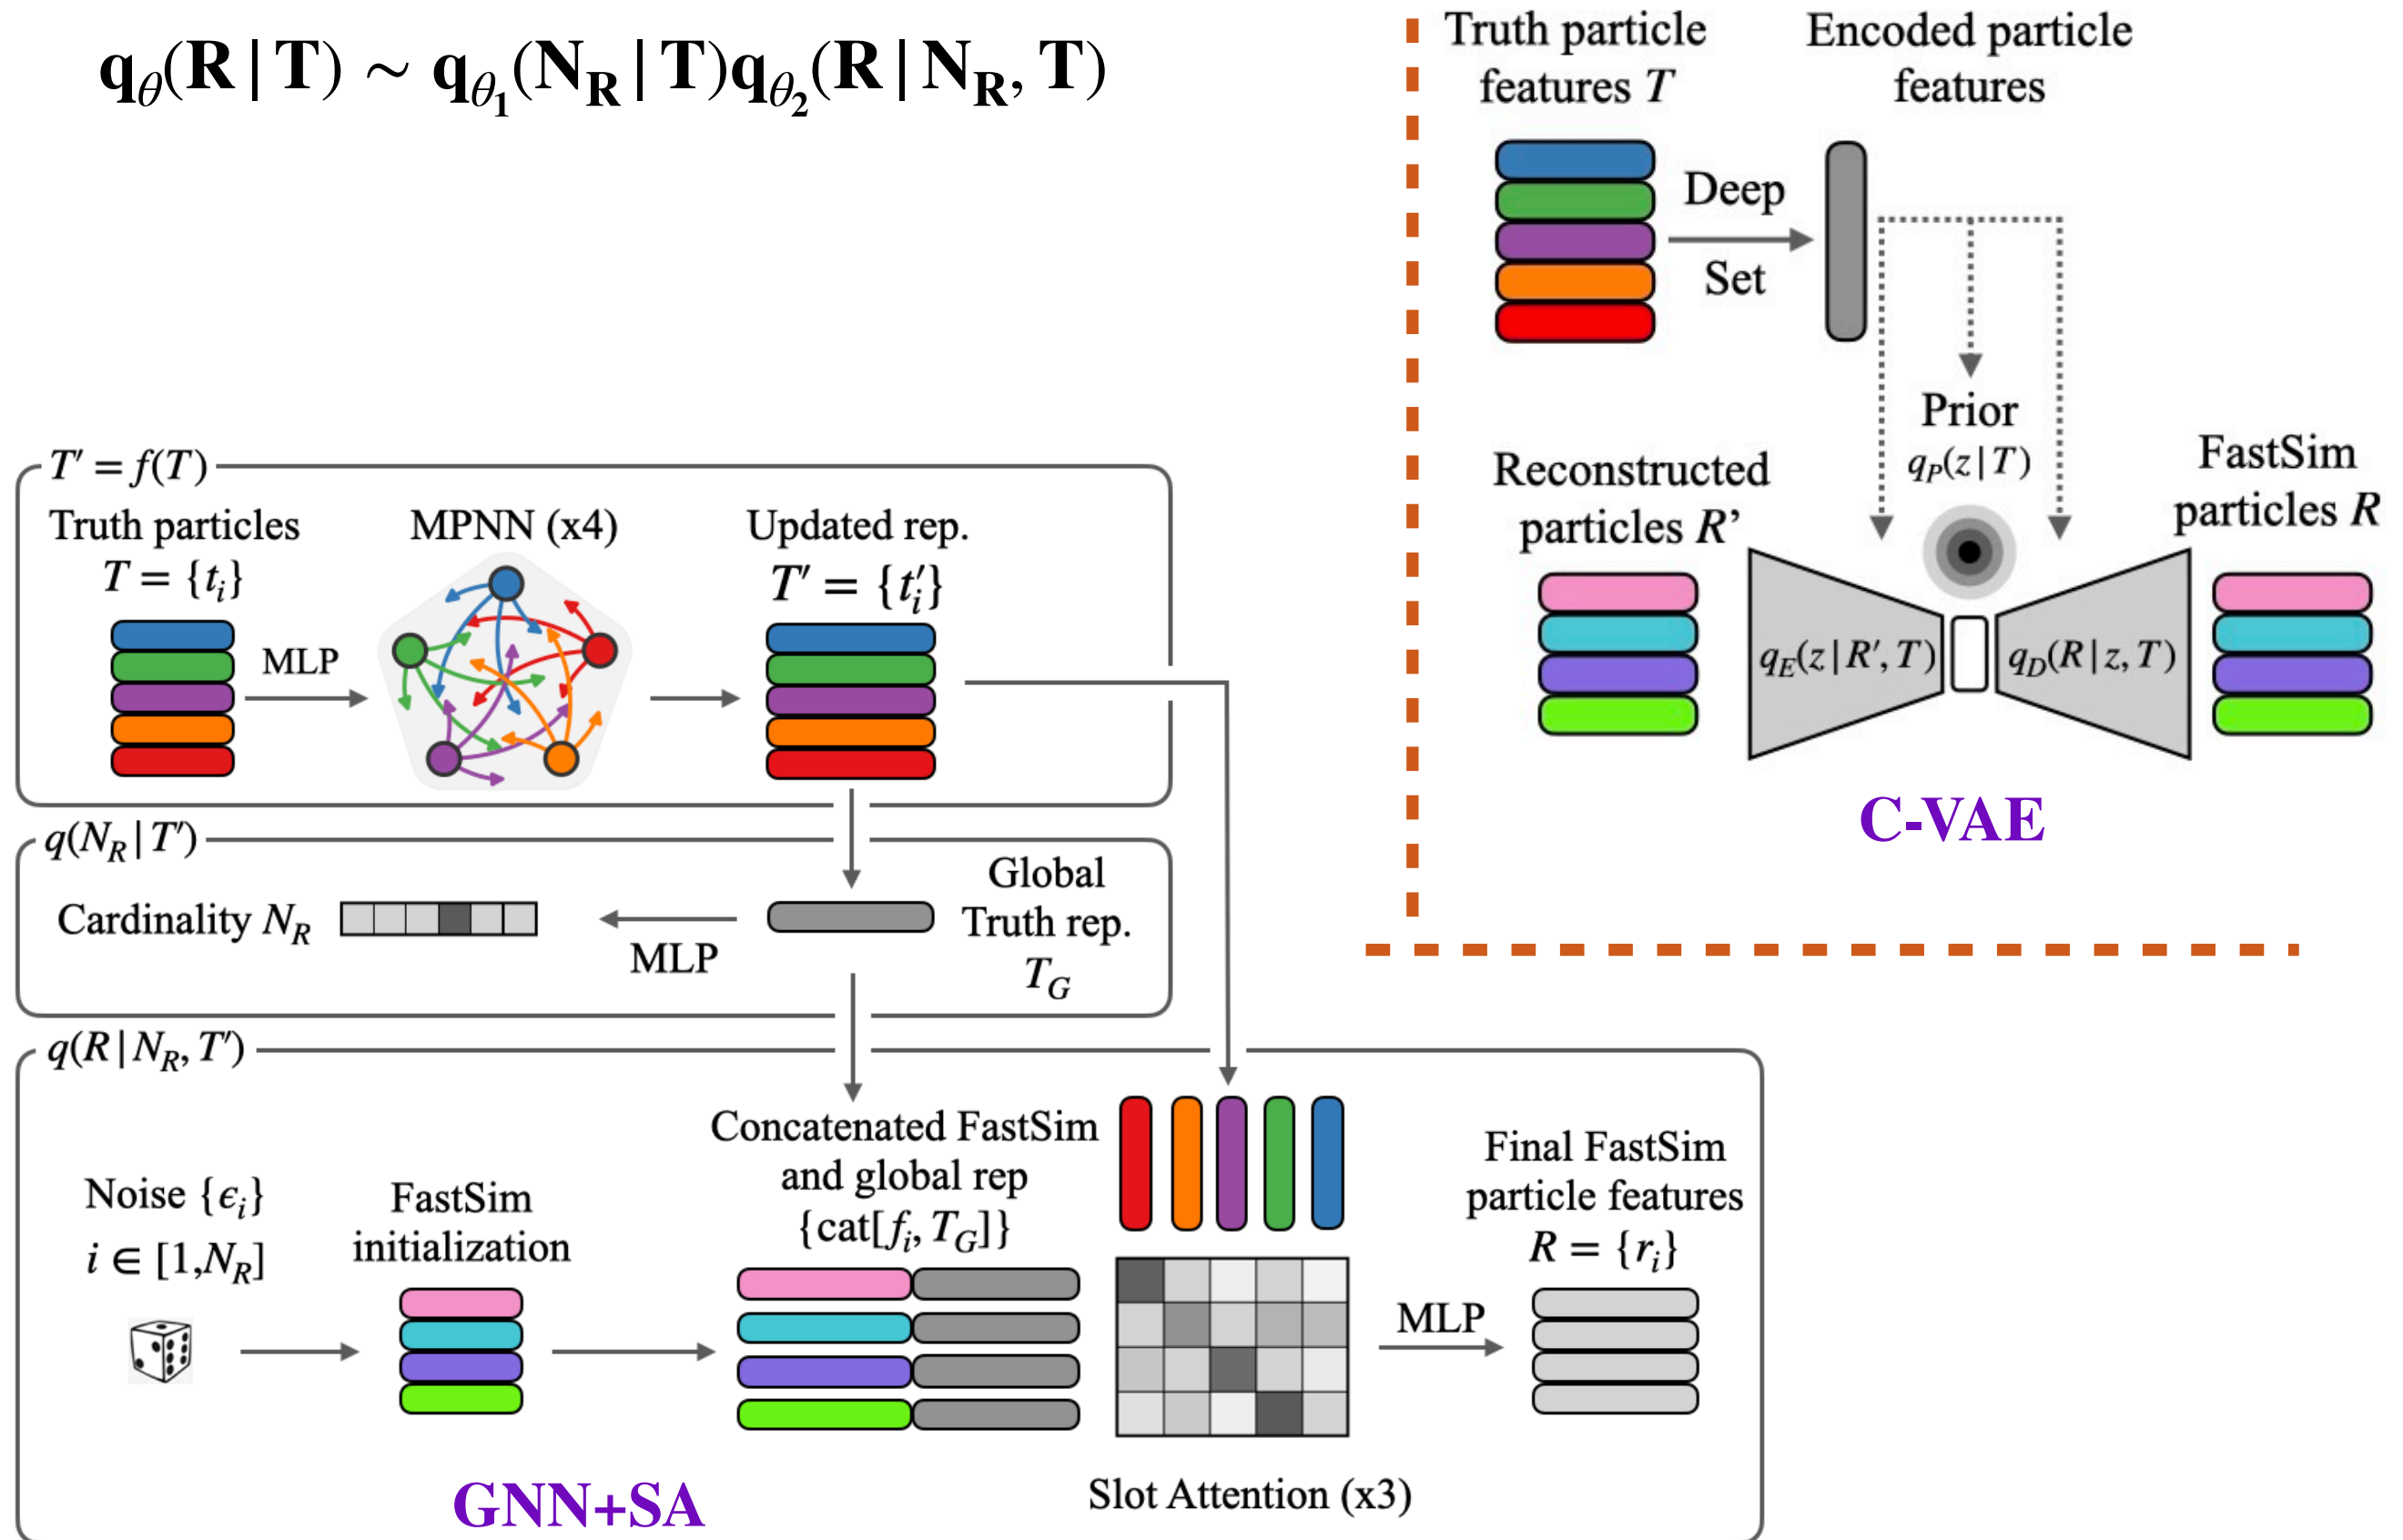

The task of constrained set generation

The cVAE training is done by optimizing negative evidence lower bound (ELBO)



loss :

$$L = -\mathbb{E}_{T,R} \mathbb{E}_{z \sim q_E(z|R,T)} \log \frac{q_D(R|z,T) q_P(z|T)}{q_E(z|R,T)}$$

$$= -\mathbb{E}_{T,R} \mathbb{E}_z \log q_D(R|z,T) + D_{\text{KL}}(q_E(z|R,T) || q_P(z|T))$$


For GNN+SA, we try a regular Hungarian loss and also MMD (maximum mean discrepancy) :

$$\text{MMD}^2 = \mathbb{E}_{(x \sim p, x' \sim p)} [k(x, x')] + \mathbb{E}_{(x \sim q, x' \sim q)} [k(x, x')] - 2\mathbb{E}_{(x \sim p, x' \sim q)} [k(x, x')]$$

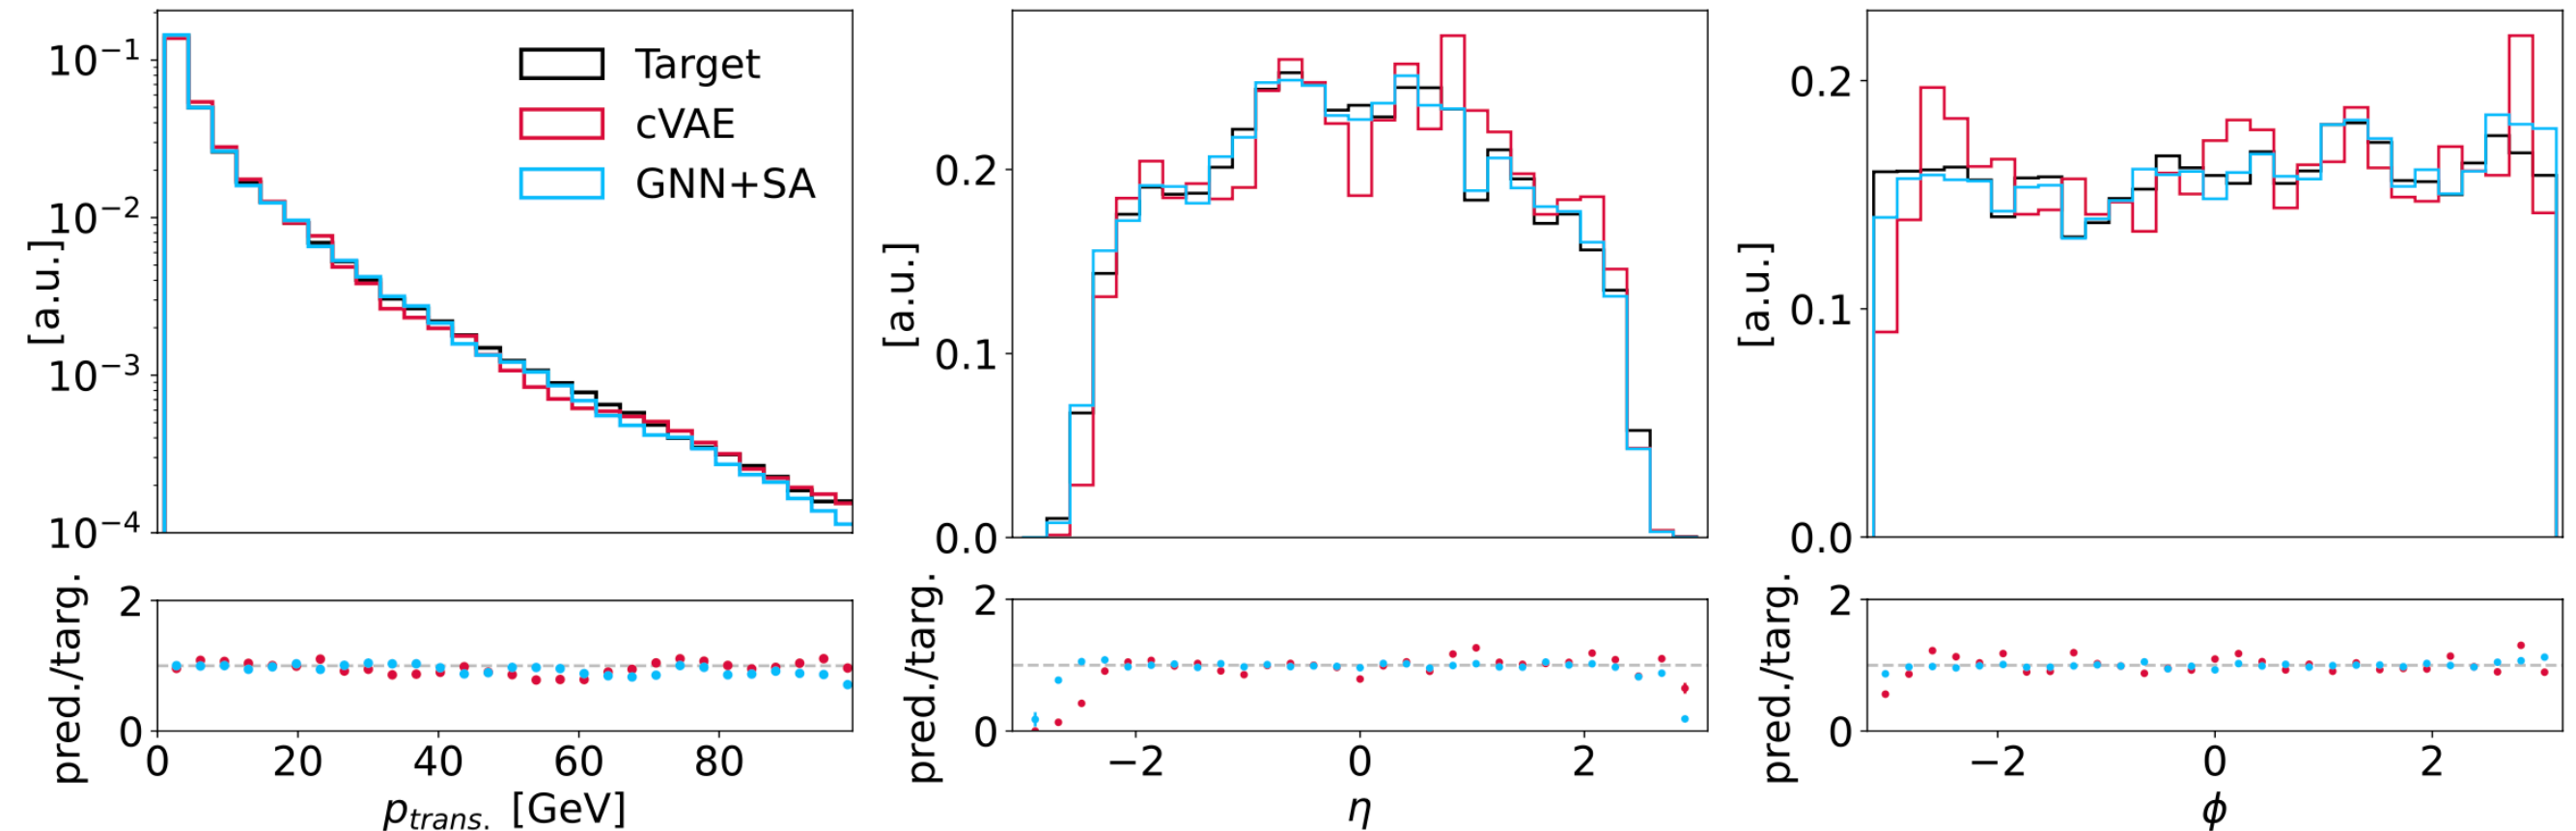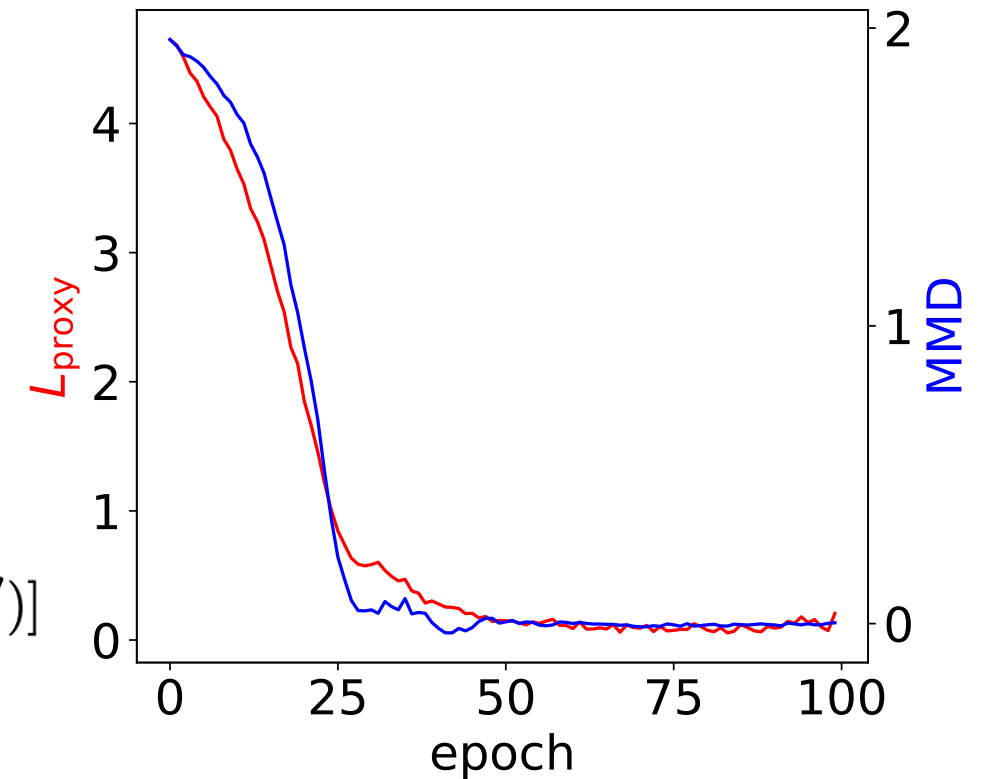

Generating smooth backgrounds



<https://atlas.web.cern.ch/Atlas/GROUPS/PHYSICS/PAPERS/HDBS-2019-29/>

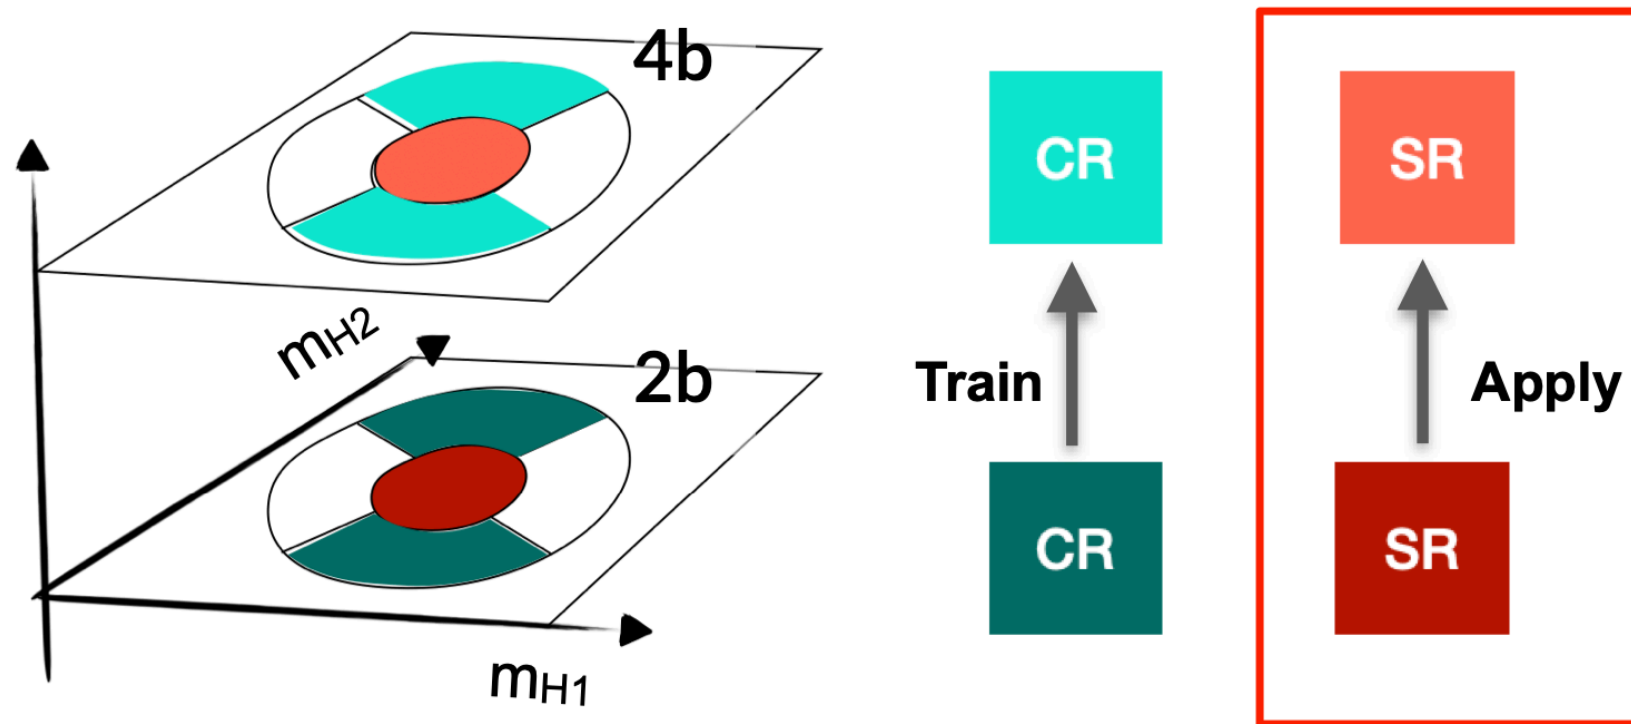


How do we want to learn?

$$p_{4b} = w(x) \cdot p_{2b}(x), x \in \mathbb{R}^d$$

Can we learn $w(x)$ using a flow method?

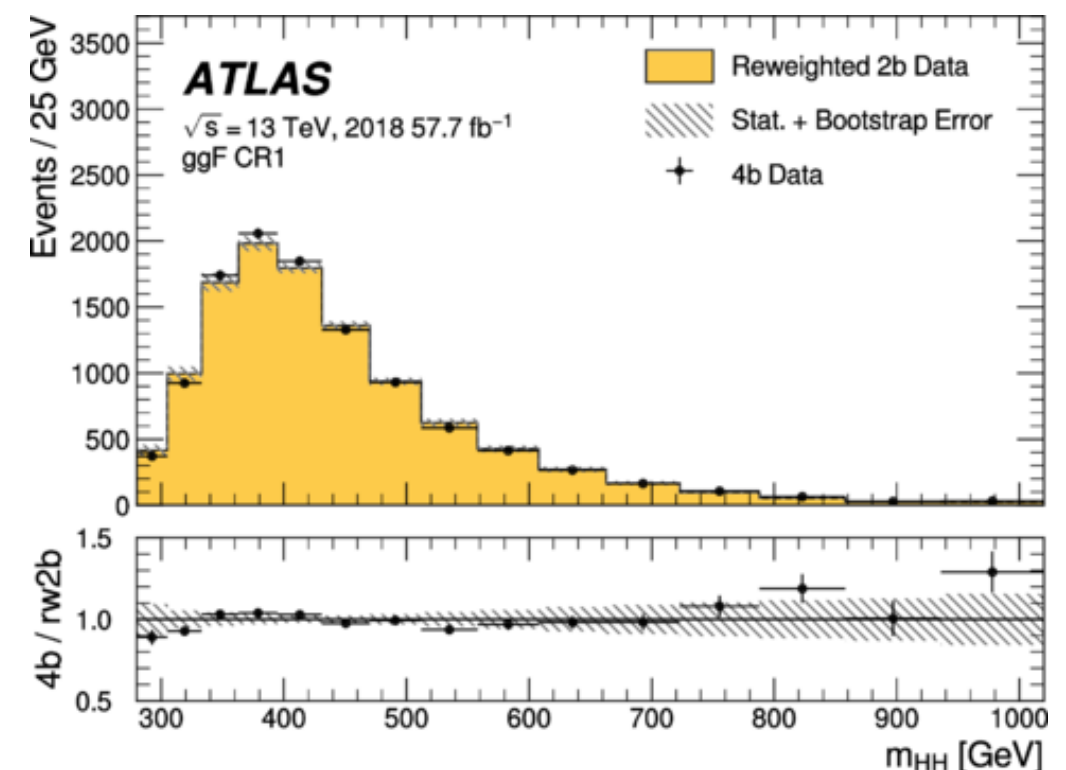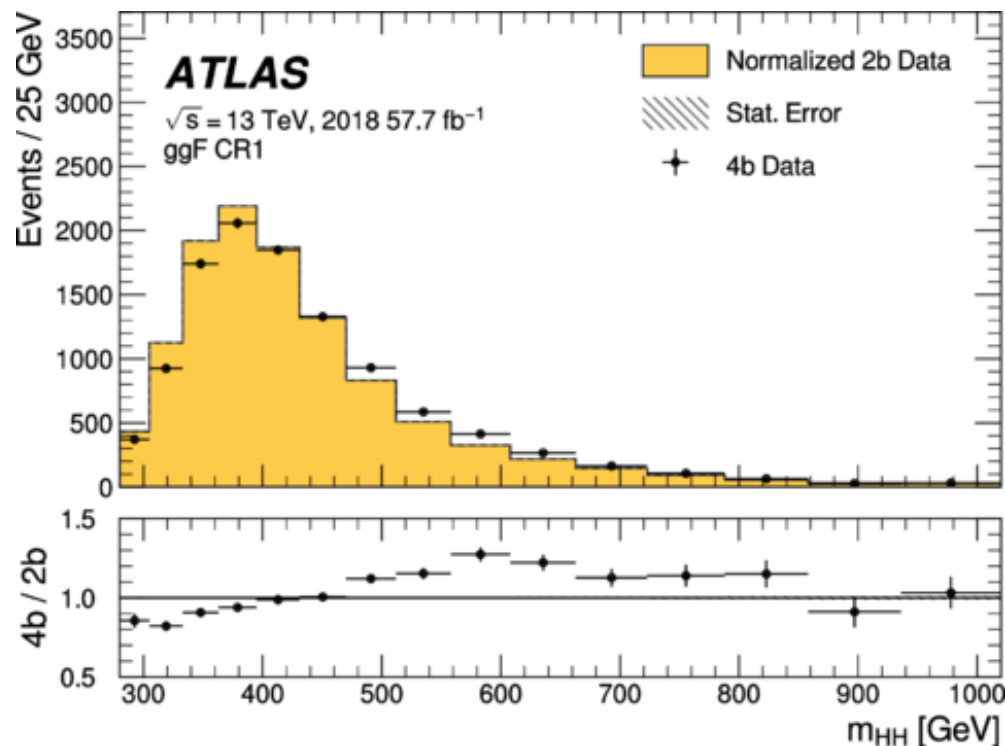

Major thrust in immediate future : Interpretability

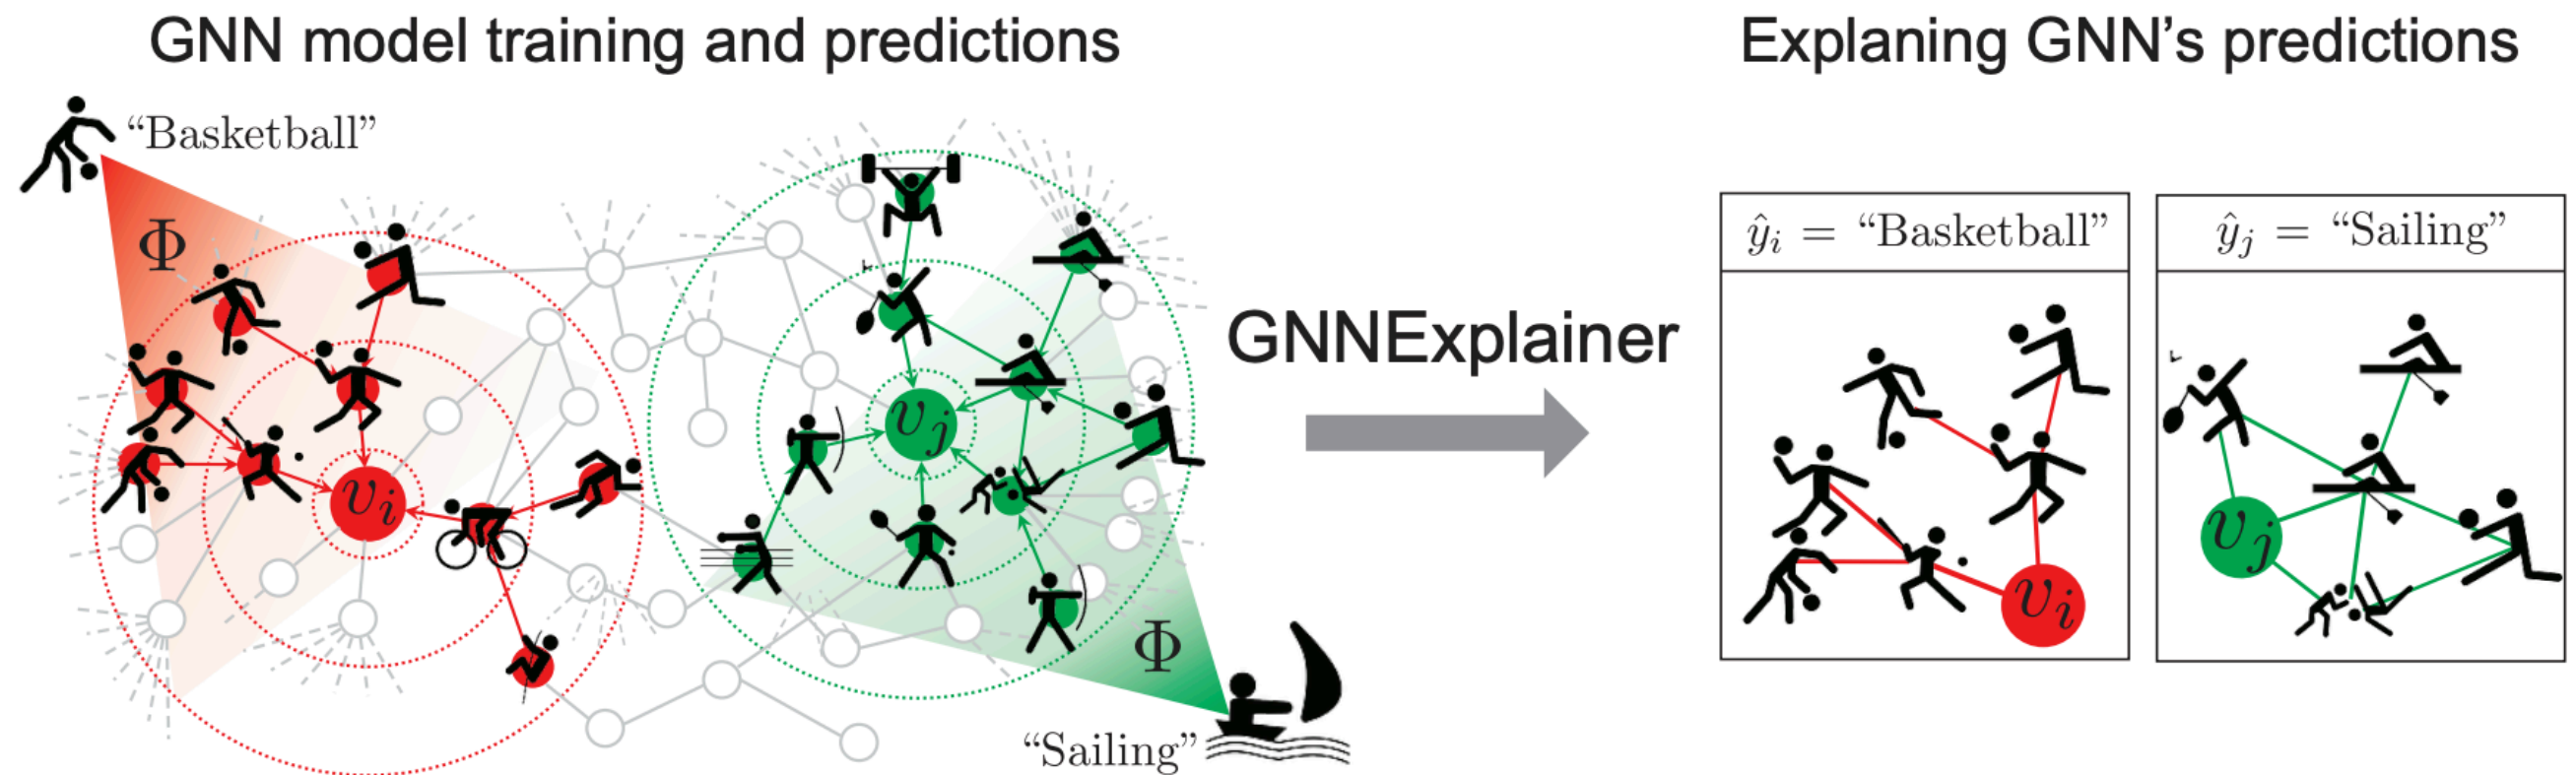

Interpretability is a key issue and efforts are ongoing to map the NN explainability to first principle physics intuition

Interpretability : an example attempt

$$\mathbf{R}_j^{(l)} = \sum_k \frac{x_j A_{jk}}{\sum_m x_m A_{mk}} \mathbf{R}_k^{(l+1)} \quad (3)$$

Neur IPS 2021. F. Mokhtar, R. Kansal et al

where $\mathbf{R}_j^{(l)}$ represent the R -scores of the features of node j at layer l , while the quantity $x_j A_{jk}$ models the extent to which node j at layer l , with activation x_j , contributes to the relevance of node k at layer $l + 1$, where A is the adjacency matrix.

Explainability for MLPF



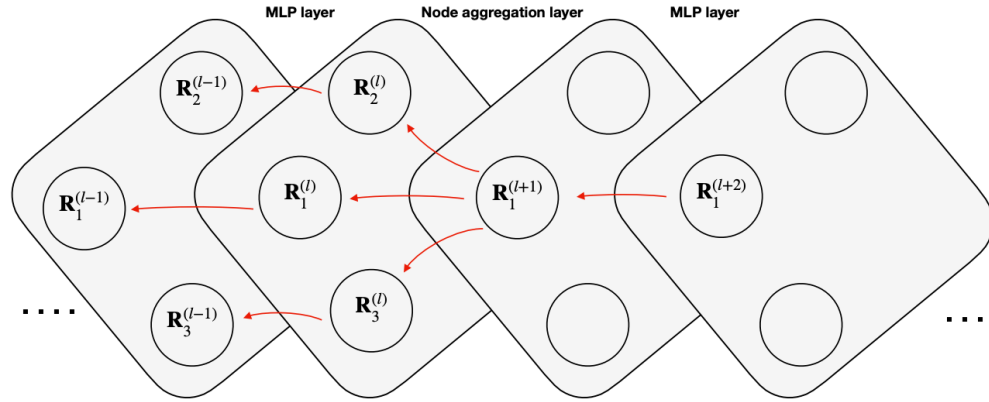


Figure 1: The flow of R -scores of node 1 across the different layers in MLPF. For MLP layers, the redistribution of R -scores follows the standard LRP rules [35, 36]. For the aggregation step in the message passing layer, the redistribution follows Equation 3. We only show three nodes for simplicity.


Feature correlation for top tagging.

arXiv 2210.04371

Ayush Khot, Mark S. Neubauer, Avik Roy

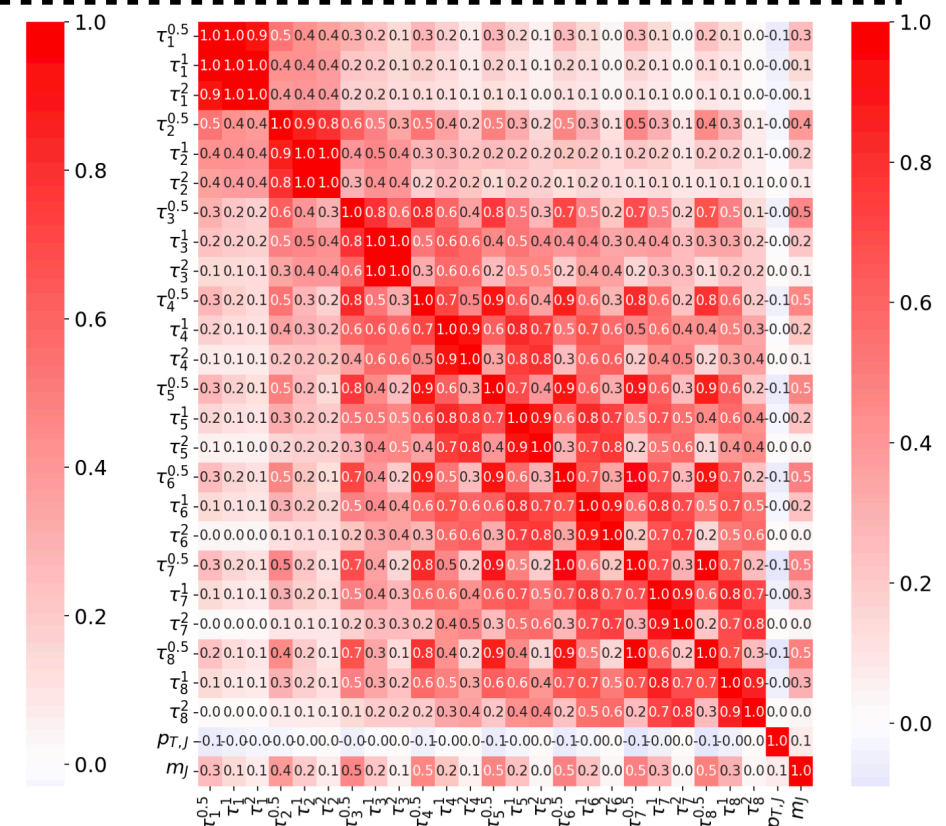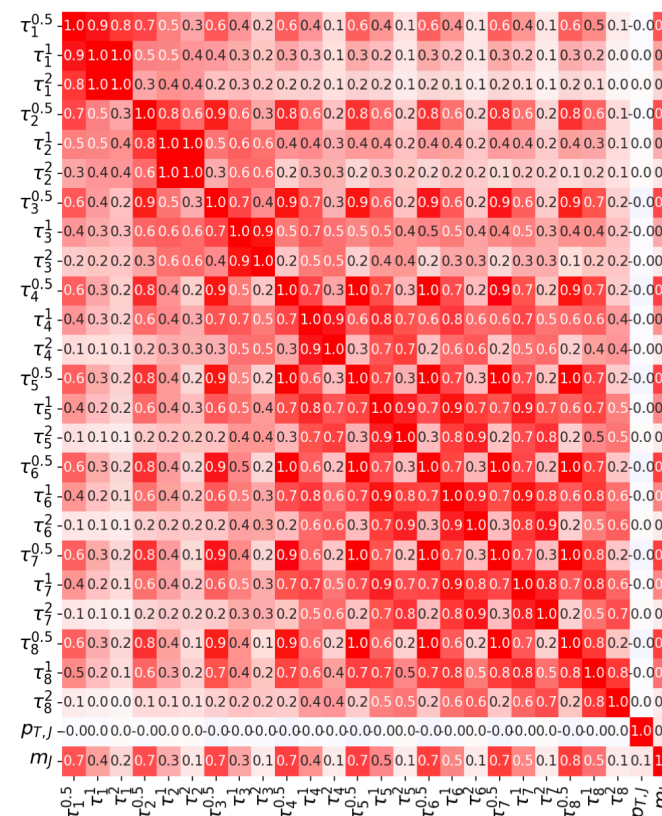


Major thrust in immediate future : Uncertainty

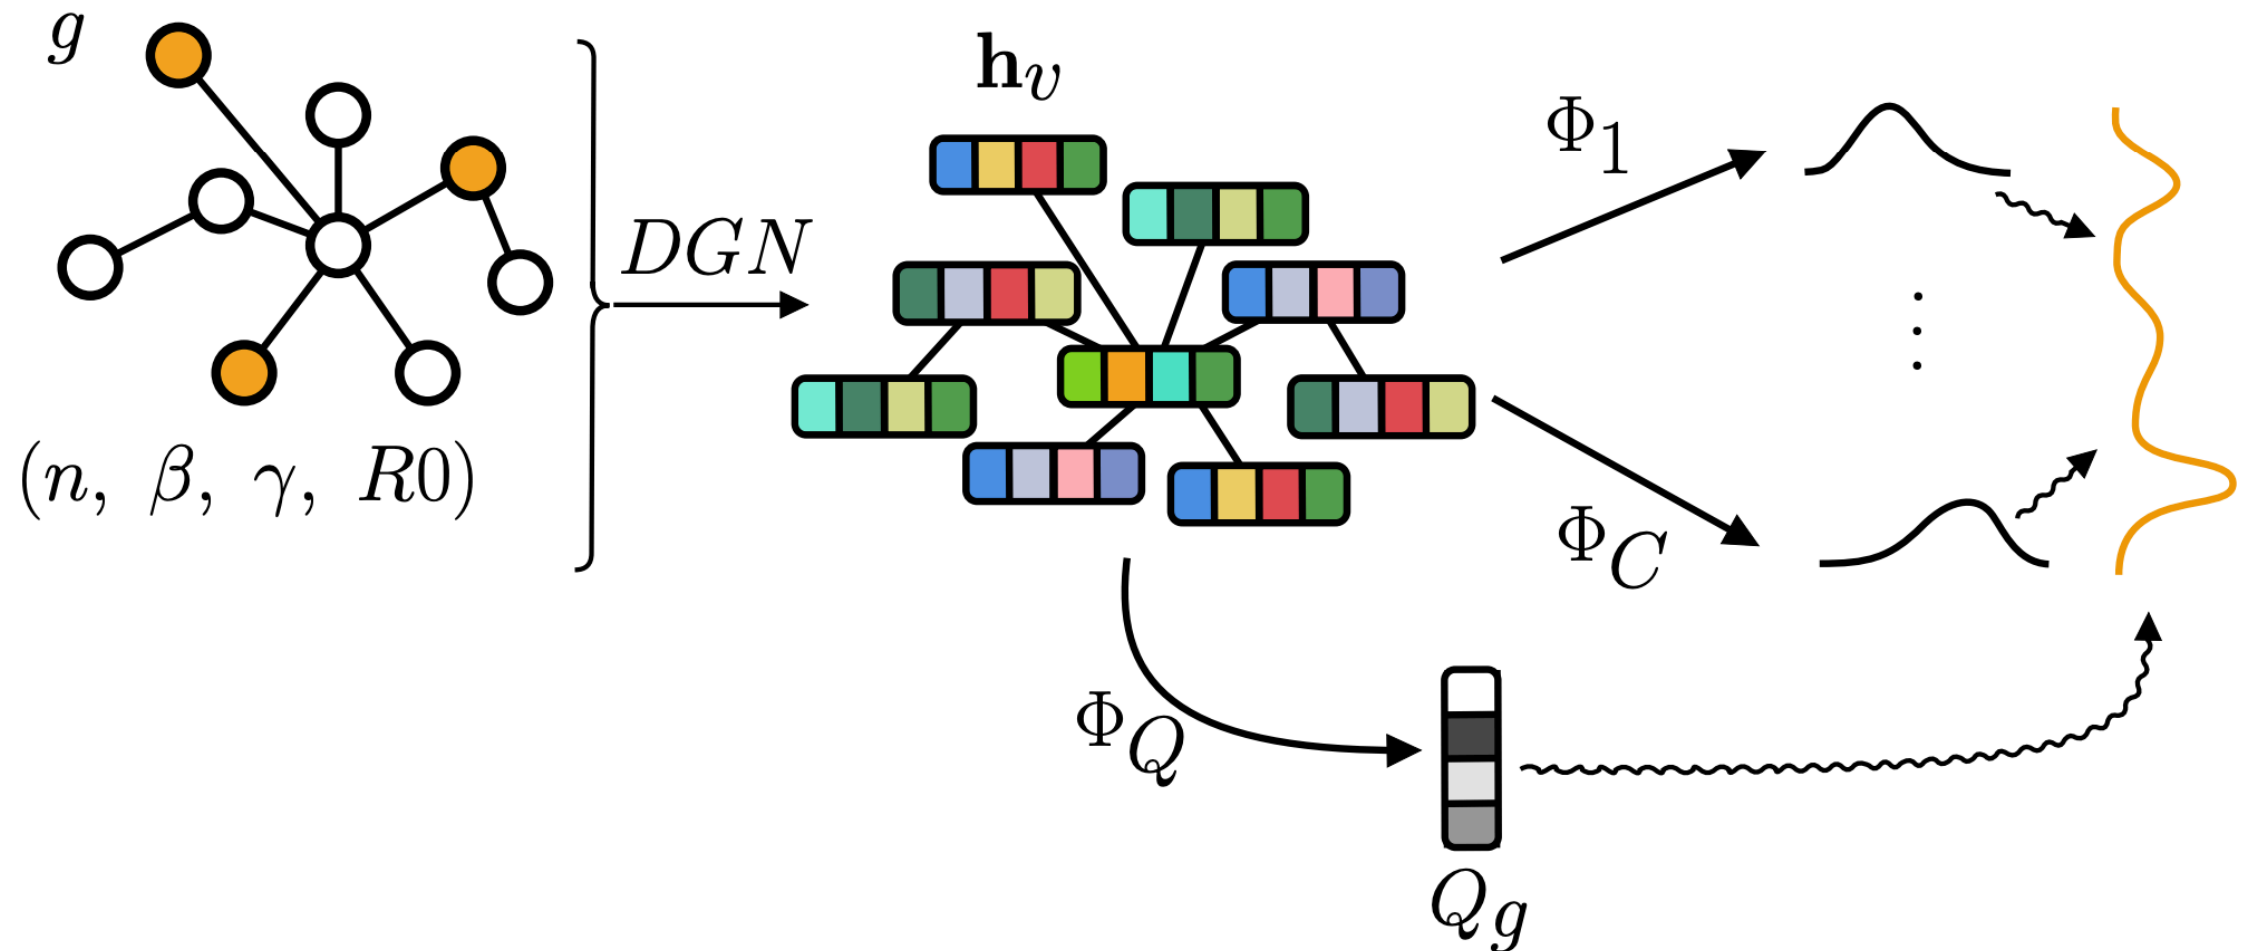


Reliable uncertainty estimation on ML based predictions are crucial for HEP
Only few Bayesian methods have been tested naively.

Can we decompose and correlate the aleatoric and epistemic uncertainties with the underlying physics?

Major thrust in immediate future : Uncertainty

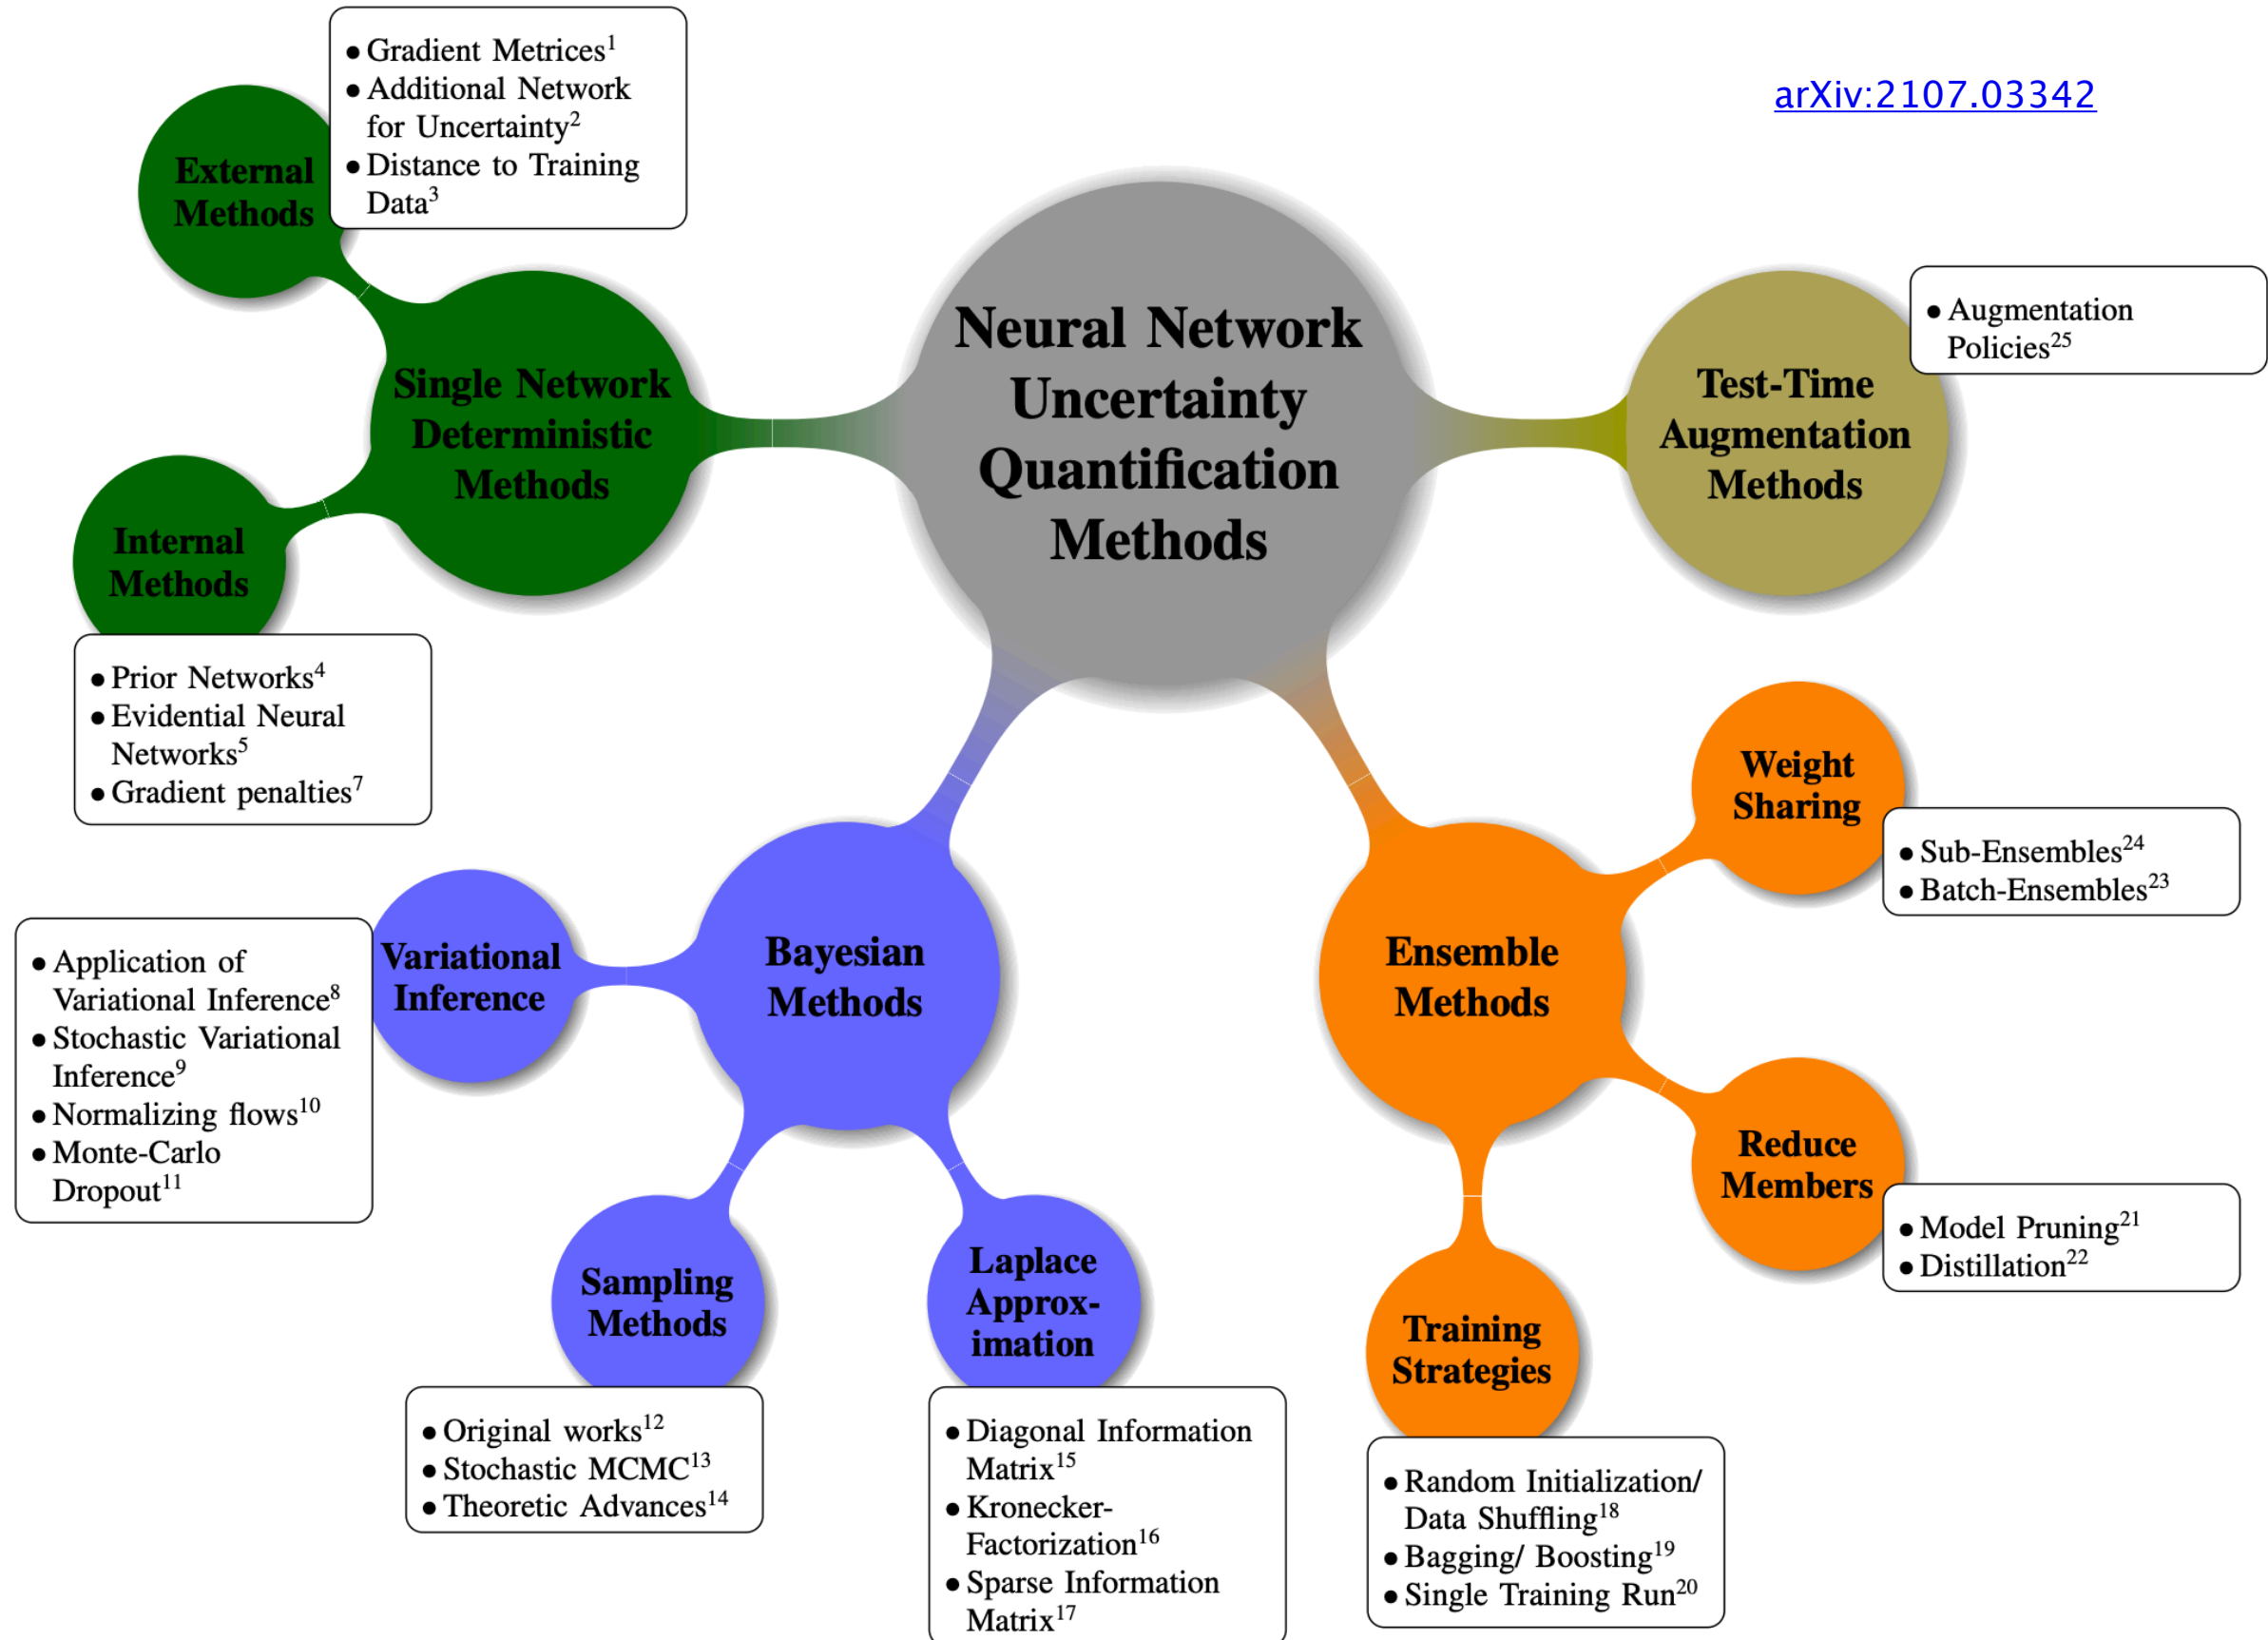


The path we will take

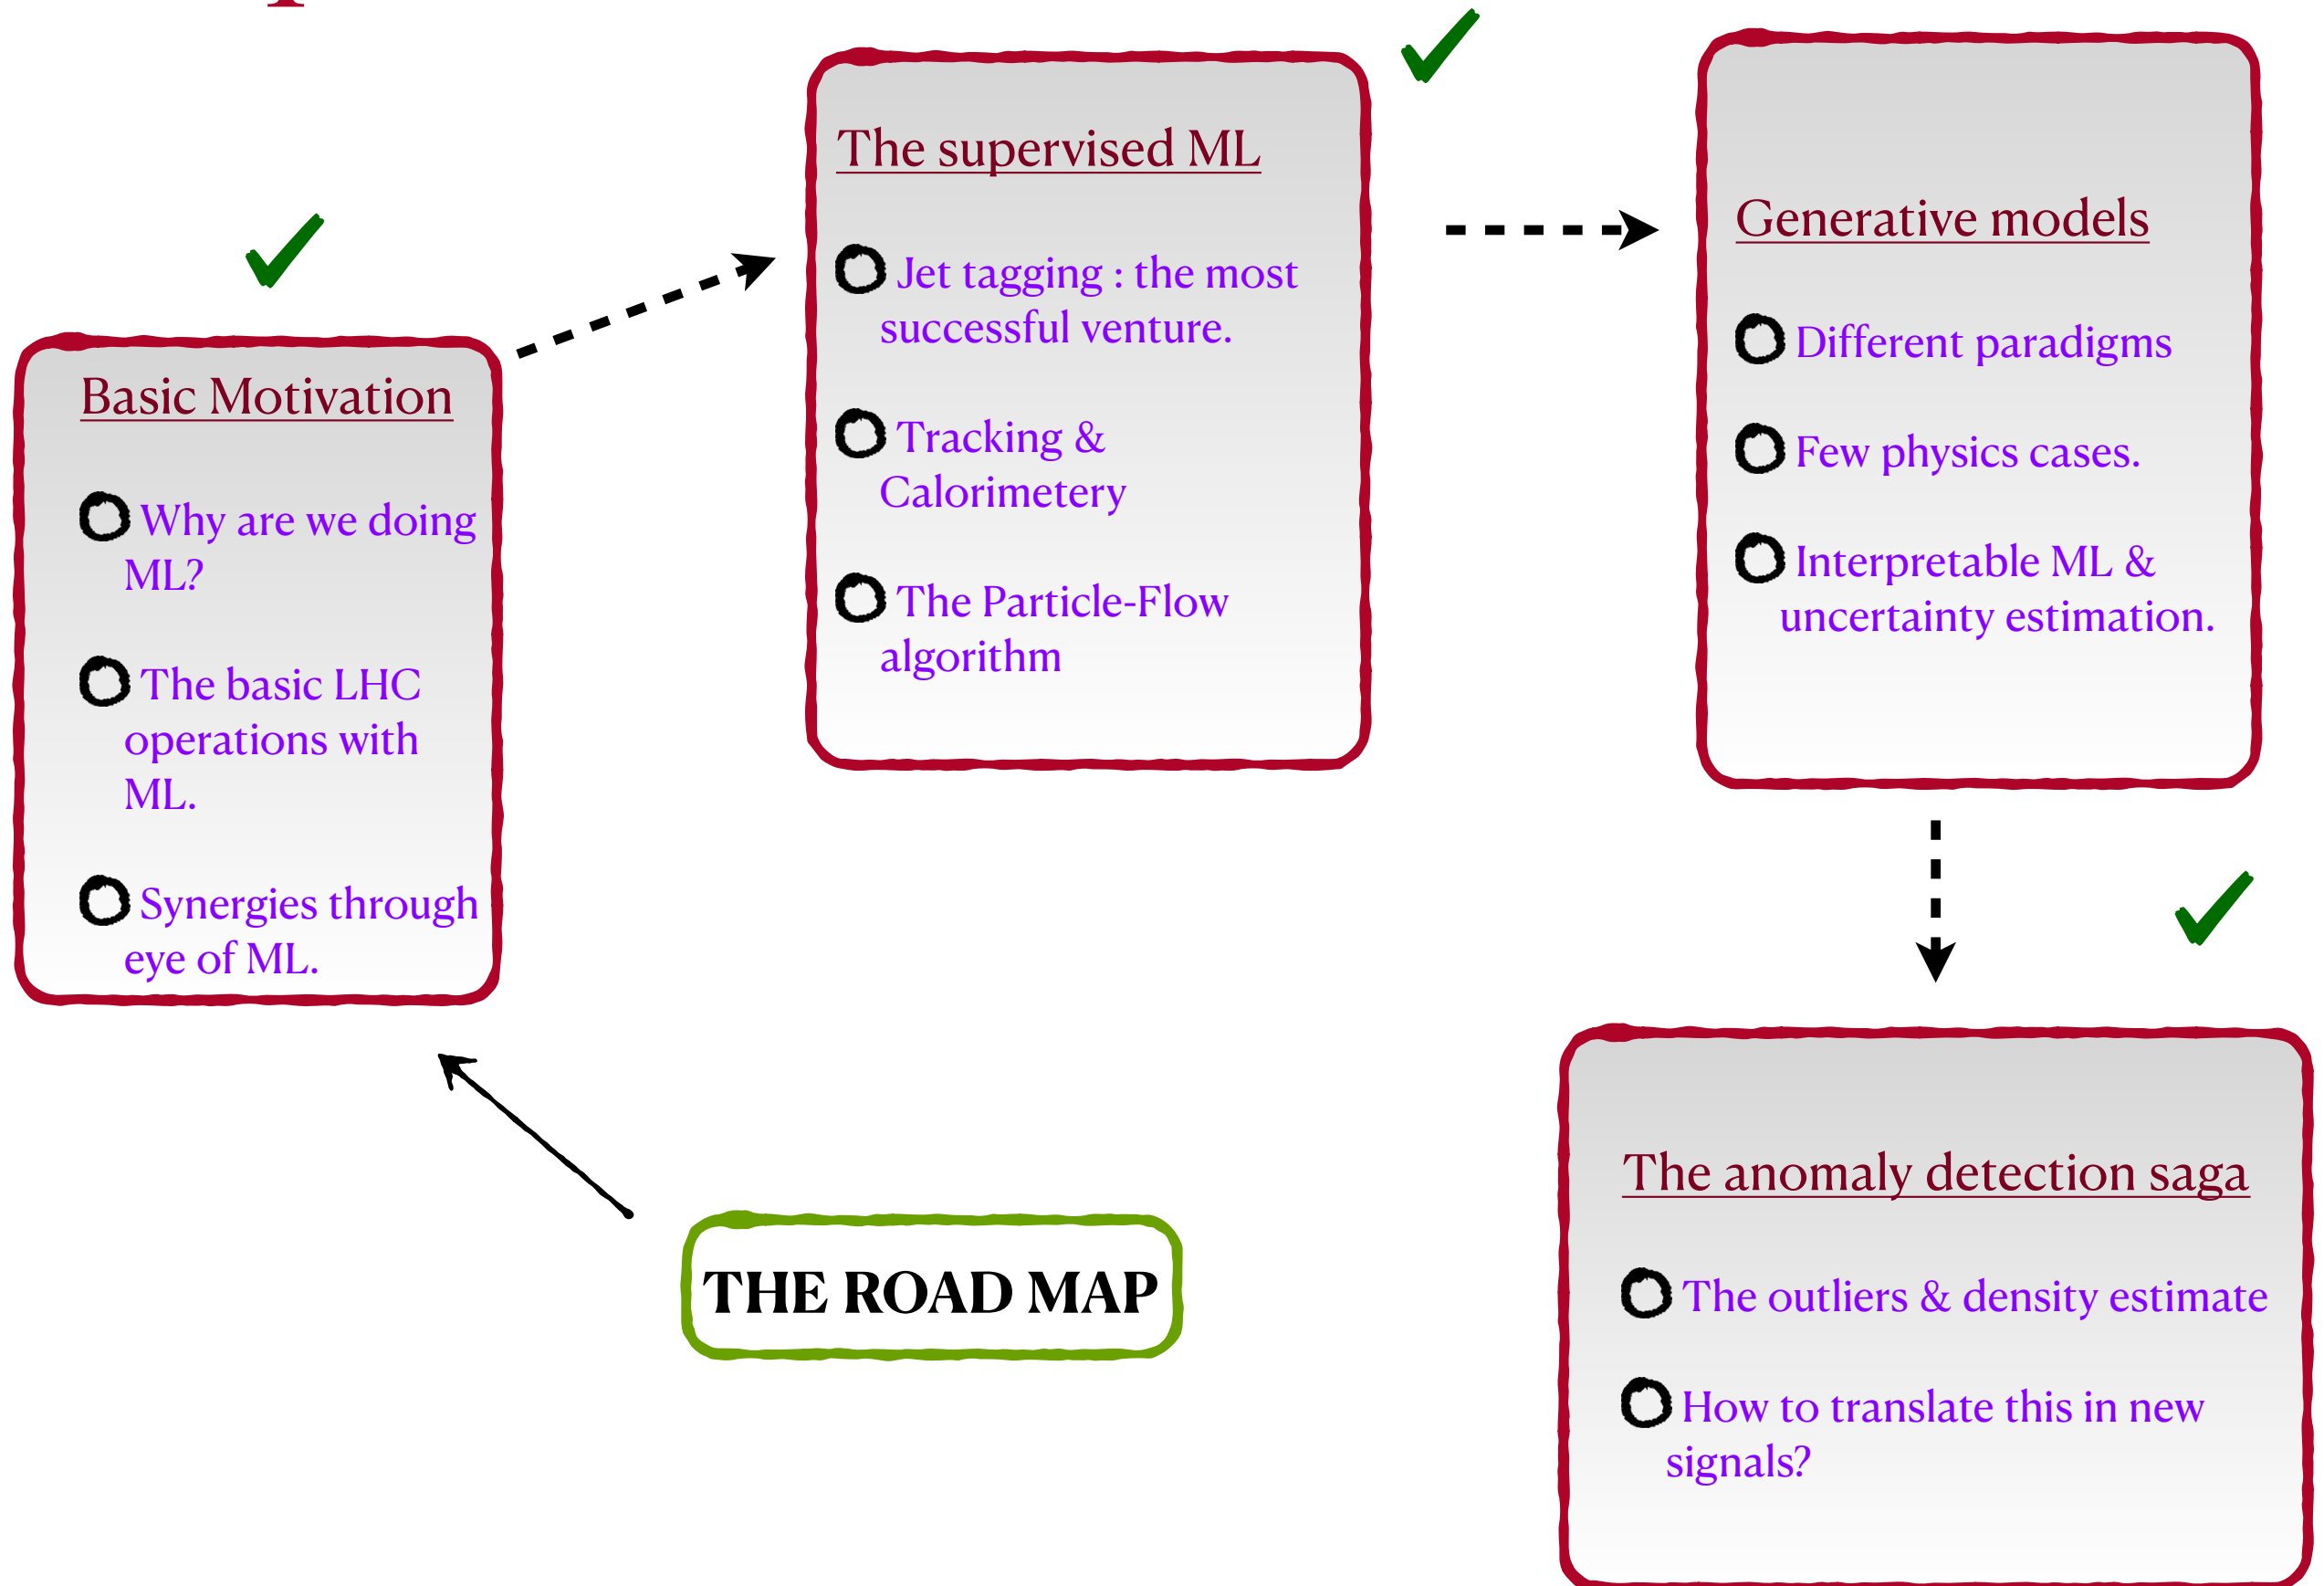

Anomaly detection : the general types

a. Outlier detection (“point anomalies”)

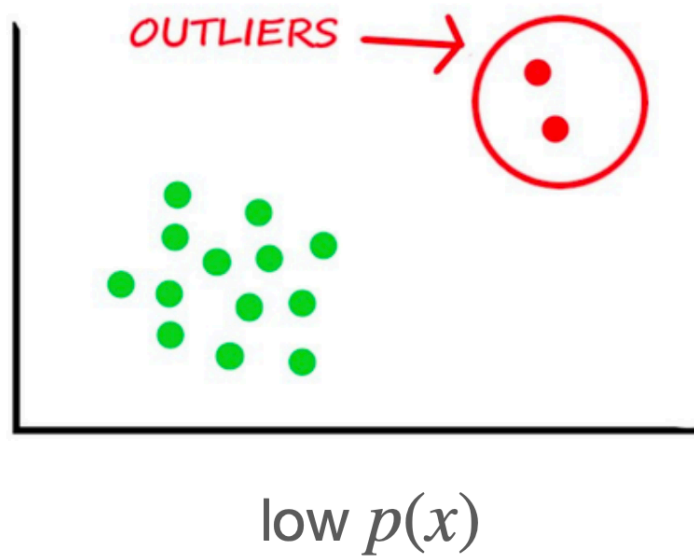

Autoencoders

Farina, Nakai & **DS** [1808.08992](#)

Heimel et al [1808.08979](#)

Cerri et al [1811.10276](#)


...

Density estimation

Caron, Hendriks, Verheyen [2106.10164](#)

...

b. Overdensity detection (“group anomalies”)

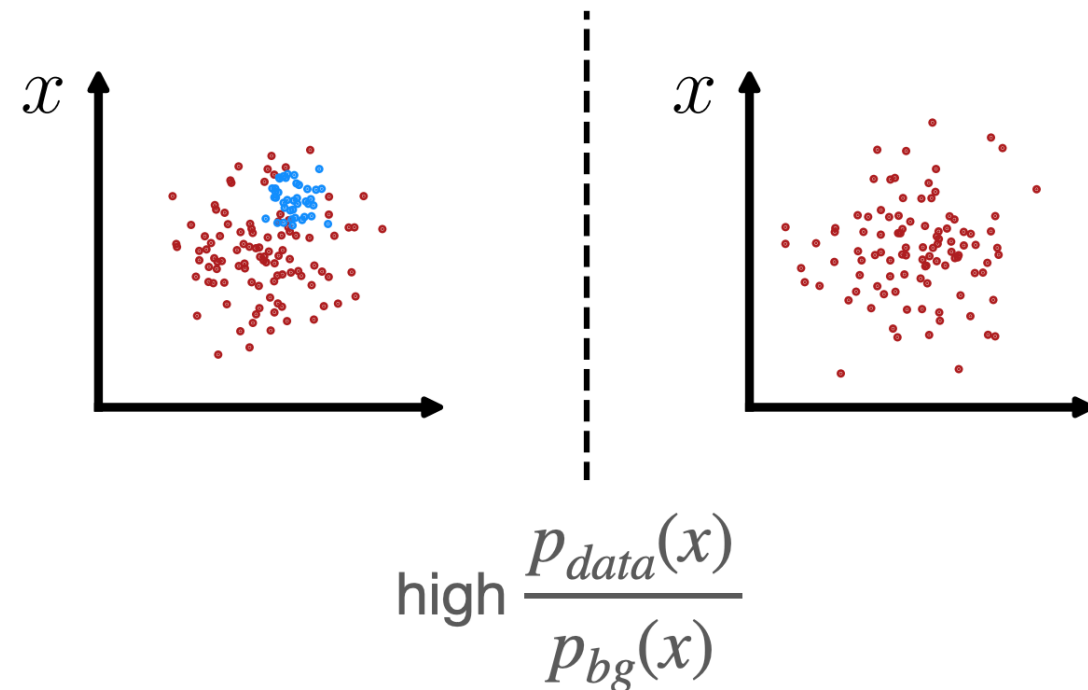

Data vs bg test statistic

D’Agnolo et al [1806.02350](#), [1912.12155](#), [2111.13633](#)

Enhanced bump hunts

CWoLa Hunting [Collins, Howe & Nachman [1805.02664](#), [1902.02634](#)]


ANODE [Nachman & **DS** [2001.04990](#)]

CATHODE [**DS+** Hallin et al [2109.00546](#), [2210.14924](#)]

CURTAINS [Raine et al [2203.09470](#)]

Slide taken from David Shih



CWoLa : a weakly supervised method

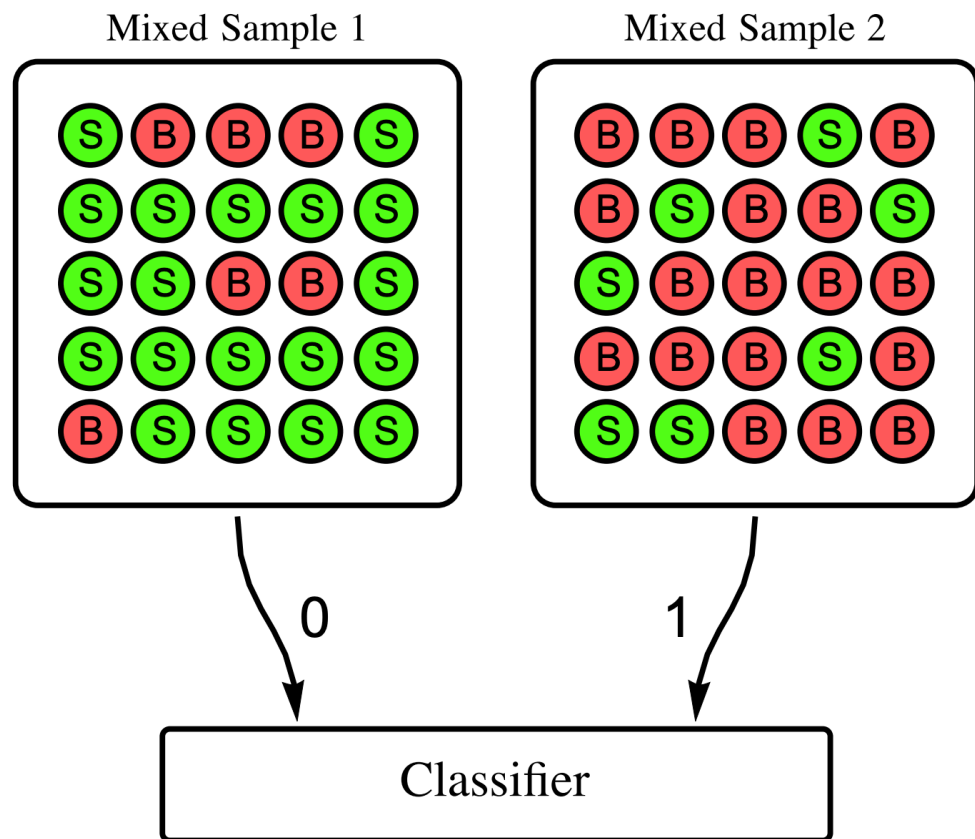

$$L_{M_1/M_2} = \frac{p_{M_1}}{p_{M_2}} = \frac{f_1 p_S + (1 - f_1) p_B}{f_2 p_S + (1 - f_2) p_B} = \frac{f_1 L_{S/B} + (1 - f_1)}{f_2 L_{S/B} + (1 - f_2)},$$

$$\partial_{L_{S/B}} L_{M_1/M_2} = (f_1 - f_2) / (f_2 L_{S/B} - f_2 + 1)^2 > 0.$$

arXiv:1708.02949

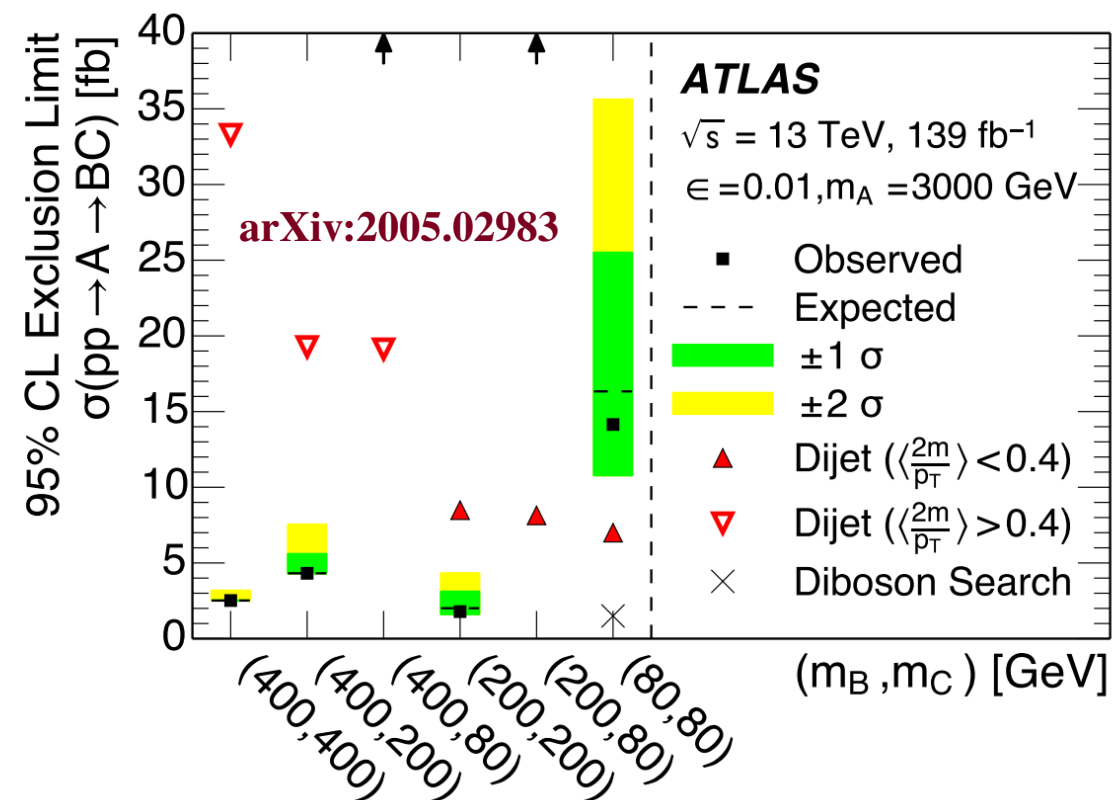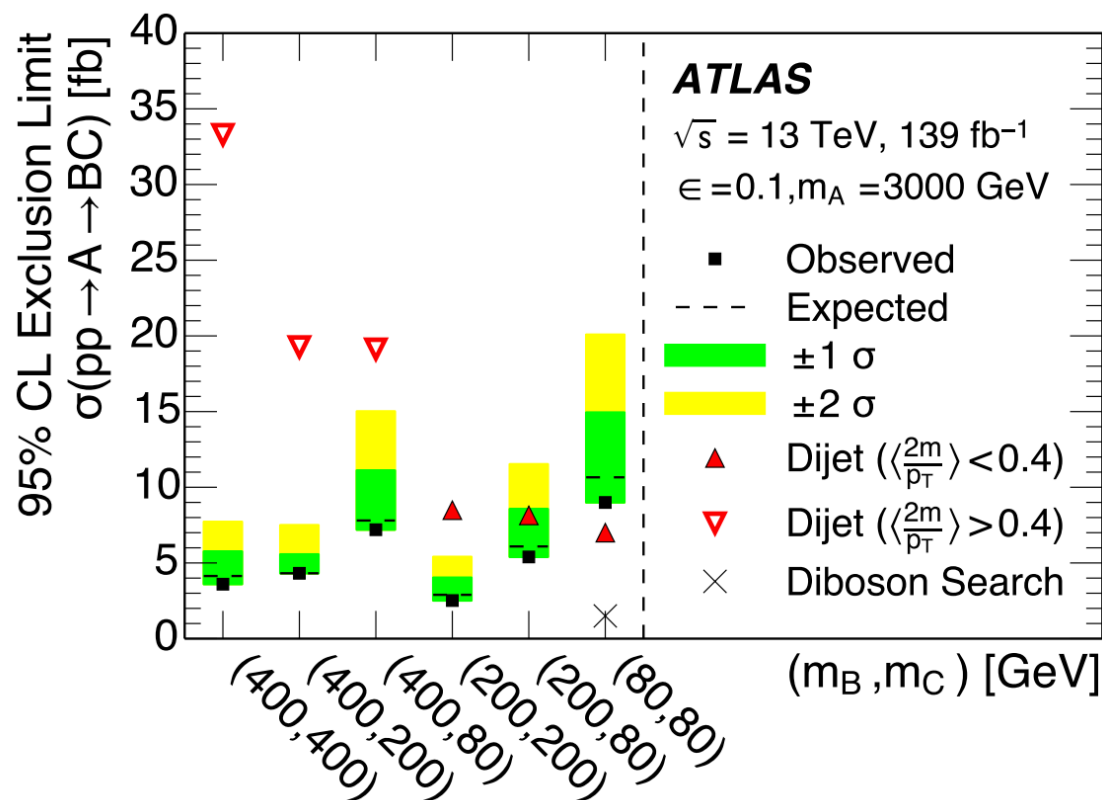

arXiv:2005.02983

ABCD background estimation with ML

arXiv > hep-ph > arXiv:2007.14400

High Energy Physics – Phenomenology

[Submitted on 28 Jul 2020]

ABCDiCo: Automating the ABCD Method with Machine Learning

Gregor Kasieczka, Benjamin Nachman, Matthew D. Schwartz, David Shih

$$N_{A,\ell} = N_\ell \Pr(f \geq f_c \text{ and } g \geq g_c | \ell)$$

$$N_{B,\ell} = N_\ell \Pr(f \geq f_c \text{ and } g < g_c | \ell)$$

$$N_{C,\ell} = N_\ell \Pr(f < f_c \text{ and } g \geq g_c | \ell)$$

$$N_{D,\ell} = N_\ell \Pr(f < f_c \text{ and } g < g_c | \ell),$$

$$N_{A,b}^{\text{predicted}} \equiv \frac{N_{B,a} N_{C,a}}{N_{D,a}}.$$

Find a ML driven way to find the variables f & g

Single DisCo

$$\mathcal{L}[f(X)] = \mathcal{L}_{\text{classifier}}[f(X), y] + \lambda \text{dCorr}_{y=0}^2[f(X), X_0].$$


Double DisCo

$$\mathcal{L}[f, g] = \mathcal{L}_{\text{classifier}}[f(X), y] + \mathcal{L}_{\text{classifier}}[g(X), y] + \lambda \text{dCorr}_{y=0}^2[f(X), g(X)].$$

$$\begin{aligned} \text{dCov}^2[f, g] = & \langle |f - f'| \times |g - g'| \rangle \\ & + \langle |f - f'| \rangle \times \langle |g - g'| \rangle - 2 \langle |f - f'| \times |g - g''| \rangle \end{aligned}$$

$$\text{dCorr}^2[f, g] = \frac{\text{dCov}^2[f, g]}{\text{dCov}[f, f] \text{dCov}[g, g]}$$



Anomaly detection with density estimation

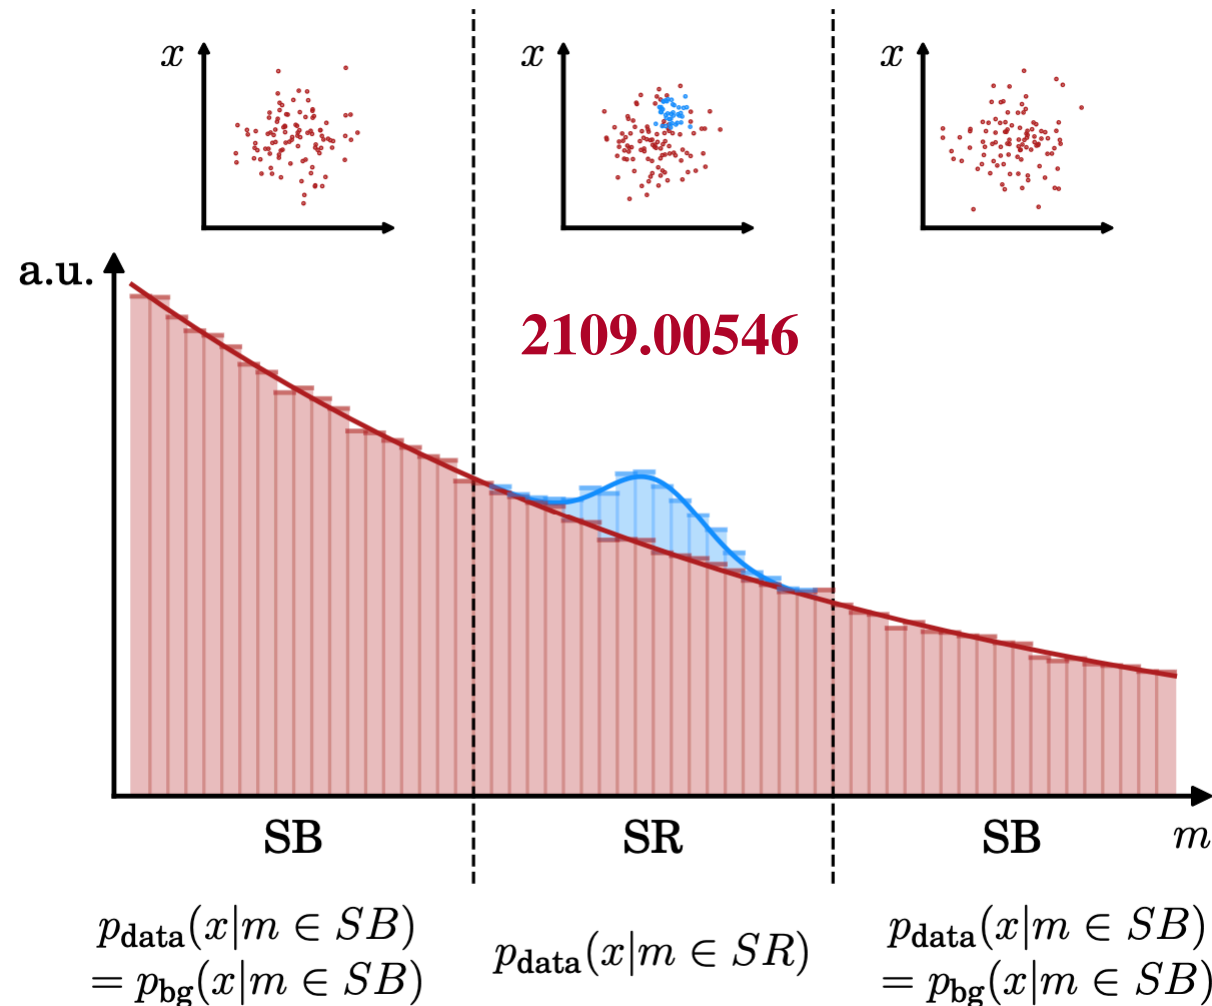



Main goal : find $R(x) = \frac{p_{\text{data}}(x)}{p_{\text{bg}}(x)}$
in the signal region, estimating from SB.

Train two NF separately in SR and SB to
learn $p_{\text{data}}(x|m \in SR)$ and $p_b(x|m \in SB)$

This is ANODE method. On top of this add
CWoaLa to create CATHODE.

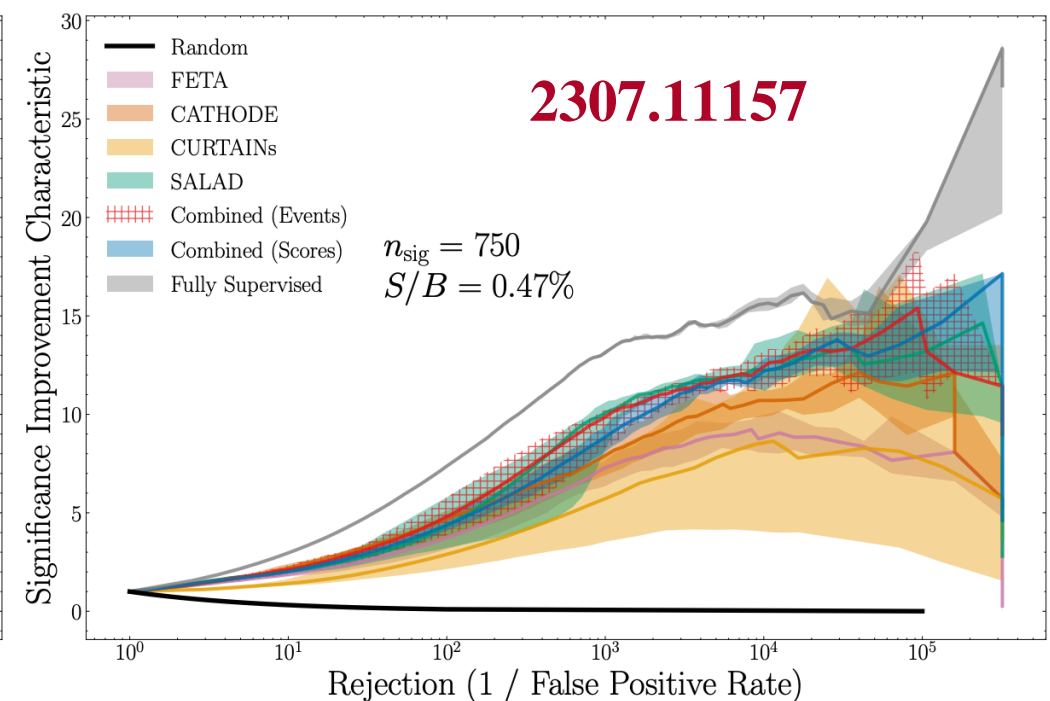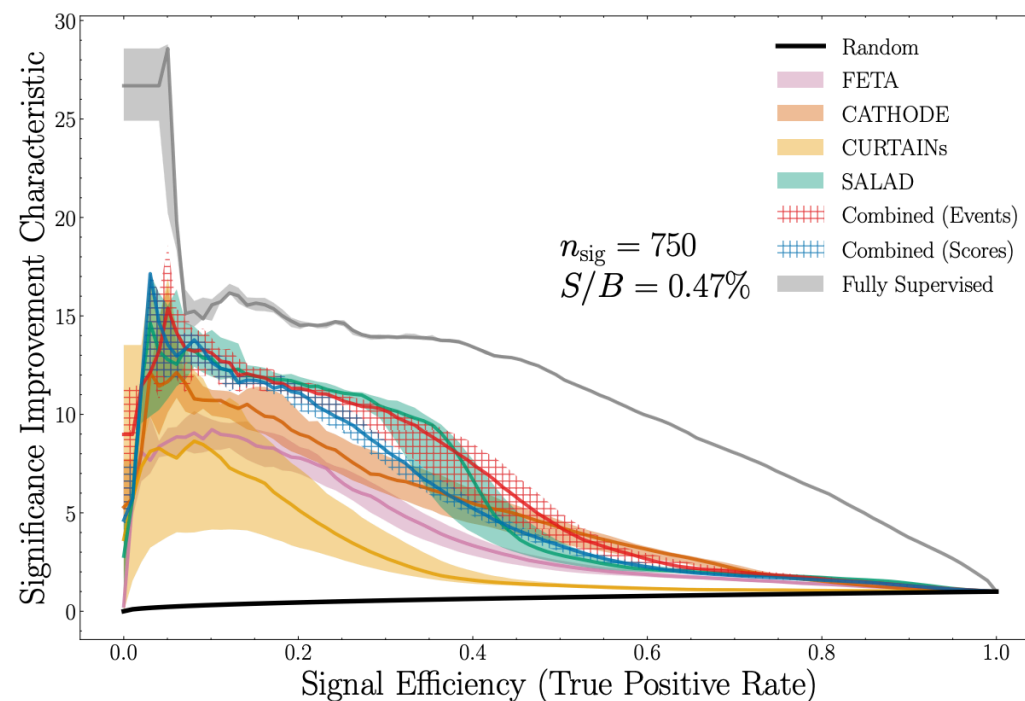

Differential programming in HEP

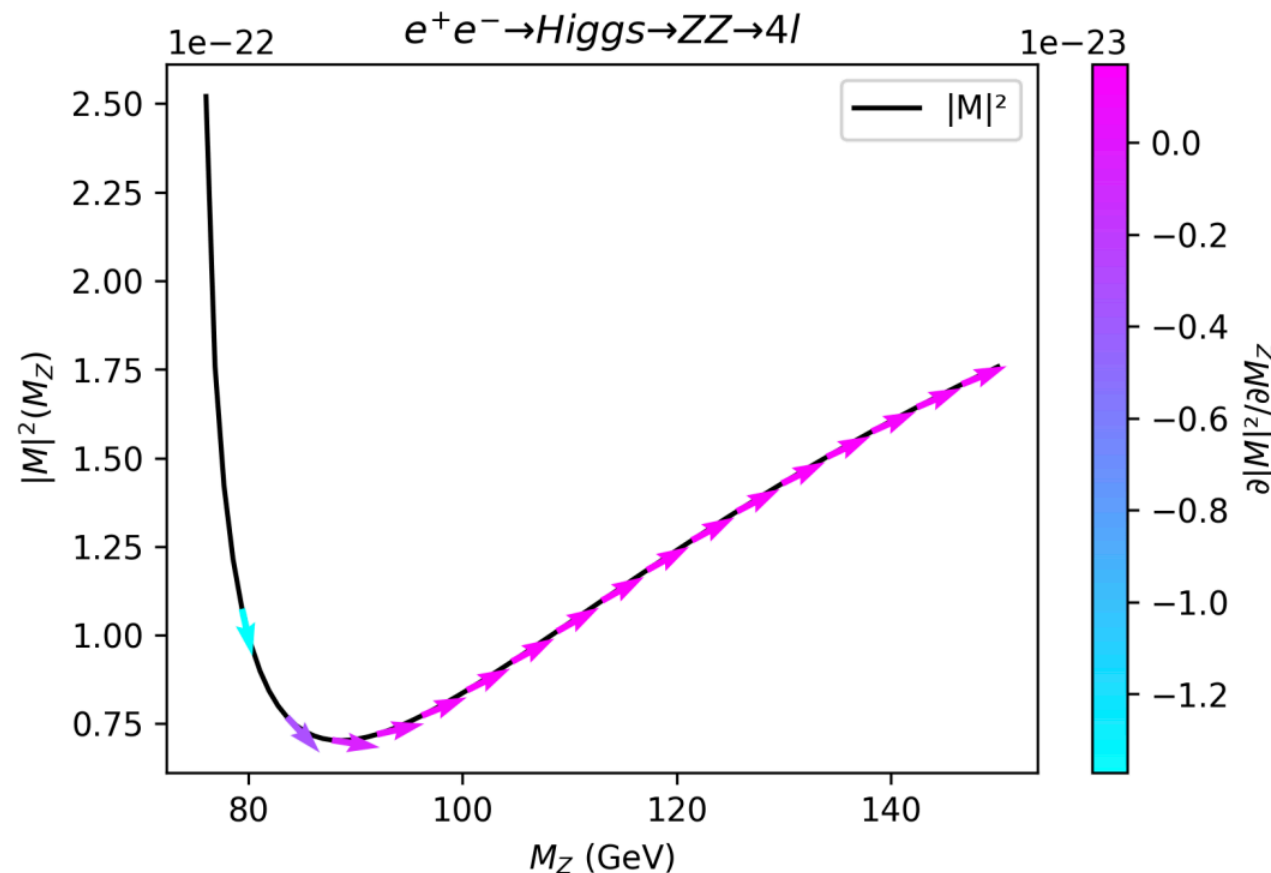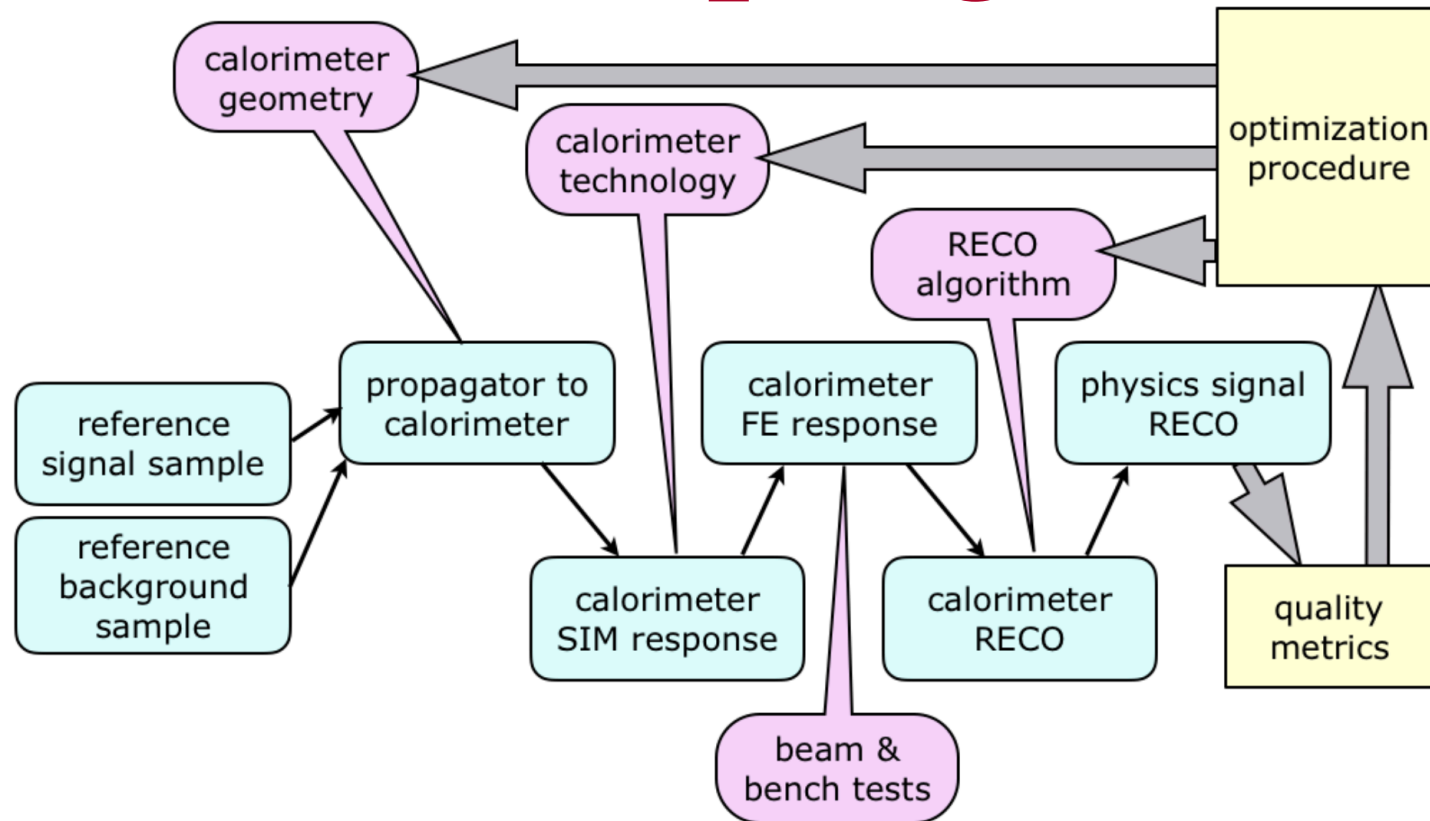

```
generate p p > t t~, t > b udsc udscx , t~ > b~ udsc udscx
output madjax generated_ttbar
```


```
set auto_update 0
```

2. Evaluation:

```
import madjax
mj = madjax.MadJax('generated_ttbar')
E_cm = 14000 #GeV
process = 'Matrix_1_gg_ttx_t_budx_tx_bxdx'
matrix_element = mj.matrix_element(E_cm, process)
```

```
parameters = ('mass', 6): 173.0 #set top mass
phasespace_coords = [0.1]*14 #14D phasespace
```

```
val, grad = matrix_element(parameters, phasespace_coords)
grad[('mass', 6)] #gradient wrt top mass
```

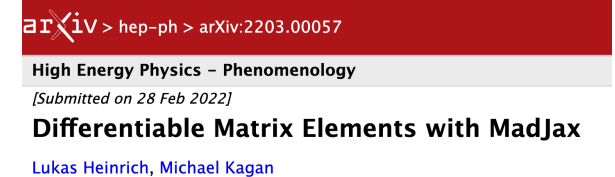


Symmetry equivariant networks

[arXiv:2203.06153](https://arxiv.org/abs/2203.06153) : SG et al


Invariance

$$f(\rho_g(x)) = f(x)$$

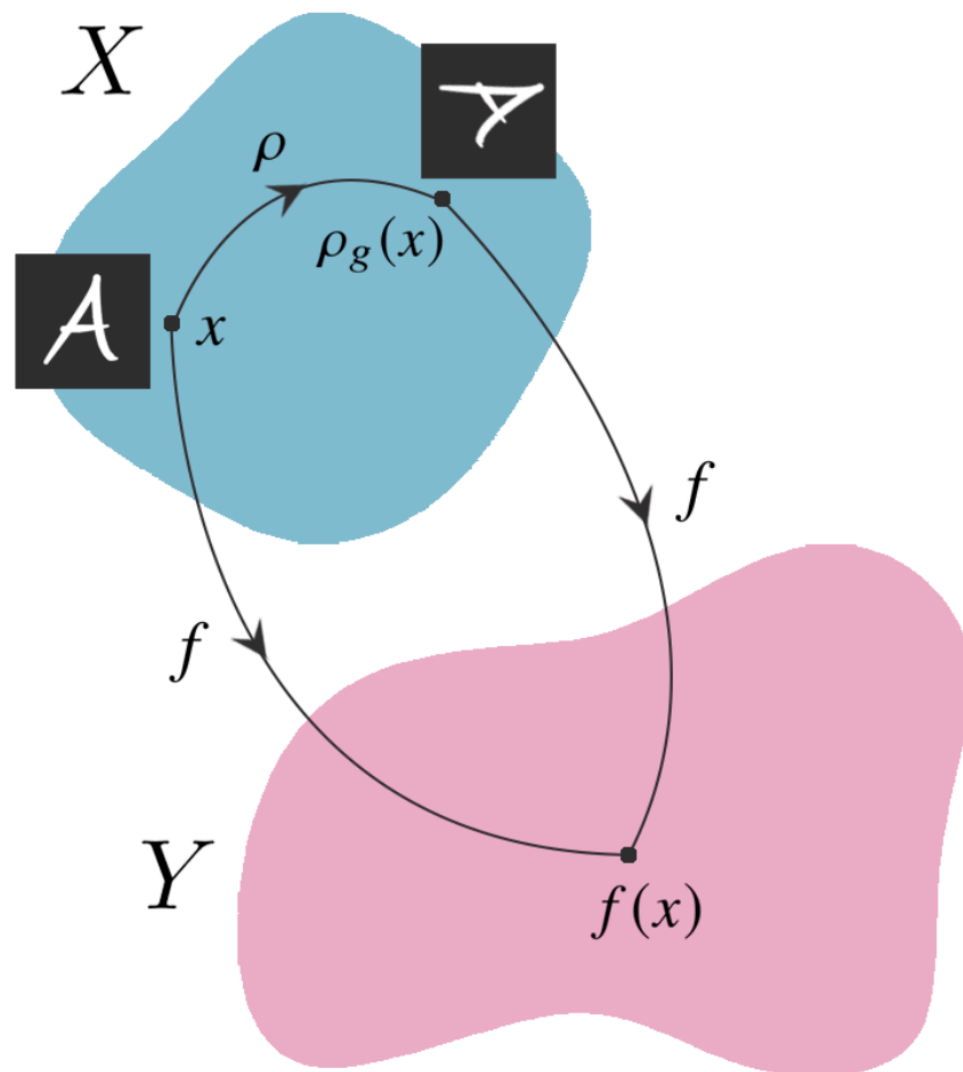


Equivariance

$$f(\rho_g(x)) = \rho'_g(f(x))$$

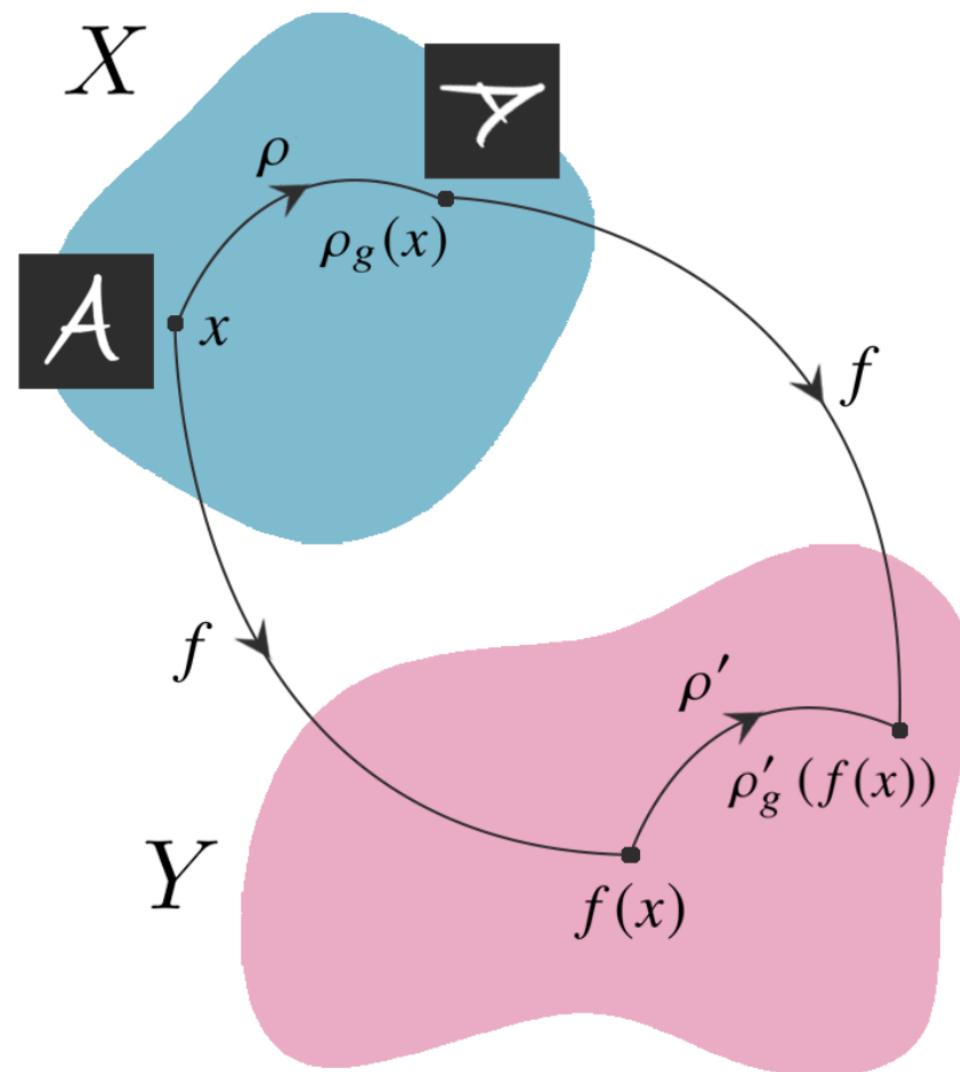

Symmetry equivariant networks


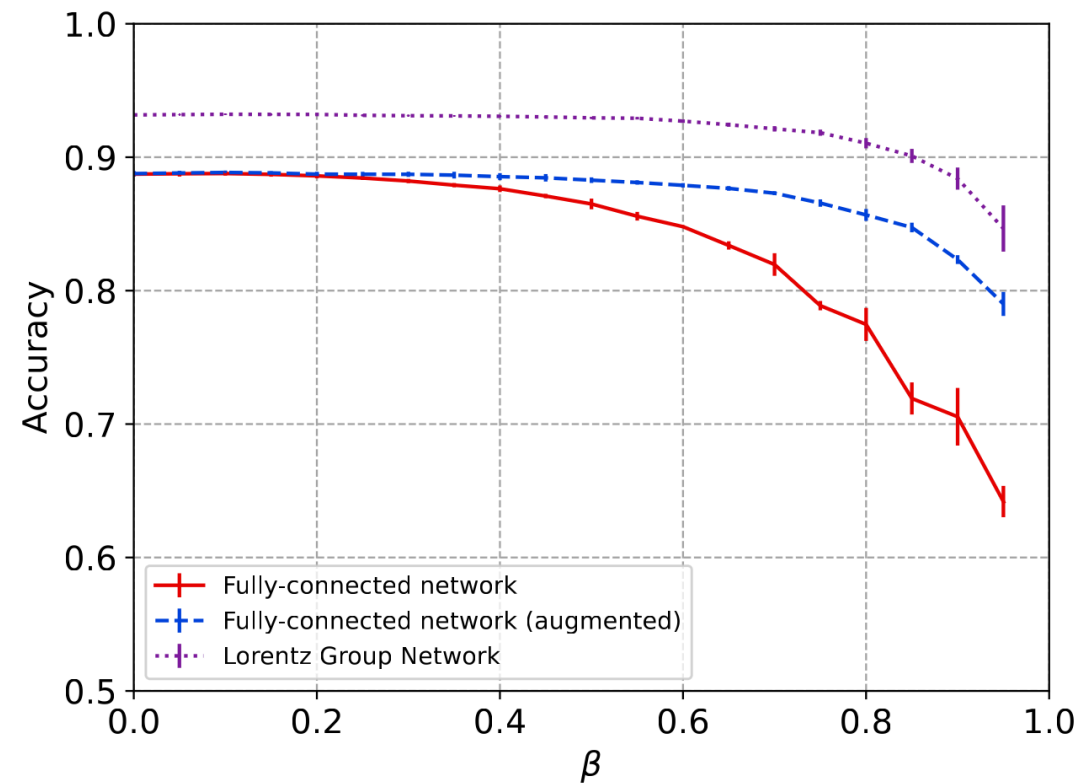


[arXiv:2006.04780](#) : A Bogatskiy et al

[arXiv:2203.06153](#) : SG et al

$$m_{ij}^l = \phi_e \left(h_i^l, h_j^l, \psi(\|x_i^l - x_j^l\|^2), \psi(\langle x_i^l, x_j^l \rangle) \right)$$


$$h_i^{l+1} = h_i^l + \phi_h \left(h_i^l, \sum_{j \in [N]} w_{ij} m_{ij}^l \right),$$

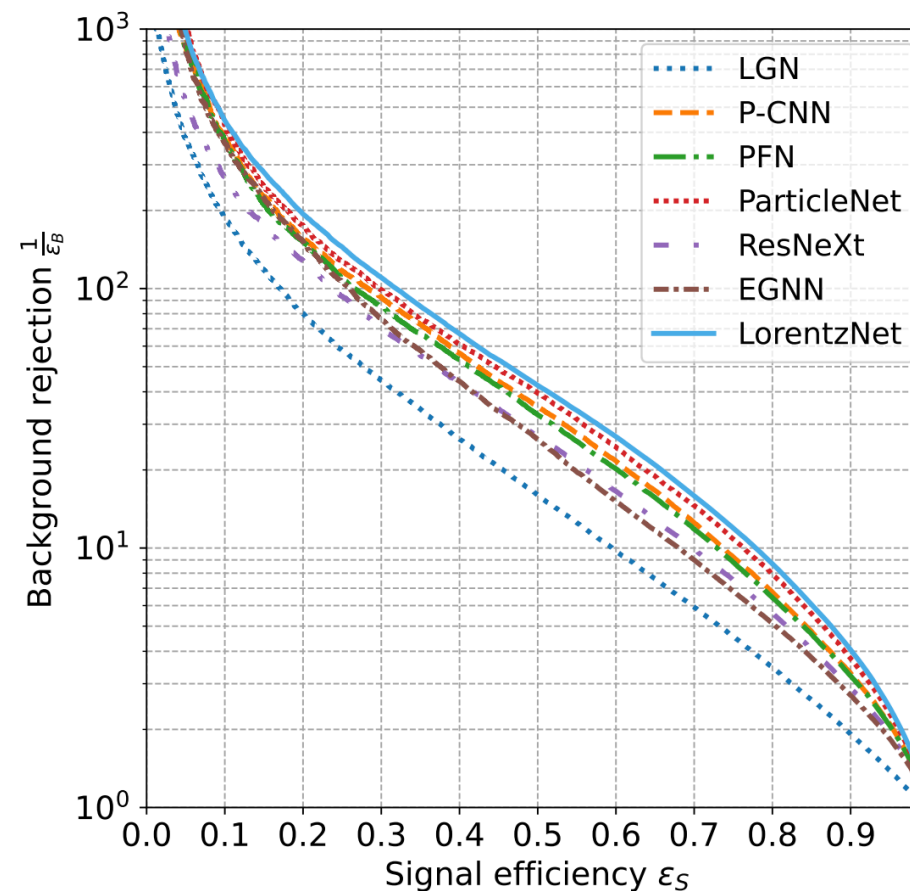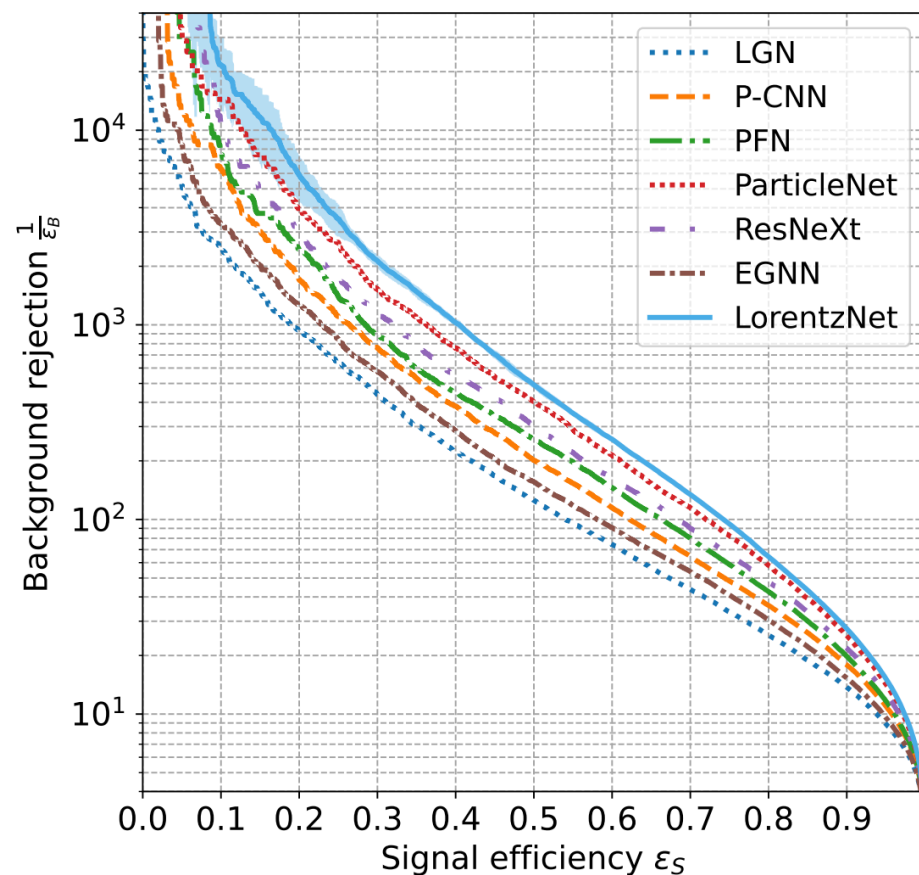


LG equivariant GNN :
[arXiv 2201.08187](#)

ML on FPGA

arXiv : 1804.06913

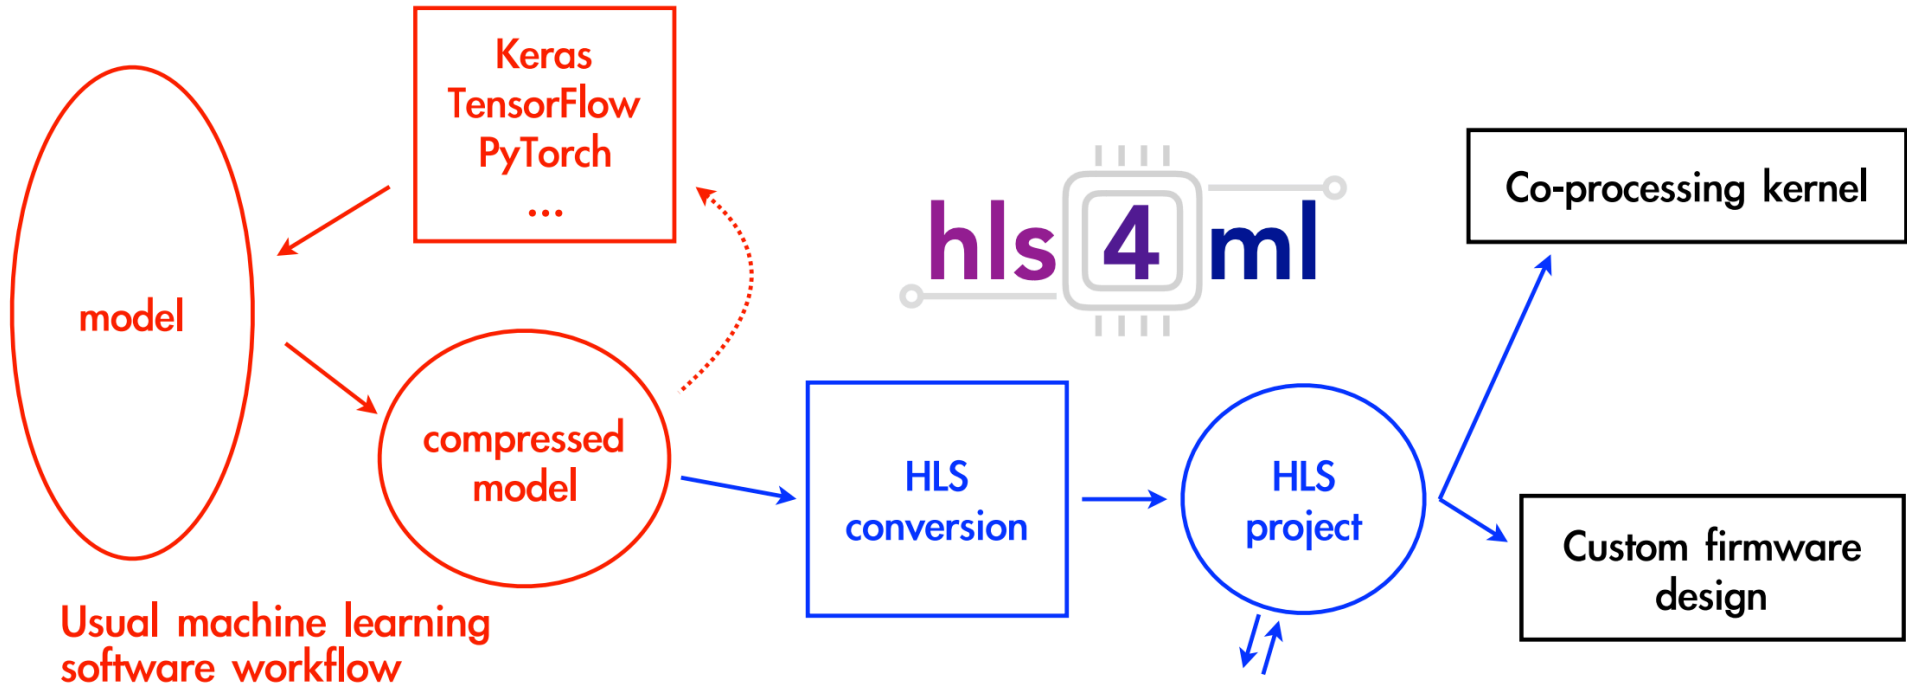

Usual machine learning software workflow

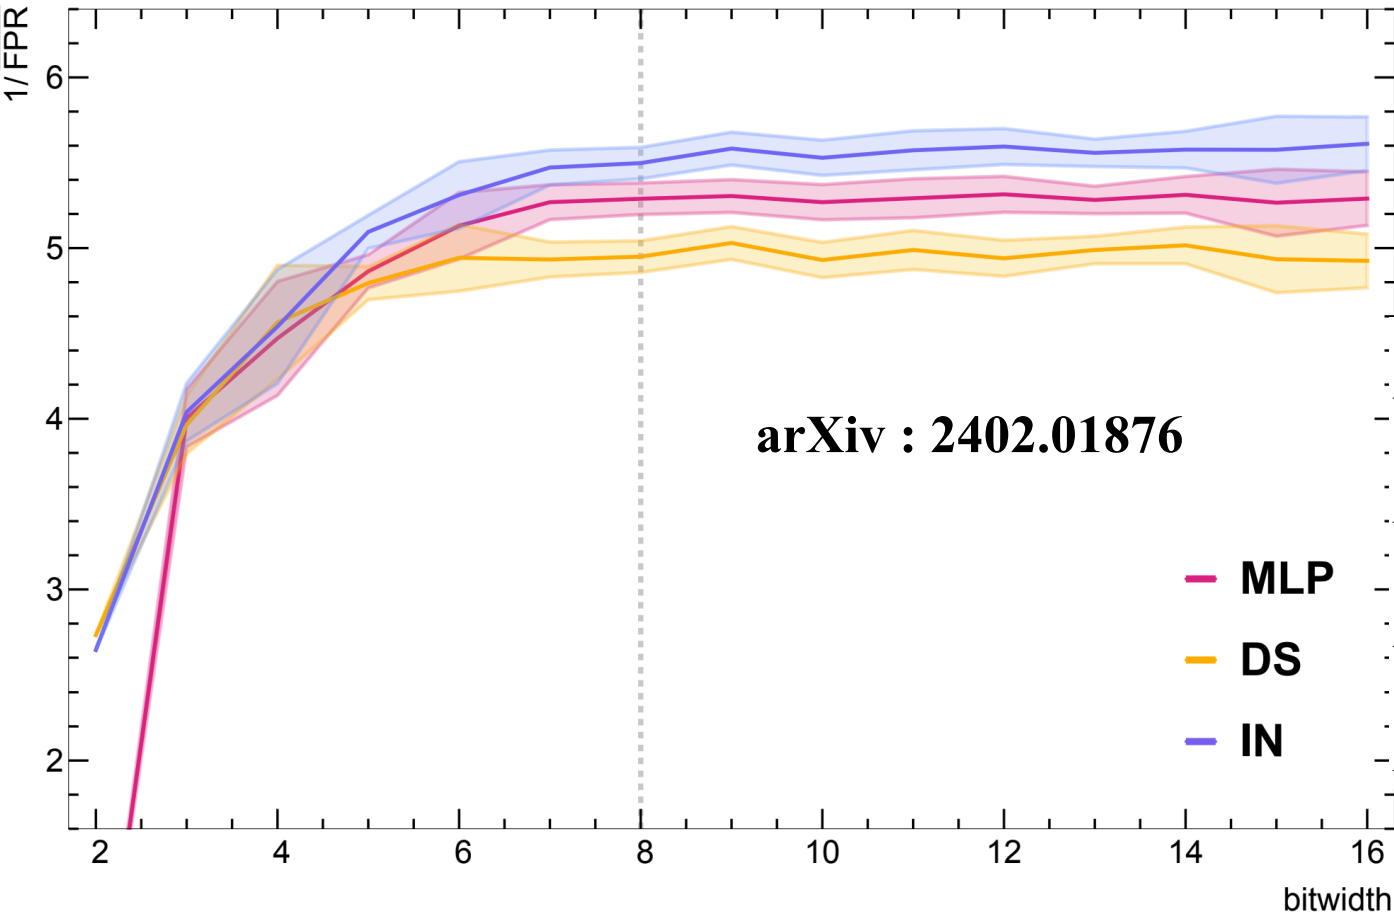

Architecture	Constituents	Parameters	FLOPs	Accuracy	AUC				
					g	q	W	Z	t
MLP	8	26,826	53,162	$64.6 \pm 0.1\%$	0.84	0.88	0.90	0.88	0.92
DS		3,461	36,805	$64.0 \pm 0.3\%$	0.84	0.88	0.90	0.88	0.92
IN		3,347	37,232	$64.9 \pm 0.2\%$	0.84	0.88	0.91	0.89	0.92
MLP	16	20,245	40,485	$68.4 \pm 0.3\%$	0.87	0.89	0.91	0.90	0.94
DS		3,461	71,109	$69.4 \pm 0.2\%$	0.87	0.89	0.93	0.92	0.94
IN		3,347	140,432	$70.8 \pm 0.2\%$	0.88	0.90	0.94	0.92	0.94
MLP	32	24,101	48,197	$66.2 \pm 0.2\%$	0.90	0.89	0.89	0.88	0.94
DS		3,461	139,717	$75.9 \pm 0.1\%$	0.91	0.91	0.96	0.95	0.95
IN		7,400	109,556	$75.8 \pm 0.3\%$	0.91	0.91	0.96	0.95	0.95


Open datasets for testing your idea!




LHC Olympics

<https://zenodo.org/records/3547722>


<https://lhco2020.github.io/homepage/>

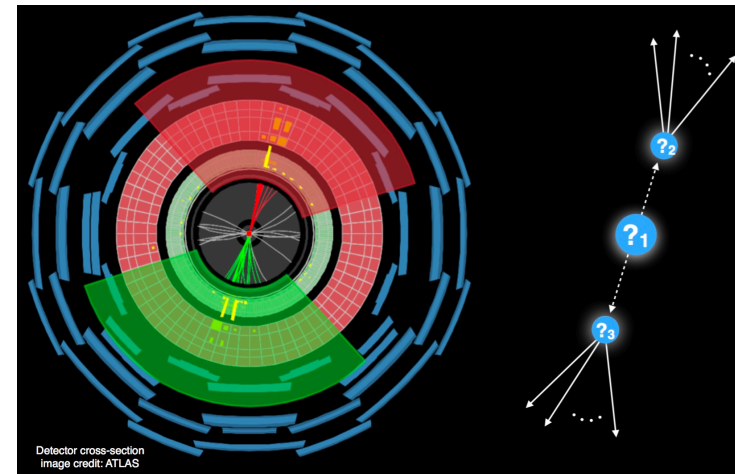

3d view

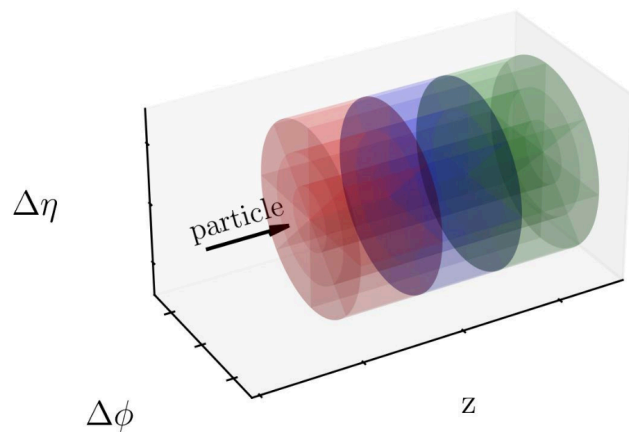

front view

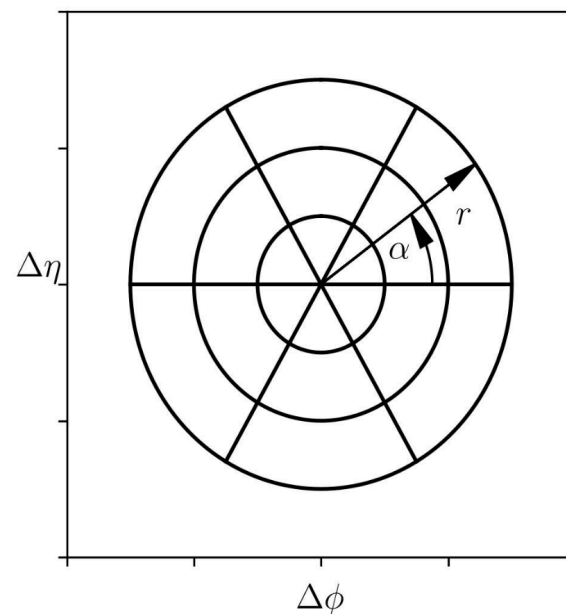

Calo Challenge


<https://calochallenge.github.io/homepage/>

CERN Open Data Portal

[Documentation](#)



[About](#)

The COCOA

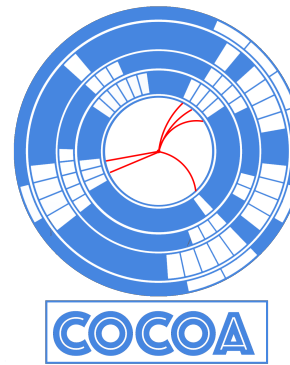

Mach. Learn.: Sci. Technol. 4 035042

<https://cocoa-hep.readthedocs.io/en/latest/>

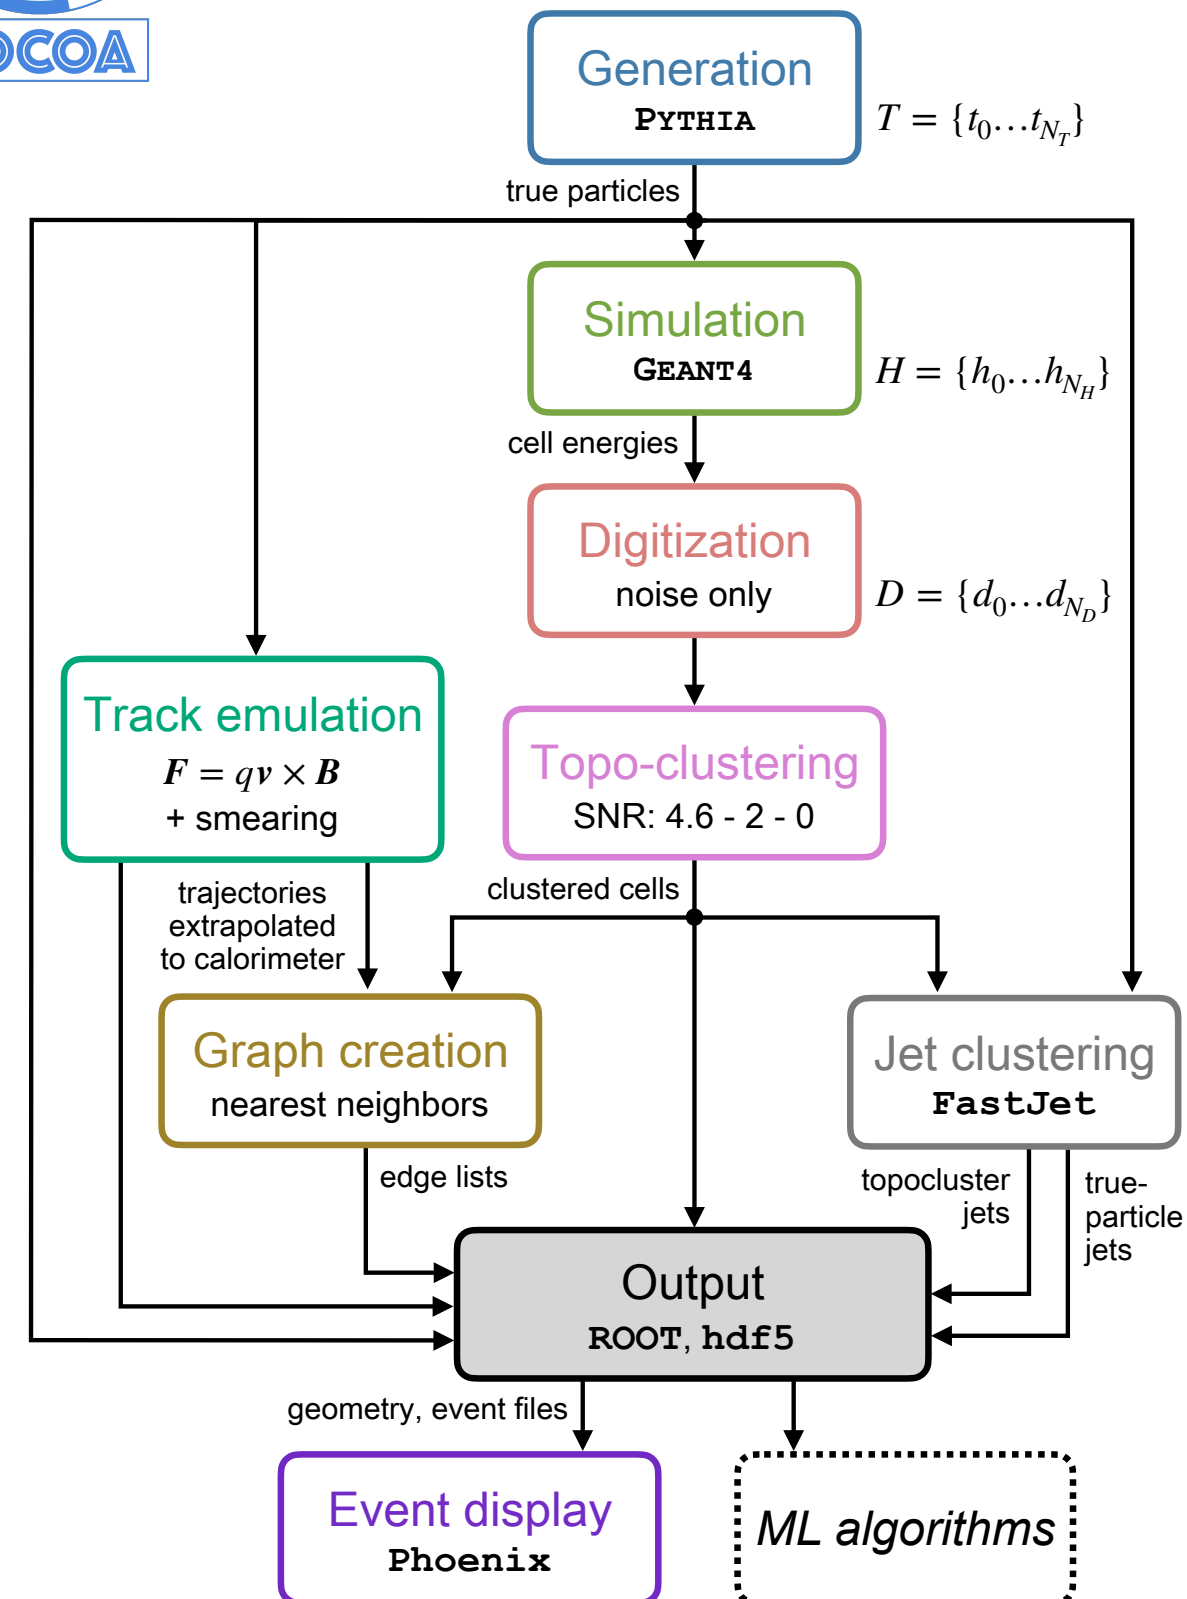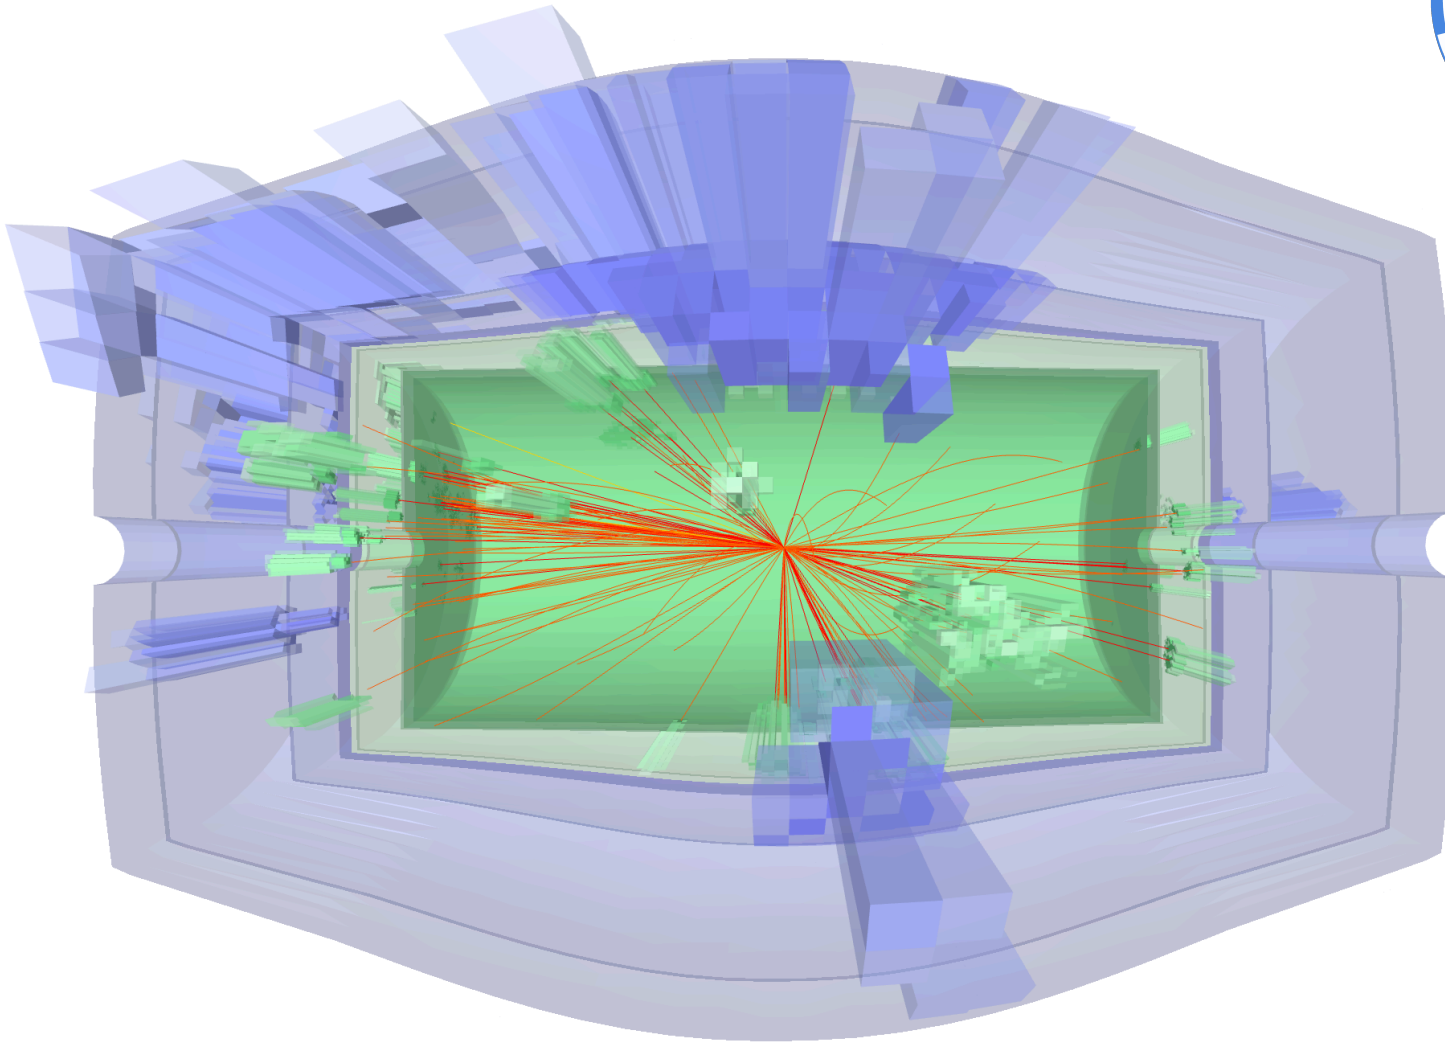


COnfigurable CAlorimeter simulation for AI

- ✓ A complete hermetic geometry with full GEANT simulation.
- ✓ PYTHIA-8 based ME/PS & Hadronization
- ✓ FASTJET integration is inbuilt.
- ✓ Comes with an ATLAS style pPFlow.



Let's formulate the questions

Image: FermiLab

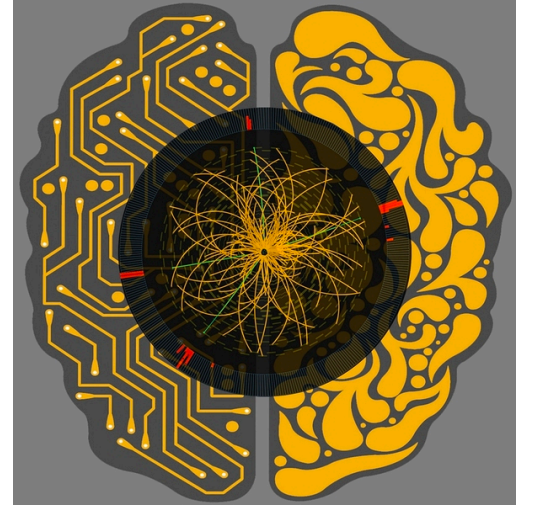


- ☑ ML is here to stay with HEP.
- ☑ When looked through the lens of ML, what's are the core questions to answer for these soft signals?
- ☑ Interpretability and uncertainty estimation is a corner stone which we should emphasize.
- ☑ The collider community should talk with mathematicians/comp-sc and other branches of natural science who are using the similar methods and exchange ideas.

<https://iml-wg.github.io/HEPML-LivingReview/>

Let's formulate the questions

Image: FermiLab

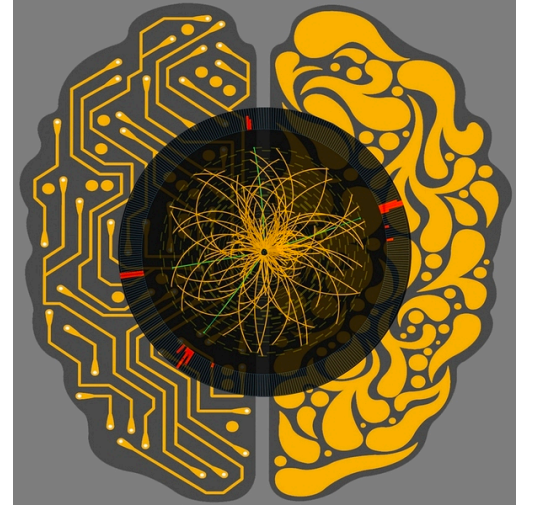

- ☑ ML is here to stay with HEP.
- ☑ When looked through the lens of ML, what's are the core questions to answer for these soft signals?
- ☑ Interpretability and uncertainty estimation is a corner stone which we should emphasize.
- ☑ The collider community should talk with mathematicians/comp-sc and other branches of natural science who are using the similar methods and exchange ideas.

<https://iml-wg.github.io/HEPML-LivingReview/>

THANK YOU